

HEAT TRANSFER

Second Edition

FRANK P. INCROPERA

DAVID P. DEWETTENHUBER

LEONARD S. THERIAULT

JOHN W. SUWART



The methods of the textbook are used



to design and analyze systems and to solve



the many practical problems involving



heat transfer in fluid systems
and all modern processes



and for computer
work



SCHAUM'S OUTLINE OF

THEORY AND PROBLEMS

OF

HEAT TRANSFER

Second Edition

•

DONALD R. PITTS, Ph.D.

*Professor Emeritus of Mechanical and Aerospace Engineering and Engineering Science
The University of Tennessee - Knoxville*

LEIGHTON E. SISSOM, Ph.D., P.E.

*Dean Emeritus of Engineering
Tennessee Technological University - Cookeville*

•

SCHAUM'S OUTLINE SERIES

McGRAW-HILL

*New York San Francisco Washington, D.C. Auckland Bogotá Caracas Lisbon
London Madrid Mexico City Milan Montreal New Delhi
San Juan Singapore Sydney Tokyo Toronto*

Dr. DONALD R. PITTS holds three engineering degrees—the B.M.E. from Auburn University, the M.S.M.E., and Ph.D. from the Georgia Institute of Technology. His 27 years of academic experiences include appointments at Tennessee Technological University, Clemson University, and the University of Tennessee-Knoxville. All of his university assignments have been in teaching and research in the *Thermal Sciences* (Thermodynamics, Fluid Mechanics, and Heat Transfer). These experiences include one year as a Program Manager at NSF and one year as Director, Tennessee Energy Extension Service. Dr. Pitts has coauthored one major textbook and one Schaum's Outline, both in the heat transfer/fluid mechanics area. He has authored or coauthored 20 refereed research papers and major reports, and he is thoroughly qualified to write on the topic of *Heat Transfer*.

Dr. LEIGHTON E. SISSOM is a registered professional engineer. He holds four degrees, including a B.S.M.E. from Tennessee Technological University and M.S.M.E. and Ph.D. from the Georgia Institute of Technology. He has served as a consultant to over 600 organizations in 41 states and 11 foreign countries. He has written many papers and proprietary reports, and has coauthored four books including one textbook and one Schaum's Outline. His 30 years in academe have been focused on teaching and research in the thermal sciences (Thermal Dynamics, Fluid Mechanics, and Heat Transfer). Dr. Sissom is highly qualified to write on the subject of *Heat Transfer*.

Schaum's Outline of Theory and Problems of
HEAT TRANSFER

Copyright © 1998, 1977 by The McGraw-Hill Companies, Inc. All rights reserved. Printed in the United States of America. Except as permitted under the Copyright Act of 1976, no part of this publication may be reproduced or distributed in any forms or by any means, or stored in a data base or retrieval system, without the prior written permission of the publisher.

2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 PRS PRS 9 0 2 1 0 9

ISBN 0-07-050207-2

Sponsoring Editor: Barbara Gilson
Production Supervisor: Sherri Souffrance
Editing Supervisor: Maureen B. Walker
Project Supervision: Keyword Publishing Services Ltd

Library of Congress Cataloging-in-Publication Data

Pitts, Donald R.

Schaum's outline of heat transfer / Donald R. Pitts, Leighton E. Sissom. — 2nd ed.
p. cm. — (Schaum's outline series)

Originally published: Schaum's outline of theory and problems of heat transfer.
New York : McGraw-Hill, c1997.

Includes index.

ISBN 0-07-050207-2 (pbk.)

1. Heat—Transmission. 2. Heat—Transmission—Problems, exercises, etc.

I. Pitts, Donald R., Schaum's outline of theory and problems of heat transfer.

II. Sissom, Leighton E. III. Title. IV. Series.

QC320.P55 1988

621.402'2—dc21

98-21008

CIP

McGraw-Hill

A Division of The McGraw-Hill Companies



Preface

Like the first edition, as well as all of the Schaum's Series books, this second edition of Heat Transfer is intended to function as (1) an independent, self-teaching text and/or (2) a supplemental aid for students taking a college course in heat transfer at the junior or senior level. To fulfill these dual roles, there are several factors that must be considered. One of these is the long-standing argument over the nature of treatment, that is, mathematical derivations of the thermal transport rate equations or collections and applications of empirical equations. Again, as in the first edition, we believe we have achieved a useful compromise between these two approaches.

Another major factor is the choice of a unit system. The unit system must be compatible with that in current college textbooks on this subject. Many, if not most, heat transfer texts are using the *Système International d'Unités* (SI unit system) exclusively. The ASME has required that all publications of the Society since July 1, 1974, must be in SI units. However, the slow transition from the English system of units decrees that most students currently studying heat transfer will need to be familiar with both SI and English units for many more years. In this book we have 208 solved problems having units and 63 solved problems with no units. The percentage split between SI and English units is approximately 75/25 whereas the first edition had approximately 60/40 English/SI problems. But we have included enough English unit system solved problems to satisfy the needs of students and professionals using English units only or those needing a dual system experience. In support of this need a very useful approach to obtaining property values has been incorporated. Basically, we have included rather complete tables for both SI and English units. The English tables continue to feature conversion factors at the bottom of each page.

While the field of heat transfer is constantly growing in useful knowledge, we have intentionally emphasized the more traditional and familiar approaches to each of the major subtopics of this subject. In many areas, we note that newer empirical correlations yield very nearly the same results as do the older ones. We have utilized simpler approaches wherever suitable.

As in the first edition we have continued the approach where each chapter begins with a statement of the class of heat transfer, or related topics to be considered. This is followed by abbreviated textual treatment(s), mathematical and/or empirical. Then the focus turns quickly to the Solved Problems which are the very essence of the presentation. Note that "related topics" include Fluid Mechanics—Chapter 5. Although not in most heat transfer texts, this book will be used by many persons with no background in Fluid Mechanics. This subject is very important, indeed, essential to understanding the material in Chapters 6, 7, and 8, and to a lesser extent, Chapter 10.

In summary, for each chapter we (i) present a concise textual treatment of a major subtopic emphasizing theory, analyses and empiricism important to that subject, (ii) provide an extensive set of Solved Problems, practical and theoretical, including a mixture of unit systems with unit inclusion in many problems, and finally (iii) include a set of unworked, Supplementary Problems (usually with answers) to enhance opportunities for self evaluation.

We believe that this second edition meets the changing needs for a self-teaching text for working professionals and students in this field and the need for a supplemental aid for junior- and senior-year college students. We wish every user a fulfilling experience in study from this book.

We wish to express our appreciation of the efforts of Ms. Mary Loebig Giles of McGraw-Hill for her continued support of this project, and to Ms. Janine Jennings who typed the manuscript.

DONALD R. PITTS
Knoxville, TN

LEIGHTON E. SISSOM
Cookeville, TN

Contents

Chapter 1	INTRODUCTION	1
	1.1 Conduction	1
	1.2 Convection	1
	1.3 Radiation	2
	1.4 Material Properties	2
	1.5 Units	5
<hr/>		
Chapter 2	ONE-DIMENSIONAL STEADY-STATE CONDUCTION	16
	2.1 Introductory Remarks	16
	2.2 General Conductive Energy Equation	16
	2.3 Plane Wall: Fixed Surface Temperatures	18
	2.4 Radial Systems: Fixed Surface Temperatures	19
	2.5 Plane Wall: Variable Thermal Conductivity	20
	2.6 Heat Generation Systems	20
	2.7 Convective Boundary Conditions	22
	2.8 Heat Transfer from Fins	25
<hr/>		
Chapter 3	MULTIDIMENSIONAL STEADY-STATE CONDUCTION	56
	3.1 Introduction	56
	3.2 Analytical Solutions	56
	3.3 Conductive Shape Factor	59
	3.4 Numerical Analysis	61
<hr/>		
Chapter 4	TIME-VARYING CONDUCTION	87
	4.1 Introduction	87
	4.2 Biot and Fourier Moduli	87
	4.3 Lumped Analysis	88
	4.4 One-Dimensional Systems: Fixed Surface Temperature	89
	4.5 One-Dimensional Systems: Convective Boundary Conditions	91
	4.6 Chart Solutions: Convective Boundary Conditions	92
	4.7 Multidimensional Systems	98
	4.8 Numerical Analysis	99
<hr/>		
Chapter 5	FLUID MECHANICS	123
	5.1 Fluid Statics	123
	5.2 Fluid Dynamics	124
	5.3 Conservation of Mass	127
	5.4 Equation of Motion Along a Streamline	128
	5.5 Conservation of Energy	129
<hr/>		
Chapter 6	FORCED CONVECTION: LAMINAR FLOW	144
	6.1 Hydrodynamic (Isothermal) Boundary Layer: Flat Plate	144

6.2	Thermal Boundary Layer: Flat Plate	149
6.3	Isothermal Pipe Flow	151
6.4	Heat Transfer in Pipe Flow	154
6.5	Summary of Temperatures for Property Evaluations	157
<hr/>		
Chapter 7	FORCED CONVECTION: TURBULENT FLOW	184
7.1	Equations of Motion	184
7.2	Heat Transfer and Skin Friction: Reynolds' Analogy	187
7.3	Flow over a Flat Plate	187
7.4	Flow in Pipes	190
7.5	External Flow over Submerged Bodies	195
7.6	Heat Transfer to Liquid Metals	200
<hr/>		
Chapter 8	NATURAL CONVECTION	221
8.1	Vertical Flat Plate	221
8.2	Empirical Correlations: Isothermal Surfaces	226
8.3	Free Convection in Enclosed Spaces	227
8.4	Mixed Free and Forced Convection	231
8.5	Newer Correlations	232
<hr/>		
Chapter 9	BOILING AND CONDENSATION	245
9.1	Boiling Phenomena	245
9.2	Pool Boiling	246
9.3	Flow (Convection) Boiling	249
9.4	Condensation	251
<hr/>		
Chapter 10	HEAT EXCHANGERS	268
10.1	Types of Heat Exchanger	268
10.2	Heat Transfer Calculations	270
10.3	Heat Exchanger Effectiveness (NTU Method)	274
10.4	Fouling Factors	275
<hr/>		
Chapter 11	RADIATION	289
11.1	Introduction	289
11.2	Properties and Definitions	289
11.3	Blackbody Radiation	291
11.4	Real Surfaces and the Gray Body	293
11.5	Radiant Exchange: Black Surfaces	296
11.6	Radiant Exchange: Gray Surfaces	303
11.7	Radiation Shielding	307
11.8	Radiation Involving Gases and Vapors	309
<hr/>		
Appendix A	328
	Table A-1. Conversion Factors for Single Terms.....	328
	Table A-2. Conversion Factors for Compound Terms	329

Appendix B	331
Figure B-1. Dynamic (Absolute) Viscosity of Liquids	331
Figure B-2. Kinematic Viscosity of Liquids	332
Figure B-3. Ratio of Steam Thermal Conductivity k to the Value k_1 , at One Atmosphere and the Same Pressure	333
Figure B-4. Generalized Correlation Chart of the Dynamic Viscosity of Gases at High Pressures	334
Table B-1 (SI). Property Values of Metals	335
Table B-2 (SI). Property Values of Nonmetals	338
Table B-3 (SI). Property Values of Liquids in a Saturated State.....	341
Table B-4 (SI). Property Values of Gases at Atmospheric Pressure	344
Table B-1 (Engl.). Property Values of Metals	347
Table B-2 (Engl.). Property Values of Nonmetals	350
Table B-3 (Engl.). Property Values of Liquids in a Saturated State	352
Table B-4 (Engl.). Property Values of Gases at Atmospheric Pressure	356
Table B-5 (Engl.). Critical Constants and Molecular Weights of Gases	360

INDEX	361
--------------------	------------

Chapter 1

Introduction

The engineering area frequently referred to as *thermal science* includes *thermodynamics* and *heat transfer*. The role of heat transfer is to supplement thermodynamic analyses, which consider only systems in equilibrium, with additional laws that allow prediction of time rates of energy transfer.

These supplemental laws are based upon the three fundamental modes of heat transfer, namely *conduction*, *convection*, and *radiation*.

1.1 CONDUCTION

A temperature gradient within a homogeneous substance results in an energy transfer rate within the medium which can be calculated by

$$q = -kA \frac{\partial T}{\partial n} \quad (1.1)$$

where $\partial T/\partial n$ is the temperature gradient in the direction normal to the area A . The *thermal conductivity* k is an experimental constant for the medium involved, and it may depend upon other properties, such as temperature and pressure, as discussed in Section 1.4. The units of k are $\text{W/m}\cdot\text{K}$ or $\text{Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$. (For units systems, see Section 1.5.)

The minus sign in *Fourier's law*, (1.1), is required by the second law of thermodynamics: thermal energy transfer resulting from a thermal gradient must be from a warmer to a colder region.

If the temperature profile within the medium is linear (Fig. 1-1), it is permissible to replace the temperature gradient (partial derivative) with

$$\frac{\Delta T}{\Delta x} = \frac{T_2 - T_1}{x_2 - x_1} \quad (1.2)$$

Such linearity always exists in a homogeneous medium of fixed k during *steady state* heat transfer.

Steady state transfer occurs whenever the temperature at every point within the body, including the surfaces, is independent of time. If the temperature changes with time, energy is either being stored in or removed from the body. This storage rate is

$$q_{\text{stored}} = mc_p \frac{\partial T}{\partial t} \quad (1.3)$$

where the mass m is the product of volume V and density ρ .

1.2 CONVECTION

Whenever a solid body is exposed to a moving fluid having a temperature different from that of the body, energy is carried or *convected* from or to the body by the fluid.

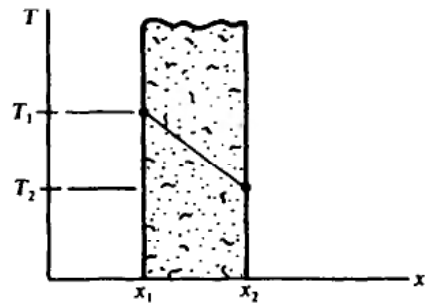


Fig. 1-1

If the upstream temperature of the fluid is T_x and the surface temperature of the solid is T_s , the heat transfer per unit time is given by

$$q = hA(T_s - T_x) \quad (1.4)$$

which is known as *Newton's law of cooling*. This equation defines the *convective heat transfer coefficient* h as the constant of proportionality relating the heat transfer per unit time and unit area to the overall temperature difference. The units of h are $\text{W/m}^2 \cdot \text{K}$ or $\text{Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$. It is important to keep in mind that the fundamental energy exchange at a solid–fluid boundary is by conduction, and that this energy is then convected away by the fluid flow. By comparison of (1.1) and (1.4), we obtain, for $y = n$,

$$hA(T_s - T_x) = -kA \left(\frac{\partial T}{\partial y} \right)_s \quad (1.5)$$

where the subscript on the temperature gradient indicates evaluation in the fluid at the surface.

1.3 RADIATION

The third mode of heat transmission is due to electromagnetic wave propagation, which can occur in a total vacuum as well as in a medium. Experimental evidence indicates that radiant heat transfer is proportional to the fourth power of the absolute temperature, whereas conduction and convection are proportional to a linear temperature difference. The fundamental *Stefan–Boltzmann law* is

$$q = \sigma AT^4 \quad (1.6)$$

where T is the absolute temperature. The constant σ is independent of surface, medium, and temperature; its value is $5.6697 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4$ or $0.1714 \times 10^{-8} \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{R}^4$.

The ideal emitter, or *blackbody*, is one which gives off radiant energy according to (1.6). All other surfaces emit somewhat less than this amount, and the thermal emission from many surfaces (*gray bodies*) can be well represented by

$$q = \epsilon \sigma AT^4 \quad (1.7)$$

where ϵ , the *emissivity* of the surface, ranges from zero to one.

1.4 MATERIAL PROPERTIES

Thermal Conductivity of Solids

Thermal conductivities of numerous pure metals and alloys are given in Tables B-1 (SI) and B-1 (Engl.). The thermal conductivity of the solid phase of a metal of known composition is primarily dependent only upon temperature. In general, k for a pure metal decreases with temperature; alloying elements tend to reverse this trend.

The thermal conductivity of a metal can usually be represented over a wide range of temperature by

$$k = k_0(1 + b\theta + c\theta^2) \quad (1.8)$$

where $\theta = T - T_{\text{ref}}$ and k_0 is the conductivity at the reference temperature T_{ref} . For many engineering applications the range of temperature is relatively small, say a few hundred degrees, and

$$k = k_0(1 + b\theta) \quad (1.9)$$

The thermal conductivity of a nonhomogeneous material is usually markedly dependent upon the *apparent bulk density*, which is the mass of the substance divided by the total volume occupied. This total volume includes the void volume, such as air pockets within the overall boundaries of the piece of material. The conductivity also varies with temperature. As a general rule, k for a nonhomogeneous

material increases both with increasing temperature and increasing apparent bulk density. Tables B-2 (SI) and B-2 (Engl.) contain thermal conductivity data for some nonhomogeneous materials.

Thermal Conductivity of Liquids

Tables B-3 (SI) and B-3 (Engl.) list thermal conductivity data for some liquids of engineering importance. For these, k is usually temperature dependent but insensitive to pressure. The data of this table are for saturation conditions, i.e., the pressure for a given fluid and given temperature is the corresponding saturation value. Thermal conductivities of most liquids decrease with increasing temperature. The exception is water, which exhibits increasing k up to about 150°C or 300°F and decreasing k thereafter. Water has the highest thermal conductivity of all common liquids except the so-called liquid metals.

Thermal Conductivity of Gases

The thermal conductivity of a gas increases with increasing temperature, but is essentially independent of pressure for pressures close to atmospheric. Tables B-4 (SI) and B-4 (Engl.) present k -data for several gases at atmospheric pressure. For high pressure (i.e., pressure of the order of the critical pressure or greater), the effect of pressure may be significant.

Two of the most important gases are air and steam. (No distinction is made between a gas and a vapor in this chapter.) For air the atmospheric values listed in Table B-4 (SI) are suitable for most engineering purposes over the ranges: (i) $0^\circ\text{C} \leq T \leq 1650^\circ\text{C}$ and $1 \text{ atm} \leq p \leq 100 \text{ atm}$; (ii) $-75^\circ\text{C} \leq T \leq 0^\circ\text{C}$ and $1 \text{ atm} \leq p \leq 10 \text{ atm}$.

Thermal conductivity data for steam exhibit a strong pressure dependence. For approximate calculations the atmospheric data of Tables B-4 (SI) and B-4 (Engl.) may be used together with Figure B-3. For other gases, one must resort to more extensive property tables.

Density

Density is defined as the mass per unit volume. All systems considered in this book will be sufficiently large for statistical averages to be meaningful; that is, we will consider only a *continuum*, which is a region with a continuous distribution of matter. For systems with variable density we define *density at a point* (a specific location) as

$$\rho \equiv \lim_{\delta V \rightarrow \delta V_c} \frac{\delta m}{\delta V} \quad (1.10)$$

where δV_c is the smallest volume for which a continuum has meaning.

Density data for most solids and liquids are only slightly temperature dependent and are negligibly influenced by pressure up to 100 atm. Density data for solids and liquids are presented in Tables B-1, B-2, and B-3 in both SI and English Engineering units. The density of a gas, however, is *strongly dependent upon the pressure* as well as upon the temperature. In the absence of specific gas data the atmospheric density of Tables B-4 (SI) and B-4 (Engl.) may be modified by application of the ideal gas law:

$$\rho = \rho_1 \left(\frac{p}{p_1} \right) \quad (1.11)$$

The *specific volume* is the reciprocal of the density,

$$v = \frac{1}{\rho} \quad (1.12)$$

and the *specific gravity* is the ratio of the density to that of pure water at a temperature of 4°C and a pressure of one atmosphere (760 mmHg). Thus

$$S = \frac{\rho}{\rho_w} \quad (1.13)$$

where S is the specific gravity.

Specific Heat

The *specific heat* of a substance is a measure of the variation of its stored energy with temperature. From thermodynamics the two important specific heats are:

$$\text{specific heat at constant volume: } c_v \equiv \left. \frac{\partial u}{\partial T} \right|_v \quad (1.14)$$

$$\text{specific heat at constant pressure: } c_p \equiv \left. \frac{\partial h}{\partial T} \right|_p \quad (1.15)$$

Here u is the internal energy per unit mass and h is the enthalpy per unit mass. In general, u and h are functions of two variables: temperature and specific volume, and temperature and pressure, respectively. For substances which are incompressible, i.e., solids and liquids, c_p and c_v are numerically equal. For gases, however, the two specific heats are considerably different. The units of c_v and c_p are J/kg·K or Btu/lb_m·°F.

For solids, specific heat data are only weakly dependent upon temperature and even less affected by pressure. It is usually acceptable to use the limited c_p data of Tables B-1 (SI), B-1 (Engl.), B-2 (SI), and B-2 (Engl.), over a fairly wide range of temperatures and pressures.

Specific heats of liquids are even less pressure dependent than those of solids, but they are somewhat temperature influenced. Data for some liquids are presented in Tables B-3 (SI) and B-3 (Engl.).

Gas specific heat data exhibit a strong temperature dependence. The pressure effect is slight except near the critical state, and the pressure dependence diminishes with increasing temperature. For most engineering calculations the data of Table B-4 (Engl.) (other than density) can be used for pressures up to 200 psia, while Table B-4 (SI) is suitable for pressures up to 1.4×10^6 Pa.

Thermal Diffusivity

A useful combination of terms already considered is the *thermal diffusivity* α , defined by

$$\alpha \equiv \frac{k}{\rho c_p} \quad (1.16)$$

It is seen that α is the ratio of the thermal conductivity to the thermal capacity of the material. Its units are ft²/h or m²/s. Thermal energy diffuses rapidly through substances with high α and slowly through those with low α .

Some of the tables of Appendix B, in both SI and English units, list thermal diffusivity data. Note the strong dependence of α for gases upon both pressure and temperature; these data for gases are only for atmospheric pressure, and they are only valid for the specified temperature.

Viscosity

The simplest flow situation involving a real fluid, i.e., one that has a nonzero viscosity, is laminar flow along a flat wall (Fig. 1-2). In this model, fluid layers slide parallel to one another, the molecular layer adjacent to the wall being stationary. The next layer out from the wall slides along this stationary layer, and its motion is impeded or slowed because of the frictional shear between these layers.

Continuing outward, a distance is reached where the retardation of the fluid due to the presence of the wall is no longer evident.

Consider plane $P-P$. The fluid layer immediately below this plane has velocity $u - \delta u$, and the fluid layer immediately above has velocity $u + \delta u$. Here u is the value of the velocity in the x -direction at the y -location of the $P-P$ plane. The difference in velocity between these two adjacent fluid layers produces a shear stress τ . Newton postulated that this stress is directly proportional to the velocity gradient normal to the plane:

$$\tau = \mu_f \frac{du}{dy} \quad (1.17)$$

The coefficient of proportionality is called the *coefficient of dynamic viscosity*, or more simply the *dynamic* or *absolute viscosity*.

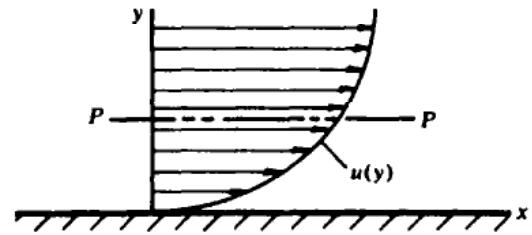


Fig. 1-2

Viscosity units As shown by (1.17), the units of μ_f are $\text{N}\cdot\text{s}/\text{m}^2$ or $\text{lb}_f\cdot\text{s}/\text{ft}^2$. In many applications it is convenient to have the dynamic viscosity expressed in terms of a mass, rather than a force, unit. In this book, μ_m will denote the mass-based viscosity coefficient. In the SI system the units of μ_m are $\text{kg}/\text{m}\cdot\text{s}$, and μ_m is numerically equal to μ_f . In the English Engineering system μ_m has units $\text{lb}_m/\text{ft}\cdot\text{s}$, and, numerically, $\mu_m = (32.17)\mu_f$. In those contexts in which the units are irrelevant we shall simply write μ for the dynamic viscosity.

For gases and liquids dynamic viscosity is markedly dependent upon the temperature but rather insensitive to pressure; data are presented in Tables B-3 (SI), B-3 (Engl.), B-4 (SI), and B-4 (Engl.).

As in the case of gas thermal conductivity, gas dynamic viscosity is pressure dependent at pressures approaching the critical value, or greater. The generalized chart of Figure B-4 may be used in the absence of specific gas viscosity data at high pressure. For air, however, the variation of μ with pressure is negligible for most engineering problems; in particular, use of the generalized chart will seriously overcorrect the viscosity.

The ratio of dynamic viscosity to density is called the *kinematic viscosity* ν :

$$\nu = \frac{\mu_m}{\rho} \quad (1.18)$$

The units of ν are ft^2/s or m^2/s .

Warning: Unlike the dynamic viscosity, the kinematic viscosity is *strongly pressure dependent* (because the density is). The data of Tables B-4 (SI) and B-4 (Engl.) are for 1 atm only; they must be modified for use at higher pressure (if used at all).

1.5 UNITS

Table 1-1 summarizes the units systems in common use. The proportionality constant g_c in Newton's second law of motion,

$$F = \frac{1}{g_c} ma, \quad (1.19)$$

is given in the last column.

In this book only the SI and English Engineering systems will be employed. For convenience, conversion factors from non-SI into SI units are given in Appendix A.

Table 1-1

Units System	Defined Units	Derived Units	Proportionality Constant, g_c
Metric Absolute	Mass, g Length, cm Time, s Temp., °K	Force: $\text{dyne} = \frac{\text{g} \cdot \text{cm}}{\text{s}^2}$	$1 \frac{\text{g} \cdot \text{cm}}{\text{dyne} \cdot \text{s}^2}$
English Absolute	Mass, lb Length, ft Time, s Temp., °R	Force: $\text{poundal} = \frac{\text{lb}_m \cdot \text{ft}}{\text{s}^2}$	$1 \frac{\text{lb}_m \cdot \text{ft}}{\text{poundal} \cdot \text{s}^2}$
British Technical	Force, lb _f Length, ft Time, s Temp., °R	Mass: $\text{slug} = \frac{\text{lb}_f \cdot \text{s}^2}{\text{ft}}$	$1 \frac{\text{slug} \cdot \text{ft}}{\text{lb}_f \cdot \text{s}^2}$
English Engineering	Force, lb _f Mass, lb _m Length, ft Time, s Temp., °R	(None)	$32.17 \frac{\text{lb}_m \cdot \text{ft}}{\text{lb}_f \cdot \text{s}^2}$
International System (SI)	Length, m Mass, kg Time, s Temp., K	Force: $\text{newton (N)} = \frac{\text{kg} \cdot \text{m}}{\text{s}^2}$	$1 \frac{\text{kg} \cdot \text{m}}{\text{N} \cdot \text{s}^2}$

Solved Problems

- 1.1. Determine the steady state rate of heat transfer per unit area through a 4.0 cm thick homogeneous slab with its two faces maintained at uniform temperatures of 38 °C and 21 °C. The thermal conductivity of the material is 0.19 W/m·K.

The physical problem is shown in Fig. 1-3. For the steady state, (1.1) and (1.2) combine to yield

$$\begin{aligned} \frac{q}{A} &= -k \left(\frac{T_2 - T_1}{x_2 - x_1} \right) \\ &= -0.19 \frac{\text{W}}{\text{m} \cdot \text{K}} \left(\frac{21 - 38}{0.04} \right) \frac{^\circ\text{C}}{\text{m}} = +80.75 \text{ W/m}^2 \end{aligned}$$

- 1.2. The forced convective heat transfer coefficient for a hot fluid flowing over a cool surface is 225 W/m²·°C for a particular problem. The fluid temperature upstream of the cool surface

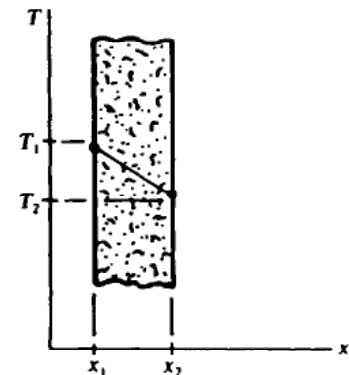


Fig. 1-3

is 120 °C, and the surface is held at 10 °C. Determine the heat transfer rate per unit surface area from the fluid to the surface.

$$q = hA(T_s - T_\infty)$$

$$\frac{q}{A} = (225 \text{ W/m}^2 \cdot ^\circ\text{C})[(120 - 10)^\circ\text{C}]$$

$$= 24\,750 \text{ W/m}^2$$

- 1.3.** After sunset, radiant energy can be sensed by a person standing near a brick wall. Such walls frequently have surface temperatures around 44 °C, and typical brick emissivity values are on the order of 0.92. What would be the radiant thermal flux per square foot from a brick wall at this temperature?

Equation (1.7) applies.

$$\frac{q}{A} = \epsilon\sigma T^4 = (0.92)(5.6697 \times 10^{-8})(\text{W/m}^2 \cdot \text{K}^4)(44 + 273)^4 \text{ K}^4$$

$$= (0.92)(5.6697 \times 10^{-8})(317)^4 = 527 \text{ W/m}^2$$

Note that absolute temperature must be used in all radiant energy calculations. Also, σ is frequently abbreviated by $5.67 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4$.

- 1.4.** Determine the dynamic viscosity μ_m and the kinematic viscosity ν of hydrogen gas at 90 °R and 38.4 atm.

From Table B-4 (Engl.) at 90 °R = -370 °F,

$$\mu_{m1} = 1.691 \times 10^{-6} \text{ lb}_m/\text{ft} \cdot \text{s} \quad \rho_1 = 0.031\,81 \text{ lb}_m/\text{ft}^3$$

From Table B-5 (Engl.) the critical state is $p_c = 12.8 \text{ atm}$; $T_c = 59.9^\circ\text{R}$. So,

$$P_r = \frac{38.4}{12.8} = 3.0 \quad T_r = \frac{90}{59.9} = 1.50$$

From Figure B-4, $\mu_m/\mu_{m1} \approx 1.55$, so that

$$\mu_m \approx 1.55 \times 1.691 \times 10^{-6} = 2.62 \times 10^{-6} \text{ lb}_m/\text{ft} \cdot \text{s}$$

At high pressure ($P_r = 3.0$) the ideal gas law must be modified in order to calculate ρ and thence ν . For a real gas we write the equation of state as $p\nu = ZRT$, where Z is the *compressibility factor* and $R = \mathcal{R}/M$ is the universal gas constant divided by the molecular weight. It follows that

$$\frac{\rho}{\rho_1} = \frac{\nu_1}{\nu} = \frac{p/Z}{p_1/Z_1}$$

For the present problem, standard tables give $Z \approx 0.81$, $Z_1 \approx 1$. Thus,

$$\frac{\rho}{0.031\,81 \text{ lb}_m/\text{ft}^3} \approx \frac{38.4/0.81}{1/1}$$

$$\rho \approx 1.51 \text{ lb}_m/\text{ft}^3$$

and

$$\nu = \frac{\mu_m}{\rho} = \frac{2.62 \times 10^{-6} \text{ lb}_m/\text{ft} \cdot \text{s}}{1.51 \text{ lb}_m/\text{ft}^3} = 1.74 \times 10^{-6} \text{ ft}^2/\text{s}$$

In general, whenever the pressure effect upon viscosity μ or thermal conductivity k is significant, the deviation from ideal gas behavior will affect the value of ρ significantly.

- 1.5.** In the summer, parked automobile surfaces frequently average 40–50 °C. Assuming 45 °C and surface emissivity of 0.9, determine the radiant thermal flux emitted by a car roof.

$$\begin{aligned}\frac{q}{A} &= \epsilon \sigma T^4 = (0.90)(5.67 \times 10^{-8})(\text{W/m}^2 \cdot \text{K}^4)(318 \text{ K})^4 \\ &= 522 \text{ W/m}^2\end{aligned}$$

Note that absolute temperature must be used in all radiant energy calculations.

- 1.6.** Determine μ in English Engineering units ($\text{lb}_m/\text{ft} \cdot \text{s}$) for nitrogen gas at 80 °F and 2000 psia. (This is a common bottle pressure for commercial sales.)

From Table B-5 (Engl.), the critical state is $p_c = 33.5 \text{ atm}$; $T_c = 226.9^\circ\text{R}$. Thus,

$$P_r = \frac{(2000/14.7) \text{ atm}}{33.5 \text{ atm}} = 4.06 \quad T_r = \frac{539.7^\circ\text{R}}{226.9^\circ\text{R}} = 2.379$$

From Figure B-4, $\mu/\mu_1 \approx 1.25$. From Table B-4 (Engl.), $\mu_1 = 11.99 \times 10^{-6} \text{ lb}_m/\text{ft} \cdot \text{s}$, so

$$\mu = 11.99 \times 10^{-6} \times 1.25 = 14.99 \times 10^{-6} \text{ lb}_m/\text{ft} \cdot \text{s}$$

- 1.7.** Estimate the thermal conductivity in $\text{W/m} \cdot \text{K}$ of steam at 713 K and 130 atm (13.17×10^6 pascals).

From Table B-4 (SI), by interpolation at 1 atmosphere pressure and 440 °C,

$$k_1 = 0.0516 \text{ W/m} \cdot \text{K}$$

For use with Fig. B-3 for steam

$$\begin{aligned}P_r &= p/p_c = \frac{130 \text{ atm}}{218.3 \text{ atm}} = 0.5955 = 0.60 \\ T_r &= T/T_c = \frac{700 \text{ K}}{647.4 \text{ K}} = 1.10\end{aligned}$$

From Fig. B-3,

$$\frac{k}{k_1} \approx 1.3$$

and

$$k \approx 1.3(0.0516) \approx 0.0671 \text{ W/m} \cdot \text{K}$$

- 1.8.** Estimate the thermal conductivity of steam at 1283 °R and 1925 psia.

From Table B-3 (Engl.), by interpolation at 1283 °R (823 °F) and one atmosphere pressure

$$k_1 = 0.02984 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$$

For use with Fig. B-3 for steam

$$\begin{aligned}P_r &= p/p_c = \frac{1925 \text{ psia}}{3208 \text{ psia}} = 0.060 \\ T_r &= T/T_c = \frac{1283^\circ\text{R}}{1165.3^\circ\text{R}} = 1.101\end{aligned}$$

From Fig. B-3,

$$\frac{k}{k_1} = 1.3$$

and

$$k = (1.3)(0.02984) = 0.03879 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$$

- 1.9.** What is the approximate density of nitrogen gas at 27 °C and 13.79×10^6 pascals? (Common pressure and temperature for commercial cylinder of gas.)

From Table B-3 (SI), at one atmosphere pressure and 27 °C, (300 K)

$$\rho_1 = 1.1421 \frac{\text{kg}}{\text{m}^3}$$

By eq. (1.11) with $\rho_1 = 1 \text{ atm} = 1.013 \times 10^5$ pascals

$$\rho = \rho_1 \left(\frac{P}{P_1} \right) = 1.1421 \frac{\text{kg}}{\text{m}^3} \left(\frac{13.79 \times 10^6}{1.013 \times 10^5} \right)$$

$$\rho = 155.5 \text{ kg/m}^3$$

- 1.10.** A hollow cylinder having a weight of 4 lb_f slides along a vertical rod which is coated with a light lubricating oil (see Fig. 1-4(a)). The steady velocity (terminal) of the slide is 3.0 ft/s. The hole diameter in the slide is 1.000 in and the radial clearance between the slide and the rod is 0.001 in. The slide length is 5 in. Neglecting all drag forces except the viscous shear at the inner surface of the cylinder and assuming a linear velocity profile for the lubricant, estimate the dynamic viscosity of the oil. Compare this with tabulated values for engine oil at 158 °F.

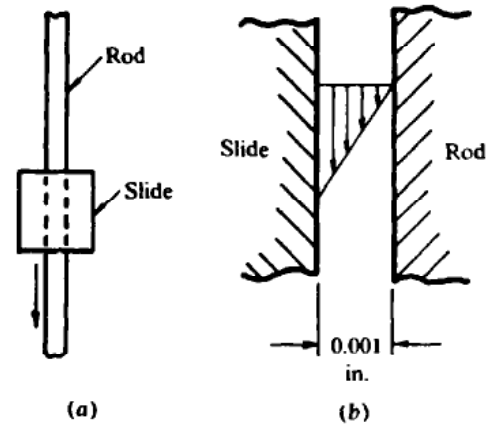


Fig. 1-4

Since the radial clearance is small, the suggested linear velocity profile, shown in Fig. 1-4(b), will be a suitable first-order approximation. The velocity in the fluid ranges from 0 at the rod surface to 3 ft/s at the slide surface, and

$$\frac{du}{dy} \approx \frac{\Delta u}{\Delta r} = \frac{(3 - 0) \text{ ft/s}}{(0.001/12) \text{ ft}} = 3.6 \times 10^4 \text{ s}^{-1}$$

From a free-body diagram of the slide, the total downward force is the weight, and the total upward force is the product of the shear stress and the inner surface area. So $\tau A = 4 \text{ lb}_f$, whence

$$\tau = \frac{4 \text{ lb}_f}{A} = \frac{4 \text{ lb}_f}{\pi \left(\frac{1}{12} \text{ ft} \right) \left(\frac{5}{12} \text{ ft} \right)} = 36.7 \frac{\text{lb}_f}{\text{ft}^2}$$

By (1.17),

$$\tau = \mu_f \frac{du}{dy} = 36.7 \frac{\text{lb}_f}{\text{ft}^2}$$

$$\mu_f = \frac{36.7 \text{ lb}_f/\text{ft}^2}{du/dy} \approx \frac{(36.7 \text{ lb}_f/\text{ft}^2) \text{ s}}{3.6 \times 10^4} = 1.019 \times 10^{-3} \frac{\text{lb}_f \cdot \text{s}}{\text{ft}^2}$$

From Table B-3 (Engl.), the dynamic viscosity of engine oil at approximately 158 °F (70 °C) is

$$\mu_f = \rho \nu \frac{1}{g_c} = \left(53.57 \frac{\text{lb}_m}{\text{ft}^3} \right) \left(0.6535 \times 10^{-3} \frac{\text{ft}^2}{\text{s}} \right) \left(\frac{\text{lb}_f \cdot \text{s}^2}{32.17 \text{ ft} \cdot \text{lb}_m} \right)$$

$$= 1.08 \times 10^{-3} \frac{\text{lb}_f \cdot \text{s}}{\text{ft}^2}$$

which compares well with the preceding estimate. Note that the conversion from lb_m to lb_f was accomplished by use of the factor

$$32.17 \frac{\text{ft} \cdot \text{lb}_m}{\text{lb}_f \cdot \text{s}^2} = 1$$

obtained from Table 1-1. This factor can always be introduced when using English Engineering units if needed for dimensional conversion.

- 1.11.** A manometer fluid has a specific gravity $S = 2.95$ at 20°C . Determine the density of this fluid in (a) kg/m^3 and (b) lb_m/ft^3 .

(a) From Table B-3 (SI) at 20°C (68°F)

$$\rho_w \approx 1000 \text{ kg}/\text{m}^3$$

$$\rho = S\rho_w \approx (2.95)(1000 \text{ kg}/\text{m}^3) \approx 2950 \text{ kg}/\text{m}^3$$

(b) Using $\rho_w = 62.46 \text{ lb}_m/\text{ft}^3$ (from Table B-3 (Engl.))

$$\rho \approx \left(62.46 \frac{\text{lb}_m}{\text{ft}^3}\right) 2.95 \approx 184.2 \text{ lb}_m/\text{ft}^3$$

- 1.12.** Determine the thermal diffusivity of helium gas at 260°C and 8.274×10^5 pascals (approx. 8.17 atm). You may assume no effect of pressure on thermal conductivity.

From Table B-4 (SI), by interpolation,

$$k = 0.2109 \text{ W}/\text{m} \cdot \text{K}$$

$$\rho_1 = 0.0924 \frac{\text{kg}}{\text{m}^3}$$

$$c_p = 5.2 \times 10^3 \frac{\text{J}}{\text{kg} \cdot \text{K}}$$

By eq. (1.11)

$$\begin{aligned} \rho &= \rho_1 \left(\frac{p}{p_1}\right) = 0.0924 \frac{\text{kg}}{\text{m}^3} \left(\frac{8.274 \times 10^5 \text{ pascals}}{1.01325 \times 10^5 \text{ pascals}}\right) \\ &= 0.754 \text{ kg}/\text{m}^3 \end{aligned}$$

Thus, by equation (1.16)

$$\begin{aligned} \alpha &\equiv \frac{k}{\rho c_p} = \left(0.2109 \frac{\text{J}/\text{s}}{\text{m} \cdot \text{K}}\right) \left(\frac{\text{m}^3}{0.754 \text{ kg}}\right) \left(\frac{\text{kg} \cdot \text{K}}{5.2 \times 10^3 \text{ J}}\right) \\ \alpha &= 5.383 \times 10^{-5} \text{ m}^2/\text{s} \end{aligned}$$

- 1.13.** A camera used by astronauts during exploration of the lunar surface weighed 2.0 lb_f on earth. Average lunar gravitational acceleration is one-sixth that of the earth. What was the camera weight on the moon in lb_f and in N?

Since the camera weighs 2.0 lb_f where gravitational acceleration is standard, its mass is 2.0 lb_m ; i.e., by (1.19), with $F = \text{wt.}$,

$$m = \frac{(\text{wt.}) g_e}{a} = \frac{(2.0 \text{ lb}_f)(32.17 \text{ ft} \cdot \text{lb}_m/\text{lb}_f \cdot \text{s}^2)}{32.17 \text{ ft}/\text{s}^2} \approx 2.0 \text{ lb}_m$$

Hence, on the moon,

$$\text{wt.} = \frac{1}{g_c} ma = \frac{(2.0 \text{ lb}_m)[(32.17/6) \text{ ft/s}^2]}{32.17 \text{ ft} \cdot \text{lb}_m / \text{lb}_f \cdot \text{s}^2} = 0.33 \text{ lb}_f$$

In SI units (by Table A-1),

$$\text{wt.} = 0.33 \text{ lb}_f \times 4.4482 \frac{\text{N}}{\text{lb}_f} = 1.468 \text{ N}$$

1.14. What is the kinematic viscosity of air at 450 K and 1.00×10^6 pascals?

From Table B-4 (SI), at 450 K and 1 atmosphere pressure,

$$\begin{aligned} \mu_{m1} &= 2.484 \times 10^{-5} \frac{\text{kg}}{\text{m} \cdot \text{s}} \\ \rho_1 &= 0.783 \text{ kg/m}^3 \end{aligned}$$

By eq. (1.13),

$$\begin{aligned} \rho &= \rho_1 \left(\frac{p}{p_1} \right) = 0.783 \left(\frac{1.00 \times 10^6}{1.013 \times 10^5} \right) \frac{\text{kg}}{\text{m}^3} \\ &= 7.729 \text{ kg/m}^3 \end{aligned}$$

Thus, by (1.18)

$$\nu = \frac{2.484 \times 10^{-5} \text{ kg/m} \cdot \text{s}}{7.729 \text{ kg/m}^3} = 3.212 \times 10^{-6} \text{ m}^2/\text{s}$$

Checking, $p/p_c = 9.87$; $T/T_c = 3.40$, so by Fig. B-4 $\mu/\mu_1 \approx 1.0$.

1.15. Determine the dynamic viscosity μ_m of hydrogen gas at 50 K and 11.67×10^6 pascals.

From Table B-4 (SI), at 50 K = -223°C

$$\begin{aligned} \mu_{m1} &= 2.516 \times 10^{-6} \frac{\text{kg}}{\text{m} \cdot \text{s}} \\ \rho_1 &= 0.5095 \frac{\text{kg}}{\text{m}^3} \end{aligned}$$

From Table B-5 (Engl.), the critical state is

$$p_c = 12.8 \text{ atm}; \quad T_c = 59.9^\circ\text{R} \left(\frac{5 \text{ K}}{9^\circ\text{R}} \right) = 33.27 \text{ K}$$

Thus, with $p = (11.67 \times 10^6 \text{ Pa}) / (1.013 \times 10^5 \text{ Pa/atm}) = 115.2 \text{ atm}$

$$P_r = \frac{115.2}{12.8} = 9.0; \quad T_r = \frac{50}{33.27} = 1.50$$

Then from Figure B-4, $\mu_m/\mu_{m1} \approx 3.0$, so that

$$\mu_m \approx 3.0 \left(2.516 \times 10^{-6} \frac{\text{kg}}{\text{m} \cdot \text{s}} \right) = 7.55 \times 10^{-6} \frac{\text{kg}}{\text{m} \cdot \text{s}}$$

- 1.16.** A proposed experiment package weighs 132 N on earth. For a simulated gravity in a space platform of one-fifth that of earth's gravity, what is the weight of the package (a) in SI units?; (b) in English engineering units?

$$(a) \quad m = \frac{wt}{a} = \frac{132 \text{ N}}{9.80 \text{ m/s}^2} = 13.47 \text{ N/m/s}^2$$

In the space platform,

$$F = ma = \left(\frac{13.47 \text{ N}}{\text{m/s}^2} \right) \left(\frac{9.80 \text{ m}}{5 \text{ s}^2} \right) = 26.4 \text{ N}$$

- (b) In English engineering units by Table A-1,

$$\begin{aligned} wt = \text{force} &= 26.4 \text{ N} \left(\frac{\text{lb}_f}{4.448 \text{ N}} \right) \\ &= 5.94 \text{ lb}_f \end{aligned}$$

- 1.17.** Verify the conversion factors

$$(a) \quad 1 \text{ ft/s} = 0.3048 \text{ m/s}$$

$$(b) \quad 1 \text{ ft/h} = 8.4666 \times 10^{-5} \text{ m/s}$$

$$(c) \quad 1 \text{ km/h} = 0.2777 \text{ m/s}$$

$$(a) \quad \left(1 \frac{\text{ft}}{\text{s}} \right) \left(\frac{0.3048 \text{ m}}{\text{ft}} \right) = 0.3048 \text{ m/s}$$

$$(b) \quad \left(1 \frac{\text{ft}}{\text{hs}} \right) \left(\frac{0.3048 \text{ m}}{\text{ft}} \right) \left(\frac{\text{h}}{3600 \text{ s}} \right) = 8.4666 \times 10^{-5} \text{ m/s}$$

$$(c) \quad \left(1 \frac{\text{km}}{\text{h}} \right) \left(\frac{1000 \text{ m}}{\text{km}} \right) \left(\frac{\text{h}}{3600 \text{ s}} \right) = 0.2777 \text{ m/s}$$

- 1.18.** Verify the conversion factors

$$(a) \quad 1 \text{ Btu/ft}^2 \cdot \text{h} = 3.1525 \text{ W/m}^2$$

$$(b) \quad 1 \text{ Btu/h} = 0.292875 \text{ W}$$

$$(c) \quad 1 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F} = 1.729 \text{ W/m} \cdot \text{K}$$

$$(a) \quad \left(1 \frac{\text{Btu}}{\text{ft}^2 \cdot \text{h}} \right) \left(\frac{1054.35 \text{ J}}{\text{Btu}} \right) \left(\frac{\text{ft}^2}{(0.3048 \text{ m})^2} \right) \left(\frac{\text{h}}{3600 \text{ s}} \right) = 3.1525 \frac{\text{J}}{\text{s} \cdot \text{m}^2} = 3.1525 \frac{\text{W}}{\text{m}^2}$$

$$(b) \quad \left(1 \frac{\text{Btu}}{\text{h}} \right) \left(\frac{1054.35 \text{ J}}{\text{Btu}} \right) \left(\frac{\text{h}}{3600 \text{ s}} \right) = 0.292875 \text{ W}$$

$$(c) \quad \left(1 \frac{\text{Btu}}{\text{h} \cdot \text{ft} \cdot ^\circ\text{F}} \right) \left(\frac{1054.35 \text{ J}}{\text{Btu}} \right) \left(\frac{\text{ft}}{0.3048 \text{ m}} \right) \left(\frac{\text{h}}{3600 \text{ s}} \right) \left(\frac{9^\circ\text{F}}{5 \text{ K}} \right) = 1.72958 \frac{\text{W}}{\text{m} \cdot \text{K}}$$

- 1.19.** Estimate the thermal conductivity of steam at 65 atm pressure and 575 K.

These conditions are relatively extreme and this pressure undoubtedly alters the value for one atmosphere. Using Fig. B-3, with $T_c = 647.4 \text{ K}$

$$T_r = \frac{575 \text{ K}}{647 \text{ K}} \approx 0.89; \quad P_r = \frac{65 \text{ atm}}{218.3 \text{ atm}} \approx 0.30$$

From Fig. B-3 obtain k where k_1 is the value at 1.0 atm,

$$\frac{k}{k_1} = 1.29$$

From Table B-4 (SI), at $P = 1 \text{ atm}$ and $T = 575 \text{ K}$,

$$k_1 = 0.04005 \text{ W/m}\cdot\text{K}$$

and hence

$$k = 1.29 (0.0401) \approx 0.0517 \text{ W/m}\cdot\text{K}$$

1.20. To show the sensitivity of k of steam to pressure, repeat Problem 1.19 at 87.5 atm.

Since the temperature is unchanged from that of Problem 1.19,

$$T_r = 0.89$$

and

$$P_r \text{ is } \frac{87.5}{218.3} \approx 0.4$$

From Fig. B-3, $k/k_1 \approx 1.5$ and using k_1 from Problem 1.19,

$$k \approx 1.5 (0.0401) \approx 0.0601 \text{ W/m}\cdot\text{K}$$

A 34% increase in pressure caused a 16% increase in k . So steam thermal conductivity is quite pressure sensitive at high pressure.

1.21. The air inside an electronics package housing has a temperature of 50°C . A “chip” in this housing has internal thermal power generation (heating) rate of $3 \times 10^{-3} \text{ W}$. This chip is subjected to an air flow resulting in a convective coefficient h of $9 \text{ W/m}^2\cdot^\circ\text{C}$ over its two main surfaces which are $0.5 \text{ cm} \times 1.0 \text{ cm}$ (see Fig. 1-5). Determine the chip surface temperature neglecting radiation and heat transfer from the edges.

The heat transfer rate is, by eq. (1.5),

$$q = hA_s(T_s - T_\infty)$$

In this case q is known ($3 \times 10^{-3} \text{ W}$), and this is from the two surfaces having total area

$$A_s = 2 \left(\frac{0.5}{100} \text{ m} \right) \left(\frac{1.0}{100} \text{ m} \right) = 2(0.5 \text{ m}^2) \times 10^{-4} = 10^{-4} \text{ m}^2$$

$$T_s = T_\infty + \frac{q}{hA_s} = 50^\circ\text{C} + \frac{3 \times 10^{-3} \text{ W}}{(9 \text{ W/m}^2\cdot^\circ\text{C}) \times 10^{-4} \text{ m}^2}$$

Thus

$$T_s = 50^\circ\text{C} + 3.33^\circ\text{C} = 53.33^\circ\text{C}$$

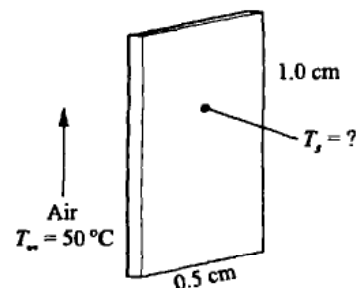


Fig. 1-5

Supplementary Problems

1.22. A plane wall 0.15 cm thick, of a homogeneous material with $k = 0.40 \text{ W/m}\cdot\text{K}$, has steady and uniform temperatures $T_1 = 20^\circ\text{C}$ and $T_2 = 70^\circ\text{C}$ (see Fig. 1-6). Determine the heat transfer rate in the positive x -direction per square meter of surface area. *Ans.* -133 W/m^2

1.23. Forced air flows over a convective heat exchanger in a room heater, resulting in a convective heat transfer coefficient $h = 200 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$. The surface temperature of the heat exchanger may be considered constant at 150°F , and the air is at 65°F . Determine the heat exchanger surface area required for $30\,000 \text{ Btu/h}$ of heating. *Ans.* 1.765 ft^2

1.24. Asphalt pavements on hot summer days exhibit surface temperatures of approximately 50°C . Consider such a surface to emit as a blackbody and calculate the emitted radiant energy per unit surface area. *Ans.* 617 W/m^2

1.25. Plot thermal conductivity versus temperature in SI units for copper and cast iron over the range of values given in Appendix B-1 (SI). Which of these is the better thermal conductor?

1.26. Plot thermal conductivity versus temperature in SI units for saturated liquid ammonia and saturated liquid carbon dioxide over the ranges of temperature given in Table B-3 (SI). Does the behavior of either of these depart from the general rule that k for liquids decreases with increasing temperature?

1.27. Determine the thermal conductivity for steam at 530°F and 100 psia .

Ans. $0.0219 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$ ($k/k_1 \approx 1.0$)

1.28. Determine the thermal conductivity of steam at 700 K and $1.327 \times 10^7 \text{ N/m}^2$.

Ans. $0.0505 \text{ W/m}\cdot\text{K}$ ($k/k_1 \approx 1.0$)

1.29. Determine the thermal conductivity of carbon monoxide gas at 1 atm pressure and 93.7°C .

Ans. $0.0299 \text{ W/m}\cdot\text{K}$

1.30. Approximate the density of gaseous carbon monoxide at 550 K and 827 kPa . *Ans.* 5.06 kg/m^3

1.31. Using the density of mercury at 50°C , determine its specific gravity.

Ans. 13.49 (based on density of water at 20°C)

1.32. A 1.5 in diameter shaft rotates in a sleeve bearing which is 2.5 in long. The radial clearance between the shaft and the sleeve is 0.0015 in, and this is filled with oil having $\mu_m = 1.53 \times 10^{-2} \text{ lb}_m/\text{ft}\cdot\text{s}$. Assuming a rotational speed of 62 rpm and a linear velocity gradient in the lubricating oil, determine the resistive torque due to viscous shear at the shaft-lubricant interface. *Ans.* $0.0079 \text{ ft}\cdot\text{lb}_f$

1.33. Plot the kinematic viscosity of steam at 300 psia for the range of temperature of steam properties in Table B-4 (Engl.). *Ans.* $\nu = 2.4814 \times 10^{-5} \text{ ft}^2/\text{s}$ at 530°F , $\rho = 0.5102 \text{ lb}_m/\text{ft}^3$ at 530°F

1.34. During launch a NASA Space Shuttle Vehicle had a maximum acceleration of approximately $3.0 g$, where g is standard gravitational acceleration. What total weight in lb_f and in N should be used for a 180 lb_m crew member? *Ans.* 540 lb_f ; 2402 N




Fig. 1-6

- 1.35.** A land vehicle to be used in the future manned exploration of the moon surface weighs 493.8 lb_f on earth. This is loaded weight minus crew. Assume an average lunar gravity equal to one-sixth standard earth gravity. (a) What is the vehicle mass in kg? (b) What is the vehicle weight on earth in N? (c) What is the vehicle weight on the moon in lb_f? *Ans.* 223.9 kg; 2196 N; 82.3 lb_f
- 1.36.** Verify the viscosity conversion factors
- (a) 1 stoke = 1.0×10^4 m²/s
(b) 1 ft²/s = 9.2903×10^{-2} m²/s
(c) 1 ft²/h = 2.5806×10^{-5} m²/s
- 1.37.** Verify the following pressure conversion factors:
- (a) 1 lb_f/ft² = 47.8803 N/m²
(b) 1 lb_f/in² = 6.8947×10^3 N/m²
(c) 1 mmHg = 1.3332×10^2 N/m²
- 1.38.** The lunar temperature range on the side facing the earth is approximately -400 °F to +200 °F. These correspond to the lunar night and day. What is this range in (a) °C, (b) °R, (c) K?
Ans. -240 °C to 93.33 °C; 59.67 °R to 659.67 °R; 33.15 K to 366.48 K

Chapter 2

One-Dimensional Steady-state Conduction

2.1 INTRODUCTORY REMARKS

The conductive heat transfer rate at a point within a medium is related to the local temperature gradient by Fourier's law, (1.1). In many one-dimensional problems we can write the temperature gradient simply by inspection of the physical situation. However, more complex cases—and the multidimensional problems to be treated in later chapters—require the formation of an energy equation which governs the temperature distribution in general. From the temperature distribution, the temperature gradient at any desired location within the medium can be formed, and consequently the heat transfer rate may be calculated.

2.2 GENERAL CONDUCTIVE ENERGY EQUATION

Consider a control volume consisting of a small parallelepiped, as shown in Fig. 2-1. This may be an element of material from a homogeneous solid or a homogeneous fluid so long as there is no relative motion between the macroscopic material particles. Heating of the material results in an energy flux per unit area within the control volume. This flux is, in general, a three-dimensional vector. For simplicity, only one component, q_x , is shown in Fig. 2-1.

Application of the first law of thermodynamics to the control volume, as carried out in Problem 2.1, yields the *general conduction equation*

$$\blacksquare \quad \frac{\partial}{\partial x} \left(k \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left(k \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left(k \frac{\partial T}{\partial z} \right) + q''' = \rho c \frac{\partial T}{\partial t} \quad (2.1)$$

for the temperature T as a function of x , y , z , and t . (The \blacksquare designates an important equation.) Here, k is the thermal conductivity, ρ is the density, c is the specific heat per unit mass, and q''' is the *rate of internal energy conversion* ("heat generation") per unit volume. A common instance of q''' is provided by resistance heating in an electrical conductor.

In most engineering problems k can be taken as constant, and (2.1) reduces to

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} + \frac{q'''}{k} = \frac{1}{\alpha} \frac{\partial T}{\partial t} \quad (2.2)$$

where α is given by (1.16).

Special Cases of the Conduction Equation

1. *Fourier equation* (no internal energy conversion)

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} = \frac{1}{\alpha} \frac{\partial T}{\partial t} \quad (2.3)$$

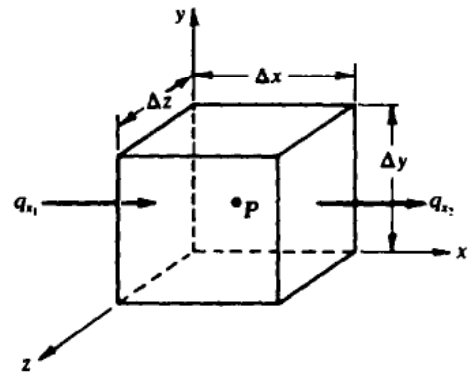


Fig. 2-1

2. **Poisson equation** (steady state with internal energy conversion)

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} + \frac{q'''}{k} = 0 \tag{2.4}$$

3. **Laplace equation** (steady state and no internal energy conversion)

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} = 0 \tag{2.5}$$

Cylindrical and Spherical Coordinate Systems

The general conduction equation for constant thermal conductivity can be written as

■
$$\nabla^2 T + \frac{q'''}{k} = \frac{1}{\alpha} \frac{\partial T}{\partial t} \tag{2.6}$$

in which ∇^2 denotes the Laplacian operator. In cartesian coordinates,

$$\begin{aligned} \nabla^2 T &= \nabla \cdot \nabla T = \left(\mathbf{i} \frac{\partial}{\partial x} + \mathbf{j} \frac{\partial}{\partial y} + \mathbf{k} \frac{\partial}{\partial z} \right) \cdot \left(\mathbf{i} \frac{\partial T}{\partial x} + \mathbf{j} \frac{\partial T}{\partial y} + \mathbf{k} \frac{\partial T}{\partial z} \right) \\ &= \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} \end{aligned}$$

Forming $\nabla^2 T$ in cylindrical coordinates as given in Fig. 2-2 results in

$$\nabla^2 T = \frac{\partial^2 T}{\partial r^2} + \frac{1}{r} \frac{\partial T}{\partial r} + \frac{1}{r^2} \frac{\partial^2 T}{\partial \phi^2} + \frac{\partial^2 T}{\partial z^2} \tag{2.7}$$

and the result for the spherical coordinate system of Fig. 2-3 is

$$\nabla^2 T = \frac{1}{r} \frac{\partial^2}{\partial r^2} (rT) + \frac{1}{r^2 \sin \psi} \frac{\partial}{\partial \psi} \left(\sin \psi \frac{\partial T}{\partial \psi} \right) + \frac{1}{r^2 \sin^2 \psi} \frac{\partial^2 T}{\partial \phi^2} \tag{2.8}$$

In the following sections the general conduction equation will be used to obtain the temperature gradient only when such cannot be found by inspection or simple integration of Fourier's law.

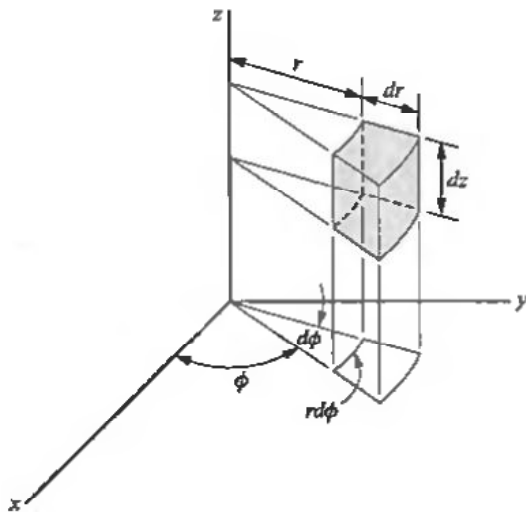


Fig. 2-2

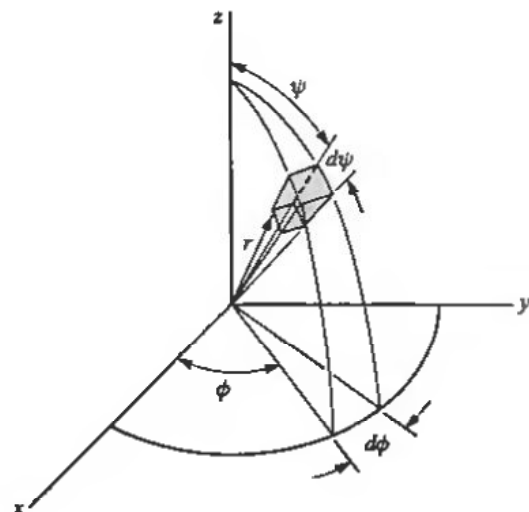


Fig. 2-3

2.3 PLANE WALL: FIXED SURFACE TEMPERATURES

The simplest heat transfer problem is that of one-dimensional, steady state conduction in a plane wall of homogeneous material having constant thermal conductivity and with each face held at a constant uniform temperature, as shown in Fig. 2-4.

Separation of variables and integration of (1.1) where the gradient direction is x results in

$$q \int_{x_1}^{x_2} dx = -kA \int_{T_1}^{T_2} dT$$

or

$$q = -kA \frac{T_2 - T_1}{x_2 - x_1} = -kA \frac{T_2 - T_1}{\Delta x} \quad (2.9)$$

This equation can be rearranged as

$$q = \frac{T_1 - T_2}{\Delta x/kA} = \frac{\text{thermal potential difference}}{\text{thermal resistance}} \quad (2.10)$$

Notice that the resistance to the heat flow is directly proportional to the material thickness, inversely proportional to the material thermal conductivity, and inversely proportional to the area normal to the direction of heat transfer.

These principles are readily extended to the case of a composite plane wall as shown in Fig. 2-5(a). In the steady state the heat transfer rate entering the left face is the same as that leaving the right face. Thus,

$$q = \frac{T_1 - T_2}{\Delta x_a/k_a A} \quad \text{and} \quad q = \frac{T_2 - T_3}{\Delta x_b/k_b A}$$

Together these give:

$$q = \frac{T_1 - T_3}{(\Delta x_a/k_a A) + (\Delta x_b/k_b A)} \quad (2.11)$$

Equations (2.10) and (2.11) illustrate the analogy between conductive heat transfer and electrical




Fig. 2-4

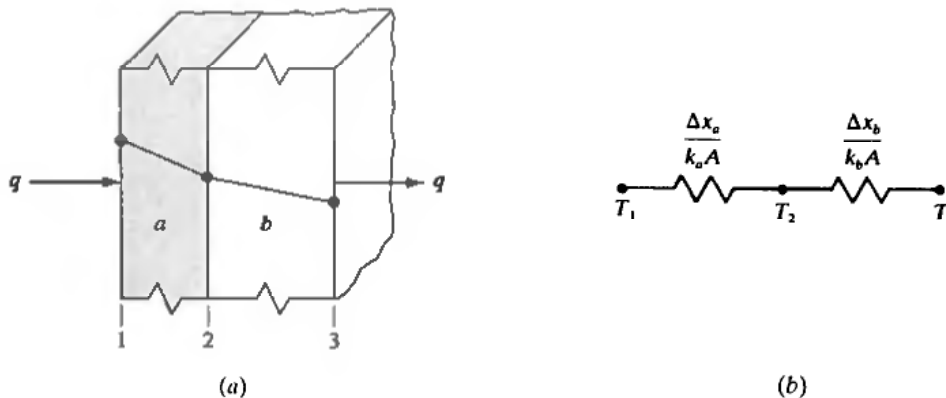


Fig. 2-5

current flow, an analogy that is rooted in the similarity between Fourier's and Ohm's laws. It is convenient to express Fourier's law as

$$\text{conductive heat flow} = \frac{\text{overall temperature difference}}{\text{summation of thermal resistances}} \quad (2.12)$$

In the case of the composite two-layered plane wall the total thermal resistance is simply the sum of the two resistances in series shown in Fig. 2-5(b). The extension to three or more layers is obvious.

2.4 RADIAL SYSTEMS: FIXED SURFACE TEMPERATURES

Figure 2-6 depicts a single-layer cylindrical wall of a homogeneous material with constant thermal conductivity and uniform inner and outer surface temperatures. At a given radius the area normal to radial heat flow by conduction is $2\pi rL$, where L is the cylinder length. Substituting this into (1.1) and integrating with q constant gives

$$T_2 - T_1 = -\frac{q}{2\pi kL} \ln \frac{r_2}{r_1} \quad (2.13)$$

or

$$q = \frac{2\pi kL(T_1 - T_2)}{\ln(r_2/r_1)} \quad (2.14)$$

From (2.14) the thermal resistance of the single cylindrical layer is $[\ln(r_2/r_1)]/2\pi kL$. For a two-layered cylinder (Fig. 2-7) the heat transfer rate is, by (2.12),

$$q = \frac{2\pi L(T_1 - T_3)}{(1/k_a) \ln(r_2/r_1) + (1/k_b) \ln(r_3/r_2)} \quad (2.15)$$

and this too is readily extended to three or more layers.




Fig. 2-6




Fig. 2-7

For radial conductive heat transfer in a spherical wall the area at a given radius is $4\pi r^2$. Substituting this into Fourier's law and integrating with q constant yields

$$q = \frac{4\pi k(T_1 - T_2)}{(1/r_1) - (1/r_2)} \quad (2.16)$$

From this the thermal resistance afforded by a single spherical layer is $(1/r_1 - 1/r_2)/4\pi k$. In a multilayered spherical problem the resistances of the individual layers are linearly additive, and (2.12) applies.

2.5 PLANE WALL: VARIABLE THERMAL CONDUCTIVITY

From Section 1.4 we recall that material thermal conductivity is temperature dependent, and rather strongly so for many engineering materials. It is common to express this dependence by the linear relationship (1.9). Then, as shown in Problem 2.12, (2.10) is replaced by

$$q = \frac{T_1 - T_2}{\Delta x / k_m A} \quad (2.17)$$

where

$$k_m = k_0 \left(1 + b \frac{\theta_1 + \theta_2}{2} \right) = k_0 (1 + b \theta_m) \quad (2.18)$$

is the thermal conductivity evaluated at the mean temperature of the wall,

$$\theta_m = \frac{\theta_1 + \theta_2}{2} = \frac{T_1 + T_2}{2} - T_{\text{ref}}$$

Often, however, the average material temperature is unknown at the start of the problem. This is generally true for multilayer walls, where only the overall temperature difference is initially specified. In such cases, if the data warrant an attempt at precision, the problem is attacked by assuming reasonable values for the interfacial temperatures, obtaining k_m for each material, and then determining the heat flux per unit area by (2.12). Using this result, the assumed values of the interfacial temperatures may be improved by application of Fourier's law to each layer, beginning with a known surface temperature. This procedure can be repeated until satisfactory agreement between previous interfacial temperatures and the next set of computed values is obtained.

The temperature distribution for the plane wall having thermal conductivity which is linearly dependent upon temperature is obtained analytically in Problem 2.13, and the treatment for a cylindrical wall with linear dependence of k upon temperature is considered in Problem 2.15.

2.6 HEAT GENERATION SYSTEMS

Besides I^2R heating in electrical conductors, heat generation occurs in nuclear reactors and in chemically reacting systems. In this section we will examine one-dimensional cases with constant and uniform heat generation.

Plane Wall

Consider the plane wall with uniform internal conversion of energy (Fig. 2-8). Assuming constant thermal conductivity and very large dimensions in the y - and z -directions so that the temperature gradient is significant in the x -direction only, the Poisson equation, (2.4), reduces to

$$\frac{d^2 T}{dx^2} + \frac{q'''}{k} = 0 \quad (2.19)$$

which is a second-order ordinary linear differential equation. Two boundary conditions are sufficient for determination of the specific solution for $T(x)$. These are (Fig. 2-8(a)):

$$T = T_1 \quad \text{at} \quad x = 0 \quad \text{and} \quad T = T_2 \quad \text{at} \quad x = 2L$$

Integrating (2.19) twice with respect to x results in

$$T = -\frac{q'''}{2k} x^2 + C_1 x + C_2$$

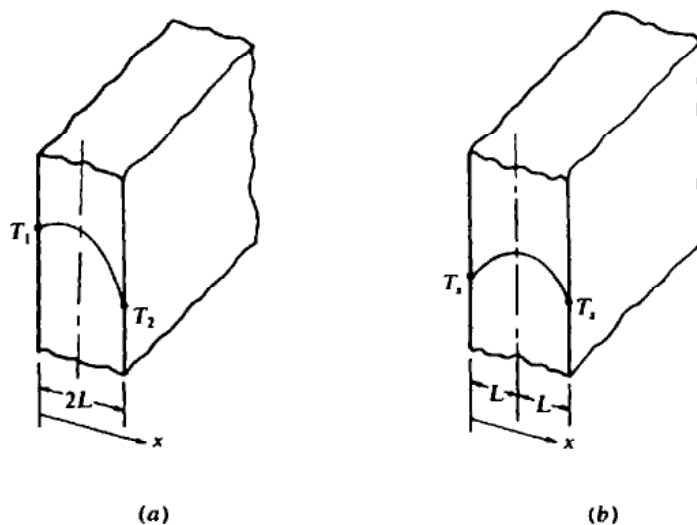


Fig. 2-8

The boundary conditions are then used to give

$$C_2 = T_1 \quad C_1 = \frac{T_2 - T_1}{2L} + \frac{q'''L}{k}$$

Hence,

$$T = \left[\frac{T_2 - T_1}{2L} + \frac{q'''}{2k}(2L - x) \right] x + T_1 \quad (2.20)$$

The heat flux is dependent upon x -location; see Problem 2.18.

For the simpler case where $T_1 = T_2 = T_s$ (Fig. 2-8(b)), (2.20) reduces to

$$T = T_s + \frac{q'''}{2k}(2L - x)x \quad (2.21)$$

Differentiating (2.21) yields

$$\frac{dT}{dx} = \frac{q'''L}{k} - \frac{q'''x}{k} = \frac{q'''}{k}(L - x)$$

so that the heat flux out of the left face is

$$q = -kA \left. \frac{dT}{dx} \right|_{x=0} = -kA \frac{q'''L}{k} = -q'''AL \quad (2.22)$$

The minus sign indicates that the heat transfer is in the minus x -direction (for positive q'''); the product AL is one-half the plate volume. Thus (2.22) can be interpreted as indicating that the heat generated in the left half of the wall is conducted out of the left face, etc.

Cylinder

Consider a long circular cylinder of constant thermal conductivity having uniform internal energy conversion per unit volume, q''' . If the surface temperature is constant, the azimuthal gradient $\partial T/\partial \phi$ is zero during steady state, and the length precludes a significant temperature gradient along the axis, $\partial T/\partial z$. For this case, (2.7) simplifies to

$$\nabla^2 T = \frac{d^2 T}{dr^2} + \frac{1}{r} \frac{dT}{dr}$$

and (2.6) becomes for steady state

$$\frac{d^2 T}{dr^2} + \frac{1}{r} \frac{dT}{dr} + \frac{q'''}{k} = 0 \quad (2.23)$$

a second-order ordinary differential equation requiring two boundary conditions on $T(r)$ to effect a solution. Usually the surface temperature is known and thus

$$T = T_s \quad \text{at} \quad r = r_s \quad (2.24)$$

A secondary boundary condition is provided by the physical requirement that the temperature be finite on the axis of the cylinder, i.e., $dT/dr = 0$ at $r = 0$.

Rewriting (2.23) as

$$\frac{d}{dr} \left(r \frac{dT}{dr} \right) = -\frac{r q'''}{k}$$

and then performing a first integration gives

$$\frac{dT}{dr} = -\frac{r q'''}{2k} + \frac{C_1}{r}$$

Integrating again, we obtain

$$T = -\frac{r^2 q'''}{4k} + C_1 \ln r + C_2$$

The finiteness condition at $r = 0$ requires that $C_1 = 0$. Application of the remaining boundary condition, (2.24), yields

$$C_2 = T_s + \frac{r_s^2 q'''}{4k}$$

and consequently

$$T - T_s = \frac{r_s^2 q'''}{4k} \left[1 - \left(\frac{r}{r_s} \right)^2 \right] \quad (2.25)$$

A convenient dimensionless form of the temperature distribution is obtained by denoting the centerline temperature of the rod as T_c and forming the ratio

$$\frac{T - T_s}{T_c - T_s} = 1 - \left(\frac{r}{r_s} \right)^2 \quad (2.26)$$

2.7 CONVECTIVE BOUNDARY CONDITIONS

Newton's law of cooling, (1.4), may be conveniently rewritten as

$$q = hA \Delta T \quad (2.27)$$

where h = convective heat transfer coefficient, Btu/h·ft²·°F or W/m²·K

A = area normal to the direction of the heat flux, ft² or m²

ΔT = temperature difference between the solid surface and the fluid, °F or K

In this section we will consider problems wherein values of h are known or specified, and we will direct our attention to the solution of combined conductive-convective problems.

Overall Heat-Transfer Coefficient

It is often convenient to express the heat transfer rate for a combined conductive-convective problem in the form (2.27), with h replaced by an overall heat-transfer coefficient U . We now determine U for plane and cylindrical wall systems.

Plane wall A plane wall of a uniform, homogeneous material a having constant thermal conductivity and exposed to fluid i at temperature T_i on one side and fluid o at temperature T_o on the other side is shown in Fig. 2-9(a). Frequently the fluid temperatures sufficiently far from the wall to be unaffected by the heat transfer are known, and the surface temperatures T_1 and T_2 are not specified.

Applying (2.27) at the two surfaces yields

$$\frac{q}{A} = \bar{h}_i(T_i - T_1) = \bar{h}_o(T_2 - T_o)$$

or

$$q = \frac{T_i - T_1}{1/\bar{h}_i A} = \frac{T_2 - T_o}{1/\bar{h}_o A} \tag{2.28}$$

where the overbar on h denotes an average value for the entire surface.

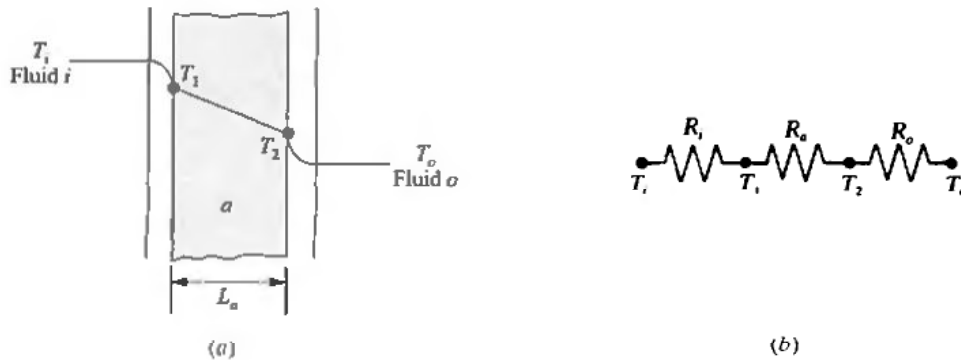


Fig. 2-9

In agreement with the electrical analogy of Section 2.3, $1/\bar{h}A$ can be thought of as a *thermal resistance due to the convective boundary*. Thus, the electrical analog to this problem is that of three resistances in series, Fig. 2-9(b). Here, $R_a = L_a/k_a A$ is the conductive resistance due to the homogeneous material a . Since the conductive heat flow within the solid must exactly equal the convective heat flow at the boundaries, (2.12) gives

$$\frac{q}{A} = \frac{T_i - T_o}{1/\bar{h}_i + L_a/k_a + 1/\bar{h}_o} = \frac{(\Delta T)_{\text{overall}}}{A \Sigma R_{\text{th}}} \tag{2.29}$$

Defining the overall heat-transfer coefficient U by

$$U = \frac{1}{A \Sigma R_{\text{th}}} \tag{2.30}$$

for any geometry, we see that

$$\frac{q}{A} = U(\Delta T)_{\text{overall}} \tag{2.31}$$

and for the plane wall of Fig. 2-9(a),

$$U = \frac{1}{1/\bar{h}_i + L_a/k_a + 1/\bar{h}_o} \quad (2.32)$$

For a multilayered plane wall consisting of layers a, b, \dots ,

$$U = \frac{1}{1/\bar{h}_i + L_a/k_a + L_b/k_b + \dots + 1/\bar{h}_o} \quad (2.33)$$

Radial systems Consider the cylindrical system consisting of a single material layer having an inner and an outer convective fluid flow as shown in Fig. 2-10(a). If T_2 is the temperature at r_2 , etc., then (2.12) gives

$$q = \frac{(\Delta T)_{\text{overall}}}{\Sigma R_{\text{th}}} = \frac{T_i - T_o}{\Sigma R_{\text{th}}} \quad (2.34)$$

where the thermal resistances are:

$$R_i = \text{inside convective } R_{\text{th}} = \frac{1}{2\pi r_1 L \bar{h}_i}$$

$$R_a = \text{conductive } R_{\text{th}} \text{ due to material } a = \frac{\ln(r_2/r_1)}{2\pi k_a L}$$

$$R_o = \text{outside convective } R_{\text{th}} = \frac{1}{2\pi r_2 L \bar{h}_o}$$

In these expressions L is the length of the cylindrical system. Summing the thermal resistances,

$$\Sigma R_{\text{th}} = \frac{1}{2\pi r_1 L \bar{h}_i} + \frac{\ln(r_2/r_1)}{2\pi k_a L} + \frac{1}{2\pi r_2 L \bar{h}_o}$$

Now by definition $U = 1/(A \Sigma R_{\text{th}})$, and for A it is customary to use the outer surface area, $A_o = 2\pi r_2 L$, so that

$$U_o = \frac{1}{(r_2/r_1 \bar{h}_i) + [r_2 \ln(r_2/r_1)/k_a] + (1/\bar{h}_o)}$$

where the subscript o denotes that U_o is based on the outside surface area of the cylinder. For a multilayered cylindrical system having $n - 1$ material layers,

$$U_o = \frac{1}{(r_n/r_1 \bar{h}_i) + [r_n \ln(r_2/r_1)/k_{1,2}] + \dots + [r_n \ln(r_n/r_{n-1})/k_{n-1,n}] + (1/\bar{h}_o)} \quad (2.35)$$

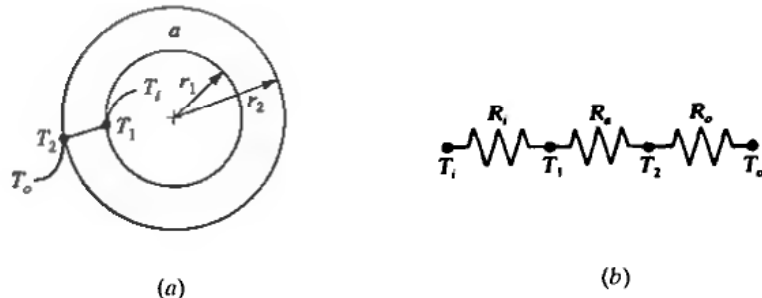


Fig. 2-10

where the subscripts on k denote the bounding radii of a layer (e.g., for a two-layered system with the outer layer of material b , $k_b = k_{2,3}$).

Critical Thickness of Cylindrical Insulation

In many cases, the thermal resistance offered by a metal pipe or duct wall is negligibly small in comparison with that of the insulation layer (see Problem 2.27). Also, the pipe wall temperature is often very nearly the same as that of the fluid inside the pipe. For a single layer of insulation material, the heat transfer rate per unit length is given by

$$\frac{q}{L} = U_o \frac{A}{L} \Delta T = \frac{2\pi(T_i - T_o)}{[\ln(r/r_i)/k] + (1/hr)} \tag{2.36}$$

where the nomenclature is defined in Fig. 2-11.

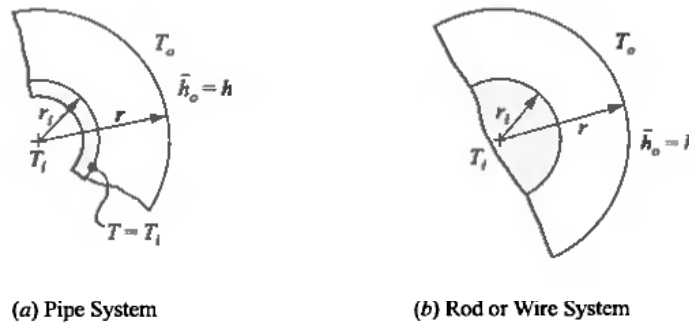


Fig. 2-11

As a function of r , q/L has a *maximum* at

$$r = r_{crit} = \frac{k}{h} \tag{2.37}$$

Thus, if $r_i < r_{crit}$, which is sometimes the case with small tubes, rods or wires, the heat loss rate *increases* with addition of insulation until $r = r_{crit}$, and then decreases with further addition of insulation. On the other hand, if $r_i > r_{crit}$, the heat loss rate decreases for any addition of insulation.

2.8 HEAT TRANSFER FROM FINS

Extended surfaces or fins are used to increase the effective surface area for convective heat transfer in heat exchangers, internal combustion engines, electrical components, etc.

Uniform Cross-Section

Two common designs, the rectangular fin and the rodlike fin, have uniform cross-section and lend themselves to a common analysis.

Rectangular fin Figure 2-12 shows a rectangular fin having temperature T_b at the base and surrounded by a fluid at temperature T_∞ . Applying the first law of thermodynamics to an element of the fin of thickness Δx gives, in the steady state,

$$\begin{aligned} (\text{energy conducted in at } x) &= (\text{energy conducted out at } x + \Delta x) \\ &+ (\text{energy out by convection}) \end{aligned}$$

Assuming no temperature variation in the y - or z -directions, the three energy terms are respectively

$$q \Big|_x = -kA \frac{dT}{dx} \Big|_x \quad q \Big|_{x+\Delta x} = -kA \frac{dT}{dx} \Big|_{x+\Delta x} \quad q_{\text{conv}} = \bar{h}(P\Delta x)(T - T_\infty)$$

where P is the perimeter, $2(w + t)$. Substituting these three expressions, dividing by Δx , and taking the limit as $\Delta x \rightarrow 0$ results in

$$\frac{d^2 T}{dx^2} - \frac{\bar{h}P}{kA} (T - T_\infty) = 0 \quad (2.38)$$

if the thermal conductivity k is constant.

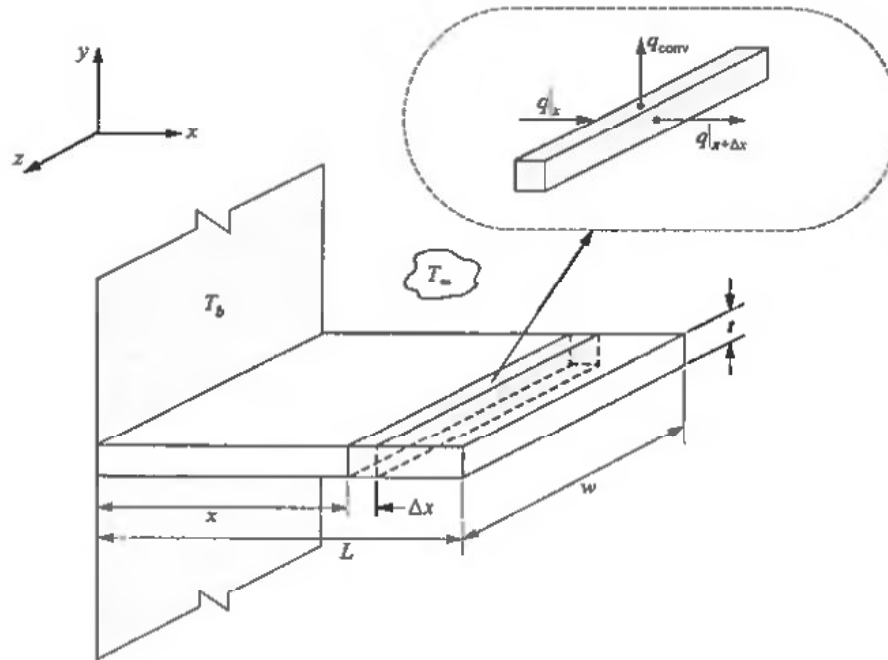


Fig. 2-12

Letting $\theta = T - T_\infty$ and $n = \sqrt{\bar{h}P/kA}$, (2.38) becomes

$$\frac{d^2 \theta}{dx^2} - n^2 \theta = 0 \quad (2.39)$$

which has the general solution

$$\theta(x) = C_1 e^{nx} + C_2 e^{-nx} \quad (2.40)$$

One boundary condition on (2.40) is $\theta(0) = T_b - T_\infty = \theta_b$, which requires that $C_1 + C_2 = \theta_b$. Table 2-1 presents the solutions corresponding to three useful choices for the second boundary condition. For Case 3, \bar{h}_L is the average heat transfer coefficient for the end area; it may differ from \bar{h} along the sides.

Table 2-1

Rectangular Fin	Second Boundary Condition	θ/θ_b
Case 1. Very long, with end at temperature of surrounding fluid	$\theta(+\infty) = 0$	e^{-nx}
Case 2. Finite length, insulated end	$\left. \frac{d\theta}{dx} \right _{x=L} = 0$	$\frac{\cosh [n(L-x)]}{\cosh nL}$
Case 3. Finite length, heat loss by convection at end	$-k \left. \frac{d\theta}{dx} \right _{x=L} = \bar{h}_L \theta(L)$	$\frac{\cosh [n(L-x)] + (\bar{h}_L/nk) \sinh [n(L-x)]}{\cosh nL + (\bar{h}_L/nk) \sinh nL}$

In all three cases the heat transfer from the fin is most easily found by evaluating the conductive flux into the fin at its base:

$$q = -kA \left. \frac{dT}{dx} \right|_{x=0} = -kA \left. \frac{d\theta}{dx} \right|_{x=0}$$

where $A = wt$ and where the gradient at $x = 0$ is derived from Table 2-1. We have:

$$\text{Case 1: } q = kAn\theta_b \tag{2.41}$$

$$\text{Case 2: } q = kAn\theta_b \tanh nL \tag{2.42}$$

$$\text{Case 3: } q = kAn\theta_b \left[\frac{\sinh nL + (\bar{h}_L/nk) \cosh nL}{\cosh nL + (\bar{h}_L/nk) \sinh nL} \right] \tag{2.43}$$

Remark (a). For a thin fin, $w \gg t$ and $P \approx 2w$, so

$$\text{thin fin: } n \approx \sqrt{\frac{2\bar{h}}{kt}} \tag{2.44}$$

Remark (b). The preceding solutions for temperature distributions and heat fluxes would be unchanged for a solid cylindrical rod or pin-type fin other than in the expressions for P and n . If r is the radius of the rod,

$$\text{pin or rod: } n = \sqrt{\frac{2\bar{h}}{kr}} \tag{2.45}$$

Remark (c). The insulated-end solution (2.42) is often used even when the end of the fin is exposed, the heat loss along the sides being typically much larger than that from the exposed end. In that case, L in (2.42) is replaced by a corrected length only in evaluation of q :

$$\text{rectangular fin: } L_c = L + \frac{t}{2}$$

$$\text{cylindrical pin or rod: } L_c = L + \frac{r}{2}$$

Nonuniform Cross-Section

The differential equation for the temperature distribution is now

$$\frac{d^2 \theta}{d\xi^2} + \frac{1}{A} \frac{dA}{d\xi} \frac{d\theta}{d\xi} - \frac{\bar{h}}{k} \left(\frac{1}{A} \frac{dS}{d\xi} \right) \theta = 0 \tag{2.46}$$

where $A = A(\xi)$ and $S = S(\xi)$ are respectively the variable cross-sectional area and variable surface area.

Annular fin of uniform thickness Consider the annular fin shown in Fig. 2-13. For no circumferential temperature variation and for t small compared with $r_2 - r_1$, the temperature is a function of r only ($\xi = r$). The cross-sectional area and the surface area are $A(r) = 2\pi r t$ and $S(r) = 2\pi(r^2 - r_1^2)$ so that (2.46) becomes

$$\frac{d^2 \theta}{dr^2} + \frac{1}{r} \frac{d\theta}{dr} - \frac{2\bar{h}}{kt} \theta = 0 \quad (2.47)$$

This is a form of Bessel's differential equation of zero order, and it has the general solution

$$\theta = C_1 I_0(nr) + C_2 K_0(nr) \quad (2.48)$$

where $n = \sqrt{2\bar{h}/kt}$

I_0 = modified Bessel function of the 1st kind

K_0 = modified Bessel function of the 2nd kind

The constants C_1 and C_2 are determined by the boundary conditions, which are:

$$\theta(r_1) = T_b - T_\infty = \theta_b \quad \left. \frac{d\theta}{dr} \right|_{r=r_2} = 0$$

The second of these conditions assumes no heat loss from the end of the fin. This is generally more realistic for the annular fin than for the rectangular case because of rapidly increasing surface area with increasing r .

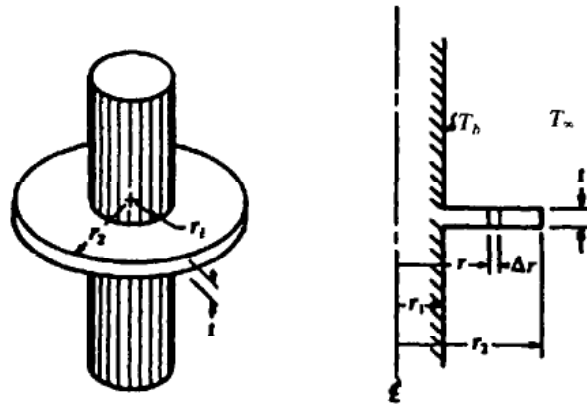


Fig. 2-13

With C_1 and C_2 evaluated, (2.48) becomes

$$\frac{\theta}{\theta_b} = \frac{I_0(nr) K_1(nr_2) + K_0(nr) I_1(nr_2)}{I_0(nr_1) K_1(nr_2) + K_0(nr_1) I_1(nr_2)} \quad (2.49)$$

Determining the heat loss from the fin by evaluating the conductive heat transfer rate into the base, we obtain

$$q = 2\pi k t \theta_b (nr_1) \frac{K_1(nr_1) I_1(nr_2) - I_1(nr_1) K_1(nr_2)}{I_0(nr_1) K_1(nr_2) + K_0(nr_1) I_1(nr_2)} \quad (2.50)$$

A table of Bessel functions sufficiently accurate for most engineering applications is included in

Jahnke, E., F. Emde, and F. Lösch. *Tables of Higher Functions*, 6th ed., McGraw-Hill, New York, 1960.

Straight triangular fin The solution of (2.46) for the fin shown in Fig. 2-14 (for $t \ll L$, the temperature will be a function of x alone) is

$$\frac{\theta}{\theta_b} = \frac{I_0(2px^{1/2})}{I_0(2pL^{1/2})} \quad (2.51)$$

where

$$p = \sqrt{\frac{2fhL}{kt}} \quad f = \sqrt{1 + (t/2L)^2}$$

The heat loss from the fin per unit width (z -direction) may be found by application of Fourier's law at the base of the fin; this results in

$$q = \frac{-kt\theta_b p}{L^{1/2}} \frac{I_1(2pL^{1/2})}{I_0(2pL^{1/2})} \quad (2.52)$$

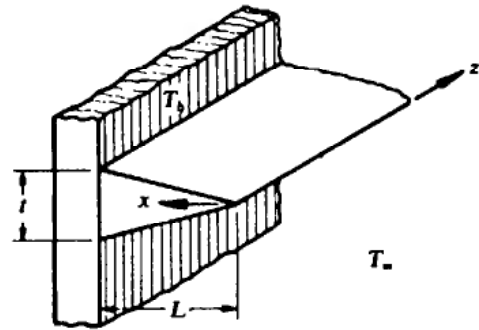


Fig. 2-14

Fin Efficiency

The primary purpose of fins is to increase the effective heat transfer surface area exposed to a fluid in a heat exchanger. The performance of fins is often expressed in terms of the *fin efficiency*, η_f , defined by

$$\eta_f = \frac{\text{actual heat transfer}}{\text{heat transfer if entire fin were at the base temperature}} \quad (2.53)$$

In terms of η_f , the heat transfer rate is given by the simple expression

$$q = \bar{h}(A_b + \eta_f A_f) \theta_b \quad (2.54)$$

where A_f is the total surface area of fins and A_b is the surface area of the wall, tube, etc., between fins (Fig. 2-15).

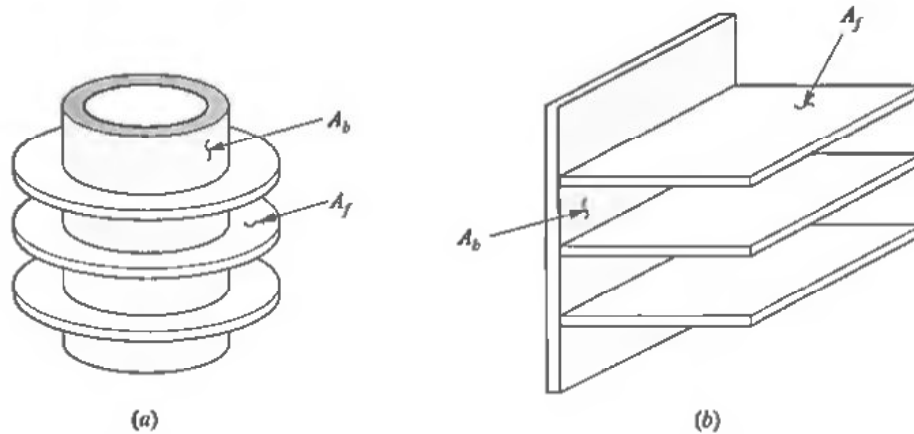


Fig. 2-15

Analytical expressions for η_f are readily obtained for several common configurations. Consider, for example, the simple case of a rectangular fin with no end heat loss. The efficiency is, from (2.42),

$$\eta_f = \frac{\sqrt{hPkA} \theta_b \tanh nL}{\bar{h}PL\theta_b} = \frac{1}{nL} \tanh nL \quad (2.55)$$

If the fin is thin, (2.44) gives

$$nL \approx \left(\frac{2\bar{h}}{kt}\right)^{1/2} L = L^{3/2} \left(\frac{2\bar{h}}{kLt}\right)^{1/2} = L^{3/2} \left(\frac{2\bar{h}}{kA_p}\right)^{1/2} \quad (2.56)$$

where $A_p = Lt$ is the profile area of the rectangular fin.

In Fig. 2-16 the fin efficiency of (2.55) is plotted against $nL/2^{1/2}$ of (2.56), in which L is replaced by $L_c = L + (t/2)$ to account for tip loss. Similar graphs for the straight triangular fin and the annular fin of uniform thickness are also presented in this figure. Note that the product $L_c t$ is the profile area A_p for the rectangular and annular fins, whereas A_p is one-half of the product Lt for the triangular fin. There is, of course, no length correction for the triangular fin. For the annular fin, $r_{2c} = r_2 + (t/2)$.

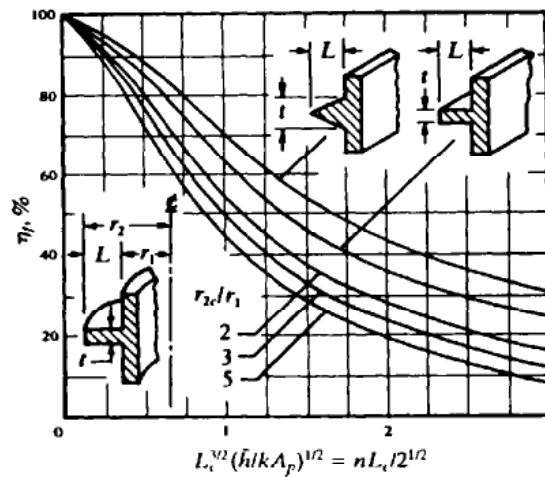


Fig. 2-16

Solved Problems

2.1. Derive the general conduction equation, (2.1).

For the control volume in Fig. 2-1, the first law of thermodynamics may be expressed as

$$\begin{aligned} & \text{(rate of heat transfer in)} + \text{(rate of work in)} + \text{(rate of other energy conversion)} \\ & = \text{(rate of heat transfer out)} + \text{(rate of work out)} \\ & \quad + \text{(rate of internal energy storage)} \end{aligned} \quad (1)$$

For an incompressible substance the net work done on the control volume is converted to internal energy. Denoting the rate of energy conversion (from work, chemical reaction, etc.) as q''' , (1) becomes

$$q_{x_1} + q_{y_1} + q_{z_1} + q''' \Delta x \Delta y \Delta z = q_{x_2} + q_{y_2} + q_{z_2} + \frac{\partial U}{\partial t} \quad (2)$$

Examine the heat transfer terms in (2). In the x -direction the two terms may be grouped to form

$$q_{x_1} - q_{x_2} = -\Delta y \Delta z \left[\left(k \frac{\partial T}{\partial x} \right)_{x_1} - \left(k \frac{\partial T}{\partial x} \right)_{x_2} \right] \quad (3)$$

by application of Fourier's law. Notice that k may be temperature dependent and hence spatially dependent. By a Taylor's series expansion about the center point P ,

$$\left(k \frac{\partial T}{\partial x}\right) \Big|_{x_1} = k \frac{\partial T}{\partial x} + \left(-\frac{\Delta x}{2}\right) \frac{\partial}{\partial x} \left(k \frac{\partial T}{\partial x}\right) + \dots$$

$$\left(k \frac{\partial T}{\partial x}\right) \Big|_{x_2} = k \frac{\partial T}{\partial x} + \left(\frac{\Delta x}{2}\right) \frac{\partial}{\partial x} \left(k \frac{\partial T}{\partial x}\right) + \dots$$

so that (3) becomes

$$q_{x_1} - q_{x_2} = \Delta y \Delta z \left[\Delta x \frac{\partial}{\partial x} \left(k \frac{\partial T}{\partial x}\right) + \dots \right] \quad (4)$$

Similarly,

$$q_{y_1} - q_{y_2} = \Delta x \Delta z \left[\Delta y \frac{\partial}{\partial y} \left(k \frac{\partial T}{\partial y}\right) + \dots \right] \quad (5)$$

$$q_{z_1} - q_{z_2} = \Delta x \Delta y \left[\Delta z \frac{\partial}{\partial z} \left(k \frac{\partial T}{\partial z}\right) + \dots \right] \quad (6)$$

Finally, the internal energy storage per unit volume and per unit temperature is the product of density and specific heat, so

$$\frac{\partial U}{\partial t} = \rho c (\Delta x \Delta y \Delta z) \frac{\partial T}{\partial t} \quad (7)$$

Substituting expressions (4) through (7) into (2), dividing by the volume $\Delta x \Delta y \Delta z$, and taking the limit as Δx , Δy , and Δz simultaneously approach zero yields (2.1).

2.2. Beginning with the general conduction equation, show that the linear temperature distribution of Fig. 2-4 is correct.

The appropriate coordinate system is cartesian and hence the equation to be used is (2.2):

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} + \frac{q'''}{k} = \frac{1}{\alpha} \frac{\partial T}{\partial t}$$

Assumptions:

1. The plane wall is very large in the y - and z -directions, hence

$$\frac{\Delta T}{\Delta y} \approx \frac{\Delta T}{\Delta z} = \frac{\text{small number}}{\text{very large number}}$$

Further, the rate of change of, say, $\Delta T/\Delta y$ with y will be even smaller, so

$$\frac{\partial^2 T}{\partial y^2} \approx 0 \quad \frac{\partial^2 T}{\partial z^2} \approx 0$$

2. No internal energy conversion, hence $q''' = 0$.
3. The problem is steady state, so $\partial T/\partial t = 0$.

Under assumptions 1, 2, and 3, the conduction equation reduces to

$$\frac{d^2 T}{dx^2} = 0$$

Integrating twice gives $T = C_1 x + C_2$, which is a linear temperature distribution. The constants C_1 and C_2 are then chosen to satisfy the boundary conditions

$$T_1 = C_1 x_1 + C_2 \quad T_2 = C_1 x_2 + C_2$$

- 2.3.** Obtain dT/dr for the single-layered cylinder of Fig. 2-6 directly from the appropriate steady state conduction equation. Substitute this into Fourier's law and obtain (2.13).

Since the problem is cylindrical and steady state, and there is no internal energy conversion, the appropriate conduction equation is

$$\nabla^2 T = \frac{\partial^2 T}{\partial r^2} + \frac{1}{r} \frac{\partial T}{\partial r} + \frac{1}{r^2} \frac{\partial^2 T}{\partial \phi^2} + \frac{\partial^2 T}{\partial z^2} = 0$$

Assumptions: Very long cylinder (or negligible z -direction temperature change) and no angular temperature variation; hence,

$$\frac{\partial^2 T}{\partial z^2} = 0 \quad \frac{\partial^2 T}{\partial \phi^2} = 0$$

Thus, the equation reduces to

$$\frac{d^2 T}{dr^2} + \frac{1}{r} \frac{dT}{dr} = 0 \quad \text{or} \quad \frac{1}{r} \frac{d}{dr} \left(r \frac{dT}{dr} \right) = 0$$

A first integration gives

$$r \frac{dT}{dr} = B \quad \text{or} \quad dT = B \frac{dr}{r}$$

and a second integration yields

$$T = B \ln r + c$$

The boundary conditions, $T(r_1) = T_1$ and $T(r_2) = T_2$, determine

$$B = \frac{T_1 - T_2}{\ln(r_1/r_2)}$$

Fourier's law becomes

$$q = -k(2\pi rL) \frac{dT}{dr} = -k(2\pi rL)B = 2\pi kL \frac{T_1 - T_2}{\ln(r_2/r_1)}$$

which is the desired result.

- 2.4.** A laboratory furnace wall is constructed of 0.2 m thick fireclay brick having $k_a = 1.0 \text{ W/m}\cdot\text{K}$. This is covered on the outer surface with a 0.03 m thick layer of insulating material having $k_b = 0.07 \text{ W/m}\cdot\text{K}$. The furnace inner brick surface is at 1250 K and the outer surface of the insulation material is at 310 K. Calculate the steady state heat transfer rate through the wall in W/m^2 , and determine the interfacial temperature T_2 between the brick and the insulation.

Equation (2.11) applies, as does Fig. 2-5, where the temperatures over surfaces 1 and 3 are 1250 K and 310 K, respectively. In this problem the thickness of material a (the brick) is greater than that of material b (the insulation). Proceeding to apply (2.11),

$$\begin{aligned} \frac{q}{A} &= \frac{T_1 - T_3}{(\Delta x_a/k_a) + (\Delta x_b/k_b)} = \frac{(1250 - 310)\text{K}}{(0.2 \text{ m}/1.0 \text{ W/m}\cdot\text{K}) + (0.03 \text{ m}/0.07 \text{ W/m}\cdot\text{K})} \\ &= 1495 \text{ W/m}^2 \end{aligned}$$

For the interfacial temperature T_2 we can apply eq. (2.10) to either the brick layer or the insulation layer. Choosing the brick

$$\frac{q}{A} = \frac{T_1 - T_2}{\Delta x_a/k_a} \quad \text{or} \quad T_2 = T_1 - \frac{q}{A} \left(\frac{\Delta x_a}{k_a} \right)$$

so

$$T_2 = 1250 \text{ K} - 1495 \frac{\text{W}}{\text{m}^2} \left(\frac{0.2 \text{ m}}{1.0 \text{ W/m}\cdot\text{K}} \right) = 951 \text{ K (or) } 678^\circ\text{C}$$

- 2.5.** A common engineering problem is to determine the insulation thickness for a specified heat transfer rate. If the maximum allowable heat transfer rate through the wall of the furnace in Problem 2.4 is 900 W/m^2 , how thick must the insulating layer be? The brick is unchanged, and the same insulation material is to be used as in Problem 2.4.

We can apply eq. (2.11) with everything known except Δx_b . Thus

$$900 \text{ W/m}^2 = \frac{(1250 - 310) \text{ K}}{(0.2 \text{ m}/1.0 \text{ W/m}\cdot\text{K}) + (\Delta x_b/0.07 \text{ W/m}\cdot\text{K})}$$

Solving for Δx_b ,

$$\Delta x_b = (0.07) \left(\frac{940}{900} - 0.2 \right) \text{ m} = 0.059 \text{ m}$$

- 2.6.** The ceilings of many American homes consist of a $5/8$ in thick sheet of Celotex board supported by ceiling joists, with the space between the joists filled with loose rock wool insulation (Fig. 2-17). Neglecting the effect of the wooden joists, determine the heat transfer rate per unit area for a ceiling lower surface temperature of 85°F and a rock wool upper surface temperature of 45°F .

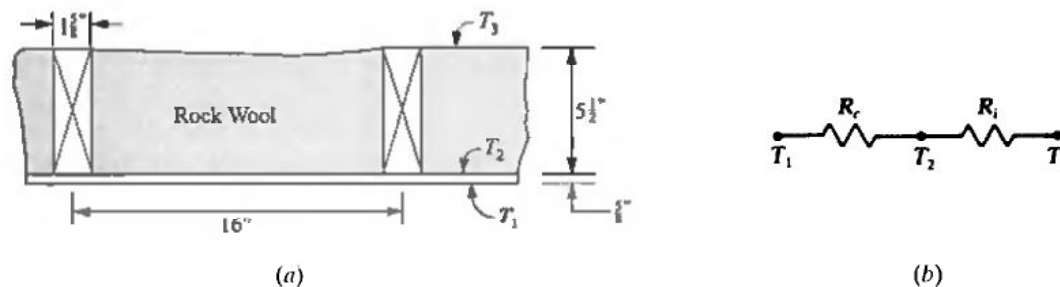


Fig. 2-17

The thermal conductivity of rock wool at 65°F average temperature may be taken as $k_i \approx 0.0192 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$ and that of the Celotex board is $k_c = 0.028 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$. (The latter value is at 90°F , which should be acceptable for this problem.) By the electrical analogy (Fig. 2-17(b))

$$\frac{q}{A} = \frac{T_1 - T_3}{R_c + R_i}$$

The thermal resistances per unit area of the Celotex and the insulation (rock wool) are

$$R_c = \frac{(0.625/12) \text{ ft}}{0.028 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}} = 1.86 \text{ h}\cdot\text{ft}^2\cdot^\circ\text{F/Btu}$$

$$R_i = \frac{(5.5/12) \text{ ft}}{0.0192 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}} = 23.87 \text{ h}\cdot\text{ft}^2\cdot^\circ\text{F/Btu}$$

Hence,

$$\frac{q}{A} = \frac{(85 - 45)^\circ\text{F}}{(1.86 + 23.87) \text{ h}\cdot\text{ft}^2\cdot^\circ\text{F/Btu}} = 1.55 \text{ Btu/h}\cdot\text{ft}^2$$

- 2.7. A composite three-layered wall is formed of a 0.5 cm thick aluminum plate, a 0.25 cm thick layer of sheet asbestos, and a 2.0 cm thick layer of rock wool (at 93 °C, $k = 0.0548$); the asbestos is the center layer. The outer aluminum surface is at 400 °C, and the outer rock wool surface is at 50 °C. Determine the heat flow per unit area.

From Table B-1 (SI), at 400 °C, $k_{al} = 249 \text{ W/m}\cdot\text{K}$

From Table B-2 (SI), at 51 °C, $k_{ast} = 0.166 \text{ W/m}\cdot\text{K}$

At 93 °C, $k_{rw} = 0.0548 \text{ W/m}\cdot\text{K}$

Note that the asbestos sheet average temperature is certainly greater than 51 °C, but this is the only k value provided for rock wool. Also, the other two thermal conductivities were taken at reasonable temperatures for this problem. By (2.12),

$$\begin{aligned} \frac{q}{A} &= \frac{(400 - 50) \text{ }^\circ\text{C}}{[(0.5 \times 10^{-2}/249) + (0.25 \times 10^{-2}/0.166) + (2.0 \times 10^{-2}/0.0548)] \text{ m/W/m}\cdot\text{K}} \\ &= \frac{350 \text{ K}}{0.38004 \text{ m}^2\cdot\text{K/W}} = 920.95 \frac{\text{W}}{\text{m}^2} \end{aligned}$$

- 2.8. Repeat Problem 2.7 for a two-layer composite wall consisting of the asbestos sheet and the rock wool, with the same overall temperature difference.

Using the thermal conductivities given in the solution of Problem 2.7 and applying (2.12),

$$\frac{q}{A} = \frac{(400 - 50) \text{ K}}{[(0.25 \times 10^{-2}/0.1660) + (2.0 \times 10^{-2}/0.0548)] \text{ m/W/m}\cdot\text{K}} = 920.99 \frac{\text{W}}{\text{m}^2}$$

Clearly, the thermal resistance of the aluminum sheet is negligibly small.

- 2.9. A simple thermal conductivity measuring device is shown in Fig. 2-18. The center rod is a metal with unknown thermal conductivity k which is to be determined. The upper surface of the rod is maintained at 80 °C with an electric heater, while the lower end surface is held at 22 °C with a cooling water flow through a plate-type heat exchanger. Assume that over this temperature range, 22 to 80 °C, b in eq. (1.9) is zero and determine the value of k if the electric power input is 18.45 W and the specimen length and diameter are 0.1 m and 0.03 m, respectively. From an examination of Table B-1 (SI), is there a metal having this approximate value of k ?

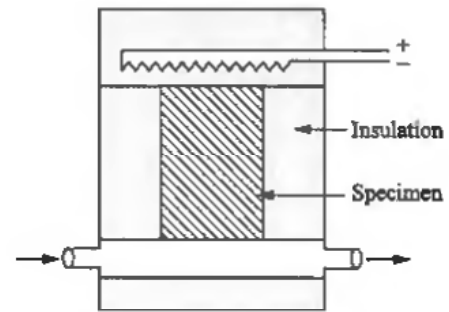


Fig. 2-18

With $b = 0$, k is independent of θ (or temperature) and we have

$$q = -kA \frac{\Delta T}{\Delta y} \quad \text{or} \quad \frac{q}{A} = -k \frac{\Delta T}{\Delta y}$$

Hence,

$$k = \frac{(-q/A)}{\Delta T/\Delta y} = \frac{-q\Delta y}{\Delta T \cdot A}$$

Where:

$$q = -18.45 \text{ W}; \quad A = \frac{\pi}{4} (0.03 \text{ m})^2 = 7.07 \times 10^{-4} \text{ m}^2$$

$$\Delta T = -58 \text{ K}; \quad \Delta y = 0.1 \text{ m}$$

Thus,

$$k = \frac{(18.45 \text{ W})(0.1 \text{ m})}{(58 \text{ K})(7.07 \times 10^{-4} \text{ m}^2)} = 44.99 \text{ W/m} \cdot \text{K}$$

From Table B-1 (SI), with $k = 44.99 \text{ W/m} \cdot \text{K} = 26.02 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$, this metal could be 1.0% carbon steel which has $k = 43 \text{ W/m} \cdot \text{K}$ over the range of 0 to 100 K.

- 2.10.** A 3 in o.d. steel pipe is covered with a 1/2 in layer of asbestos ($\rho = 36 \text{ lb}_m/\text{ft}^3$) which is covered in turn with a 2 in layer of glass wool ($\rho = 4 \text{ lb}_m/\text{ft}^3$). Determine (a) the steady state heat transfer rate per lineal foot and (b) the interfacial temperature between the asbestos and the glass wool if the pipe outer surface temperature is 400°F and the glass wool outer temperature is 100°F .

Reported conductivity values at 392°F and 200°F for asbestos and glass wool, respectively, are

$$k_{\text{asb}} = 0.120 \frac{\text{Btu}}{\text{h} \cdot \text{ft} \cdot ^\circ\text{F}} \quad k_{\text{gw}} = 0.0317 \frac{\text{Btu}}{\text{h} \cdot \text{ft} \cdot ^\circ\text{F}}$$

These temperatures should be reasonably close to the average values for these two materials.

(a) By (2.15),

$$\begin{aligned} \frac{q}{L} &= \frac{2\pi(400 - 100)^\circ\text{F}}{[\ln(2.0/1.5)]/k_{\text{asb}} + [\ln(4.0/2.0)]/k_{\text{gw}}} \\ &= \frac{2\pi(300)^\circ\text{F}}{(0.288/0.120 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}) + (0.693/0.0317 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F})} \\ &= \frac{1884.96^\circ\text{F}}{24.261 \text{ h} \cdot \text{ft} \cdot ^\circ\text{F}/\text{Btu}} = 77.69 \frac{\text{Btu}}{\text{h} \cdot \text{ft}} \end{aligned}$$

(b) Since the heat transfer per ft is now known, the single-layer equation, (2.13), can be used to determine the interfacial temperature. Thus, considering the glass wool layer,

$$\begin{aligned} T_2 - (100^\circ\text{F}) &= \left[\frac{77.69}{2\pi(0.0317)} \ln \frac{4.0}{2.0} \right] ^\circ\text{F} \\ T_2 &= 270.37 + 100 = 370.37^\circ\text{F} \end{aligned}$$

We could have instead used the asbestos layer to find T_2 , since q/L is the same for either layer in steady state. Note that the average temperature of the glass wool is about 235°F , which is reasonably close to the temperature at which the thermal conductivity was chosen.

- 2.11.** A steel pipe ($k = 45.0 \text{ W/m} \cdot \text{K}$) having a 5.0 cm o.d. is covered with a 4.2 cm thick layer of magnesia ($k = 0.07 \text{ W/m} \cdot \text{K}$) which is in turn covered with a 2.4 cm layer of fiberglass insulation ($k = 0.048 \text{ W/m} \cdot \text{K}$). The pipe wall outside temperature is 370 K and the outside surface temperature of the fiberglass is 305 K. What is the interfacial temperature between the magnesia and the fiberglass?

Figure 2-7 with (2.15) applies, where material a is 85% magnesia and b is fiberglass. Then for

$$\begin{aligned} r_1 &= 2.5 \text{ cm} = 0.025 \text{ m} & r_2 &= 6.7 \text{ cm} = 0.067 \text{ m} \\ r_3 &= 10.1 \text{ cm} = 0.101 \text{ m} \\ T_1 &= 370 \text{ K} & T_2 &= 305 \text{ K} \\ k_a &= k_{\text{mag}} = 0.07 \text{ W/m} \cdot \text{K} & k_b &= k_{\text{fg}} = 0.048 \text{ W/m} \cdot \text{K} \end{aligned}$$

(2.15) yields

$$\begin{aligned}\frac{q}{L} &= \frac{2\pi(370 - 305) \text{ K}}{[(1/0.07) \ln(6.7/2.5) + (1/0.048) \ln(10.1/6.7)] \text{ m} \cdot \text{K}/\text{W}} \\ &= \frac{2\pi(65)}{14.08 + 8.55} = 18.04 \text{ W/m}\end{aligned}$$

The interfacial temperature desired is T_2 of Fig. 2-7.

By eq. (2.14) with $q/L = 18.04 \text{ W/m}$,

$$18.04 \text{ W/m} = \frac{2\pi(0.07 \text{ W/m} \cdot \text{K})(370 \text{ K} - T_2)}{\ln(6.7/2.5)}$$

$$370 \text{ K} - T_2 = 18.04 \ln\left(\frac{6.7}{2.5}\right) \text{ K} \div [2\pi(0.07)] = 40.43 \text{ K}$$

$$T_2 = 329.6 \text{ K}$$

2.12. Derive (2.17).

For a linear dependence of thermal conductivity upon temperature, $k = k_0(1 + b\theta)$, Fourier's law becomes (in terms of the variable θ)

$$q = -k_0(1 + b\theta)A \frac{d\theta}{dx} \quad \text{or} \quad \frac{q}{A} dx = -k_0(1 + b\theta)d\theta$$

Integrating with q/A constant (steady state) gives

$$\begin{aligned}\frac{q}{A} \int_{x_1}^{x_2} dx &= -k_0 \int_{\theta_1}^{\theta_2} (1 + b\theta) d\theta \\ \frac{q}{A} (x_2 - x_1) &= k_0 \left[\theta_1 - \theta_2 + \frac{b}{2} (\theta_1^2 - \theta_2^2) \right] \\ &= k_0(\theta_1 - \theta_2) \left(1 + b \frac{\theta_1 + \theta_2}{2} \right)\end{aligned}$$

Writing $x_2 - x_1 = \Delta x$, $\theta_2 - \theta_1 = T_2 - T_1 = \Delta T$ and defining k_m as in (2.18), the last equation becomes

$$\frac{q}{A} \Delta x = -k_m \Delta T$$

which is equivalent to (2.17).

2.13. Obtain an analytical expression for the temperature distribution $T(x)$ in the plane wall of Fig. 2-19 having uniform surface temperatures T_1 and T_2 at x_1 and x_2 , respectively, and a thermal conductivity which varies linearly with temperature: $k = k_0(1 + bT)$.

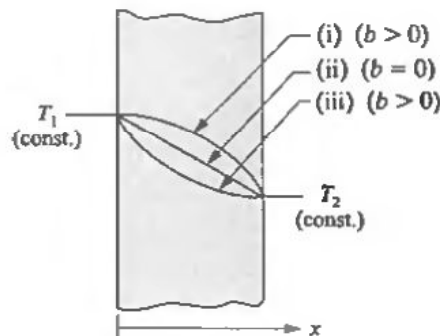


Fig. 2-19

Separating variables in Fourier's law,

$$q = -kA \frac{dT}{dx}$$

and integrating from x_1 to arbitrary x yields

$$\begin{aligned} \frac{q}{A} \int_{x_1}^x dx &= -k_0 \int_{T_1}^T (1 + bT) dT \\ \frac{q}{A} (x - x_1) &= -k_0 \left[\left(T + \frac{b}{2} T^2 \right) - \left(T_1 + \frac{b}{2} T_1^2 \right) \right] \end{aligned}$$

or, completing the squares on the right,

$$-\frac{2q}{bAk_0} (x - x_1) = \left(T + \frac{1}{b} \right)^2 - \left(T_1 + \frac{1}{b} \right)^2 \quad (1)$$

Since the curve (1) must pass through the point (x_2, T_2) ,

$$-\frac{2q}{bAk_0} (x_2 - x_1) = \left(T_2 + \frac{1}{b} \right)^2 - \left(T_1 + \frac{1}{b} \right)^2 = 2 \left(T_m + \frac{1}{b} \right) (T_2 - T_1) \quad (2)$$

with $T_m = (T_1 + T_2)/2$. Divide (1) by (2) and solve for T , obtaining

$$T = -\frac{1}{b} + \left[\left(T_1 + \frac{1}{b} \right)^2 + 2 \left(T_m + \frac{1}{b} \right) \left(\frac{T_2 - T_1}{x_2 - x_1} \right) (x - x_1) \right]^{1/2} \quad (b \neq 0) \quad (3)$$

If $b = 0$, Fourier's law gives directly

$$T = T_1 + \frac{T_2 - T_1}{x_2 - x_1} (x - x_1) \quad (b = 0) \quad (4)$$

- 2.14.** Refer to Problem 2.13. Verify that for $b > 0$ the temperature profile is concave downward, as drawn in Fig. 2-19.

Differentiate Fourier's law,

$$-\frac{q}{Ak_0} = (1 + bT) \frac{dT}{dx}$$

with respect to x :

$$0 = b \left(\frac{dT}{dx} \right)^2 + (1 + bT) \frac{d^2T}{dx^2}$$

or

$$\frac{d^2T}{dx^2} = - \left(\frac{b}{1 + bT} \right) \left(\frac{dT}{dx} \right)^2 < 0$$

The second derivative is negative, as was to be shown. Note that the result is independent of the boundary conditions.

- 2.15.** A hollow cylinder having inner and outer radii r_1 and r_2 , respectively, is subjected to a steady heat transfer resulting in constant surface temperatures T_1 and T_2 at r_1 and r_2 . If the thermal conductivity can be expressed as $k = k_0(1 + b\theta)$, obtain an expression for the heat transfer per unit length of the cylinder.

In terms of θ , Fourier's law is

$$q = -kA_r \frac{d\theta}{dr}$$

where A_r is the area normal to r . Substituting $k = k_0(1 + b\theta)$ and $A_r = 2\pi rL$, where L is cylinder length, results in

$$q = -k_0(1 + b\theta)(2\pi rL) \frac{d\theta}{dr} \quad \text{or} \quad \frac{q}{2\pi L} \frac{dr}{r} = -k_0(1 + b\theta)d\theta$$

In the steady state, $q/2\pi L$ is constant. Hence, integrating through the cylinder wall yields, after rearrangement,

$$\frac{q}{L} = -2\pi k_0 \left[1 + \frac{b}{2}(\theta_2 + \theta_1) \right] \frac{\theta_2 - \theta_1}{\ln(r_2/r_1)}$$

Using (2.18) to define the mean thermal conductivity, we can simplify this result to

$$\frac{q}{L} = -2\pi k_m \frac{\theta_2 - \theta_1}{\ln(r_2/r_1)} = -2\pi k_m \frac{T_2 - T_1}{\ln(r_2/r_1)}$$

- 2.16.** In a single experiment with a 2 cm thick sheet of pure copper having one face maintained at 500 °C and the other at 300 °C, the measured heat flux per unit area is 3.633 MW/m² (1 MW = 10⁶ W). A reported value of k for this material at 150 °C is 371.9 W/m·K. Determine an expression for $k(T)$ of form (1.9).

For the experiment, (2.17) yields

$$\frac{q}{A} = 3.633 \times 10^6 \frac{\text{W}}{\text{m}^2} = k_m \left| \frac{\Delta T}{\Delta x} \right| = k_m \left| \frac{200 \text{ K}}{2 \times 10^{-2} \text{ m}} \right|$$

$$k_m = 363.3 \text{ W/m}\cdot\text{K}$$

Using $k_0 = 371.9 \text{ W/m}\cdot\text{K}$ and $\theta = T - 150 \text{ }^\circ\text{C}$ in (2.18),

$$363.3 \frac{\text{W}}{\text{m}\cdot\text{K}} = \left(371.9 \frac{\text{W}}{\text{m}\cdot\text{K}} \right) \left[1 + b \frac{(500 - 150) + (300 - 150)}{2} \right]$$

$$b = \left(\frac{363.3}{371.9} - 1 \right) \times \frac{1}{250} = -9.25 \times 10^{-5} \text{ K}^{-1}$$

and

$$k = (371.9)[1 - 9.25 \times 10^{-5}(T - 150 \text{ }^\circ\text{C})] \text{ W/m}\cdot\text{K}$$

where T is in degrees C.

The accuracy of this expression may be checked by comparison with tabulated values in Table B-1(SI). At 300 °C,

$$k = (371.9)[1 - 9.25 \times 10^{-5}(300 - 150)] = 366.7 \text{ W/m}\cdot\text{K} = 212.0 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$$

At 600 °C,

$$k = (371.9)[1 - 9.25 \times 10^{-5}(600 - 150)] = 356.4 \text{ W/m}\cdot\text{K} = 206.1 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$$

These values are in reasonable agreement with the tabulated data. The lack of agreement is simply due to the actual nonlinearity of the $k(T)$ relationship, and the linear representation of $k(T)$ obtained should not be applied over an excessive temperature range.

- 2.17.** A thick-walled copper cylinder has an inside radius of 1 cm and an outside radius of 1.8 cm. The inner and outer surface temperatures are held at 305 °C and 295 °C, respectively. Assume k varies linearly with temperature, with k_0 and b the same as in Problem 2.16. Determine the heat loss per unit length.

From Problem 2.15,

$$\frac{q}{L} = -2\pi k_m \frac{T_2 - T_1}{\ln(r_2/r_1)}$$

where $k_m = k_0[1 + b\theta_m]$. For this problem,

$$\theta_m = \frac{\theta_2 + \theta_1}{2} = \frac{(305 - 150) + (295 - 150)}{2} = 150^\circ\text{C}$$

and from Problem 2.16,

$$k_m = (371.9) \text{ W/m}\cdot\text{K} [1 - 9.25 \times 10^{-5} \text{ K}^{-1}(150)^\circ\text{C}] = 366.7 \text{ W/m}\cdot\text{K}$$

Hence,

$$\frac{q}{L} = -2\pi \left(366.7 \frac{\text{W}}{\text{m}\cdot\text{K}} \right) \frac{(295 - 305) \text{ K}}{\ln(1.8/1)} = 39.20 \text{ kW/m}$$

- 2.18.** Consider a plate with uniform heat generation q''' as shown in Fig. 2-8(a). For $k = 200 \text{ W/m}\cdot\text{K}$, $q''' = 40 \text{ MW/m}^3$, $T_1 = 160^\circ\text{C}$ (at $x = 0$), $T_2 = 100^\circ\text{C}$ (at $x = 2L$), and a plate thickness of 2 cm, determine (a) $T(x)$, (b) q/A at the left face, (c) q/A at the right face, and (d) q/A at the plate center.

(a) By (2.20),

$$T = \left[\frac{(100 - 160)^\circ\text{C}}{(0.02 \text{ m})} + \frac{(4 \times 10^7 \text{ W/m}^3)(0.02 \text{ m} - x)}{2(200) \text{ W/m}\cdot\text{K}} \right] x + 160 = 160 - 10^3 x - 10^5 x^2$$

where T is in °C and x is in m.

(b) Obtain dT/dx at $x = 0$ and substitute into Fourier's law.

$$\frac{dT}{dx} = [-10^3 - (2)(10^5)x] \text{ K/m} \quad \left. \frac{dT}{dx} \right|_{x=0} = -10^3 \text{ K/m}$$

$$\left. \frac{q}{A} \right|_0 = -k \left. \frac{dT}{dx} \right|_0 = - \left(\frac{200 \text{ W}}{\text{m}\cdot\text{K}} \right) \left(-10^3 \frac{\text{K}}{\text{m}} \right) = +200 \text{ kW/m}^2$$

The + sign signifies a heat flux into the left surface.

(c) $\left. \frac{dT}{dx} \right|_{2L} = [-10^3 - 2(10^5)(0.02)] = -5(10)^3 \text{ K/m}$

$$\left. \frac{q}{A} \right|_{2L} = -k \left. \frac{dT}{dx} \right|_{2L} = - \left(\frac{200 \text{ W}}{\text{m}\cdot\text{K}} \right) \left(\frac{-5(10)^3 \text{ K}}{\text{m}} \right) = 1 \text{ MW/m}^2$$

An energy balance on the plate,

$$\left. \frac{q}{A} \right|_{2L} = \left. \frac{q}{A} \right|_0 + \frac{q''' \times \text{volume}}{A}$$

can be used to check the above results.

(d) $\left. \frac{dT}{dx} \right|_L = [-10^3 - 2(10^5)(0.01)] = -3 \times 10^3 \text{ K/m}$

$$\left. \frac{q}{A} \right|_L = - \left(\frac{200 \text{ W}}{\text{m}\cdot\text{K}} \right) \left(\frac{-3 \times 10^3 \text{ K}}{\text{m}} \right) = +600 \text{ kW/m}^2$$

- 2.19.** For the heat generation problem depicted in Fig. 2-8(b), determine an analytical expression for the dimensionless temperature $(T - T_s)/(T_c - T_s)$, where T_c is the temperature at the center of the wall.

From (2.21),

$$T - T_s = \frac{q'''}{2k}(2L - x)x \quad \text{and} \quad T_c - T_s = \frac{q'''}{2k}(2L - L)L = \frac{q'''L^2}{2k}$$

so

$$\frac{T - T_s}{T_c - T_s} = \frac{(2L - x)x}{L^2} = 2\left(\frac{x}{L}\right) - \left(\frac{x}{L}\right)^2$$

This shows the parabolic form of the nondimensional temperature distribution.

- 2.20.** For the heat generation problem of Fig. 2-8(b), show that the temperature at the center, T_c , is the maximum temperature when q''' is positive and the minimum temperature when q''' is negative.

By differentiating (2.21),

$$\frac{dT}{dx} = \frac{q'''}{k}(L - x)$$

and at $x = L$, which is the center plane, dT/dx vanishes. This is the condition for an extremal; T is either a maximum or a minimum at this location. To determine which, examine the second derivative,

$$\frac{d^2T}{dx^2} = -\frac{q'''}{k}$$

This is negative for positive q''' , the condition for a maximum, and positive for negative q''' , the condition for a minimum.

- 2.21.** An electrical resistance heater wire has a 0.08 in diameter. The electrical resistivity is $\rho = 80 \times 10^{-6}$ ohm·cm, and the thermal conductivity is 11 Btu/h·ft·°F. For a steady state current of 150 A passing through the wire, determine the centerline temperature rise above the surface temperature, in °F.

It will be convenient to solve this problem in SI units, since we will deal with electrical power dissipation and electrical resistivity, and then to convert the temperature difference from K to °F. Using Appendix A,

$$d = (0.08 \text{ in})\left(0.0254 \frac{\text{m}}{\text{in}}\right) = 2.032 \times 10^{-3} \text{ m}$$

$$\rho = (80 \times 10^{-6} \text{ ohm}\cdot\text{cm})\left(0.01 \frac{\text{m}}{\text{cm}}\right) = 8 \times 10^{-7} \text{ ohm}\cdot\text{m}$$

$$k = \left(11 \frac{\text{Btu}}{\text{h}\cdot\text{ft}\cdot\text{°F}}\right)\left(1.729577 \frac{\text{W}/\text{m}\cdot\text{K}}{\text{Btu}/\text{h}\cdot\text{ft}\cdot\text{°F}}\right) = 19.0253 \frac{\text{W}}{\text{m}\cdot\text{K}}$$

Assuming uniform energy conversion within the wire, $q'''(\pi r_s^2)L = I^2R$, where r_s is the wire outside radius; I is the electric current; and R is the electrical resistance of the wire, which is

$$R = \rho \frac{L}{A} = \rho \frac{L}{\pi r_s^2}$$

Thus,

$$q''' = \frac{I^2 R}{(\pi r_s^2) L} = \frac{I^2 \rho}{(\pi r_s^2)^2} = \frac{(150 \text{ A})^2 (8 \times 10^{-7} \text{ ohm} \cdot \text{m})}{\pi^2 [(2.032 \times 10^{-3}/2) \text{ m}]^4} = 1.7116 \times 10^9 \frac{\text{W}}{\text{m}^3}$$

By (2.25),

$$T - T_s = \frac{r_s^2 q'''}{4k} \left[1 - \left(\frac{r}{r_s} \right)^2 \right] = \frac{(1.016 \times 10^{-3} \text{ m})^2 (1.7116 \times 10^9 \text{ W/m}^3)}{4(19.0253) \text{ W/m} \cdot \text{K}} \left[1 - \left(\frac{0}{r_s} \right)^2 \right] = 23.22 \text{ K}$$

Since $(\Delta T)_{\text{F}} = \frac{9}{5}(\Delta T)_{\text{K}}$, $T - T_s = 41.79 \text{ }^\circ\text{F}$.

- 2.22.** Show that the temperature inside a rod of material having uniform heat generation per unit volume, q''' , and uniform thermal conductivity, can be expressed as

$$T = a - br^2$$

where a and b are constants and r is the radius measured from the rod centerline.

Equation (2.25) applies where subscript s denotes the rod surface condition, so

$$T - T_s = \frac{r_s^2 q'''}{4k} \left[1 - \left(\frac{r}{r_s} \right)^2 \right]$$

Rearranging,

$$T = T_s + \frac{r_s^2 q'''}{4k} - \frac{r_s^2 q'''}{4k} \left(\frac{r^2}{r_s^2} \right)$$

Letting

$$a = T_s + \frac{r_s^2 q'''}{4k}$$

and

$$b = \frac{q'''}{4k}$$

yields the desired form,

$$T = a - br^2$$

- 2.23.** A prototype nuclear reactor has a fuel element design consisting of a thin aluminum tube (cladding) filled with the nuclear material. The resulting nuclear fuel pin is $2r_s$ in diameter where the subscript s denotes the nuclear material outer surface (or the cladding inner surface). The interfacial temperature T_s is measured via thermocouples. Parameters are:

$$\begin{aligned} q_f''' &= 6.5 \times 10^7 \text{ W/m}^3 & T_s &= 550 \text{ K} \\ k_f &= 2.5 \text{ W/m} \cdot \text{K} & r_s &= 0.008 \text{ m} \end{aligned}$$

where subscript f denotes the nuclear fuel material. Determine the maximum temperature in the nuclear fuel pin. Compare this with the temperature at $r = 0.004 \text{ m}$.

From the last problem, the temperature in the nuclear material (rod) is given by

$$T = a - br^2 \tag{1}$$

where:

$$\begin{aligned} a &= T_s + \frac{r_s^2 q'''}{4k} = 550 \text{ K} + \frac{(0.008 \text{ m})^2 (6.5 \times 10^7 \text{ W/m}^3)}{4(2.5 \text{ W/m} \cdot \text{K})} \\ &= 550 + 416 = 966 \text{ K} \\ b &= \frac{q'''}{4k} = \frac{6.5 \times 10^7 \text{ W/m}^3}{4(2.5 \text{ W/m} \cdot \text{K})} = 6.5 \times 10^6 \text{ K/m}^2 \end{aligned}$$

Thus, since T is maximum for $r = 0$ by inspection of (A),

$$T_{\max} = T_c = T(r = 0) = a = 966 \text{ K}$$

At $r = 0.004 \text{ m}$,

$$\begin{aligned} T &= a - br^2 = 966 \text{ K} - (6.5 \times 10^6 \text{ K/m}^2)(0.004 \text{ m})^2 \\ &= 862 \text{ K} \end{aligned}$$

The reader should verify that eq. (I) yields 550 K at $r = 0.008 \text{ m} = r_s$.

- 2.24.** A 6 in thick concrete wall, having thermal conductivity $k = 0.50 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$, is exposed to air at 70°F on one side and air at 20°F on the opposite side. The heat transfer coefficients are $\bar{h}_i = 2.0 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$ on the 70°F side and $\bar{h}_o = 10 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$ on the 20°F side. Determine the heat transfer rate and the two surface temperatures of the wall.

By (2.29) and with reference to Fig. 2-9,

$$\frac{q}{A} = \frac{T_i - T_o}{(1/\bar{h}_i) + (L_d/k_w) + (1/\bar{h}_o)} = \frac{(70 - 20)^\circ\text{F}}{[(1/2) + (0.5/0.50) + (1/10)] \text{ h} \cdot \text{ft}^2 \cdot ^\circ\text{F}/\text{Btu}} = 31.25 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2}$$

The surface temperatures can be determined from (2.28):

$$\frac{q}{A} = \frac{T_i - T_1}{1/\bar{h}_i}$$

$$T_1 = T_i - \frac{q}{A} \frac{1}{\bar{h}_i} = 70^\circ\text{F} - \left(31.25 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2} \right) \left(\frac{\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F}}{2.0 \text{ Btu}} \right) = 54.375^\circ\text{F}$$

$$\frac{q}{A} = \frac{T_2 - T_o}{1/\bar{h}_o}$$

$$T_2 = T_o + \frac{q}{A} \frac{1}{\bar{h}_o} = 20^\circ\text{F} + \left(31.25 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2} \right) \left(\frac{\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F}}{10 \text{ Btu}} \right) = 23.125^\circ\text{F}$$

- 2.25.** A 12 in thick brick outer wall is used in an office building in a southern city with no insulation or added internal finish. On a winter day the following temperatures were measured: inside air temperature, $T_i = 70^\circ\text{F}$; outside air temperature, $T_o = 15^\circ\text{F}$; inside surface temperature, $T_1 = 56^\circ\text{F}$; outside surface temperature, $T_2 = 19.5^\circ\text{F}$. Using $k = 0.76 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$ from Table B-2 (Engl.), estimate the average values of the inner and outer heat transfer coefficients, \bar{h}_i and \bar{h}_o .

With reference to Fig. 2-9, the heat transfer per unit area may be determined by applying Fourier's law to the solid brick wall. Thus

$$\frac{q}{A} = -k \frac{\Delta T}{\Delta x} = \frac{-0.76 \text{ Btu}}{\text{h} \cdot \text{ft} \cdot ^\circ\text{F}} \frac{(19.5 - 56)^\circ\text{F}}{1 \text{ ft}} = 27.74 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2}$$

Now, from (2.28),

$$\frac{q}{A} = 27.74 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2} = \bar{h}_i [(70 - 56)^\circ\text{F}] \quad \text{or} \quad \bar{h}_i = 1.981 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F}}$$

$$\frac{q}{A} = 27.74 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2} = \bar{h}_o [(19.5 - 15)^\circ\text{F}] \quad \text{or} \quad \bar{h}_o = 6.164 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F}}$$

- 2.26.** Determine U for the situation of Problem 2.25, using SI units throughout. From U and the overall temperature difference, determine q/A in W/m^2 . Compare this with the result of Problem 2.25.

Using the conversion factors of Appendix A,

$$\bar{h}_i = \left(1.981 \frac{\text{Btu}}{\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}} \right) \left(\frac{3.1524 \text{ W/m}^2}{\text{Btu/h}\cdot\text{ft}^2} \right) \left(\frac{9^\circ\text{F}}{5 \text{ K}} \right) = 11.241 \text{ W/m}^2\cdot\text{K}$$

$$\bar{h}_o = \left(6.164 \frac{\text{Btu}}{\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}} \right) \left(\frac{3.1524 \text{ W/m}^2}{\text{Btu/h}\cdot\text{ft}^2} \right) \left(\frac{9^\circ\text{F}}{5 \text{ K}} \right) = 34.976 \text{ W/m}^2\cdot\text{K}$$

$$L_a = (12 \text{ in})(0.0254 \text{ m/in}) = 0.3048 \text{ m}$$

$$k_a = \left(0.76 \frac{\text{Btu}}{\text{h}\cdot\text{ft}\cdot^\circ\text{F}} \right) \left(\frac{1.729577 \text{ W/m}\cdot\text{K}}{\text{Btu/h}\cdot\text{ft}\cdot^\circ\text{F}} \right) = 1.314 \text{ W/m}\cdot\text{K}$$

Applying (2.32),

$$U = \frac{1}{[(1/11.241) + (0.3048/1.314) + (1/34.976)] \text{ m}^2\cdot\text{K/W}} = 2.861 \text{ W/m}^2\cdot\text{K}$$

Now

$$(\Delta T)_{\text{overall}} = [(70 - 15)^\circ\text{F}] \times \frac{5 \text{ K}}{9^\circ\text{F}} = 30.555 \text{ K}$$

so

$$\frac{q}{A} = \frac{2.861 \text{ W}}{\text{m}^2\cdot\text{K}} (30.555 \text{ K}) = 87.421 \text{ W/m}^2$$

Converting to English Engineering units,

$$\frac{q}{A} = \left(87.421 \frac{\text{W}}{\text{m}^2} \right) \left(\frac{\text{Btu/h}\cdot\text{ft}^2}{3.1524 \text{ W/m}^2} \right) = 27.73 \frac{\text{Btu}}{\text{h}\cdot\text{ft}^2}$$

which agrees well with the result in Problem 2.25. Note that the conversion $(9^\circ\text{F})/(5 \text{ K})$ may *not* be used to convert a specific temperature but may be used for ΔT conversions and for unit conversions.

- 2.27.** Steam at 250°F flows in an insulated pipe. The pipe is 1% carbon steel and has an inside radius of 2.0 in and an outside radius of 2.25 in. The pipe is covered with a one-inch layer of 85% magnesia. The inside heat transfer coefficient, \bar{h}_i , is $15 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$, and the outside coefficient, \bar{h}_o , is $2.2 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$. Determine the overall heat transfer coefficient U_o and the heat transfer rate from the steam per foot of pipe length, if the surrounding air temperature is 65°F .

In terms suitable for (2.35),

$$\begin{aligned} n &= 3 & k_{1,2} &= k_{\text{steel}} = 25 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F} \\ r_1 &= 2.0 \text{ in} & k_{2,3} &= k_{\text{mag}} = 0.041 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F} \\ r_2 &= 2.25 \text{ in} & \bar{h}_i &= 15 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F} \\ r_3 &= r_n = 3.25 \text{ in} & \bar{h}_o &= 2.2 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F} \end{aligned}$$

where thermal conductivity data are from Tables B-1 (Engl.) and B-2 (Engl.) at temperatures reasonably close to the expected average material temperatures. By (2.35),

$$U_o = \frac{1}{(3.25/2.0 \times 15) + [(3.25/12) \ln(2.25/2.0)/25] + [(3.25/12) \ln(3.25/2.25)/0.041] + (1/2.2)}$$

where each term in the denominator has units $\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}/\text{Btu}$. Thus,

$$U_o = \frac{1}{0.1083 + 0.0013 + 2.4291 + 0.4545} = \frac{1}{2.9932} = 0.3341 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$$

Clearly, the thermal resistance of the steel pipe wall is negligibly small in this problem. The heat transfer per unit length of the pipe is

$$\frac{q}{L} = U_o \frac{A}{L} (\Delta T)_{\text{overall}} = \frac{0.3341 \text{ Btu}}{\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}} (2\pi) \left(\frac{3.25}{12} \text{ ft}\right) [(250 - 65) ^\circ\text{F}] = 105.18 \text{ Btu/h}\cdot\text{ft}$$

- 2.28.** In Problem 2.27 the thermal conductivity of the magnesia was taken at 200°F . Determine the two surface temperatures of the magnesia using $q/L = 105.18 \text{ Btu/h}\cdot\text{ft}$, and evaluate k_{mag} at the average temperature.

Refer to Fig. 2-20. Since \bar{h}_o and \bar{h}_i are specified together with T_o and T_i , we need to determine T_2 beginning with T_i and working from the inside out; and we should calculate T_3 beginning with T_o and working inward. From the steam to the inner wall of the steel pipe:

$$\begin{aligned} \frac{q}{L} &= 2\pi r_1 \bar{h}_i (T_i - T_1) \\ T_1 &= T_i - \frac{q/L}{2\pi r_1 \bar{h}_i} = \left[250 - \frac{105.18}{2\pi(2.0/12)(15)} \right] = 243.30^\circ\text{F} \end{aligned}$$

Through the steel pipe:

$$\begin{aligned} \frac{q}{L} &= \frac{2\pi k_{\text{st}}(T_1 - T_2)}{\ln(r_2/r_1)} \\ T_2 &= T_1 - \frac{(q/L) \ln(r_2/r_1)}{2\pi k_{\text{st}}} = \left[243.30 - \frac{105.18 \ln(2.25/2.0)}{2\pi(25)} \right] = 241.33^\circ\text{F} \end{aligned}$$




Fig. 2-20

From the ambient air to the magnesia outer surface:

$$\begin{aligned} \frac{q}{L} &= 2\pi r_3 \bar{h}_o (T_3 - T_o) \\ T_3 &= \left[65 + \frac{105.18}{2\pi(3.25/12)(2.2)} \right] = 93.09^\circ\text{F} \end{aligned}$$

Hence, the average temperature of the magnesia is

$$T_{\text{avg}} = \left[\frac{241.33 + 93.09}{2} \right] = 167.21^\circ\text{F}$$

and by linear interpolation of the data of Table B-2 (Engl.), $k_{\text{mag}} \approx 0.0403 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$. However, it is questionable that Table B-2 (Engl.) is sufficiently accurate to justify recalculation of U_o and q/L for Problem 2.27.

- 2.29.** It is sometimes necessary to account for radiation loss (or gain) from a surface either in conjunction with or without convection at the surface. From Chapter 11, it can be shown that the heat transfer by radiation from a relatively small gray body surface to much, much larger surroundings is given approximately by

$$\frac{q_{s-\text{surr}}}{A_s} = \epsilon_s \sigma (T_s^4 - T_{\text{surr}}^4) \quad (I)$$

where A_s is the gray body surface having emissivity ϵ_s . To apply this as a boundary condition

it is helpful to obtain an expression for a pseudo-radiation heat transfer coefficient, \bar{h}_r , where this is defined by

$$\frac{q_{s-surr}}{A_s} = \bar{h}_r(T_s - T_{surr}) \quad (2)$$

Determine an analytic expression for \bar{h}_r .

By equating (1) and (2) there results

$$\bar{h}_r(T_s - T_{surr}) = \epsilon_s \sigma(T_s^4 - T_{surr}^4)$$

Continuing,

$$\bar{h}_r(T_s - T_{surr}) = \epsilon_s \sigma(T_s - T_{surr})(T_s + T_{surr})(T_s^2 + T_{surr}^2)$$

and hence

$$\bar{h}_r = \epsilon_s \sigma(T_s + T_{surr})(T_s^2 + T_{surr}^2) \quad (3)$$

which is the desired result.

- 2.30.** A flat panel used on a spacecraft is fabricated from a single layer of SiC/SiC composite, 0.010 m thick. The spacecraft has inner air temperature $T_i = 298$ K, and the spacecraft is in orbit with the panel exposed only to deep space, where $T_o = 0$ K (zero Kelvin). This material has $k_c = 5.0$ W/m·K and $\epsilon_c \cong 0.8$. The inner surface of the panel is exposed to airflow resulting in $\bar{h}_i = 70$ W/m²·K. Determine the outer surface temperature T_2 . Determine q/A .

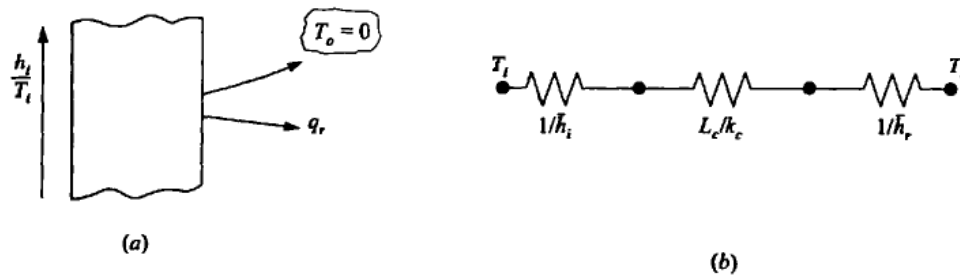


Fig. 2-21

The electrical analog to this is shown in Fig. 2-21. Hence the heat flux is by (2.29) with \bar{h} , instead of \bar{h}_o

$$\frac{q}{A} = \frac{T_i - T_o}{(1/\bar{h}_i) + (L_c/k_c) + (1/\bar{h}_r)}$$

where

$$\bar{h}_r = \epsilon_c \sigma(T_2 + 0)(T_2^2 + 0^2) = \epsilon_c \sigma T_2^3 = (0.8)(5.67 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4) T_2^3 = 4.536 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4 T_2^3$$

So,

$$\frac{q}{A} = \frac{(298 - 0) \text{ K}}{[(1/70)(\text{m}^2 \cdot \text{K/W}) + (0.01/5)(\text{m}^2 \cdot \text{K/W}) + (1/4.536 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4 T_2^3)]} \quad (1)$$

which can also be determined solely by radiation from the outer surface

$$\frac{q}{A} = \epsilon_c \sigma(T_2^4 - T_o^4) = 0.8(5.67 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4)(T_2^4) \quad (2)$$

Combining expressions (1) and (2)

$$\frac{q}{A} = \frac{298 \text{ K}}{[0.01428 + 0.002 + (1/4.536 \times 10^{-8} T_2^3)]} = 4.536 \times 10^{-8} (T_2^3)$$

Solving by trial and error and noting that $T_2 < 298 \text{ K}$, the results are:

Assumed T_2 (K)	q/A by (1) (W/m ²)	q/A by (2) (W/m ²)
285	307.6	299.3
287	314.1	307.7
293	333.8	334.3
292	330.5	329.8
292.5	332.1	332.03

A satisfactory solution is $T_2 = 292.5 \text{ K}$ and $q/A = 332 \text{ W/m}^2$.

- 2.31.** To reduce the relatively high q/A value, the physical situation of Problem 2.30 is modified by bonding a very thin layer of polished aluminum to the outer surface of the SiC/SiC panel. The polished aluminum has $\epsilon = 0.04$ and its thickness is such that $(L/k)_a \approx 0$. Determine the outer surface temperature and q/A with all other parameters unchanged from Problem 2.30.

The electric analog is shown in Fig. 2-21(b), where:

$$\begin{aligned} \bar{h}_i &= 70 \text{ W/m}^2 \text{ K} \\ T_i &= 298 \text{ K}; \quad T_o = 0 \end{aligned}$$

and from Problem 2.29 (3)

$$\bar{h}_r = (0.04)(5.67 \times 10^{-9})(T_2 + 0)(T_2^2 + 0) = 2.268 \times 10^{-9} T_2^3$$

Then

$$\frac{q}{A} = \frac{T_i - T_o}{(1/\bar{h}_i) + (L/k_s) + (1/\bar{h}_r)} = \frac{(298 - 0) \text{ K}}{(1/70 \text{ (m}^2 \cdot \text{K/W)}) + (0.01/5 \text{ (m}^2 \cdot \text{K/W)}) + (1/2.268 \times 10^{-9} \text{ W/m}^2 \cdot \text{K T}_2^3)} \quad (1)$$

and

$$\frac{q}{A} = \bar{h}_r(T_2 - 0) = 2.268 \times 10^{-9} \text{ W/m}^2 \cdot \text{K T}_2^3 \quad (2)$$

A trial-and-error solution is:

Assumed T_2 (K)	q/A by (1) (W/m ²)	q/A by (2) (W/m ²)
295	17.3	17.2
296	17.5	17.4
297	17.68	17.65

Thus, the outer surface temperature is 297 K resulting in a radiant heat loss of 17.7 W/m² from the panel. The addition of the very thin polished aluminum sheet reduced the heat loss by 94.7%.

- 2.32.** Begin with eq. (2.36) and show that the heat transfer rate per unit length q/L is a maximum at r_{crit} given by eq. (2.37).

Rewrite equation (2.36) as

$$\frac{q}{L} = q' = \frac{T_i - T_u}{R'}$$

where

$$R' = R'_{total} = \frac{\ln(r/r_i)}{2\pi k} + \frac{1}{2\pi r h}$$

which is the sum of the conductive and convective radial resistances.

Now if a maximum or minimum for R' occurs, it will be at

$$\frac{dR'}{dr} = 0 = \frac{1}{2\pi k r} - \frac{1}{2\pi r^2 h}$$

which yields eq. (2.37),

$$\frac{1}{k} = \frac{1}{r h} \quad \text{or} \quad r = \frac{k}{h} \quad (2.37)$$

Examining the second derivative of R' ,

$$\frac{d^2 R'}{dr^2} = \frac{-1}{2\pi k r^2} + \frac{1}{\pi r^3 h}$$

At $r_{crit} = (k/h)$ this becomes

$$\left. \frac{d^2 R'}{dr^2} \right|_{k/h} = \frac{-1}{2\pi(k^3/h^2)} + \frac{1}{\pi(k^3/h^2)} = \frac{1}{\pi(k/h)^2} \left(\frac{1}{k} - \frac{1}{2k} \right) = \frac{1}{2\pi(k^3/h^2)} > 0$$

Since the second derivative is positive at r_{crit} , then $r = k/h$ is the condition for a minimum value of R' and a maximum value of q' . Hence there is no optimum insulation thickness. Addition of insulation below the value of r_{crit} will *increase* the heat transfer rate. For values of r above r_{crit} , increasing thickness (increasing r) will decrease q' .

- 2.33.** A thin-walled copper tube having an outside metal radius $r = 0.008$ m carries steam at 383 K. It is inside a room where the surrounding air temperature is 298 K. It is insulated with 85% magnesia insulation having an approximate thermal conductivity of 0.071 W/m·K.

- (a) What is the critical thickness of insulation for an external convective coefficient $h = 4.0$ W/m²·K? (Assume negligible conductive resistance due to the wall of the copper tube.)
- (b) Under these conditions, determine the radial heat transfer rate per meter of tube length, q' , for:
- (i) a 0.004 m thick layer of insulation
 - (ii) an r_{crit} thick layer of insulation
 - (iii) a 0.05 m thick layer of insulation

The solution to part (a) is given by (2.37)

$$r_{crit} = \frac{k}{h} = \frac{0.071 \text{ W/m}\cdot\text{K}}{4.0 \text{ W/m}^2\cdot\text{K}} = 0.0178 \text{ m} = 17.8 \text{ mm}$$

The solutions to part (b) are obtained with (2.36), i.e.,

$$q' = \frac{q}{L} = \frac{T_i - T_o}{[\ln(r/r_i)/2\pi k] + (1/2\pi hr)} = \frac{T_i - T_o}{R'}$$

Solving for R'_{i2} with $r = 12 \text{ mm} = 0.012 \text{ m}$ and $r_i = 0.008 \text{ m}$ (see Fig. 2-11) yields

$$R'_{i2} = \left[\frac{\ln(12/8)}{2\pi(0.071)} + \frac{1}{2\pi(4)(0.012)} \right] \frac{\text{m} \cdot \text{K}}{\text{W}} = 4.225 \frac{\text{m} \cdot \text{K}}{\text{W}}$$

and

$$q'_{i2} = \frac{q}{L} = \frac{T_i - T_o}{R'_{i2}} = \frac{383 \text{ K} - 298 \text{ K}}{4.225 \text{ m} \cdot \text{K}/\text{W}} = 20.12 \text{ W/m}$$

Likewise

$$R'_{cm} = R'_{r8} = \left[\frac{\ln(17.8/8)}{2\pi(0.071)} + \frac{1}{2\pi(4)(0.0178)} \right] \frac{\text{m} \cdot \text{K}}{\text{W}} = 4.028 \frac{\text{m} \cdot \text{K}}{\text{W}}$$

and

$$q'_{cm} = \frac{(383 - 298) \text{ K}}{4.028 \text{ m} \cdot \text{K}/\text{W}} = 21.10 \text{ W/m}$$

and

$$R'_{s0} = \left[\frac{\ln(50/8)}{2\pi(0.071)} + \frac{1}{2\pi(4)(0.050)} \right] \frac{\text{m} \cdot \text{K}}{\text{W}} = 4.904 \frac{\text{m} \cdot \text{K}}{\text{W}}$$

with

$$q'_{s0} = \frac{(383 - 298) \text{ K}}{4.904 \text{ m} \cdot \text{K}/\text{W}} = 17.33 \text{ W/m}$$

Note that q' increased by about 5% when the insulation thickness increased from 0.004 m to the critical value of 0.0178 m. Adding insulation beyond the critical thickness, say to 0.05 m thick, decreased the q' loss.

- 2.34.** Determine the critical radius in cm for an asbestos-cement covered pipe. From Table B-2 (SI), $k_{\text{ash}} = 0.208 \text{ W/m} \cdot \text{K}$. The external heat-transfer coefficient is $1.5 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$.

First, we need to convert h to SI units. Using Appendix A,

$$h = (1.5 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}) \left(\frac{3.15248 \text{ W/m}^2}{\text{Btu/h} \cdot \text{ft}^2} \right) \left(\frac{9^\circ\text{F}}{5 \text{ K}} \right) = 8.51 \text{ W/m}^2 \cdot \text{K}$$

By (2.37)

$$r_{\text{crit}} = \frac{k}{h} = \frac{0.208 \text{ W/m} \cdot \text{K}}{8.51 \text{ W/m}^2 \cdot \text{K}} = 0.0244 \text{ m} = 2.44 \text{ cm}$$

- 2.35.** Plot q/L (Btu/h·ft) versus r (in) for the situation of Problem 2.34 if $r_i = 0.5 \text{ in}$, $T_i = 250^\circ\text{F}$, and $T_o = 70^\circ\text{F}$. Consider the range $r = r_i$ to $r = 1.5 \text{ in}$.

Converting units,

$$k = \left(0.208 \frac{\text{W}}{\text{m} \cdot \text{K}} \right) \left(\frac{\text{Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}}{1.729577 \text{ W/m} \cdot \text{K}} \right) = 0.120 \frac{\text{Btu}}{\text{h} \cdot \text{ft} \cdot ^\circ\text{F}}$$

By (2.36),

$$\frac{q}{L} = \frac{2\pi(T_i - T_o)}{[\ln(r/r_i)/k] + (1/hr)} = \frac{2\pi(250 - 70)^\circ\text{F}}{[\ln(r/0.5)/0.120] + (12/1.5r)/(h \cdot \text{ft} \cdot ^\circ\text{F}/\text{Btu})} = \frac{1130.97}{[\ln(r/0.5)/0.12] + (8/r)} \text{ Btu/h} \cdot \text{ft}$$

in which r is in inches.

Values of q/L are displayed in Table 2-2 and Fig. 2-22. Observe that 1.0 in of insulation ($r = 1.5$ in) still results in a higher q/L than the bare or uninsulated pipe! This illustrates the necessity of checking the critical radius prior to specification of an insulation thickness, especially for small pipes, ducts, or wires. As a final comment, the critical radius is strongly dependent upon h , which was arbitrarily specified to be constant in this problem. Accurate determination of h can be made using the methods of Chapters 6, 7, and 8.

Table 2-2

r (in)	q/L (Btu/h·ft)	r	q/L
0.5	70.69	1.0	82.10
0.6	76.15	1.1	81.70
0.7	79.46	1.2	81.00
0.8	81.27	1.3	80.12
0.9	82.03	1.4	79.12
0.961	82.14	1.5	78.06

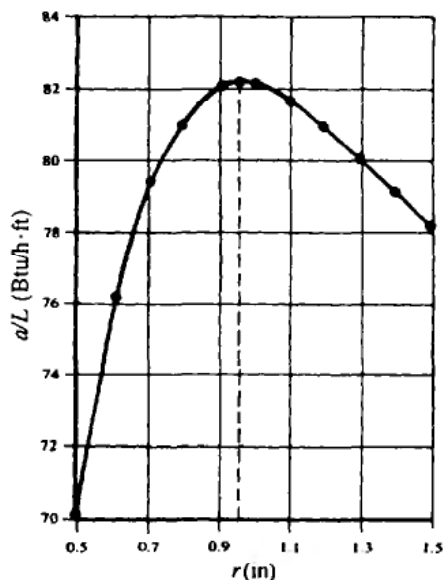


Fig. 2-22

- 2.36. An aluminum cylindrical rod ($k = 132 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$), having a diameter of 0.375 in and a length of 4 in, is attached to a surface having a temperature of 200°F . The rod is exposed to ambient air at 70°F , and the heat transfer coefficient along the length and at the end is $1.5 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$. Determine the temperature distribution and the heat flux (a) neglecting the heat transfer at the end and (b) accounting for the heat transfer at the end.

For a cylindrical rod, (2.45) gives

$$n = \sqrt{\frac{2\bar{h}}{kr}} = \sqrt{\frac{2(1.5) \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}}{132[0.375/2(12)] \text{ Btu/h} \cdot ^\circ\text{F}}} = 1.2060 \text{ ft}^{-1}$$

- (a) Using the solution for θ/θ_b given in Table 2-1 (Case 2),

$$\frac{T - 70^\circ\text{F}}{(200 - 70)^\circ\text{F}} = \frac{\cosh[1.2060(\frac{4}{12} - x)]}{\cosh[(1.2060)(\frac{4}{12})]}$$

$$T = 70^\circ\text{F} + (130^\circ\text{F}) \frac{\cosh[1.2060(\frac{4}{12} - x)]}{1.0819}$$

Evaluating T at $1/2$ in intervals, we obtain Table 2-3.

The heat transfer rate is, by (2.42),

$$q = kAn\theta_b \tanh nL$$

$$= (132 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}) \left(\frac{\pi}{4}\right) \left(\frac{0.375}{12}\right)^2 \text{ft}^2 (1.2060) \text{ft}^{-1} (200 - 70)^\circ\text{F} \tanh [(1.2060) \text{ft}^{-1} (\frac{4}{12}) \text{ft}]$$

$$= 6.058 \text{ Btu/h}$$

(b) The appropriate solution (Case 3) from Table 2-1, with $\bar{h}_L/nk = \bar{h}/nk = 0.00942$, gives

$$T = 70^\circ\text{F} + (130^\circ\text{F}) \left\{ \frac{\cosh [1.2060 \text{ ft}^{-1}(\frac{4}{12} \text{ ft} - x)] + 0.00942 \sinh [1.2060 \text{ ft}^{-1}(\frac{4}{12} \text{ ft} - x)]}{\cosh [1.2060 \text{ ft}^{-1}(\frac{4}{12} \text{ ft})] + 0.00942 \sinh [(1.2060) \text{ ft}^{-1}(\frac{4}{12} \text{ ft})]} \right\}$$

Evaluating T at $1/2$ in intervals yields Table 2-4. The values in Tables 2-3 and 2-4 are only slightly different, the largest difference being near the rod end ($x = 4$ in).

Table 2-3

x (in)	T ($^\circ\text{F}$)	x	T
0.0	200.00	2.5	191.53
0.5	197.67	3.0	190.77
1.0	195.66	3.5	190.31
1.5	193.97	4.0	190.16
2.0	192.59		

Table 2-4

x (in)	T ($^\circ\text{F}$)	x	T
0.0	200.00	2.5	191.26
0.5	197.63	3.0	190.45
1.0	195.56	3.5	189.94
1.5	193.81	4.0	189.73
2.0	192.38		

The heat transfer rate from the rod is, by (2.43),

$$\begin{aligned} q &= 132 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F} \left(\frac{\pi}{4} \right) \left(\frac{0.375}{12} \right)^2 (1.2060 \text{ ft}^{-1})(200 - 70)(^\circ\text{F}) \\ &\quad \times \frac{\sinh [(1.2060 \text{ ft}^{-1})(\frac{4}{12} \text{ ft})] + 0.00942 \cosh [(1.2060 \text{ ft}^{-1})(\frac{4}{12} \text{ ft})]}{\cosh [(1.2060 \text{ ft}^{-1})(\frac{4}{12} \text{ ft})] + 0.00942 \sinh [(1.2060 \text{ ft}^{-1})(\frac{4}{12} \text{ ft})]} \\ &= 6.185 \text{ Btu/h} \end{aligned}$$

If, instead of this exact solution for q , we use the corrected length $L_c = (4 + 0.375/4)$ in in (2.42), we find

$$q = 132 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F} \left(\frac{\pi}{4} \right) \left(\frac{0.375}{12} \right)^2 (\text{ft}^2)(1.2060 \text{ ft}^{-1})(130^\circ\text{F}) \tanh \left[(1.2060) \text{ ft}^{-1} \left(\frac{4.0938}{12} \right) \text{ ft} \right] = 6.185 \text{ Btu/h}$$

The solution for q in part (a) is 2.04% low, whereas the L_c approach yields a result essentially the same as the exact solution.

- 2.37.** A thin fin of length L has its two ends attached to two parallel walls which have temperatures T_1 and T_2 (Fig. 2-23). The fin loses heat by convection to the ambient air at T_∞ . Obtain an analytical expression for the one-dimensional temperature distribution along the length of the fin.

The general solution for the rectangular fin,

$$\theta = C_1 e^{mx} + C_2 e^{-mx}$$

where $\theta = T - T_\infty$ applies to this problem. The two boundary conditions are

$$\theta(0) = T_1 - T_\infty = \theta_1 \quad \theta(L) = T_2 - T_\infty = \theta_2$$

Applying these gives

$$C_1 = \frac{\theta_2 - \theta_1 e^{-mL}}{e^{mL} - e^{-mL}} \quad C_2 = \theta_1 - C_1$$

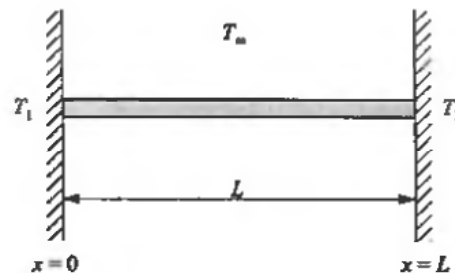


Fig. 2-23

Substituting,

$$\begin{aligned}\theta &= \left(\frac{\theta_2 - \theta_1 e^{-nL}}{e^{nL} - e^{-nL}} \right) (e^{nx} - e^{-nx}) + \theta_1 e^{-nx} \\ &= \theta_2 \left(\frac{e^{nx} - e^{-nx}}{e^{nL} - e^{-nL}} \right) + \theta_1 \left[\frac{e^{-nx}(e^{nL} - e^{-nL}) - e^{-nL}(e^{nx} - e^{-nx})}{e^{nL} - e^{-nL}} \right]\end{aligned}$$

Since $\sinh y \equiv (e^y - e^{-y})/2$,

$$\theta = \theta_1 \frac{\sinh n(L-x)}{\sinh nL} + \theta_2 \frac{\sinh nx}{\sinh nL}$$

This result is, of course, applicable to cylindrical rods of small diameter as well as to rectangular fins. Also, the total heat loss from such a fin or rod with both ends fixed could be obtained by applying Fourier's law at each end and algebraically summing the two conductive heat transfer rates into the fin. See Problem 2.57.

- 2.38.** Consider a thin cylindrical rod with its ends fixed to two parallel surfaces (similar to Fig. 2-23). Let dimensions, properties, and temperatures be such that $n = 0.9 \text{ m}^{-1}$, $\theta_1 = 10 \text{ K}$, $\theta_2 = 10 \text{ K}$, and $L = 0.3 \text{ m}$. (a) Determine the temperature at $x = 0.12 \text{ m}$ using the result found in Problem 2.37, if the ambient temperature is 24°C . (b) Obtain the same numerical result by considering the symmetry of the problem and using the temperature distribution given in Table 2-1 for the insulated-end case.

(a) From Problem 2.37

$$\theta(0.12) = 10 \frac{\sinh [0.9(0.3 - 0.12)]}{\sinh [0.9(0.3)]} + 10 \frac{\sinh [0.9(0.12)]}{\sinh [0.9(0.3)]}$$

or

$$\theta(0.12) = 5.954 + 3.959 = 9.913^\circ\text{C}$$

so that

$$T(0.12) = \theta(0.12) + T_\infty = 9.913 + 24 = 33.91^\circ\text{C}$$

- (b) Since the problem is symmetrical about the midpoint of the rod, the insulated-end solution applies with $L = 0.15 \text{ m}$. So

$$\theta(0.12) = 10 \frac{\cosh [0.9(0.15 - 0.12)]}{\cosh [(0.9)(0.15)]} = 9.913^\circ\text{C}$$

and

$$T(0.12) = 33.91^\circ\text{C}$$

as before in part (a).

- 2.39.** A very long, 1 cm diameter copper rod ($k = 377 \text{ W/m}\cdot\text{K}$) is exposed to an environment at 22°C . The base temperature of the rod is maintained at 150°C . The heat transfer coefficient between the rod and the surrounding air is $11 \text{ W/m}^2\cdot\text{K}$. Determine the heat transfer rate from the rod to the surrounding air.

Since the rod is very long, (2.41) may be used. We have

$$n = \sqrt{\frac{2\bar{h}}{kr}} = \left[\frac{2(11 \text{ W/m}^2\cdot\text{K})}{(377 \text{ W/m}\cdot\text{K})(0.005 \text{ m})} \right]^{1/2} = 3.416 \text{ m}^{-1}$$

Thus,

$$q = kAn\theta_b = (377 \text{ W/m}\cdot\text{K}) \left(\frac{\pi}{4} \right) (0.01 \text{ m})^2 (3.416 \text{ m}^{-1}) [(150 - 22) \text{ K}] = 12.95 \text{ W}$$

- 2.40.** Repeat Problem 2.39 for finite lengths 2, 4, 8, ..., 128 cm, assuming heat loss at the end, i.e., Case 3 of Table 2-1. Assume $h_L = 11 \text{ W/m}^2 \cdot \text{K}$ also.

The heat loss from the rod may be calculated from (2.43). We need the parameters

$$n = 3.416 \text{ m}^{-1} \quad (\text{from Problem 2.39})$$

$$\frac{h_L}{nk} = \frac{11 \text{ W/m}^2 \cdot \text{K}}{(3.416 \text{ m}^{-1})(377 \text{ W/m} \cdot \text{K})} = 0.00854$$

$$kAn\theta_b = 12.95 \text{ W} \quad (\text{from Problem 2.39})$$

For $L = 2 \text{ cm}$,

$$nL = 3.416 \text{ m}^{-1} \times 0.02 \text{ m} = 0.06832$$

$$\sinh nL = 0.06837 \quad \cosh nL = 1.00233$$

and by (2.43)

$$q = (12.95 \text{ W}) \left[\frac{0.06837 + 0.00854(1.00233)}{1.00233 + 0.00854(0.06837)} \right] = 0.993 \text{ W}$$

Repeating for lengths of 2, 4, 8, 16, 32, 64, and 128 cm we obtain the results plotted in Fig. 2-24. This problem illustrates that when k is large there are significant differences between the finite-length and infinite-length cases.

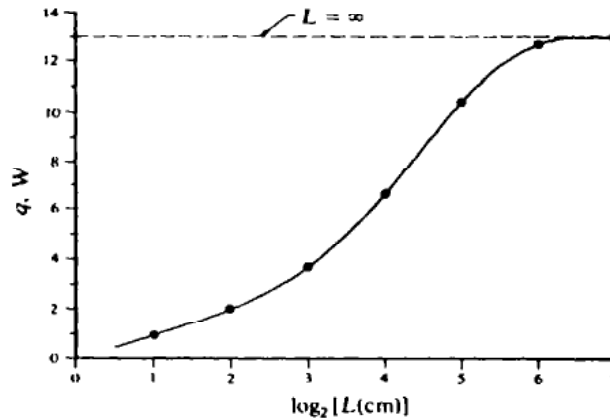


Fig. 2-24

- 2.41.** An annular aluminum alloy fin ($k = 90 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$) is mounted on a 1 in o.d. heated tube. The fin is of constant thickness equal to $1/64 \text{ in}$ and has an outer radius of 1.5 in. The tube wall temperature is 300°F , the surrounding temperature is 70°F , and the average convective heat transfer coefficient is $5 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$. Calculate the heat loss from the fin.

Equation (2.50) may be used, with the parameters

$$nr_1 = \left[\frac{2\bar{h}}{kt} \right]^{1/2} r_1 = \left[\frac{2(5)(12)}{90(1/64)} \right]^{1/2} \left(\frac{0.5}{12} \right) = 0.385$$

$$nr_2 = \left[\frac{2(5)(12)}{90(1/64)} \right]^{1/2} \left(\frac{1.5}{12} \right) = 1.155$$

Thus,

$$q = 2\pi(90) \left[\frac{1}{64(12)} \right] (300 - 70)(0.385) \left[\frac{K_1(0.385)I_1(1.155) - I_1(0.385)K_1(1.155)}{I_0(0.385)K_1(1.155) + K_0(0.385)I_1(1.155)} \right]$$

The modified Bessel functions are obtained from standard tables of higher functions, and thus

$$q = (65.18) \left[\frac{(2.2860)(0.6793) - (0.1961)(0.4667)}{(1.0374)(0.4667) + (1.1483)(0.6793)} \right] = 75.35 \text{ Btu/h}$$

The main drawback to the use of (2.50) is the effort required to obtain accurate values of the Bessel functions.

- 2.42.** Repeat Problem 2.41 using the fin-efficiency approach with no length correction for the tip loss.

$$L = \frac{1}{12} \text{ ft} \quad A_p = \frac{1}{12} \left[\frac{1}{(64)(12)} \right] \text{ ft}^2$$

$$L^{3/2} \left(\frac{\bar{h}}{kA_p} \right)^{1/2} = \left(\frac{1}{12} \right)^{3/2} \left[\frac{5(64)(144)}{(90)(1)} \right]^{1/2} = 0.5443$$

$$\frac{r_2}{r_1} = \frac{1.5}{0.5} = 3.0$$

From Fig. 2-16, $\eta_f \approx 0.75$, so that (2.53) gives

$$q_{\text{act}} = \eta_f \bar{h} A_f \theta_b \approx (0.75) \left(\frac{5 \text{ Btu}}{\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F}} \right) \left[\left(\frac{2}{144} \right) (\pi)(1.5^2 - 0.5^2) \text{ ft}^2 \right] (230 ^\circ\text{F}) = 75.27 \text{ Btu/h}$$

which is very close to the previous solution. If we had used a correction for tip loss, then $r_{2c} = 1.508$ rather than $r_2 = 1.5$ which is a negligible difference when using Fig. 2-16.

- 2.43.** A 2.5 cm o.d. tube is fitted with 5.0 cm o.d. annular fins spaced on 0.50 cm centers. The fins are aluminum alloy ($k = 161 \text{ W/m} \cdot \text{K}$) and are of constant thickness 0.0229 cm. The external free convective heat transfer coefficient to the ambient air is $8.5 \text{ W/m}^2 \cdot \text{K}$. For a tube wall temperature of $165 ^\circ\text{C}$ and an ambient temperature of $27 ^\circ\text{C}$, determine the heat loss per meter of length of finned tube.

We will first determine the fin efficiency with Fig. 2-16 and then apply (2.54).

$$L_c = \frac{5.0 - 2.5}{2} + \frac{0.0229}{2} = 1.261 \text{ cm}; \quad r_{2c} = 1.261 + 1.25 = 2.511 \text{ cm}$$

$$(L_c)^{3/2} \left[\frac{\bar{h}}{kA_p} \right]^{1/2} = \left(\frac{1.261}{100} \right)^{3/2} \left(\frac{8.5 \times 10^4}{161 \times 1.261 \times 0.0229} \right)^{1/2} = 0.1910$$

$$\frac{r_{2c}}{r_1} = \frac{2.511}{1.25} = 2.009$$

From Fig. 2-16, $\eta_f \approx 0.94$. Then the number of fins per meter of tube length is

$$no. = \frac{100 \text{ cm}}{0.5 \text{ cm/fin}} = 200 \text{ fins/m}$$

Area of fins per meter length:

$$A_f = (no.) (2) (\pi) (r_{2c}^2 - r_1^2) = 200 (2\pi) (2.511^2 - 1.25^2) = 5959 \text{ cm}^2/\text{m}$$

Area of exposed tube per meter length:

$$A_b = [\pi(o.d.)] (L - 200t) = \pi \left(\frac{2.5}{100} \right) \left[1 - 200 \left(\frac{0.0229}{100} \right) \right] = 7.494 \times 10^{-2} \text{ m}^2/\text{m}$$

The heat transfer per lineal meter is

$$\frac{q}{L} = \bar{h} (A_b + \eta_f A_f) \theta_b = (8.5) [0.07494 + (0.94)(0.5959)] (165 - 27) = 744.9 \text{ W/m}$$

Supplementary Problems

- 2.44.** Begin with an appropriate form of the general conduction equation for the steady state radial flow in a single-layered spherical shell. Obtain the temperature gradient dT/dr by solution of the equation and substitute this into Fourier's law to obtain (2.16).
- 2.45.** If insulation thickness in Problem 2.4 is changed to 0.05 m, determine T_2 , the interfacial temperature between brick and insulation. *Ans.* $T_2 = 1044.4$ K
- 2.46.** For the ceiling of Problem 2.6, what is the temperature at the center of the rock wool insulation ($\frac{3}{4}$ in below upper surface)? *Ans.* 63.6 °F
- 2.47.** Steam at 120 °C flows in an insulated 1% carbon steel pipe. The pipe inner radius is 10 cm and the outer radius is 11 cm. This is covered with a 3 cm thick layer of asbestos having a density of 577 kg/m³. The outer asbestos surface is at 45 °C. Using carbon steel thermal conductivity, $k = 43$ W/m·K and asbestos thermal conductivity $k = 0.192$ W/m·K, determine the heat transfer from the steam per meter of pipe length. Use SI units throughout. *Ans.* 375 W/m
- 2.48.** Problem 2.16 presents an expression of the form $k = k_0[1 + b(T - T_{ref})]$ for the thermal conductivity of copper in SI units, where $k_0 = 371.9$ W/m·K at $T_{ref} = 150$ °C and $b = -9.25 \times 10^{-5}$ K⁻¹. Convert this expression to English Engineering units. Compare k from the resulting expression with the four values in Table B-1 (Engl.). Comment on any lack of agreement.
Ans. $k = (215.02)[1 - 5.14 \times 10^{-5}(T - 302)]$ Btu/h·ft·°F; $k_{32} = 223$, $k_{212} = 219$, $k_{392} = 216$, $k_{572} = 213$ Btu/h·ft·°F; not highly accurate but good enough for many engineering applications.

- 2.49.** Estimate the conductive heat transfer in the insulated copper wire between the two liquid surfaces for two thermocouples located in boiling water and an ice bath (Fig. 2-25). The wire length between the surfaces is 35 cm; the wire is A.W.G. no. 28 (0.032 cm diameter) and it is pure copper. Use linear interpolation of Table B-1 (SI) to obtain k_m . *Ans.* For each wire, $q = 8.78 \times 10^{-3}$ W

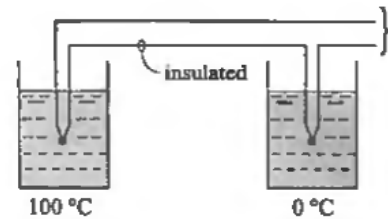


Fig. 2-25

- 2.50.** Determine a linear expression for $k(T)$ for 1% mild carbon steel in the temperature range between 0 °C and 300 °C. Comment on the applicability of the resulting expression outside of the stated temperature range.
Ans. $k = (45.8338)[1 - 1.8868 \times 10^{-4} T]$ W/m·°C, where T is in °C
 $k = (26.5)[1 - 1.0482 \times 10^{-4}(T - 32)]$ Btu/h·ft·°F, where T is in °F
- 2.51.** A wall has a freshly plastered layer which is 0.5 in thick. If q''' due to the chemical reaction during "curing" of the plaster is approximately constant at 5000 Btu/h·ft³, the outer surface is insulated (no heat transfer), and the inner surface is held at 90 °F, determine the steady state temperature of the outer surface. Assume that k of the fresh plaster is 0.5 Btu/h·ft·°F (which is higher than usual values due to increased moisture content). (*Hint:* This problem is mathematically the same as that of a plaster wall 1 in thick with both surfaces held at 90 °F.) *Ans.* 98.68 °F

- 2.52.** An electric resistance wire 0.25 cm in diameter and 0.5 m long has measured voltage drop of 25 V for a current flow of 40 A. The material thermal conductivity is 24 W/m·K. Determine (a) q''' in W/m³ and (b) the maximum temperature in the wire if the surface temperature is 650 K.
Ans. (a) $q''' = 4.074 \times 10^8$ W/m³; (b) $T = 656.63$ K

- 2.53.** A rectangular steel tank is filled with a liquid at 150 °F and exposed along the outside surface to air at 70 °F, the inner and outer convective heat transfer coefficients being $\bar{h}_i = 4.0$ Btu/h·ft²·°F and

$\bar{h}_o = 1.5 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$. The tank wall is 1/4 in carbon steel ($k = 26 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$), and this is covered with a 1 in layer of glass wool ($k = 0.024 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$). Determine (a) the overall heat transfer coefficient U and (b) the heat transfer rate per sq. ft.

Ans. (a) $0.2278 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$; (b) $18.224 \text{ Btu/h}\cdot\text{ft}^2$

(Note that the thermal resistance due to the steel wall is negligible in this problem.)

- 2.54.** Determine the critical radius of insulation for rock wool, 10 lb/ft^3 , at 32°C if the external heat transfer coefficient is $6.8 \text{ W/m}^2\cdot\text{K}$ and $k = 0.040 \text{ W/m}\cdot\text{K}$.

Ans. $r_c = \frac{k}{h} = \frac{0.040}{6.8} = 0.00588 \text{ m} = 0.59 \text{ cm}$

- 2.55.** Determine the critical radius of insulation for asbestos felt, 40 laminations per inch, at 100°F , if the external heat transfer coefficient is $1.2 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$. For k_{asb} see Table B-2 (Engl.). *Ans.* 0.33 in

- 2.56.** Repeat Problem 2.40 for an aluminum alloy rod ($k = 161 \text{ W/m}\cdot\text{K}$). All other factors remain unchanged. *Ans.* Selected values of L and q are: $L = \infty$, $q = 8.465 \text{ W}$; $L = 16 \text{ cm}$, $q = 5.848 \text{ W}$; $L = 32 \text{ cm}$, $q = 7.903 \text{ W}$

- 2.57.** Using the expression for the temperature distribution obtained in Problem 2.37, determine an analytical expression for the heat transfer from a fin or rod attached to two parallel walls as shown in Fig. 2-23.

Ans. $q = kA \left(\frac{d\theta}{dx} \Big|_{x=l} - \frac{d\theta}{dx} \Big|_{x=0} \right) = \frac{kAn}{\sinh nL} [\theta_2(\cosh nL - 1) + \theta_1(\cosh nL - 1)]$

(q is the sum of the two conductive heat transfer rates *into* the fin at its ends.)

- 2.58.** Show that for the straight rectangular fin, (2.46) reduces to (2.39).

Multidimensional Steady-state Conduction

3.1 INTRODUCTION

The steady-state temperature in a three-dimensional cartesian coordinate system obeys, when thermal conductivity is constant, the Laplace equation,

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} + \frac{\partial^2 T}{\partial z^2} = 0 \quad (3.1)$$

The solution of this equation, $T(x, y, z)$, can be differentiated and combined with Fourier's equation to yield the components of the *vector heat transfer rate*. These components are

$$q_x = -kA_x \frac{\partial T}{\partial x} \quad q_y = -kA_y \frac{\partial T}{\partial y} \quad q_z = -kA_z \frac{\partial T}{\partial z} \quad (3.2)$$

where A_x is the area normal to q_x , etc.

A number of methods of solving the Laplace equation are available, including analytical, numerical, graphical and analog techniques.

3.2. ANALYTICAL SOLUTIONS

Method of Separation of Variables

We illustrate this classical method of solution by means of an example.

EXAMPLE 3.1. A very long (z -direction) rectangular bar has three of its lateral sides held at a fixed temperature; the temperature distribution across the fourth side is sinusoidal with a maximum value θ_m (see Fig. 3-1). Find the temperature distribution within the bar.

By using the shifted temperature $\theta = T - T_0$ we may suppose the fixed temperature to be zero. Since there is no z -direction temperature gradient, the Laplace equation is

$$\frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2} = 0 \quad (3.3)$$

subject to the boundary conditions

- (1) $\theta(0, y) = 0 \quad (0 < y < W)$
- (2) $\theta(L, y) = 0 \quad (0 < y < W)$
- (3) $\theta(x, 0) = 0 \quad (0 < x < L)$
- (4) $\theta(x, W) = \theta_m \sin \frac{\pi x}{L} \quad (0 < x < L)$

Assume a solution of the form $\theta(x, y) = X(x)Y(y)$. When substituted into the Laplace equation this yields

$$-\frac{1}{X} \frac{d^2 X}{dx^2} = \frac{1}{Y} \frac{d^2 Y}{dy^2}$$

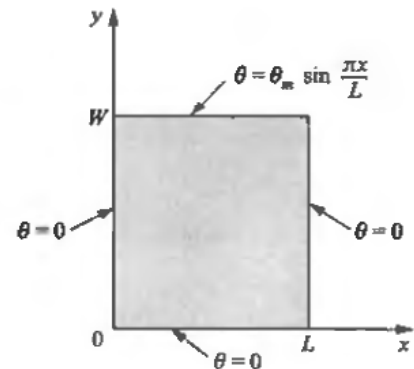


Fig. 3-1.

The left side, a function of x alone, can equal the right side, a function of y alone, only if both sides have a constant value, say $\lambda^2 > 0$ (see Problem 3.1). Then, letting the term with the two homogeneous boundary conditions have the λ^2 coefficient

$$\frac{d^2 X}{dx^2} + \lambda^2 X = 0 \quad \frac{d^2 Y}{dy^2} - \lambda^2 Y = 0$$

The general solutions to these separated equations are:

$$X = C_1 \cos \lambda x + C_2 \sin \lambda x \quad Y = C_3 e^{-\lambda y} + C_4 e^{\lambda y}$$

so that

$$\theta = (C_1 \cos \lambda x + C_2 \sin \lambda x) / (C_3 e^{-\lambda y} + C_4 e^{\lambda y})$$

Now, applying the boundary conditions, (1) gives $C_1 = 0$ and (3) gives $C_3 = -C_4$. Using these together with (2) yields

$$0 = C_2 C_4 (\sin \lambda L) (e^{\lambda y} - e^{-\lambda y})$$

which requires that

$$\sin \lambda L = 0 \quad \text{or} \quad \lambda = \frac{n\pi}{L} \quad (n \text{ a positive integer})$$

Because the original differential equation (3.3) is linear, the sum of any number of solutions constitutes a solution. Thus, θ can be written as the sum of an infinite series:

$$\theta = \sum_{n=1}^{\infty} C_n \sin \frac{n\pi x}{L} \sinh \frac{n\pi y}{L} \quad (3.4)$$

where the constants have been combined and where we have replaced $e^{\lambda y} - e^{-\lambda y}$ by $2 \sinh \lambda y$.

Finally, boundary condition (4) gives

$$\theta_m \sin \frac{\pi x}{L} = \sum_{n=1}^{\infty} C_n \sin \frac{n\pi x}{L} \sinh \frac{n\pi W}{L} \quad (3.5)$$

which holds only if $C_2 = C_3 = C_4 = \dots = 0$ and

$$C_1 = \frac{\theta_m}{\sinh(\pi W/L)}$$

Therefore,

$$\theta = \theta_m \frac{\sinh(\pi y/L)}{\sinh(\pi W/L)} \sin \frac{\pi x}{L} \quad (3.6)$$

which is the final expression for the temperature distribution in the plate.

EXAMPLE 3.2. Example 3.1 is changed so that the shifted temperature along $y = W$ is given by the arbitrary function $f(x)$. Find the temperature distribution within the bar.

Everything in Example 3.1 through (3.4) remains valid for the present problem. The new fourth boundary condition gives, instead of (3.5),

$$f(x) = \sum_{n=1}^{\infty} C_n \sin \frac{n\pi x}{L} \sinh \frac{n\pi W}{L} \quad (0 < x < L)$$

Thus, the quantities $C_n \sinh(n\pi W/L)$ must be the coefficients of the Fourier sine series for $f(x)$ in the interval $0 < x < L$. From the theory of Fourier series,

$$C_n \sinh \frac{n\pi W}{L} = \frac{2}{L} \int_0^L f(x) \sin \frac{n\pi x}{L} dx$$

and

$$\theta = \frac{2}{L} \sum_{n=1}^{\infty} \frac{\sinh(n\pi y/L)}{\sinh(n\pi W/L)} \sin \frac{n\pi x}{L} \int_0^L f(x) \sin \frac{n\pi x}{L} dx \quad (3.7)$$

For the special case $f(x) = \theta_c = \text{constant}$, (3.7) reduces to

$$\theta = \theta_c \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^{n+1} + 1}{n} \frac{\sinh(n\pi y/L)}{\sinh(n\pi W/L)} \sin \frac{n\pi x}{L} \quad (3.8)$$

Note that only odd-order terms appear in (3.8).

Principle of Superposition

The linearity of the Laplace equation requires that a linear combination of solutions is itself a solution; this is the *principle of superposition*. Examples 3.1 and 3.2 dealt with problems having only one nonhomogeneous boundary condition (for present purposes, a nonhomogeneous boundary condition is one for which the dependent variable θ is not zero). A problem having more than one nonhomogeneous boundary condition can be resolved into a set of simpler problems each with the physical geometry of the original problem and each having only one nonhomogeneous boundary condition. The solutions to the simpler problems can be superposed (at the geometric point being considered) to yield the solution to the original problem.

EXAMPLE 3.3. Determine the temperature at the center of Fig. 3-2.

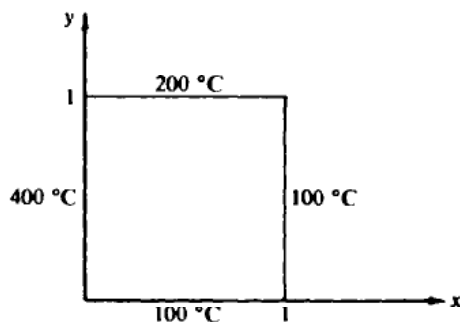


Fig. 3-2

Two of the nonhomogeneous boundary conditions can be removed by defining $\theta = T - (100^\circ\text{C})$. Then the resulting problem may be separated into the two subproblems of Fig. 3-3.

Either by use of (3.8) or by intuition (see Problem 3.24), the solutions are $\theta_1 = 75^\circ\text{C}$ and $\theta_2 = 25^\circ\text{C}$. Consequently,

$$\theta = 75 + 25 = 100^\circ\text{C} \quad \text{and} \quad T = \theta + 100 = 200^\circ\text{C}$$

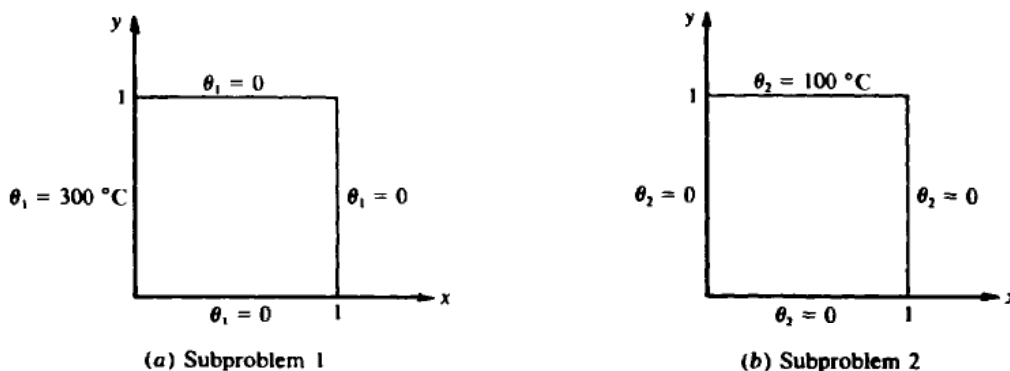


Fig. 3-3

3.3 CONDUCTIVE SHAPE FACTOR

Figure 3-4 represents a heated pipe with a thick layer of insulation. The inner surface of the insulation is at uniform temperature T_i , the outer surface is at uniform temperature T_o , and there is a resulting outward heat flux for $T_i > T_o$. Constructing *uniformly spaced lines* perpendicular to the isotherms results in a group of *heat flow lanes*. In Fig. 3-4 there are four such lanes in the quadrant selected for study, and the other three quadrants would be similar due to the problem symmetry. If we can determine the rate of heat transfer for a single lane, then we can easily find the total. Note that there is no heat transfer across one of the radial lines, such as line $a-b$, because there is no angular temperature gradient.

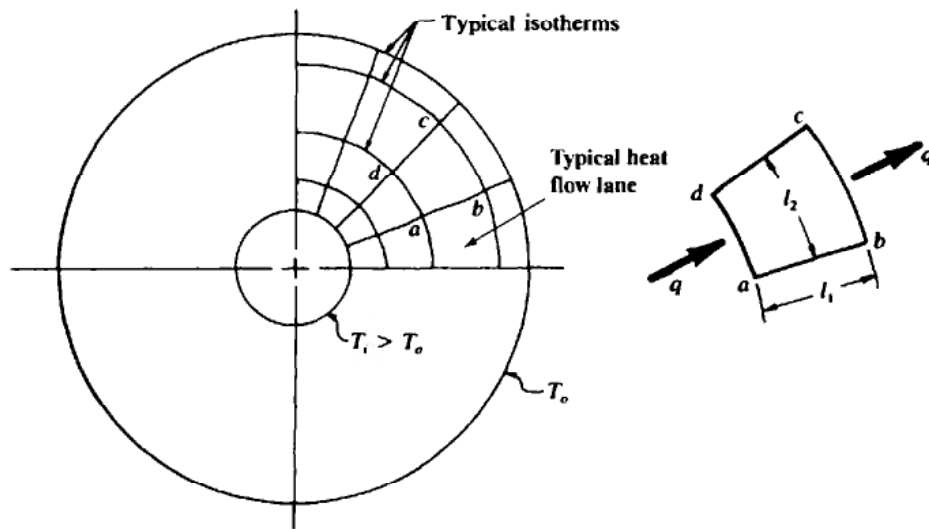


Fig. 3-4

By Fourier's law applied to the element $a-b-c-d$ of a typical lane, the heat transfer per unit depth is

$$\frac{q}{L} = \frac{kl_2(T_{ad} - T_{bc})}{l_1} \quad (3.9)$$

For the case where $l_1 = l_2$ (then the element is called a *curvilinear square*) this simplifies to

$$\frac{q}{L} = k(T_{ad} - T_{bc}) \quad (3.10)$$

In this case, $l_1 = (ab + cd)/2$ and $l_2 = (ad + bc)/2$.

Now if the isotherms are uniformly spaced (with regard to temperature difference) and if there are M such curvilinear squares in the flow lane, then the temperature difference across one square is

$$\Delta T = \frac{T_i - T_o}{M} \quad (3.11)$$

Using this together with (3.10) and noting that the entire system consists of N flow lanes yields

$$\frac{q}{L} = Nk \left(\frac{T_i - T_o}{M} \right) = \frac{S}{L} k(T_i - T_o) \quad (3.12)$$

where the *conductive shape factor per unit depth* is

$$\frac{S}{L} = \frac{N}{M}$$

Note that although the configuration of Fig. 3-4 results in a one-dimensional conduction problem, the development just presented is equally applicable to two-dimensional problems (see Example 3.4).

Freehand Plotting

One method of obtaining the conductive shape factor is by freehand plotting. As illustrated in the preceding development, a graphical plot of equally spaced isotherms and adiabatics is sufficient to determine the shape factor. The graphical net formed by isotherms and adiabatics can frequently be obtained by freehand drawing to quickly yield heat transfer results, as well as temperature distribution data, which are quite accurate.

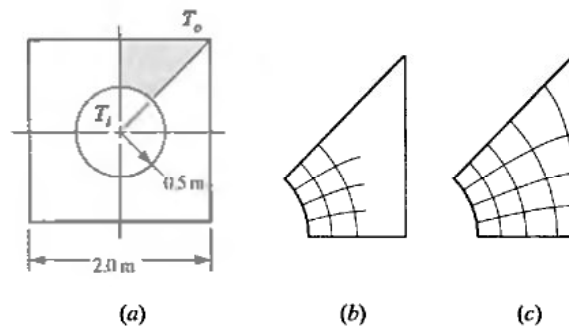


Fig. 3-5

EXAMPLE 3.4. A heated pipe in a square block of insulation material is shown in Fig. 3-5(a). Find S/L by freehand plotting.

Since the inner and outer surfaces have constant temperatures T_i and T_o , respectively, the vertical and horizontal centerlines, as well as the corner-to-corner diagonals, are lines of geometrical and thermal symmetry. These are also adiabatics, so we need to construct the flux plot for only one of the typical one-eighth sections; the resulting shape factor for this section will be one-eighth of the overall shape factor.

Figure 3-5(b) illustrates the beginning of the freehand sketch. Notice that the plot was begun by fixing the number of heat flow lanes to be four; the choice is quite arbitrary, but the use of an integral number is advisable. The freehand work is continued in Fig. 3-5(c) by progressing outward by the formation of curvilinear squares. Upon completion the average number of squares per lane for this sketch is $M \approx 3.7$, whence $S/L \approx 8(4)/3.7 = 8.65$.

Techniques for freehand plotting include:

1. Identify all known isotherms.
2. Apply symmetry (geometrical and thermal) to reduce the art work.
3. Begin, if possible, in a region where the adiabatics can be uniformly spaced.
4. Begin with a crude network sketch to find the approximate locations of isotherms and adiabatics.
5. Continuously modify the network by maintaining adiabatic lines normal to isothermal lines while forming curvilinear squares.

Electrical Analog

A second technique for determination of the conductive shape factor for a two-dimensional problem is afforded by the fact that the electric potential E also obeys the Laplace equation:

$$\frac{\partial^2 E}{\partial x^2} + \frac{\partial^2 E}{\partial y^2} = 0$$

for steady state conditions. Consequently, if the boundary conditions for E are similar to those for temperature and if the physical geometry of the problem is the same as for the thermal problem, then lines of constant electric potential are also lines of constant temperature. This analogy leads to a more accurate grid of curvilinear squares than obtainable by freehand plotting and consequently to a somewhat better value of the conductive shape factor. (See Problem 3.31.)

Tabulated Values of S

A summary of useful conductive shape factors is given in Table 3-1, page 62.

3.4 NUMERICAL ANALYSIS

Consider a general two-dimensional body as shown in Fig. 3-6. The body has uniform thickness L in the z -direction and no temperature gradient in that direction. Choosing an appropriate Δx and Δy , the body is divided into a network of rectangles, each containing a single nodal point at its center. It is convenient to consider the heat transfer as occurring between nodal points only, these being connected by fictitious rods acting as conductors/resistors for the heat flow. Thermal energy is considered to be "stored" at the nodal points only. The horizontal and vertical conductances are given by

$$kA_h/\Delta x = kL(\Delta y)/\Delta x \quad \text{and} \quad kA_v/\Delta y = kL(\Delta x)/\Delta y$$

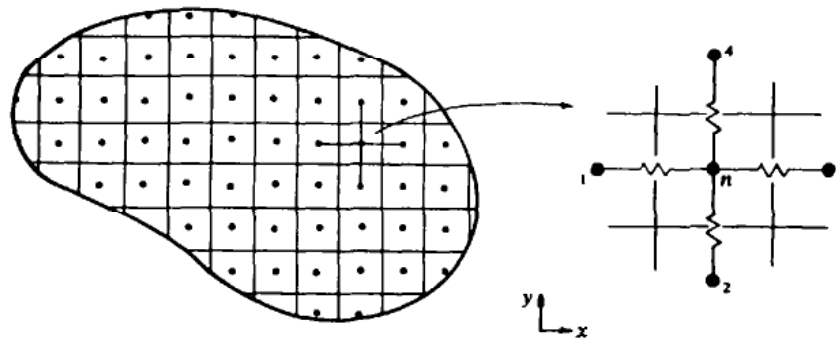


Fig. 3-6

A steady state energy balance on an interior nodal point n (see the enlarged section of Fig. 3-6) is

$$q_{1 \rightarrow n} + q_{2 \rightarrow n} + q_{3 \rightarrow n} + q_{4 \rightarrow n} = 0 \quad (3.13)$$

where q is taken positive for heat flow into n . Using the product of a conductance and a finite temperature difference for each conductive flux, (3.13) becomes

$$kL(\Delta y) \left(\frac{T_1 - T_n}{\Delta x} \right) + kL(\Delta x) \left(\frac{T_2 - T_n}{\Delta y} \right) + kL(\Delta y) \left(\frac{T_3 - T_n}{\Delta x} \right) + kL(\Delta x) \left(\frac{T_4 - T_n}{\Delta y} \right) = 0$$

Table 3-1. Selected conduction shape factors. [From several sources.]

Physical Description	Sketch	Conductive Shape Factor
Conduction through a material of uniform k from a horizontal isothermal cylinder to an isothermal surface		<p>(a) $L \gg 2r$</p> $S = \frac{2\pi L}{\cosh^{-1}(z/r)}$ <p>(b) $L \gg 2r$ $z > 3r$</p> $\frac{S}{L} = \frac{2\pi}{\ln(2z/r)}$
Conduction in a medium of uniform k from a cylinder of length L to two parallel planes of infinite width and length L		$S = \frac{2\pi L}{\ln(4z/\pi r)}$ <p>$z \gg r$ $L \gg z$</p>
Conduction from an isothermal sphere through a material of uniform k to an isothermal surface		$S = \frac{4\pi r}{1 - (r/2z)}$ <p>$z > r$</p>
Conduction between two long isothermal parallel cylinders in an infinite medium of constant k		$\frac{S}{L} = \frac{2\pi}{\cosh^{-1}[(x^2 - r_1^2 - r_2^2)/2r_1 r_2]}$ <p>$L \gg r_1, r_2$ $L \gg x$</p>
Conduction between a vertical isothermal cylinder in a medium of uniform k and a horizontal isothermal surface		$S = \frac{2\pi L}{\ln(4L/d)}$ <p>$L \gg d$</p>
Conduction through an edge formed by intersection of two plane walls, with inner wall temperature T_1 and outer wall temperature T_2 as shown*		$S = 0.54 L$ <p>$a > t/5$ $b > t/5$</p>
Conduction through a corner at intersection of three plane walls, each of thickness t , with uniform inner temperature T_1 and outer temperature T_2		$S = 0.15 t$ <p>inside dimensions $> t/5$</p>

*S for the plane wall is simply A/t , where A for the top wall shown is $A = aL$; for side wall, $A = bL$.

or, when we choose $\Delta x = \Delta y$,

$$T_1 + T_2 + T_3 + T_4 - 4T_n = 0 \tag{3.14}$$

For cases where the boundary temperatures are known (specified) an equation of the form (3.14) can be written for each interior nodal point of a body, and the simultaneous solution of the resulting set of equations yields the temperatures at the nodal points. These temperatures can then be used to approximate temperature gradients for calculation of heat transfer rates over finite areas. For other boundary conditions such as convective or insulated boundaries, see the section Exterior Nodal Points.

EXAMPLE 3.5. Write the set of nodal temperature equations for a six-square grid for the square chimney shown in Fig. 3-7. Assume the material to have uniform thermal conductivity, uniform inside temperature $T_i = 300^\circ\text{C}$, and uniform outside temperature $T_o = 100^\circ\text{C}$.

In the indicated quadrant of the chimney, the only unknown nodal temperatures are T_a , T_b , and T_c , since clearly $T_{b'} = T_b$, $T_{c'} = T_c$, etc. The nodal equations are, from (3.14),

$$\begin{aligned} \text{node } a: \quad & T_{b'} + T_b + 100 + 100 - 4T_a = 0 \\ & \text{or} \quad T_b + 100 - 2T_a = 0 \\ \text{node } b: \quad & 300 + T_c + 100 + T_a - 4T_b = 0 \\ & \text{or} \quad 400 + T_c + T_a - 4T_b = 0 \\ \text{node } c: \quad & 300 + T_{b'} + 100 + T_b - 4T_c = 0 \\ & \text{or} \quad 200 + T_b - 2T_c = 0 \end{aligned}$$

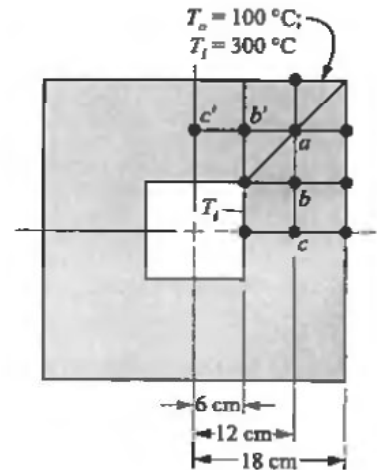


Fig. 3-7

In conventional form, the set of equations is

$$\begin{aligned} 2T_a - T_b + 0 &= 100 \\ -T_a + 4T_b - T_c &= 400 \\ -T_b + 2T_c &= 200 \end{aligned}$$

and the problem is reduced to solving this set of linear algebraic equations.

Computer Solution

The widely used methods for solving a set of linear algebraic equations are the matrix inversion technique (Gaussian elimination); the relaxation technique; and Gauss-Seidel iteration. We will next examine these methods in the order listed.

Gaussian Elimination

EXAMPLE 3.6. Solve the system

$$\begin{aligned} x_1 + 2x_2 + 3x_3 &= 20 & (a) \\ x_1 - 3x_2 + x_3 &= -3 & (b) \\ 2x_1 + x_2 + x_3 &= 11 & (c) \end{aligned}$$

by Gaussian elimination.

First, triangularize the given set of equations. This can always be accomplished by repeated application of three basic row operations: (i) multiplication of a row by a constant, (ii) addition to another row, (iii) interchange of two rows.

Thus, eliminate x_1 from (b) and (c) by respectively adding to these equations -1 times (a) and -2 times (a). The result is:

$$\begin{aligned} x_1 + 2x_2 + 3x_3 &= 20 & (a') \\ -5x_2 - 2x_3 &= -23 & (b') \\ -3x_2 - 5x_3 &= -29 & (c') \end{aligned}$$

Now eliminate x_2 from (c') by adding to it $-3/5$ times (b'):

$$\begin{aligned}x_1 + 2x_2 + 3x_3 &= 20 \\5x_2 + 2x_3 &= 23 \\x_3 &= 4\end{aligned}$$

This is the triangularized set of equations.

Finally, "back substitute," beginning with the bottom equation and working upward, to obtain successively $x_2 = 3$ and $x_1 = 2$. Thus, the final solution is

$$x_1 = 2 \quad x_2 = 3 \quad x_3 = 4$$

To solve large systems of equations by Gaussian elimination, it is convenient to express the equations in matrix form:

$$\begin{bmatrix} A(1,1) & A(1,2) & \dots & A(1,N) \\ A(2,1) & A(2,2) & \dots & A(2,N) \\ \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot \\ A(N,1) & A(N,2) & \dots & A(N,N) \end{bmatrix} \begin{bmatrix} T(1) \\ T(2) \\ \cdot \\ \cdot \\ \cdot \\ T(N) \end{bmatrix} = \begin{bmatrix} B(1) \\ B(2) \\ \cdot \\ \cdot \\ \cdot \\ B(N) \end{bmatrix} \quad (3.15)$$

Figure 3-8 presents one possible flow diagram which is useful in formulating a computer program for solution of a set of linear algebraic equations such as (3.15).

Relaxation Technique

A method of solving a set of linear algebraic equations without the use of a digital computer will be considered next. This method is frequently useful for nonrepetitive-type problems involving a relatively small number of nodal points, say not more than 10, in a conduction problem.

EXAMPLE 3.7. Determine the steady state temperatures at the four interior nodal points of Fig. 3-9.

The nodal equations, obtained with the aid of (3.14), are

$$\text{node 1: } 400 + 500 + T_2 + T_4 - 4T_1 = 0 \quad (1)$$

$$\text{node 2: } 500 + 200 + T_1 + T_3 - 4T_2 = 0 \quad (2)$$

$$\text{node 3: } 200 + 300 + T_2 + T_4 - 4T_3 = 0 \quad (3)$$

$$\text{node 4: } 300 + 400 + T_1 + T_3 - 4T_4 = 0 \quad (4)$$

which comprise a set of four linear algebraic equations containing the four unknown nodal temperatures. The *relaxation method* of solution proceeds as follows:

1. Assume (guess) values for the four unknown temperatures. Good initial guesses help to minimize the ensuing work.
2. Since the initial guesses will usually be in error, the right side of each nodal equation will differ from zero; a *residual* will exist due to inaccuracies in the assumed values. Consequently, we replace the zeros in equations (1) through (4) with R_1 , R_2 , R_3 , and R_4 , respectively:

$$900 + T_2 + T_4 - 4T_1 = R_1 \quad (5)$$

$$700 + T_1 + T_3 - 4T_2 = R_2 \quad (6)$$

$$500 + T_2 + T_4 - 4T_3 = R_3 \quad (7)$$

$$700 + T_1 + T_3 - 4T_4 = R_4 \quad (8)$$

3. Set up a "unit change" table such as Table 3-2, which shows the effect of a one-degree change of temperature at one node upon the residuals. The fact that a "block" (overall) unit change has the same effect upon all residuals is unusual, this being due to the overall problem symmetry.

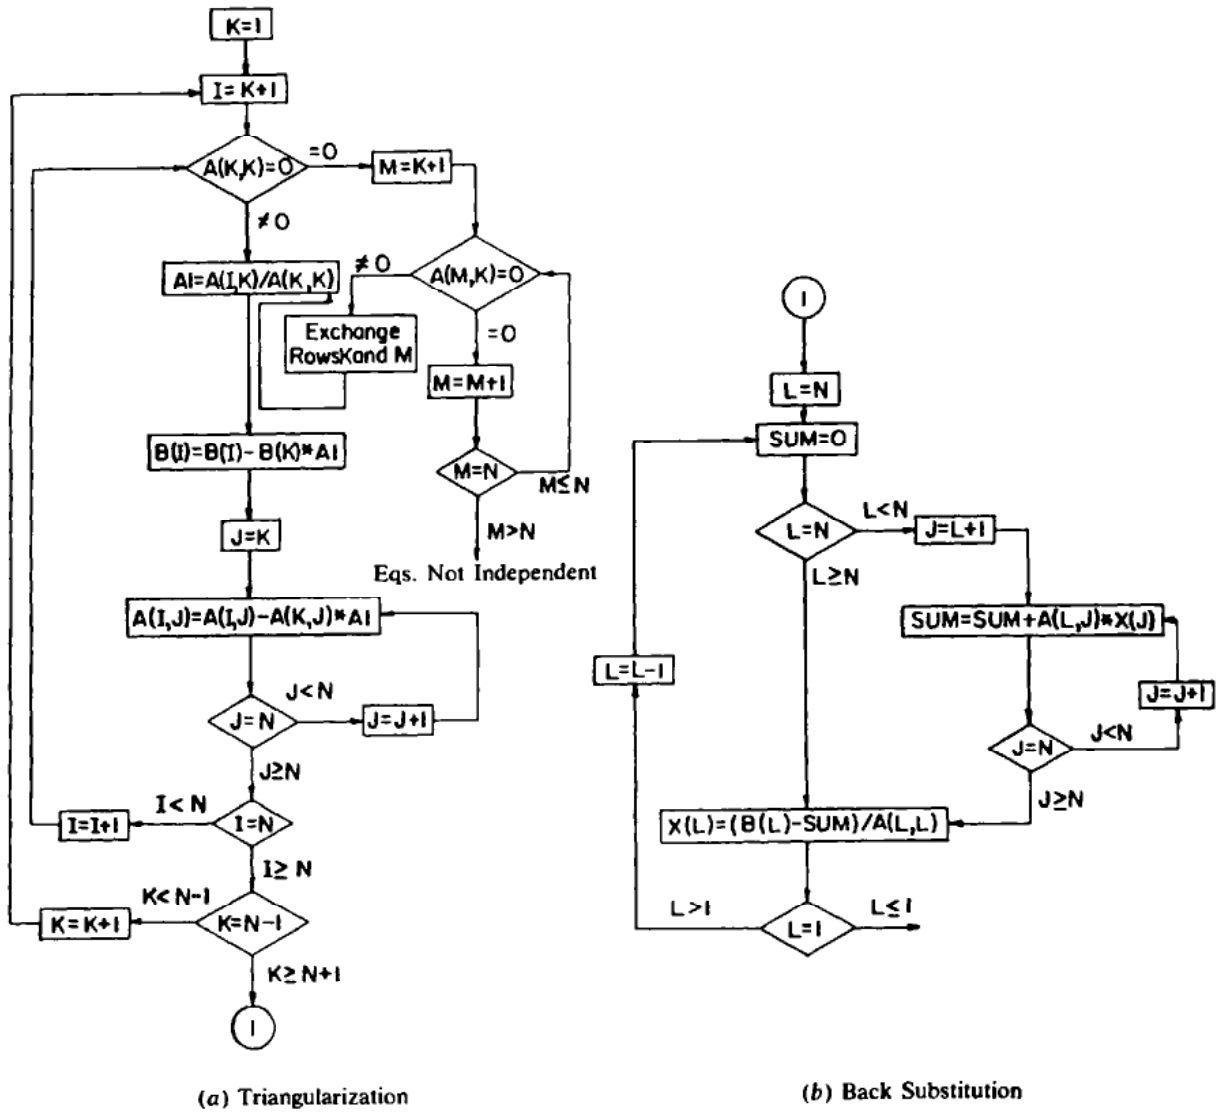


Fig. 3-8

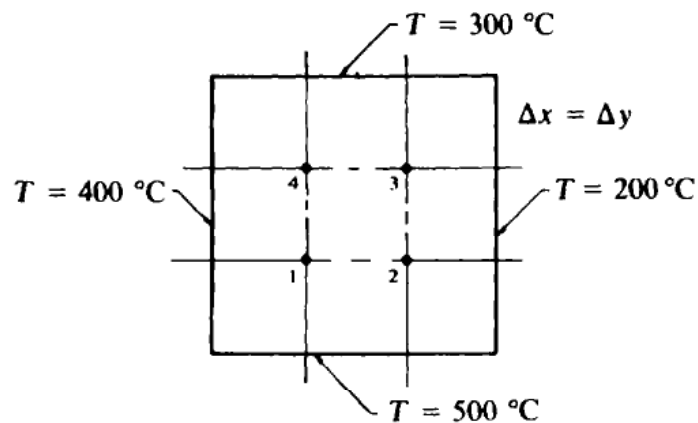


Fig. 3-9

Table 3-2

	ΔR_1	ΔR_2	ΔR_3	ΔR_4
$\Delta T_1 = +1$	-4	+1	0	+1
$\Delta T_2 = +1$	+1	-4	+1	0
$\Delta T_3 = +1$	0	+1	-4	+1
$\Delta T_4 = +1$	+1	0	+1	-4
Block Change = +1	-2	-2	-2	-2

- Calculate the initial residuals for the initially assumed temperatures using the "residual equations" (5) through (8).
- Set up a *relaxation table* such as Table 3-3. Begin with the initially assumed temperatures and the resulting initial residuals. The left-hand column records the changes from the initially assumed temperature values. Notice that the procedure begins by "relaxing" the largest initial residual (or perhaps by making a block change, a technique useful when all residuals are of the same sign).

Table 3-3. Relaxation table.

	T_1	R_1	T_2	R_2	T_3	R_3	T_4	R_4
Initial Values	400	-25	325	+75	275	+75	350	-25
$\Delta T_2 = +20$	400	-5	<u>345</u>	-5	275	+95	350	-25
$\Delta T_3 = +25$	400	-5	<u>345</u>	+20	<u>300</u>	-5	350	0
$\Delta T_2 = +5$	400	0	<u>350</u>	0	300	0	350	0
Check by equations		✓ 0		✓ 0		✓ 0		✓ 0
Solution	400		350		300		350	

In the present problem, we should begin by reducing R_2 or R_3 . Arbitrarily choose R_2 and proceed by over-relaxing slightly. At this point the convenience afforded by Table 3-2 becomes evident; this facilitates rapid calculation of the changes in the residuals without recourse to the equations. Notice that the $+20^\circ$ change in T_2 reduced the residuals at nodes 1 and 2 but unfortunately increased R_3 .

The first row in Table 3-3 shows the new residuals and temperatures; the only temperature changed is underlined. Proceeding, we next relax the largest resulting residual, this being R_3 . Following a temperature change of $+25^\circ$ at node 3, we see that $R_4 = 0$. This does not necessarily mean that we have obtained the correct temperature at node 4, but rather that the set of as yet incorrect temperature values happens to satisfy eq. (4) exactly. Proceeding, the largest residual is now R_2 , which is reduced to 0 by a $+5^\circ$ change in T_2 . This also reduces all remaining residuals to zero. A check is made by substituting the temperatures thus obtained into eqs. (1) through (4); this verifies the solution.

Gauss–Seidel Method

To illustrate this very popular method of solution of a set of nodal equations, return to Fig. 3-9 and associated temperature nodal equations (1), (2), (3), and (4). Naming the set of equations (3.16a) we have

$$\begin{aligned}
 400 + 500 + T_2 + T_4 - 4T_1 &= 0 \\
 500 + 200 + T_1 + T_3 - 4T_2 &= 0 \\
 200 + 300 + T_2 + T_4 - 4T_3 &= 0 \\
 300 + 400 + T_1 + T_3 - 4T_4 &= 0
 \end{aligned}
 \tag{3.16a}$$

Next, we rearrange these equations to have the unknown temperature at each node to appear on one side of the equation alone and with the coefficient +1. This is done by solving the first equation in (3.16a) for T_1 , the second for T_2 , and so forth, yielding (3.16b).

$$\begin{aligned}
 T_1 &= 225 - \left(-\frac{1}{4}T_2 - \frac{1}{4}T_4\right) \\
 T_2 &= 175 - \left(-\frac{1}{4}T_1 - \frac{1}{4}T_3\right) \\
 T_3 &= 125 - \left(-\frac{1}{4}T_2 - \frac{1}{4}T_4\right) \\
 T_4 &= 175 - \left(-\frac{1}{4}T_1 - \frac{1}{4}T_3\right)
 \end{aligned}
 \tag{3.16b}$$

More generally, this can be written

$$\begin{aligned}
 T_1 &= C_1 - (C_{12}T_2 + C_{13}T_3 + \cdots + C_{1n}T_n) \\
 T_2 &= C_2 - (C_{21}T_1 + C_{23}T_3 + \cdots + C_{2n}T_n) \\
 T_3 &= C_3 - (C_{31}T_1 + C_{32}T_2 + \cdots + C_{3n}T_n) \\
 &\vdots \\
 &\vdots \\
 &\vdots \\
 T_n &= C_n - (C_{n1}T_1 + C_{n2}T_2 + \cdots + C_{nn-1}T_{n-1})
 \end{aligned}
 \tag{3.16c}$$

Proceeding to solve (3.16b) with the Gauss–Seidel method, an initial set of temperatures T_1 through T_4 is assumed. Obviously, reasonable choices here will facilitate the solution, and the temperatures must be bounded by 200 °C and 500 °C. Choosing $T_1 = 450$, $T_2 = 350$, $T_3 = 250$, and $T_4 = 350$, all in °C, is a reasonable guess. We next insert these T_2 and T_4 values in the right side of the first equation of (3.16b) and calculate a new estimate of T_1 , viz.

$$T_1 = 225 - \left[-\frac{1}{4}(350) - \frac{1}{4}(350)\right], \quad T_1 = 400$$

Proceeding to calculate new estimates of T_2 , T_3 , and T_4 , always using the *newest* value available for each temperature, yields (3.16d).

$$\begin{aligned}
 &T_1 = 400.00 \\
 T_2 &= 175 - \left[-\frac{1}{4}(400.00) - \frac{1}{4}(250.00)\right], & T_2 &= 337.50 \\
 T_3 &= 125 - \left[-\frac{1}{4}(337.50) - \frac{1}{4}(350.00)\right], & T_3 &= 296.87 \\
 T_4 &= 175 - \left[-\frac{1}{4}(400.00) - \frac{1}{4}(296.87)\right], & T_4 &= 349.22
 \end{aligned}
 \tag{3.16d}$$

At this point we have completed one iteration. To proceed, we next use the newest temperature values from set (3.16d) together with the solution set (3.16b) to calculate the next iteration set, *always* using the newest T value available. Thus, to calculate a new T_1 , defined in set (3.16b), we use the T_2 and T_4 values from (3.16d), obtaining

$$T_1 = 225 - \left[-\frac{1}{4}(337.50) - \frac{1}{4}(349.22)\right], \quad T_1 = 396.68$$

Again, proceeding to calculate new estimates for T_2 , T_3 , and T_4 , always using the newest value available for each temperature, yields (3.16e).

$$\begin{aligned} T_1 &= 396.68 \\ T_2 &= 175 - \left[-\frac{1}{4}(396.68) - \frac{1}{4}(296.87)\right], & T_2 &= 348.39 \\ T_3 &= 125 - \left[-\frac{1}{4}(348.39) - \frac{1}{4}(349.22)\right], & T_3 &= 299.40 \\ T_4 &= 175 - \left[-\frac{1}{4}(396.68) - \frac{1}{4}(299.40)\right], & T_4 &= 349.02 \end{aligned} \quad (3.16e)$$

The next (third) iteration through the set of equations yields

$$\begin{aligned} T_1 &= 225 - \left[-\frac{1}{4}(348.39) - \frac{1}{4}(349.02)\right], & T_1 &= 399.35 \\ T_2 &= 175 - \left[-\frac{1}{4}(399.35) - \frac{1}{4}(299.40)\right], & T_2 &= 349.68 \\ T_3 &= 125 - \left[-\frac{1}{4}(349.68) - \frac{1}{4}(349.02)\right], & T_3 &= 299.67 \\ T_4 &= 175 - \left[-\frac{1}{4}(399.35) - \frac{1}{4}(299.67)\right], & T_4 &= 349.76 \end{aligned} \quad (3.16f)$$

and the next (fourth) iteration yields

$$\begin{aligned} T_1 &= 225 - \left[-\frac{1}{4}(349.68) - \frac{1}{4}(349.76)\right], & T_1 &= 399.86 \\ T_2 &= 175 - \left[-\frac{1}{4}(399.86) - \frac{1}{4}(299.67)\right], & T_2 &= 349.88 \\ T_3 &= 125 - \left[-\frac{1}{4}(349.88) - \frac{1}{4}(349.76)\right], & T_3 &= 299.91 \\ T_4 &= 175 - \left[-\frac{1}{4}(399.86) - \frac{1}{4}(299.91)\right], & T_4 &= 349.94 \end{aligned} \quad (3.16g)$$

All temperatures are in °C.

At this point we question the value of additional iterations. Usually, temperature values within \pm a few per cent accuracy are suitable for engineering calculations. If we use m as a superscript to denote the previous iteration and $m + 1$ to identify the iteration just completed, a computer program could use a test such as

$$\delta\text{-Test: } |T_i^{m+1} - T_i^m| \leq \delta$$

Applying δ -Test to the equation sets (3.16f) and (3.16g) with, say, $\delta = \frac{2}{3}^\circ\text{C}$, we find that the maximum value of

$$|T_i^{m+1} - T_i^m| \leq \delta$$

is 0.51°C , and we stop the process. Clearly, we can satisfy smaller values of δ with additional iterations, but it is doubtful that we would know the thermal conductivity with sufficient accuracy to justify a smaller value of δ .

Exterior Nodal Points

Frequently the temperatures of exterior nodal points are not specified or known at the outset but must be determined as a part of the solution. For example, consider the boundary nodal point subjected to a convective heat transfer, as shown in Fig. 3-10. A steady state energy balance on nodal point n is

$$kL \frac{\Delta y}{2} \left(\frac{T_1 - T_n}{\Delta x} \right) + kL(\Delta x) \left(\frac{T_2 - T_n}{\Delta y} \right) + kL \frac{\Delta y}{2} \left(\frac{T_3 - T_n}{\Delta x} \right) + hL(\Delta x)(T_\infty - T_n) = 0 \quad (3.17)$$

where L is again the thickness of the body in the z -direction. Note that the effective horizontal conductance between nodes 1 and n , or that between 3 and n , involves only one-half the area that is associated with a horizontal conductance between a pair of adjacent interior nodal points.




Fig. 3-10

For a square grid, (3.17) simplifies to

$$\frac{1}{2}(T_1 + 2T_2 + T_3) + \frac{h \Delta x}{k}(T_\infty) - \left(\frac{h \Delta x}{k} + 2\right)T_n = 0 \tag{3.18}$$

For numerical solution using a digital computer, this last equation is suitable for each exterior nodal point along a plane boundary experiencing convective heat transfer. For solution using the relaxation method, we simply replace the zero on the right-hand side of (3.18) with a residual, R_n .

A summary of useful nodal equations (in residual form) is given in Table 3-4. Simply replace the R_n with zero to use any of these in a computer solution. Although not an exterior nodal point per se, the case of an interior nodal point near a curved boundary has been included in this table for convenience.

Table 3-4. Nodal equations for numerical calculations, square grid.

	<p>Convective boundary at exterior corner:</p> $\frac{1}{2}(T_1 + T_2) + \frac{h \Delta x}{k}(T_\infty) - \left(\frac{h \Delta x}{k} + 1\right)T_n = R_n$
	<p>Convective boundary at internal corner:</p> $T_1 + T_4 + \frac{1}{2}(T_2 + T_3) + \frac{h \Delta x}{k}(T_\infty) - \left(\frac{h \Delta x}{k} + 3\right)T_n = R_n$
	<p>Nodal point along a line of symmetry (or on an insulated boundary):</p> $\frac{1}{2}(T_1 + T_2) + T_3 - 2T_n = R_n$
	<p>Nodal point near a curved boundary:</p> $\frac{T_1}{a(a+1)} + \frac{T_2}{b+1} + \frac{T_3}{a+1} + \frac{T_4}{b(b+1)} - \left(\frac{1}{a} + \frac{1}{b}\right)T_n = R_n$

Solved Problems

- 3.1.** Show that, in the solution of (3.3), the sine function boundary condition (4) requires a positive separation constant λ^2 .

The equation for $X(x)$,

$$\frac{d^2 X}{dx^2} + \lambda^2 X = 0$$

has general solutions (for other than $\lambda^2 > 0$)

$$X = C_5 + C_6 x \quad (\lambda^2 = 0) \quad X = C_7 e^{-\lambda x} + C_8 e^{\lambda x} \quad (\lambda^2 < 0)$$

In neither case could X fit a sine function along the edge $y = W$.

- 3.2.** Consider a two-dimensional problem of the type shown in Fig. 3-1. The linear dimensions are $W = L = 2$ m, and the temperature on three sides is $T_u = 280$ K. The temperature along the upper surface is $T_c = 320$ K. Determine the temperature at the center of the plate.

The answer is obtained from the infinite series (3.8), with

$$\frac{\pi y}{L} = \frac{\pi x}{L} = \frac{\pi(1)}{2} = \frac{\pi}{2} \quad \frac{\pi W}{L} = \frac{\pi(2)}{2} = \pi$$

$$\theta_c = T_c - T_u = 320 - 280 = 40 \text{ K}$$

Using six significant figures, we compute in Table 3-5 the quantities needed in the first three nonvanishing terms of the infinite series.

Table 3-5

n	$\frac{(-1)^{n+1} + 1}{n}$	$\sinh \frac{n\pi}{2}$	$\sinh n\pi$	$\sin \frac{n\pi}{2}$
1	2	2.301 30	11.5487	1.0
3	2/3	55.6544	6195.82	-1.0
5	2/5	1287.98	$3.317 81 \times 10^6$	1.0

Thus

$$\begin{aligned} \theta(1, 1) &= 40 \left(\frac{2}{\pi} \right) \left[2 \frac{\sinh(\pi/2)}{\sinh \pi} \sin \left(\frac{\pi}{2} \right) + \frac{2}{3} \frac{\sinh(3\pi/2)}{\sinh 3\pi} \sin(3\pi/2) \right. \\ &\quad \left. + \frac{2}{5} \frac{\sinh(5\pi/2)}{\sinh 5\pi} \sin \left(\frac{5\pi}{2} \right) + \dots \right] \\ &= \frac{80}{\pi} [0.398 538 - 0.005 988 + 0.000 155 - \dots] = 10.0002 \text{ K} \end{aligned}$$

and $T(1, 1) = 10.0002 + 280 \approx 290$ K.

It can be shown (Problem 3.19) that the exact answer is $\theta(1, 1) = 10$ K. The very slight error in the series solution is due to round-off and truncation errors.

- 3.3.** For the situation shown in Fig. 3-11, determine the steady state temperature at the point $(\frac{1}{2}, \frac{1}{2})$.

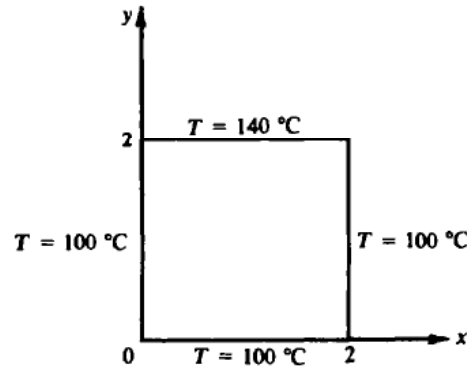


Fig. 3-11

The problem in θ has only one nonhomogeneous boundary condition, and consequently (3.8) gives the solution as

$$\begin{aligned} \theta\left(\frac{1}{2}, \frac{1}{2}\right) &= (40^\circ\text{C}) \left(\frac{2}{\pi}\right) \left[2 \frac{\sinh(\pi/4)}{\sinh \pi} \sin(\pi/4) + \frac{2}{3} \frac{\sinh(3\pi/4)}{\sinh 3\pi} \sin(3\pi/4) \right. \\ &\quad \left. + \frac{2}{5} \frac{\sinh(5\pi/4)}{\sinh 5\pi} \sin(5\pi/4) + \frac{2}{7} \frac{\sinh(7\pi/4)}{\sinh 7\pi} \sin(7\pi/4) + \dots \right] \\ &= \frac{80}{\pi} \left[2 \left(\frac{0.868\ 671}{11.5487}\right) (0.707\ 107) + \frac{2}{3} \left(\frac{5.227\ 97}{6195.82}\right) (0.707\ 107) \right. \\ &\quad \left. + \frac{2}{5} \left(\frac{25.3671}{3.317\ 81 \times 10^6}\right) (-0.707\ 107) + \frac{2}{7} \left(\frac{122.073}{1.776\ 66 \times 10^9}\right) (-0.707\ 107) + \dots \right] \\ &= \frac{80}{\pi} [0.106\ 374 + 0.000\ 398 - 0.000\ 002 - \dots] = 2.718\ 88 \approx 2.72^\circ\text{C} \end{aligned}$$

and $T\left(\frac{1}{2}, \frac{1}{2}\right) \approx 102.72^\circ\text{C}$.

3.4. For the two-dimensional configuration of Fig. 3-2, determine the temperature at the point $\left(\frac{1}{4}, \frac{3}{4}\right)$.

The problem can be separated into two simpler subproblems in θ , as shown in Fig. 3-3, and the final temperature is given by $\theta = \theta_1 + \theta_2$, where θ is $T - (100^\circ\text{C})$. To solve the two subproblems, we first must reorient subproblem 1 to match the orientation used in the derivation of (3.8). This is shown in Fig. 3-12(a); notice that in the new (x', y') coordinate system the point in question is $\left(\frac{3}{4}, \frac{3}{4}\right)$, obtained by a 90° clockwise rotation of the original problem.

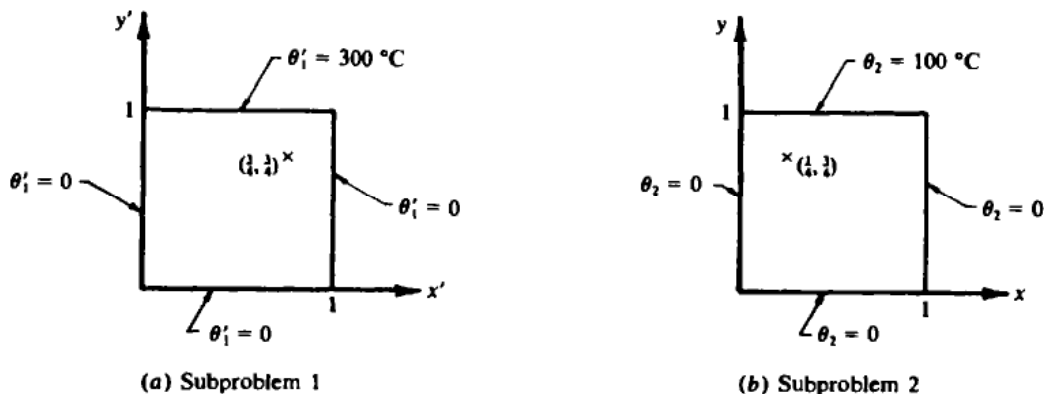


Fig. 3-12

Solving,

$$\begin{aligned}\theta_1\left(\frac{1}{4}, \frac{3}{4}\right) &= 300 \left(\frac{2}{\pi}\right) \left[2 \frac{\sinh(3\pi/4)}{\sinh \pi} \sin(3\pi/4) + \frac{2}{3} \frac{\sinh(9\pi/4)}{\sinh 3\pi} \sin(9\pi/4) \right. \\ &\quad \left. + \frac{2}{5} \frac{\sinh(15\pi/4)}{\sinh 5\pi} \sin(15\pi/4) + \dots \right] \\ &= \frac{600}{\pi} \left[\frac{2(5.22797)}{11.5487} (0.707107) + \frac{2(587.241)}{3(6195.82)} (0.707107) \right. \\ &\quad \left. + \frac{2(6.53704 \times 10^4)}{5(3.3178 \times 10^6)} (-0.707107) + \dots \right] \\ &= \frac{600}{\pi} (0.640199 + 0.044680 - 0.005573 + \dots) = 129.7379^\circ\text{C} \equiv \theta_1\left(\frac{1}{4}, \frac{3}{4}\right)\end{aligned}$$

$$\begin{aligned}\theta_2\left(\frac{1}{4}, \frac{3}{4}\right) &= 100 \left(\frac{2}{\pi}\right) \left[2 \frac{\sinh(3\pi/4)}{\sinh \pi} \sin(\pi/4) + \frac{2}{3} \frac{\sinh(9\pi/4)}{\sinh 3\pi} \sin(3\pi/4) \right. \\ &\quad \left. + \frac{2}{5} \frac{\sinh(15\pi/4)}{\sinh 5\pi} \sin(5\pi/4) + \dots \right] \\ &= \frac{200}{\pi} \left[\frac{2(5.22797)}{11.5487} (0.707107) + \frac{2(587.241)}{3(6195.82)} (0.707107) \right. \\ &\quad \left. + \frac{2(6.53704 \times 10^4)}{5(3.31781 \times 10^6)} (-0.707107) + \dots \right] \\ &= \frac{200}{\pi} (0.640199 + 0.044680 - 0.005573 + \dots) \approx 43.2460^\circ\text{C}\end{aligned}$$

Therefore,

$$\theta\left(\frac{1}{4}, \frac{3}{4}\right) = \theta_1\left(\frac{1}{4}, \frac{3}{4}\right) + \theta_2\left(\frac{1}{4}, \frac{3}{4}\right) \approx 172.98^\circ\text{C} \quad \text{and} \quad T\left(\frac{1}{4}, \frac{3}{4}\right) \approx 172.98 + 100 \approx 272.98^\circ\text{C}$$

It should be noted that in the solution of the two subproblems, the infinite series for $\theta_1\left(\frac{1}{4}, \frac{3}{4}\right)$ is numerically the same as that for $\theta_2\left(\frac{1}{4}, \frac{3}{4}\right)$; this is intuitively correct from a physical viewpoint.

- 3.5.** Consider an 8.0 in o.d. pipe with a 12.3 in thick insulation blanket. By flux plotting determine the heat transfer per unit length if the inner surface of the insulation is at 300 °F, the outer surface is at 120 °F, and the thermal conductivity of the insulation is 0.35 Btu/h·ft·°F.

Starting with an accurately scaled set of two concentric circles, as shown in Fig. 3-4, construct a network of curvilinear squares as explained in Section 3.3. Since this has been done in Fig. 3-4, it will not be repeated here. From Fig. 3-4, there are approximately $3\frac{1}{3}$ squares in each heat flow lane, and there are 4 flow lanes per quarter-section. So, $M \approx 3.33$, $N = 16$, and

$$\frac{S}{L} \approx \frac{16}{3.33} = 4.80$$

Thus,

$$\frac{q}{L} \approx 4.80 k(T_i - T_o) = 4.80 \left(\frac{0.35 \text{ Btu}}{\text{h}\cdot\text{ft}\cdot^\circ\text{F}}\right) [(300 - 120)^\circ\text{F}] = 302.4 \text{ Btu/h}\cdot\text{ft}$$

Since this is actually a one-dimensional problem, we can readily check the result by use of (2.14). Hence

$$\begin{aligned}\frac{q}{L} &= \frac{2\pi k(T_i - T_o)}{\ln(r_o/r_i)} = \frac{2\pi}{\ln(16.3/4)} (k)(T_i - T_o) \\ &= 4.47 \left(\frac{0.35 \text{ Btu}}{\text{h}\cdot\text{ft}\cdot^\circ\text{F}}\right) [(300 - 120)^\circ\text{F}] = 281.61 \frac{\text{Btu}}{\text{h}\cdot\text{ft}}\end{aligned}$$

This exact result is 7% lower than the result by freehand plotting; this is an indication of the accuracy to be expected from freehand plotting. Note that in this case, the analytical representation for S/L is $2\pi/\ln(r_o/r_i)$.

- 3.6.** Consider a 4 × 4 in square block of fire clay having a 1 in square hole at the center, as shown in Fig. 3-13. If the inner and outer surface temperatures are 150 °C and 30 °C, respectively, and the thermal conductivity is 1.00 W/m·K, determine the heat transfer from the inner surface to the outer surface per meter of length by freehand plotting.

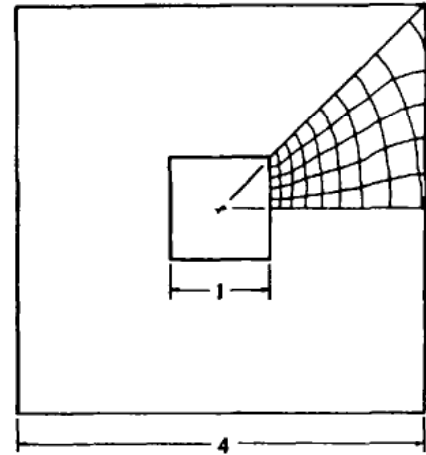


Fig. 3-13

Since this problem has isothermal boundaries, freehand plotting is applicable. Due to symmetry, it is necessary to construct the freehand grid of curvilinear squares for only one-eighth of the body, as shown in Fig. 3-13. From the plot,

$$M_{av} \approx \frac{8.15 + 8.25 + 8.35 + 8.70 + 9.00}{5} \approx 8.5$$

and, for the entire block, $N = 8 \times 5 = 40$. Thus,

$$\frac{S}{L} \approx \frac{40}{8.5} = 4.71$$

and

$$\frac{q}{L} = \frac{S}{L} k (T_i - T_o) \approx (4.71) \left(\frac{1.00 \text{ W}}{\text{m} \cdot \text{K}} \right) [(150 - 30) \text{ K}] = 564.7 \text{ W/m}$$

Notice that because S/L depends only on the ratio of linear dimensions, no conversion from inches to meters was required.

- 3.7.** A 2.0 m long pipe with 3.25 cm o.d. carries hot water. The outer surface temperature is 55 °C and it is buried 30 cm deep in damp soil. The soil upper surface temperature is 8 °C. The damp soil conductivity is 0.78 W/m·K. Using a tabulated expression for S , determine q in watts.

The uppermost sketch in Table 3-1 may apply. Since there are two expressions for S given, we need to see that one or the other is appropriate. For this problem:

$$L = 200 \text{ cm}; \quad r = 1.625 \text{ cm}; \quad 2r = 3.25 \text{ cm}$$

For expression (a)

$$200 \gg 3.25; \quad \text{so} \quad L \gg 2r$$

Hence

$$S = \frac{2\pi L}{\cosh^{-1}(z/r)} = \frac{2\pi(2 \text{ m})}{\cosh^{-1}(30/1.625)}$$

$$S = \frac{2\pi(2 \text{ m})}{3.608} = 3.483 \text{ m}$$

For expression (b)

$$z = 30 \text{ cm}; \quad 3r = 4.875 \text{ cm}; \quad \text{so} \quad z > 3r$$

$$200 \gg 3.25; \quad \text{so} \quad L \gg 2r$$

Hence,

$$S = \frac{2\pi L}{\ln(2z/r)} = \frac{2\pi(2\text{ m})}{\ln(60/1.625)} = 3.482\text{ m}$$

and either expression for S is suitable. Then,

$$\frac{q}{L} = \frac{S}{L} k(T_2 - T_1)$$

so,

$$\begin{aligned} q &= 3.48\text{ m}(0.78\text{ W/m}\cdot\text{K})(55 - 8)\text{ }^\circ\text{C} \\ &= 127.6, \text{ say } 127\text{ W} \end{aligned}$$

Note that we do not usually have k value accuracy better than two significant figures, so an answer of 120 to 130 W is suitable.

- 3.8.** In Problem 3.7, there appear to be two expressions for the conduction shape factor S that yield answers that are very close to each other. Is this circumstantial or not?

We can check this by examining values of $\cosh^{-1}(z/r)$ and $\ln(2z/r)$ for the stated lower limiting value of z , $z = 3r$, and a large value of z , say $z = 100r$.

For $z = 3r$,

$$\begin{aligned} \cosh^{-1}(z/r) &= \cosh^{-1}(3) = 1.763, \text{ and} \\ \ln(2z/r) &= \ln(6) = 1.792 \end{aligned}$$


These differ by about 1.6%. This is surely close enough for most practical applications.

For $z = 100r$,

$$\begin{aligned} \cosh^{-1}(z/r) &= \cosh^{-1}(100) = 5.296 \\ \ln(2z/r) &= \ln(200) = 5.298 \end{aligned}$$


Thus, within the specified ranges of L , r , and z , both expressions for a long, buried cylinder appear to be adequate for engineering applications. Keep in mind that our k data set is probably only accurate to $\pm 10\%$.

- 3.9.** Problem 3.6 illustrates the typical accuracy obtainable by flux plotting (freehand sketching). An often encountered problem is the circular hole centered in a square block of equal length as shown in Fig. 3-14(a).

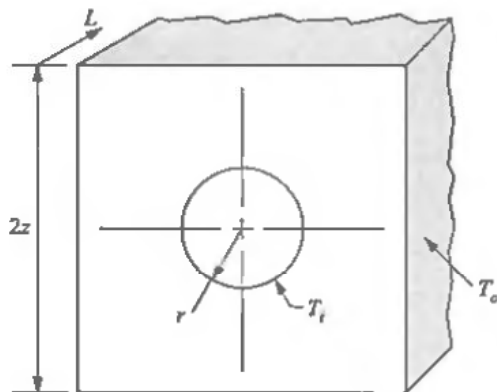

(a)

Fig. 3-14(a)

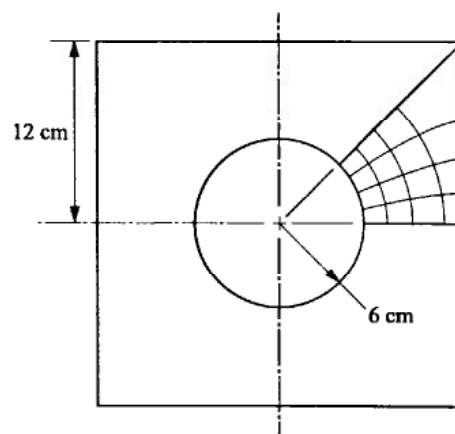

(b)

Fig. 3-14(b)

The block-hole system is very long; thus the temperature distribution is two-dimensional. A solution for this problem is given in some texts as

$$\frac{S}{L} = \frac{2\pi}{\ln(1.08 z/r)}$$

$$z > r$$

$$L \gg 2z$$

For a specific case with L very long, $z = 12$ cm and $r = 6$ cm,

$$\frac{S}{L} = \frac{2\pi}{\ln(1.08 \times 12/6)} = 8.16$$

The careful flux plot of Fig. 3-14(b) yields

$$M = \frac{3.5 + 3.7 + 4.2 + 4.3}{4} = 3.93$$

$$\frac{S}{L} = \frac{8N}{M} = \frac{8 \times 4}{3.93} = 8.14$$

This apparent high accuracy is misleading, although a careful flux plot was drawn. Five to 10% accuracy is more common with this method. See Problem 3.20.

- 3.10.** Using Appendix B, determine the heat transfer per unit length from a 2.0 in o.d. pipe located in the center of a 10 in thick cinder concrete wall. The wall is very wide and very high, resulting in the two-dimensional problem of Fig. 3-15.

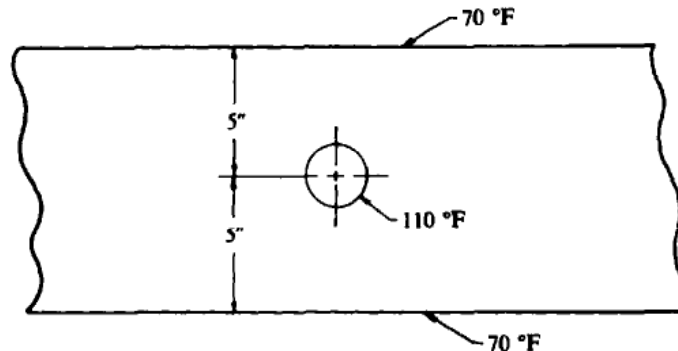


Fig. 3-15

From Table 3-1 with $z = 5$ in and $r = 1.0$ in,

$$\frac{S}{L} = \frac{2\pi}{\ln(4z/\pi r)} = \frac{2\pi}{\ln[4(5)/\pi]} = 3.39$$

From Table B-2 (Engl.), $k = 0.44$ Btu/h·ft·°F and thus

$$\frac{q}{L} = \frac{S}{L} k(T_2 - T_1) = (3.39) \left(\frac{0.44 \text{ Btu}}{\text{h}\cdot\text{ft}\cdot\text{°F}} \right) [(110 - 70) \text{ °F}] = 59.6 \text{ Btu/h}\cdot\text{ft}$$

- 3.11.** A hollow cube having outside dimension 0.5 m is made of 0.05 m thick asbestos sheets. If the inside surface temperature is 150 °C and the outside surface temperature is 50 °C, determine the rate of heat loss in watts from the cube.

There are six 0.4 m square surfaces $[0.5 - 2(0.05)]$ which can be treated as one-dimensional conduction problems. There are twelve edges each 0.4 m long, as shown in the next-to-last sketch in Table 3-1; these are two-dimensional problems. Finally, there are eight three-dimensional corners, as shown in the bottom sketch of Table 3-1.

The asbestos thermal conductivity may be taken as

$$k = \frac{0.111 \text{ Btu}}{\text{h} \cdot \text{ft} \cdot ^\circ\text{F}} \left(1.729 \frac{\text{W} \cdot \text{m} \cdot \text{K}}{\text{Btu} / \text{h} \cdot \text{ft} \cdot ^\circ\text{F}} \right) = 0.192 \text{ W/m} \cdot \text{K}$$

Square Surfaces:

$$\begin{aligned} q_s &= 6kA_s \frac{\Delta T}{\Delta n} \\ &= 6(0.192 \text{ W/m} \cdot \text{K})(0.4 \text{ m})^2 \frac{(150 - 50) \text{ K}}{0.05 \text{ m}} = 368.64 \text{ W} \end{aligned}$$

Edges: From Table 3-1, $S_e = (0.54)(0.4 \text{ m}) = 0.22 \text{ m}$ and

$$q_e = 12(S_e k \Delta T) = 12(0.22 \text{ m}) \left(\frac{0.192 \text{ W}}{\text{m} \cdot \text{K}} \right) (100 \text{ K}) = 50.69 \text{ W}$$

Corners: From Table 3-1, $S_c = (0.15) t = (0.15)(0.05 \text{ m}) = 0.0075 \text{ m}$ and

$$q_c = 8(S_c k \Delta T) = 8(0.0075 \text{ m}) \left(\frac{0.192 \text{ W}}{\text{m} \cdot \text{K}} \right) (100 \text{ K}) = 1.15 \text{ W}$$

The total heat transfer rate is then

$$q_{\text{total}} = q_s + q_e + q_c = 368.64 + 50.69 + 1.15 = 420.48 \text{ W, say } 420 \text{ W}$$

since clearly S_e and S_c are approximations.

3.12. Solve by Gaussian elimination the set of algebraic equations obtained in Example 3.5.

The nodal equations to be solved are

$$2T_a - T_b + 0 = 100 \quad (1a)$$

$$-T_a + 4T_b - T_c = 400 \quad (2a)$$

$$-T_b + 2T_c = 200 \quad (3a)$$

Multiplying (1a) by 1/2 and adding to (2a) yields

$$2T_a - T_b + 0 = 100 \quad (1b)$$

$$0 + \frac{7}{2}T_b - T_c = 450 \quad (2b)$$

$$-T_b + 2T_c = 200 \quad (3b)$$

Multiplying (2b) by 2/7 and adding to (3b) yields

$$2T_a - T_b + 0 = 100 \quad (1c)$$

$$\frac{7}{2}T_b - T_c = 450 \quad (2c)$$

$$+ \frac{12}{7}T_c = \frac{2300}{7} \quad (3c)$$

Thus, by back substitution,

$$T_c = \frac{2300}{12} = 191.67^\circ\text{F}$$

$$T_b = \frac{2}{7}(450 + 191.67) = 183.33^\circ\text{F}$$

$$T_a = \frac{1}{2}(100 + 183.33) = 141.67^\circ\text{F}$$

- 3.13. Using the flow diagram of Fig. 3-8, write a computer program for Gaussian elimination in Fortran IV. Allow for 10 equations in the DIMENSION and FORMAT statements.

The program given below is *one* suitable solution. It can easily be modified to handle more equations by appropriate renumbering in the DIMENSION statement and suitable FORMAT statement(s) changes. It is best not to heavily overdimension in the DIMENSION statement as this fixes computer storage requirements.

Part 1. Triangularization

```

0060 DIMENSION A(10,10), B(10), X(10)
0070 READ (5,1000) N
0080 N1 = N
0090 DO 100 I = 1, N
0100 READ (5,1010) (A(I,J), J=1,N1)
0110 READ (5,1010) (B(I), I=1,N)
0120 WRITE (6,1020) N
0130 WRITE (6,1030)
0140 DO 200 I = 1, N
0200 WRITE (6,1040) (A(I,J), J=1,N1), B(I)
0220 K = I
0240 I = K+1
0270 IF (A(K,K).EQ.0) GO TO 410
0280 A1 = A(I,K)/A(K,K)
0290 B(I) = B(I)-B(K)*A1
0300 J = K
0310 A(I,J) = A(I,J)-A(K,J)*A1
0320 IF (J.GE.N) GO TO 350
0330 J = J+1
0340 GO TO 310
0350 IF (I.GE.N) GO TO 380
0360 I = I+1
0370 GO TO 270
0380 IF (K.GE.(N-1)) GO TO 550
0390 K = K+1
0400 GO TO 260
0410 M = K+1
0420 IF ((A(M,K)).NE.0) GO TO 460
0430 M = M+1
0440 IF (M.LE.N) GO TO 420
0450 WRITE (6,1050)
0455 GO TO 2000
0460 C1 = B(K)
0470 B(K) = B(M)
0480 B(M) = C1
0490 DO 520 J=1,N
0500 Z1=A(K,J)
0510 A(K,J) = A(M,J)
0520 A(M,J)=Z1
0530 GO TO 280
0550 WRITE (6,1060)
0560 DO 570 I=1,N
0570 WRITE (6,1040) (A(I,J), J=1,N1)
0575 WRITE (6,1070)
0580 WRITE (6,1040) (B(I), I=1,N)

```

Part 2. Back Substitution

```

0585 WRITE(6,1090)
0590 L=N
0600 SUM=0
0610 IF (L.LT.N) GO TO 700
0620 X(L)=(B(L)-SUM)/A(L,L)
0640 IF (L.LE.1.0) GO TO 1200
0650 L=L-1
0660 GO TO 600
0700 J=L+1
0710 SUM=SUM+A(L,J)*X(J)
0720 IF(J.GE.N) GO TO 620
0730 J=J+1
0740 GO TO 710
1000 FORMAT(I2)
1010 FORMAT(10 F8.3)
1020 FORMAT('1','THERE ARE',I3,'EQUATIONS'//)
1030 FORMAT('1','THE EQUATIONS ARE:'//)

```


The computer solution is (where units are °C):

$T_n = 194.41$	$T_e = 140.34$	$T_i = 190.34$	$T_m = 137.58$
$T_h = 228.11$	$T_f = 160.71$	$T_j = 109.99$	$T_n = 142.23$
$T_c = 239.53$	$T_g = 178.51$	$T_k = 119.97$	$T_o = 143.70$
$T_d = 242.35$	$T_b = 187.65$	$T_l = 129.56$	

- 3.15.** Derive the nodal temperature equation for the case of an exterior corner node with one adjacent side insulated and one adjacent side subject to a convective heat transfer, as shown in Fig. 3-17.

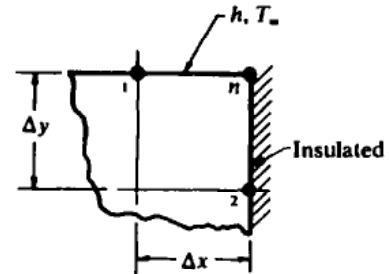


Fig. 3-17

The rates of energy conducted between nodes 1 and n and between nodes 2 and n are, respectively,

$$kL \frac{\Delta y}{2} \left(\frac{T_1 - T_n}{\Delta x} \right) \quad \text{and} \quad kL \frac{\Delta x}{2} \left(\frac{T_2 - T_n}{\Delta y} \right)$$

where L is the depth perpendicular to the xy -plane. The rate of energy convected from T_∞ to T_n is

$$hL \frac{\Delta x}{2} (T_\infty - T_n)$$

For steady state, the summation of energy transfer rates into node n must be zero, and thus

$$kL \frac{\Delta y}{2} \left(\frac{T_1 - T_n}{\Delta x} \right) + kL \frac{\Delta x}{2} \left(\frac{T_2 - T_n}{\Delta y} \right) + hL \frac{\Delta x}{2} (T_\infty - T_n) = 0$$

For a square grid, $\Delta x = \Delta y$ and this simplifies to

$$T_1 + T_2 + \frac{h\Delta x}{k} (T_\infty) - \left(\frac{h\Delta x}{k} + 2 \right) T_n = 0$$

- 3.16.** Consider a 1/4 in thick, rectangular, stainless steel fin ($k = 8 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}$) which is 1.0 in long in the x -direction and very wide in the direction perpendicular to the xy -plane of Fig. 3-18. The external convective heat-transfer coefficient is $h = 96 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$; the surrounding fluid temperature is $T_\infty = 80^\circ\text{F}$; the fin base temperature is $T_b = 200^\circ\text{F}$; and the end of the fin is insulated. Using the 1/8 in square grid shown, determine the nodal temperatures T_1 through T_{16} .

Due to symmetry about the horizontal centerline, there are only 16 different nodal conditions. This set consists of interior nodal points, exterior nodal points with a convective boundary, an exterior nodal point with an insulated boundary, and an exterior corner nodal point having both an insulated and a convective boundary. Treating these by type:

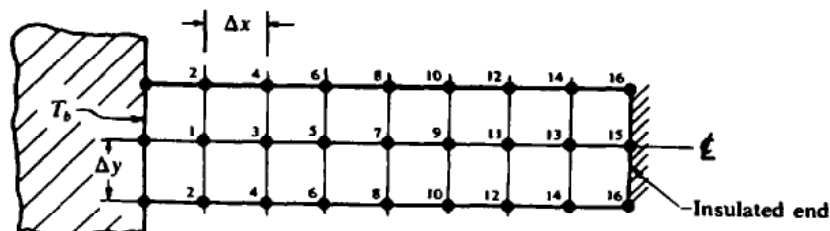


Fig. 3-18

Interior Nodes [by use of (3.14)]

$$\begin{aligned}
 \text{node 1:} & \quad 200 + 2T_2 + T_3 - 4T_1 = 0 \\
 \text{node 3:} & \quad T_1 + 2T_4 + T_5 - 4T_3 = 0 \\
 \text{node 5:} & \quad T_3 + 2T_6 + T_7 - 4T_5 = 0 \\
 \text{node 7:} & \quad T_5 + 2T_8 + T_9 - 4T_7 = 0 \\
 \text{node 9:} & \quad T_7 + 2T_{10} + T_{11} - 4T_9 = 0 \\
 \text{node 11:} & \quad T_9 + 2T_{12} + T_{13} - 4T_{11} = 0 \\
 \text{node 13:} & \quad T_{11} + 2T_{14} + T_{15} - 4T_{13} = 0
 \end{aligned}$$

Exterior Nodes with Convective Boundary (by use of (3.18))

$$\begin{aligned}
 \text{node 2:} & \quad \frac{1}{2}(200 + 2T_1 + T_4) + \frac{h \Delta x}{k}(80) - \left(\frac{h \Delta x}{k} + 2\right)T_2 = 0 \\
 & \quad \frac{h \Delta x}{k} = \frac{(96 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F})[(0.125/12) \text{ ft}]}{8 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}} = 0.125
 \end{aligned}$$

$$\begin{aligned}
 \text{thus,} & \quad 200 + 2T_1 + T_4 + 0.25(80) - 4.25 T_2 = 0 \\
 \text{or,} & \quad 220 + 2T_1 + T_4 - 4.25 T_2 = 0
 \end{aligned}$$

$$\begin{aligned}
 \text{node 4:} & \quad T_2 + 2T_3 + T_6 + 20 - 4.25 T_4 = 0 \\
 \text{node 6:} & \quad T_4 + 2T_5 + T_8 + 20 - 4.25 T_6 = 0 \\
 \text{node 8:} & \quad T_6 + 2T_7 + T_{10} + 20 - 4.25 T_8 = 0 \\
 \text{node 10:} & \quad T_8 + 2T_9 + T_{12} + 20 - 4.25 T_{10} = 0 \\
 \text{node 12:} & \quad T_{10} + 2T_{11} + T_{14} + 20 - 4.25 T_{12} = 0 \\
 \text{node 14:} & \quad T_{12} + 2T_{13} + T_{16} + 20 - 4.25 T_{14} = 0
 \end{aligned}$$

Exterior Node with Insulated Boundary (by use of Table 3-4)

$$\begin{aligned}
 \text{node 15:} & \quad \frac{1}{2}(T_{16} + T_{16}) + T_{13} - 2T_{15} = 0 \\
 \text{or,} & \quad T_{16} + T_{13} - 2T_{15} = 0
 \end{aligned}$$

Exterior Corner Node (by the result of Problem 3.13)

$$\begin{aligned}
 \text{node 16:} & \quad T_{14} + T_{15} + \frac{h \Delta x}{k}(T_\infty) - \left(\frac{h \Delta x}{k} + 2\right)T_{16} = 0 \\
 \text{or,} & \quad T_{14} + T_{15} + 10 - 2.125 T_{16} = 0
 \end{aligned}$$

Solving the system on the computer gives (units are $^\circ\text{F}$):

$$\begin{array}{cccc}
 T_1 = 167.178 & T_5 = 124.928 & T_9 = 104.533 & T_{13} = 96.366 \\
 T_2 = 163.118 & T_6 = 122.242 & T_{10} = 103.049 & T_{14} = 95.375 \\
 T_3 = 142.474 & T_7 = 112.753 & T_{11} = 99.232 & T_{15} = 95.432 \\
 T_4 = 138.896 & T_8 = 110.776 & T_{12} = 98.115 & T_{16} = 94.497
 \end{array}$$

- 3.17.** For the two-dimensional conduction problem of Fig. 3-19, determine the steady state nodal temperatures T_1 through T_6 using the relaxation technique. Consider the answers to be satisfactorily accurate for this problem when the absolute value of the largest residual is equal to or less than 1.0.

The nodal equations obtained with the aid of (3.14) are, in residual form:

- node 1: $300 + T_2 + T_4 - 4T_1 = R_1$
- node 2: $200 + T_1 + T_3 + T_5 - 4T_2 = R_2$
- node 3: $400 + T_2 + T_6 - 4T_3 = R_3$
- node 4: $200 + T_1 + T_5 - 4T_4 = R_4$
- node 5: $100 + T_2 + T_4 + T_6 - 4T_5 = R_5$
- node 6: $300 + T_3 + T_5 - 4T_6 = R_6$

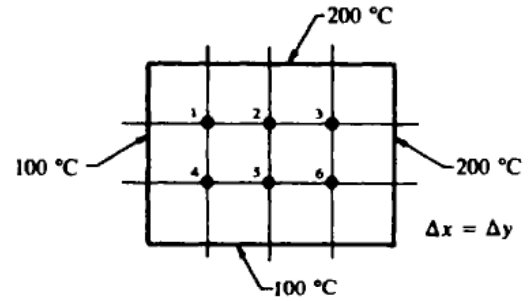


Fig. 3-19

Table 3-6 shows the effects of unit temperature changes.

Table 3-6

	ΔR_1	ΔR_2	ΔR_3	ΔR_4	ΔR_5	ΔR_6
$\Delta T_1 = +1$	-4	1	0	1	0	0
$\Delta T_2 = +1$	1	-4	1	0	1	0
$\Delta T_3 = +1$	0	1	-4	0	0	1
$\Delta T_4 = +1$	1	0	0	-4	1	0
$\Delta T_5 = +1$	0	1	0	1	-4	1
$\Delta T_6 = +1$	0	0	1	0	1	-4
Block = +1	-2	-1	-2	-2	-1	-2

We next begin the relaxation effort. Setting up the relaxation table, Table 3-7, we make an initial guess for each nodal temperature. Using the six initial temperatures (guesses) and the set of six nodal equations, we calculate the initial residuals and record these in the relaxation table. The work proceeds by relaxing, in turn, the residual of largest absolute value. Since all initial residuals were of the same sign, a “block” 10 degree reduction in all temperatures was the first step. The block change is usually advantageous whenever all residuals are of like sign. Following this, the residual of largest absolute value was R_4 ; this was relaxed by reducing T_4 , Table 3-6 showing the effect per degree of temperature change in T_4 upon all residuals.

Continuing, all residuals are within the specified tolerance for the bottom set of temperatures in the relaxation table. The work could have been reduced somewhat by over-relaxing. Notice that T_5 , for example, was reduced three times. By reducing it more than apparently needed the first time, the work could have been shortened. Excessive over-relaxation, however, could increase the required effort.

3.18. Estimate the heat transfer rate from the horizontal 100 °C surface in Fig. 3-19. Use the nodal temperatures determined in Problem 3.17. The material is magnesite and the grid size is $\Delta x = \Delta y = 15$ cm.

From Table B-2 (SI), the thermal conductivity of magnesite at 200 °C (nearest listed temperature to conditions of this problem) is $k = 3.81$ W/m·K. Dividing the body into heat flow lanes (Fig. 3-20) and assuming the lower right-hand corner to be at the average of the two adjacent surface temperatures, we proceed to approximate the heat transfer rate through each lane by one-dimensional methods. Thus for depth L perpendicular to the plane of the figure,

$$\begin{aligned} \text{Lane } a: \quad \left(\frac{q}{L}\right)_a &\approx k \frac{A_a \Delta T}{L \Delta S} = \frac{3.81 \text{ W}}{\text{m} \cdot \text{K}} (7.5 \text{ cm}) \left(\frac{100 - 100 \text{ K}}{15 \text{ cm}}\right) \approx 0 \frac{\text{W}}{\text{m}} \\ \text{Lane } b: \quad \left(\frac{q}{L}\right)_b &\approx \frac{3.81 \text{ W}}{\text{m} \cdot \text{K}} (15 \text{ cm}) \left(\frac{T_4 - 100 \text{ K}}{15 \text{ cm}}\right) \\ &\approx 3.81(120.5 - 100) \approx 78.11 \frac{\text{W}}{\text{m}} \end{aligned}$$

Table 3-7

	T_1	R_1	T_2	R_2	T_3	R_3	T_4	R_4	T_5	R_5	T_6	R_6
Initial Guesses	160	-20	180	-20	190	-15	140	-50	150	-15	165	-20
Block = -10	150	0	170	-10	180	+5	130	-30	140	-5	155	0
$\Delta T_4 = -8$	150	-8	170	-10	180	+5	122	+2	140	-13	155	0
$\Delta T_5 = -3$	150	-8	170	-13	180	+5	122	-1	137	-1	155	-3
$\Delta T_2 = -3$	150	-11	167	-1	180	+2	122	-1	137	-4	155	-3
$\Delta T_1 = -3$	147	+1	167	-4	180	+2	122	-4	137	-4	155	-3
Check by equations	147	✓ +1	167	✓ -4	180	✓ +2	122	✓ -4	137	✓ -4	155	✓ -3
$\Delta T_2 = -1$	147	0	166	0	180	+1	122	-4	137	-5	155	-3
$\Delta T_5 = -1$	147	0	166	-1	180	+1	122	-5	136	-1	155	-4
$\Delta T_4 = -1$	147	-1	166	-1	180	+1	121	-1	136	-2	155	-4
$\Delta T_6 = -1$	147	-1	166	-1	180	0	121	-1	136	-3	154	0
$\Delta T_5 = -1$	147	-1	166	-2	180	0	121	-2	135	+1	154	-1
$\Delta T_2 = -\frac{1}{2}$	147	$-\frac{1}{2}$	165 $\frac{1}{2}$	0	180	$-\frac{1}{2}$	121	-2	135	$+\frac{1}{2}$	154	-1
$\Delta T_4 = -\frac{1}{2}$	147	-2	165 $\frac{1}{2}$	0	180	$-\frac{1}{2}$	120 $\frac{1}{2}$	0	135	0	154	-1
$\Delta T_1 = -\frac{1}{2}$	146 $\frac{1}{2}$	0	165 $\frac{1}{2}$	$-\frac{1}{2}$	180	$-\frac{1}{2}$	120 $\frac{1}{2}$	$-\frac{1}{2}$	135	0	154	-1
Check by equations	146 $\frac{1}{2}$	✓ 0	165 $\frac{1}{2}$	✓ $-\frac{1}{2}$	180	✓ $-\frac{1}{2}$	120 $\frac{1}{2}$	✓ $-\frac{1}{2}$	135	✓ 0	154	✓ -1

$$\text{Lane c: } \left(\frac{q}{L}\right)_c \approx \frac{3.81 \text{ W}}{\text{m} \cdot \text{K}} (15 \text{ cm}) \left(\frac{135 - 100 \text{ K}}{15 \text{ cm}}\right) \approx 133.35 \frac{\text{W}}{\text{m}}$$

$$\text{Lane d: } \left(\frac{q}{L}\right)_d \approx \frac{3.81 \text{ W}}{\text{m} \cdot \text{K}} (15 \text{ cm}) \left(\frac{154 - 100 \text{ K}}{15 \text{ cm}}\right) \approx 205.74 \frac{\text{W}}{\text{m}}$$

$$\text{Lane e: } \left(\frac{q}{L}\right)_e \approx \frac{3.81 \text{ W}}{\text{m} \cdot \text{K}} (7.5 \text{ cm}) \left(\frac{200 - 150 \text{ K}}{15 \text{ cm}}\right) \approx 95.25 \frac{\text{W}}{\text{m}}$$

$$\text{Total: } \frac{q}{L} \approx 78.11 + 133.35 + 205.74 + 95.25 \approx 512 \frac{\text{W}}{\text{m}}$$

The approximation could be improved by using a smaller grid size; in fact, almost any desired level of accuracy can be attained at the expense of computational time.

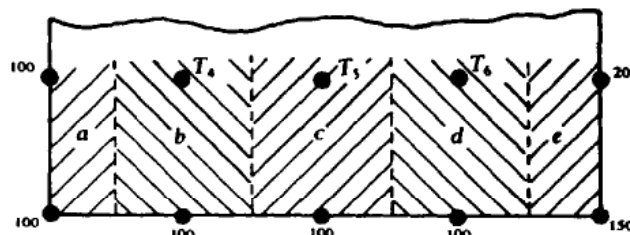


Fig. 3-20

- 3.19.** Repeat the solution for the temperatures T_1 , T_2 , T_3 , and T_4 of Fig. 3-9 using the Gauss–Seidel iterative method, but begin with the initial guess of all four temperatures being at the average value of the four exterior surfaces. Use $\delta = 1.0^\circ\text{C}$. This solution will indicate that the Gauss–Seidel method is relatively insensitive to guessed starting values.

From previous work on this problem (in example Problem 3.7) we have the following set of equations where all temperatures are in $^\circ\text{C}$.

$$\begin{aligned} T_1 &= 225 + \left(\frac{1}{4}T_2 + \frac{1}{4}T_4\right) \\ T_2 &= 175 + \left(\frac{1}{4}T_1 + \frac{1}{4}T_3\right) \\ T_3 &= 125 + \left(\frac{1}{4}T_2 + \frac{1}{4}T_4\right) \\ T_4 &= 175 + \left(\frac{1}{4}T_1 + \frac{1}{4}T_3\right) \end{aligned} \quad (3.18a)$$

Using $T_1 = T_2 = T_3 = T_4 = (200 + 300 + 400 + 500)/4 = 350^\circ\text{C}$ obtains the set, all values in $^\circ\text{C}$,

$$\begin{aligned} T_1 &= 225 + \frac{1}{4}(350.00 + 350.00) = 400.00 \\ T_2 &= 175 + \frac{1}{4}(400.00 + 350.00) = 362.50 \\ T_3 &= 125 + \frac{1}{4}(362.50 + 350.00) = 303.12 \\ T_4 &= 175 + \frac{1}{4}(400.00 + 303.12) = 350.78 \end{aligned} \quad (3.18b)$$

The first iteration by the Gauss–Seidel method gives

$$\begin{aligned} T_1 &= 225 + \frac{1}{4}(362.50 + 350.78) = 403.32 \\ T_2 &= 175 + \frac{1}{4}(403.32 + 303.12) = 351.61 \\ T_3 &= 125 + \frac{1}{4}(351.61 + 350.78) = 300.60 \\ T_4 &= 175 + \frac{1}{4}(403.32 + 300.60) = 350.98 \end{aligned} \quad (3.18c)$$

The second iteration yields

$$\begin{aligned} T_1 &= 225 + \frac{1}{4}(351.61 + 350.98) = 400.65 \\ T_2 &= 175 + \frac{1}{4}(400.65 + 300.59) = 350.31 \\ T_3 &= 125 + \frac{1}{4}(350.31 + 350.98) = 300.32 \\ T_4 &= 175 + \frac{1}{4}(400.65 + 300.32) = 350.24 \end{aligned} \quad (3.18d)$$

The third iteration gives, with all values in $^\circ\text{C}$,

$$\begin{aligned} T_1 &= 225 + \frac{1}{4}(350.31 + 350.24) = 400.14 \\ T_2 &= 175 + \frac{1}{4}(400.14 + 300.32) = 350.11 \\ T_3 &= 125 + \frac{1}{4}(350.11 + 350.24) = 300.09 \\ T_4 &= 175 + \frac{1}{4}(400.14 + 300.09) = 350.06 \end{aligned} \quad (3.18e)$$

Now by inspection we see that the largest absolute difference between T_i^{m+1} and T_i^m is approximately 0.6°C which satisfies our specified δ value, 1.0°C , and the problem is satisfactorily solved.

- 3.20.** Consider again the case of a round hole in a square block shown in Fig. 3-14(a). The z -dimension is 12 cm while the hole radius is 2.5 cm. Determine S/L by the analytic result given in Problem 3.9 and by freehand plotting.

By the equation

$$\begin{aligned} \frac{S}{L} &= \frac{2\pi}{\ln(1.08 \times z/r)} \\ \frac{S}{L} &= \frac{2\pi}{\ln(1.08 \times 12/2.5)} = 3.82 \end{aligned}$$

By freehand plotting, using three lanes in 1/8 of the square (Fig. 3-21)

$$M = \frac{(5.4 + 5.6 + 5.7)}{3} = 5.57$$

and

$$\frac{S}{L} = \frac{8 \times 3}{5.57} = 4.31$$

The two values of S/L differ by approximately 11%. This could probably be improved by using more than three flow lanes in the one-eighth section and by giving more attention to forming the curvilinear squares.

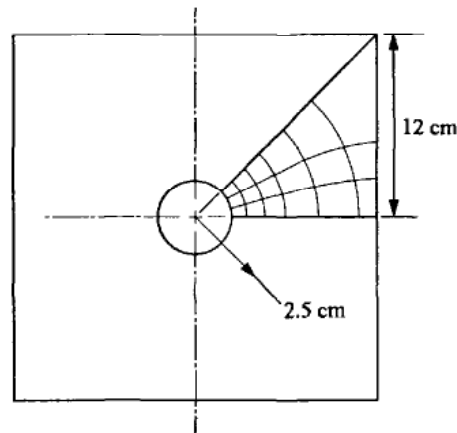


Fig. 3-21

- 3.21.** A 0.60 m square block of fiber insulation ($k = 0.048 \text{ W/m} \cdot \text{K}$) has a 0.20 m square hole centered in the insulation as shown in Fig. 3-22. The block is very long and $T_0 = 30^\circ\text{C}$ and $T_i = 110^\circ\text{C}$, both constant over the length. Determine S/L using the free-hand plotting method and then find q/L .

Using one-eighth of the block due to symmetry and five heat flow lanes ($N = 5 \times 8 = 40$) yields

$$M \approx \frac{6.6 + 6.7 + 6.8 + 7.2 + 7.4}{5} \approx 6.94$$

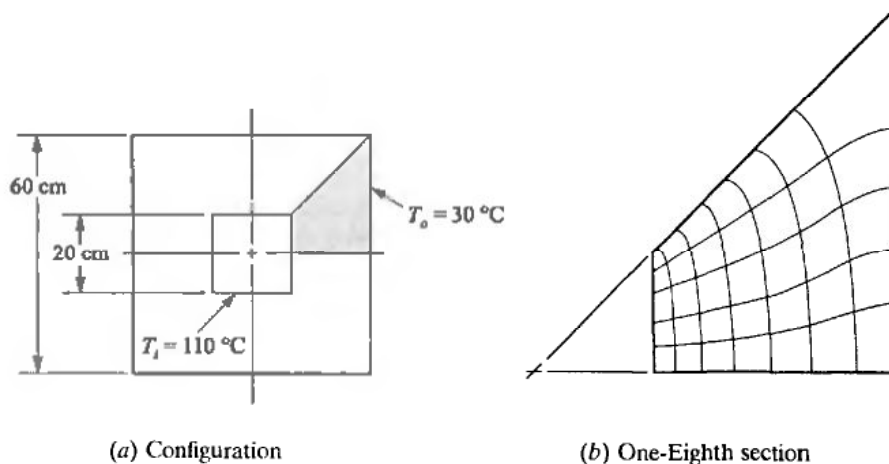


Fig. 3-22

Then

$$\frac{S}{L} \approx \frac{N}{M} \approx \frac{40}{6.94} \approx 5.76$$

The heat loss per unit length is

$$\frac{q}{L} \approx k \frac{S}{L} (T_i - T_o) = \frac{0.048 \text{ W}}{\text{m} \cdot \text{K}} (5.76)(110 - 30)^\circ\text{C}$$

$$\frac{q}{L} \approx 22.1 \text{ W/m}$$

Supplementary Problems

3.22. From (3.8) infer the solution to the steady state problem illustrated in Fig. 3-23.

Ans.
$$\theta(x, y) = \theta_c \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^{n+1} + 1}{n} \frac{\sinh(n\pi x/W)}{\sinh(n\pi L/W)} \sin \frac{n\pi y}{W}$$

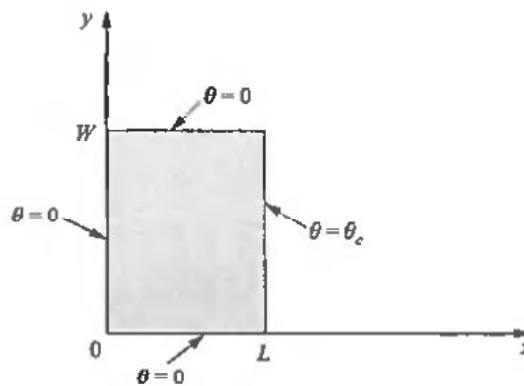


Fig. 3-23

3.23. Use the result of Problem 3.22 to obtain the temperature θ_1 at the point $(\frac{1}{4}, \frac{3}{4})$ for subproblem 1 of Fig. 3-3. (Hint: Rotate the figure 180°.) Ans. 129.7379°C using three terms of the series

3.24. A square plate (Fig. 3-24) has three sides held at temperature $T_0 = 0$, while the fourth side is held at temperature T_c . Use the principle of superposition to show that the steady state temperature at the center of the plate is $T_c/4$. (Hint: Break up the problem shown in Fig. 3-24 into four subproblems.)

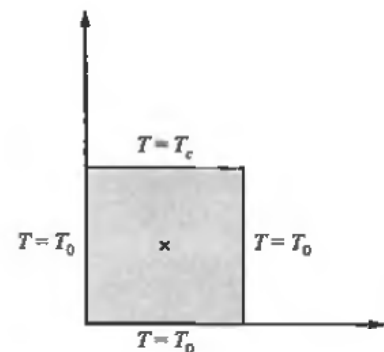


Fig. 3-24

- 3.25. Find the steady state temperature at the center of the rectangular plate shown in Fig. 3-25.

Ans. $T(\frac{1}{2}, 1) \approx 4.39^\circ\text{C}$

- 3.26. Determine by freehand plotting the heat transfer per unit length for the square chimney configuration of Fig. 3-16 if $k = 0.5$ (W/m·K). Ans. $SI L_{1/8} \approx 0.78$ (using 7 heat flow lanes); $q/L \approx 624$ W/m

- 3.27. Repeat Problem 3.26 using the method presented in Problem 3.18 and the numerical temperature values for nodes $j, k, l, m, n,$ and o from Problem 3.14.

Ans. $q/L \approx 644.7$ W/m, about 3% higher than obtained by flux plotting

- 3.28. Repeat Problem 3.10 for a 4 cm o.d. pipe at 40°C in the center of a 30 cm thick cinder concrete wall with both surfaces at 25°C . Ans. $q/L = 21.1$ W/m

- 3.29. A long, $1\frac{1}{2}$ in o.d. tube at 120°F and a long, $3/4$ in o.d. tube at 40°F are located parallel and 3.0 in apart (center-to-center distance) in a service tunnel filled with glass wool ($k \approx 0.022$ Btu/h·ft·°F). Estimate the net heat transfer per foot of length from the hotter to the cooler tube, assuming the medium length to be infinite. Ans. $q/L \approx 3.27$ Btu/h·ft

- 3.30. Derive the nodal temperature equation for the case of an exterior corner node as shown in Fig. 3-17, except both adjacent sides are insulated (i.e. the upper surface is insulated rather than subjected to a convective environment). Assume a square grid. Ans. $\frac{1}{2}(T_1 + T_2) - T_n = 0$

- 3.31. Using the electrical analogy discussed on page 61, devise an analog device for obtaining a grid of curvilinear squares to get the conductive shape factor for a two-dimensional, steady state problem.

Ans. The usual technique involves the use of a paper uniformly coated with a thin layer of conductive material. A commercially available paper is known as "Teledeltos," but other papers such as those used in some types of strip-chart recorders work equally well. The paper is cut into the exact shape of the two-dimensional model of the heat transfer problem, and a suitable d.c. electrical potential is impressed by the use of large electrodes at the boundaries. The resistance of the paper is large compared with that of the electrodes, and lines of equal potential can easily be found by using a null detector system as shown in Fig. 3-26. These lines are analogous to lines of constant temperature; constant heat-flow lines can be found by reversing the analog to apply the potential along the edges which are lines of symmetry in Fig. 3-26. The null detector can be replaced with a sensitive voltmeter if desired.

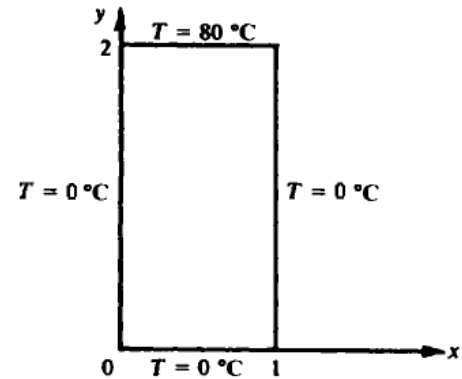


Fig. 3-25

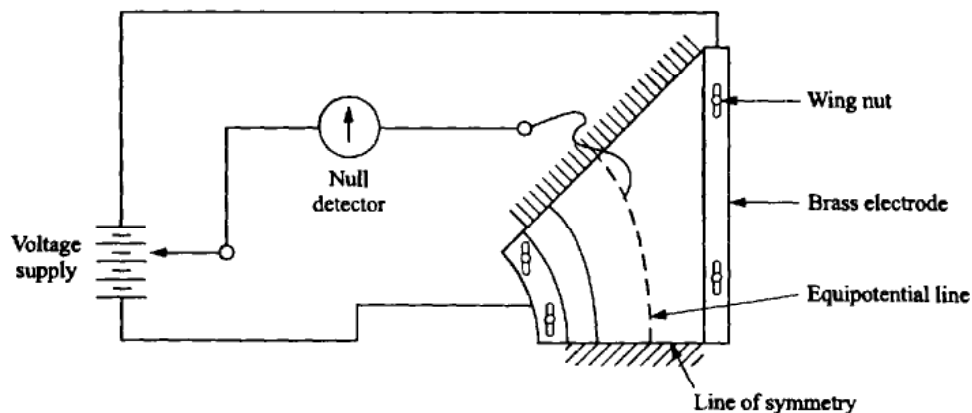


Fig. 3-26

Time-Varying Conduction

4.1 INTRODUCTION

To this point we have considered conductive heat transfer problems in which the temperatures are independent of time. In many applications, however, the temperatures are varying with time. Analysis of such transient problems can be undertaken with the general conduction equation, (2.2). In the present chapter we will deal primarily with one spatial dimension, in which case (2.2) reduces to

$$\frac{\partial^2 T}{\partial x^2} = \frac{1}{\alpha} \frac{\partial T}{\partial t} \quad (4.1)$$

For the solution of (4.1) we need two boundary conditions in the x -direction and one time condition. Boundary conditions are, as the name implies, frequently specified along the physical extremities of the body; they can, however, also be internal—e.g., a known temperature gradient at an internal line of symmetry. The time condition is usually the known initial temperature.

4.2 BIOT AND FOURIER MODULI

In some transient problems, the internal temperature gradients in the body may be quite small and of little practical interest. Yet the temperature at a given location, or the average temperature of the object, may be changing quite rapidly with time. From (4.1), we see that such could be the case for large thermal diffusivity α .

A more meaningful approach is to consider the general problem of transient cooling of an object, such as the hollow cylinder shown in Fig. 4-1. For very large r_i , the heat transfer rate by conduction through the cylinder wall is approximately

$$q \approx -k(2\pi r_s l) \left(\frac{T_s - T_i}{r_s - r_i} \right) = k(2\pi r_s l) \left(\frac{T_i - T_s}{L} \right) \quad (4.2)$$

where l is the length of the cylinder and L is the material thickness. The rate of heat transfer away from the outer surface by convection is

$$q = \bar{h}(2\pi r_s l)(T_s - T_\infty) \quad (4.3)$$

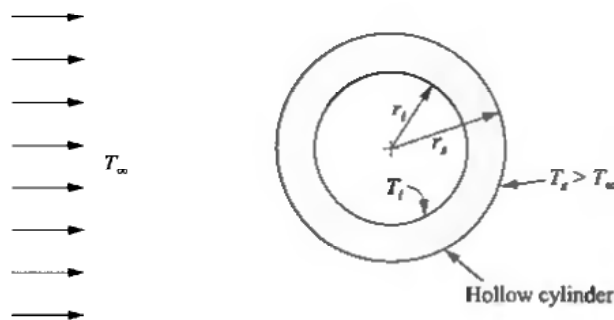


Fig. 4-1

where \bar{h} is the average heat-transfer coefficient for convection from the entire surface. Equating (4.2) and (4.3) gives

$$\frac{T_i - T_s}{T_s - T_\infty} = \frac{\bar{h}L}{k} \equiv \text{Biot number} \quad (4.4)$$

The Biot number is dimensionless, and it can be thought of as the ratio

$$\mathbf{Bi} = \frac{\text{resistance to internal heat flow}}{\text{resistance to external heat flow}}$$

Whenever the Biot number is small, the internal temperature gradients are also small and a transient problem can be treated by the "lumped thermal capacity" approach wherein the object for analysis is considered to have a single mass-averaged temperature.

In the preceding derivation, the significant body dimension was the conductive path length, $L = r_s - r_i$. In general, a characteristic linear dimension may be obtained by dividing the volume of the solid by its surface area:

$$L = \frac{V}{A_s} \quad (4.5)$$

Using this method to determine L , objects resembling a plate, a cylinder, or a sphere may be considered to have uniform temperature and the resulting error will be less than 5% if the Biot number is less than 0.1.

The *Fourier modulus* is the dimensionless time obtained by multiplying the dimensional time by the thermal diffusivity and dividing by the square of the characteristic length:

$$\text{dimensionless time} = \frac{\alpha t}{L^2} \equiv \mathbf{Fo} \quad (4.6)$$

4.3 LUMPED ANALYSIS

A typical transient problem which may be treated by a lumped analysis if the Biot modulus is suitably small is the cooling of a metal object after hot forming. In Fig. 4-2, \bar{h} denotes the average heat transfer coefficient for the entire surface area, A_s . Thermal energy is leaving the object from all elements of the surface; this is shown for simplicity by the single arrow.

The first law of thermodynamics applied to this problem is

$$\left(\begin{array}{c} \text{heat out of object} \\ \text{during time } dt \end{array} \right) = \left(\begin{array}{c} \text{decrease of internal thermal} \\ \text{energy of object during time } dt \end{array} \right)$$

Now if the temperature of the object can be considered to be uniform, i.e., independent of location within the object, this equation may be written as

$$\bar{h}A_s[T(t) - T_\infty]dt = -\rho cV dT \quad \text{or} \quad \frac{dT}{T - T_\infty} = \frac{-\bar{h}A_s}{\rho cV} dt$$

Integrating and applying the initial condition $T(0) = T_i$ yields

$$\frac{T - T_\infty}{T_i - T_\infty} = \exp\left[-\left(\frac{\bar{h}A_s}{\rho cV}\right)t\right] \quad (4.7)$$

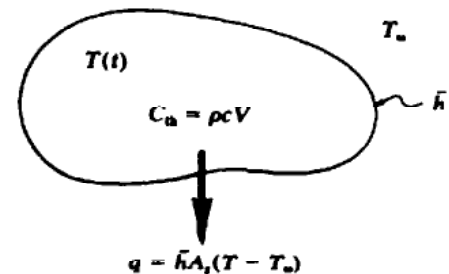


Fig. 4-2

The exponential temperature decay given in (4.7) is analogous to the voltage decay during discharge of an electrical capacitor, which is given by

$$\frac{E}{E_i} = e^{-t/(RC)}$$

To make the analogy complete, we define the *thermal time constant* by

$$(RC)_{th} \equiv \left(\frac{1}{\bar{h}A_s} \right) (\rho c V) \equiv (\text{thermal resistance})(\text{thermal capacitance}) \quad (4.8)$$

so that

$$\frac{T - T_\infty}{T_i - T_\infty} = e^{-t/(RC)_{th}} = e^{-(Bi)(Fo)} \quad (4.9)$$

where the last equality follows from (4.4), (4.5), and (4.6).

Multiple Lumped Systems

A lumped analysis may be appropriate for each material lump of a system consisting of two or more parts such as two solids in good thermal contact or a liquid in a container. Assuming the Biot number is suitably small for each subsystem, we may treat each as having a single transient temperature; thus a two-body system would result in two time-dependent temperatures. See Problems 4.9 and 4.10.

4.4 ONE-DIMENSIONAL SYSTEMS: FIXED SURFACE TEMPERATURE

Some transient conduction problems may be treated approximately by considering the body to be initially at a uniform temperature and suddenly having the temperature of part of the surface changed to and held at a known constant value different from the initial temperature.

Semi-Infinite Body

Consider a three-dimensional body that occupies the half-space $x \geq 0$. The body is initially at the uniform temperature T_i , including the surface at $x = 0$. The surface temperature at $x = 0$ is instantaneously changed to and held at T_s for all time greater than $t = 0$.

The temperature obeys (4.1), subject to

$$\text{boundary conditions: } T(0, t) = T_s \quad \text{for } t > 0 \quad (4.10)$$

$$T(\infty, t) = T_i \quad \text{for } t > 0 \quad (4.11)$$

$$\text{time condition: } T(x, 0) = T_i \quad (4.12)$$

The solution is

$$\frac{T(x, t) - T_s}{T_i - T_s} = \text{erf} \left(\frac{x}{\sqrt{4at}} \right) \quad (4.13)$$

where the *Gaussian error function* is defined by

$$\text{erf } u = \frac{2}{\sqrt{\pi}} \int_0^u e^{-\eta^2} d\eta \quad (4.14)$$

Suitable values of the error function for arguments from 0 to 2 may be obtained from Fig. 4-3. More accurate values, which can be obtained from mathematical tables, are usually not necessary in conduction problems of this type, due to larger errors in thermal properties and other conditions.

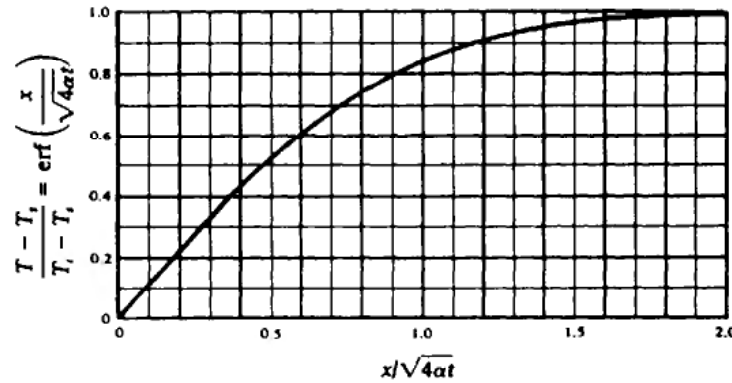


Fig. 4-3. Gaussian error function.

Of interest is the heat transfer rate at a given x -location within the semi-infinite body at a specified time. By (4.13),

$$T(x, t) = T_s + (T_i - T_s) \frac{2}{\sqrt{\pi}} \int_0^{x/\sqrt{4\alpha t}} e^{-\eta^2} d\eta$$

which may be differentiated by Leibniz' rule to yield

$$\frac{\partial T}{\partial x} = \frac{T_i - T_s}{\sqrt{\pi\alpha t}} e^{-x^2/4\alpha t}$$

Substituting this gradient in Fourier's law, the heat flux is

$$\frac{q}{A} = \frac{k(T_s - T_i)}{\sqrt{\pi\alpha t}} e^{-x^2/4\alpha t} \quad (4.15)$$

We are frequently interested in the heat flux at $x = 0$; it is

$$\left. \frac{q}{A} \right|_{x=0} = \frac{k(T_s - T_i)}{\sqrt{\pi\alpha t}} \quad (4.16)$$

and this heat flux clearly diminishes with time.

Finite Body

The preceding analytical solution for the temperature as a function of location and time was obtained under the condition that the temperature approaches T_i as x approaches infinity, for all values of time. If the temperature at some point within a relatively thick, finite body is still unaffected by heat transfer, the temperature distribution in the portion of the body that is affected is similar to that in a semi-infinite body under otherwise identical circumstances. A useful criterion for the semi-infinite solution to apply to a body of finite thickness (slab) subjected to one-dimensional heat transfer is

$$x > 3.65\sqrt{\alpha t} \quad (4.17a)$$

or

$$\frac{x}{\sqrt{4\alpha t}} > 1.825 \quad (4.17b)$$

where $2x$ is the thickness of the body. This criterion results in $(T - T_s)$ greater than 99% of $(T_i - T_s)$ for any value of the half-thickness x greater than $3.65\sqrt{\alpha t}$, and the slab meeting this criterion is effectively infinite in thickness.

4.5 ONE-DIMENSIONAL SYSTEMS: CONVECTIVE BOUNDARY CONDITIONS

Semi-Infinite Body

Consider again the semi-infinite body $x \geq 0$ initially at uniform temperature T_i . The surface at $x = 0$ is suddenly exposed to a cooler or warmer fluid at T_∞ and a constant heat transfer coefficient \bar{h} is applicable to this surface.

Again, (4.1) must be solved subject to (4.11) and (4.12). However, (4.10) must be replaced by

$$\bar{h}(T_\infty - T) \Big|_{x=0} = -k \frac{\partial T}{\partial x} \Big|_{x=0} \quad (4.18)$$

obtained by equating the convective and conductive heat fluxes at the surface.

The solution can be shown to be

$$\frac{T - T_i}{T_\infty - T_i} = 1 - \operatorname{erf} \xi - \left[\exp\left(\frac{\bar{h}x}{k} + \frac{\bar{h}^2 \alpha t}{k^2}\right) \right] \left[1 - \operatorname{erf}\left(\xi + \frac{\bar{h}\sqrt{\alpha t}}{k}\right) \right] \quad (4.19)$$

where $\xi = x/\sqrt{4\alpha t}$.

Slab of Finite Thickness

We will examine next the case of a large slab of x -thickness $2L$, as shown in Fig. 4.4(a). The slab is of infinite, or at least of very large, dimensions in the y - and z -directions. Initially at a uniform temperature T_i , it is suddenly exposed to the convective environment at T_∞ . The Biot number is such that a lumped analysis is not suitable.

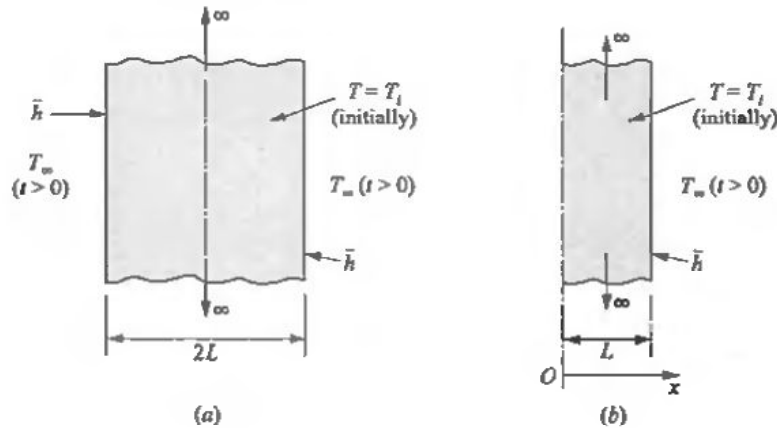


Fig. 4-4

The geometry, boundary conditions, and temperature distribution are symmetrical about the vertical centerline; consequently we may consider one-half of the problem as shown in Fig. 4.4(b). Also, the symmetry assures us that the centerline is adiabatic; thus one boundary condition is that $\partial T / \partial x$ is zero at the centerline.

The one-dimensional conduction equation appropriate for this problem is

$$\frac{\partial^2 \theta}{\partial x^2} = \frac{1}{\alpha} \frac{\partial \theta}{\partial t} \quad (4.20)$$

where $\theta \equiv T - T_\infty$. The boundary and time conditions are

$$\text{boundary conditions: } \frac{\partial \theta}{\partial x}(0, t) = 0 \quad (4.21)$$

$$\frac{\partial \theta}{\partial x}(L, t) = -\frac{\bar{h}}{k} \theta \quad (4.22)$$

$$\text{time condition: } \theta(x, 0) = \theta_i \quad (4.23)$$

where (4.22) results from equating the conductive and convective heat transfer rates at the surface.

The classical separation-of-variables technique, which was used in Section 3.2, applied to equation (4.20) yields

$$\theta = e^{-\lambda^2 \alpha t} (C_1 \sin \lambda x + C_2 \cos \lambda x) \quad (4.24)$$

where the separation parameter, $-\lambda^2$, is chosen negative to ensure that $\theta \rightarrow 0$ as $t \rightarrow \infty$. Boundary condition (4.21) requires that $C_1 = 0$, and (4.22) then gives the transcendental equation

$$\cot \lambda L = \frac{\lambda}{\bar{h}/k} \quad \text{or} \quad \cot \lambda L = \frac{\lambda L}{\mathbf{Bi}} \quad (4.25)$$

for λ . Equation (4.25) has an infinite number of positive roots, $\lambda_1, \lambda_2, \dots$, and in terms of these *eigenvalues* the solution for θ is

$$\theta = \sum_{n=1}^{\infty} C_n e^{-\lambda_n^2 \alpha t} \cos \lambda_n x \quad (4.26)$$

One method of determining the λ_n is by means of an accurate plot of the type shown in Fig. 4-5. Usually the first three or four roots are sufficient to yield an accurate answer.

Finally, (4.23) requires that

$$\theta_i = \sum_{n=1}^{\infty} C_n \cos \lambda_n x$$

which indicates that the C_n must be chosen so that θ_i is represented by an infinite series of cosine terms over the range $0 < x < L$. From the theory of orthogonal functions we find

$$C_n = \frac{2\theta_i \sin \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} \quad (4.27)$$

so that (4.26) becomes

$$\frac{\theta}{\theta_i} = 2 \sum_{n=1}^{\infty} e^{-\lambda_n^2 \alpha t} \frac{\sin \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} \cos \lambda_n x \quad (4.28)$$

Using (4.28) for the temperature, one can show (see Problem 4.16) that the thermal energy transferred to or from the slab is given by

$$\frac{Q}{Q_i} = 2 \sum_{n=1}^{\infty} \frac{1}{\lambda_n L} \left[\frac{\sin^2 \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} \right] (1 - e^{-\lambda_n^2 \alpha t}) \quad (4.29)$$

where $Q_i = V\rho c\theta_i = AL\rho c\theta_i$ is the thermal energy above the reference state, T_∞ , initially stored in the half-slab per unit depth.

4.6 CHART SOLUTIONS: CONVECTIVE BOUNDARY CONDITIONS

The results obtained in Section 4.5 can be put in dimensionless form by use of the Biot and Fourier moduli. The resulting dimensionless equations have been solved for a wide range of values of \mathbf{Bi} and \mathbf{Fo} ; these solutions are available in the form of graphs, obtained as follows.

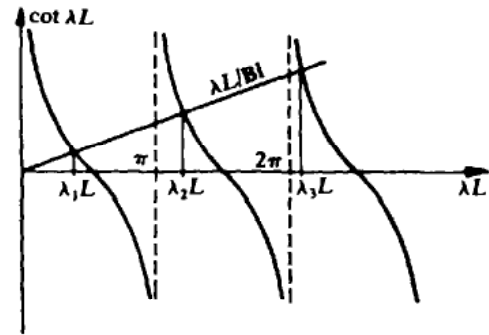


Fig. 4-5

Slab of Finite Thickness

Letting $\delta_n = \lambda_n L$, (4.28) can be written as

$$\frac{\theta}{\theta_i} = 2 \sum_{n=1}^{\infty} \exp(-\delta_n^2 \text{Fo}) \frac{\sin \delta_n}{\delta_n + (\sin \delta_n)(\cos \delta_n)} \cos(\delta_n x/L) \tag{4.30}$$

and, at $x = 0$, the dimensionless centerline temperature is

$$\frac{T_c - T_{\infty}}{T_i - T_{\infty}} = \frac{\theta_c}{\theta_i} = 2 \sum_{n=1}^{\infty} \exp(-\delta_n^2 \text{Fo}) \frac{\sin \delta_n}{\delta_n + (\sin \delta_n)(\cos \delta_n)} \tag{4.31}$$

Furthermore, (4.29) becomes

$$\frac{Q}{Q_i} = 2 \sum_{n=1}^{\infty} \frac{1}{\delta_n} \frac{\sin^2 \delta_n}{\delta_n + (\sin \delta_n)(\cos \delta_n)} [1 - \exp(-\delta_n^2 \text{Fo})] \tag{4.32}$$

Note that the δ_n are functions of **Bi** via (4.25):

$$\cot \delta_n = \delta_n / \text{Bi}$$

Consequently, (4.30), (4.31), and (4.32) indicate that θ and Q are functions of **Bi** and **Fo**. Heisler's plot of the temperature at the centerline of a slab versus **Fo** and **Bi** is given in Fig. 4-6. The temperature at any other x -location in the body at a specified time (**Fo**) can be determined with the aid of Fig. 4-7 together with the centerline temperature at that **Fo**. Notice that Fig. 4-7 implies that θ/θ_c is independent of **Fo**, which is very nearly, but not exactly, the case. Finally, Gröber's chart for the dimensionless heat removal or addition is presented in Fig. 4-8. The use of these charts is illustrated in Problems 4.17 and 4.18.

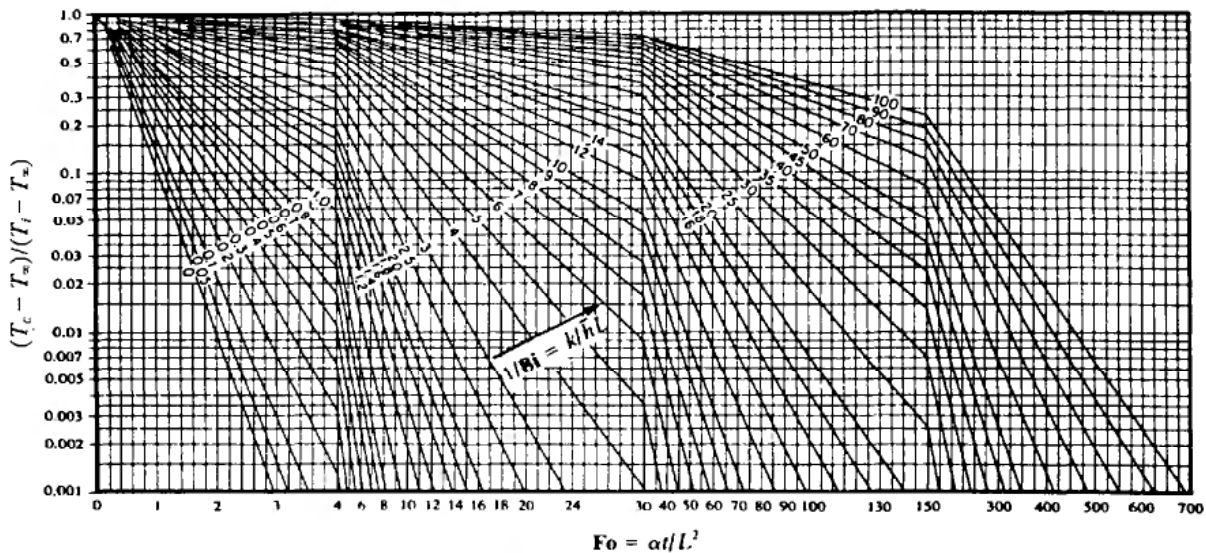


Fig. 4-6. Centerplane temperature for a slab. [From M. P. Heisler, © 1947, The American Society of Mechanical Engineers, *Trans. ASME*, 69: 227, New York. Used with permission.]

Long Solid Cylinder

The temperature differential equation for purely radial heat transfer in a cylinder of radius R is

$$\frac{\partial^2 \theta}{\partial r^2} + \frac{1}{r} \frac{\partial \theta}{\partial r} = \frac{1}{\alpha} \frac{\partial \theta}{\partial t} \tag{4.33}$$

where $\theta = T(r, t) - T_{\infty}$. The solution satisfying

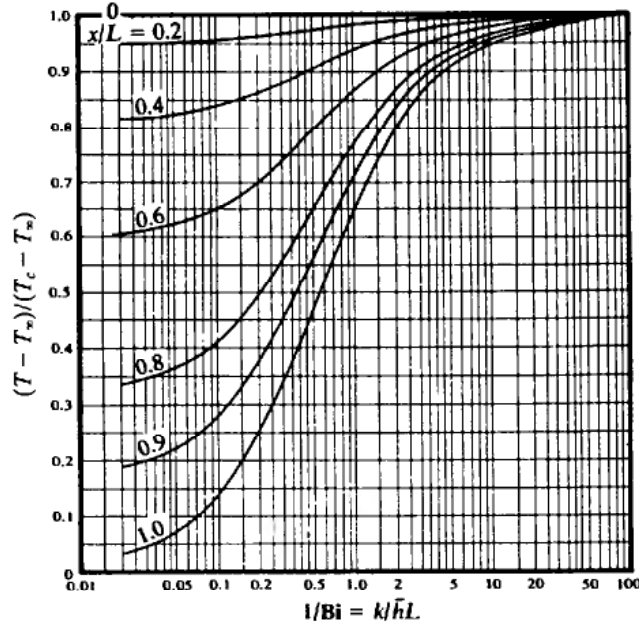


Fig. 4-7. Temperature correction chart for a slab. [From M. P. Heisler, ©1947, The American Society of Mechanical Engineers, *Trans. ASME*, 69: 227, New York. Used with permission.]

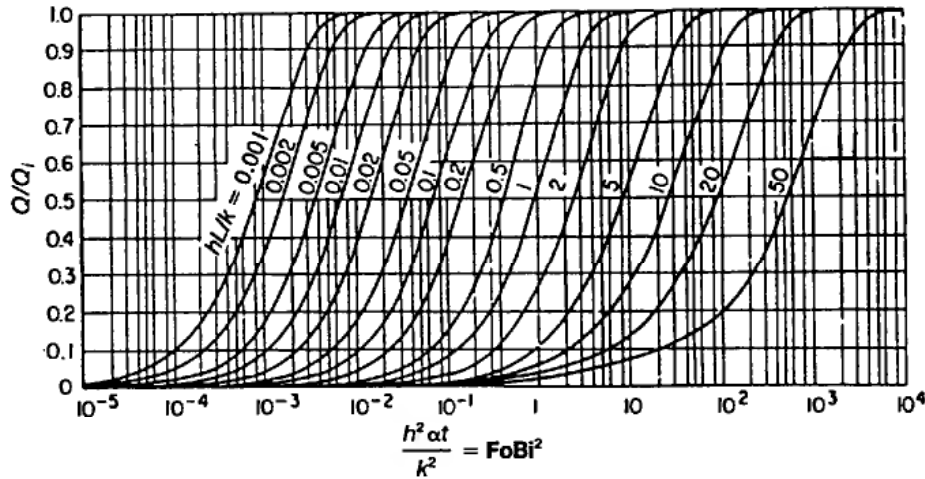


Fig. 4-8. Total heat flow for a slab. [H. Gröber, S. Erk and U. Grigull (1961), *Fundamentals of Heat Transfer*, 3rd edn, Courtesy of the McGraw-Hill Book Company, New York, NY.]

$$\begin{aligned} \text{boundary conditions: } \quad & \frac{\partial \theta}{\partial r} = 0 && \text{at } r = 0 \\ & \frac{\partial \theta}{\partial r} = -\frac{\bar{h}\theta}{k} && \text{at } r = R \\ \text{time condition: } \quad & \theta = \theta_i && \text{at } t = 0 \end{aligned}$$

is given by

$$\frac{\theta}{\theta_i} = 2 \sum_{n=1}^{\infty} \frac{1}{\delta_n} e^{-\delta_n^2 Fo} \frac{J_0(\delta_n r/R) J_1(\delta_n)}{J_0^2(\delta_n) + J_1^2(\delta_n)} \tag{4.34}$$

where J_0 and J_1 are the Bessel functions of the first kind of zero and first orders, respectively, and $\delta_n = \lambda_n R$. Since $J_0(0) = 1$, the dimensionless temperature at the centerline is

$$\frac{\theta_c}{\theta_i} = 2 \sum_{n=1}^{\infty} \frac{1}{\delta_n} e^{-\delta_n^2 \text{Fo}} \frac{J_1(\delta_n)}{J_0^2(\delta_n) + J_1^2(\delta_n)} \tag{4.35}$$

The dimensionless total thermal energy to or from the cylinder is obtained as it was for the slab (Problem 4.15); this is

$$\frac{Q}{Q_i} = 4 \sum_{n=1}^{\infty} \frac{1}{\delta_n^2} \frac{J_1^2(\delta_n)}{J_0^2(\delta_n) + J_1^2(\delta_n)} (1 - e^{-\delta_n^2 \text{Fo}}) \tag{4.36}$$

In all the equations for the cylinder, the δ_n are obtained as roots of the transcendental equation

$$\delta_n \frac{J_1(\delta_n)}{J_0(\delta_n)} = \text{Bi}^*$$

and the Biot and Fourier numbers are based upon the radius of the cylinder, i.e.,

$$\text{Bi}^* = \frac{\bar{h}R}{k} \quad \text{Fo}^* = \frac{\alpha t}{R^2}$$

We use an asterisk to indicate a deviation from the general definition of a characteristic length, (4.5). The results of numerical solutions of (4.35) and (4.36) are presented in Figs. 4-9 and 4-10. A position correction chart is given in Fig. 4-11.

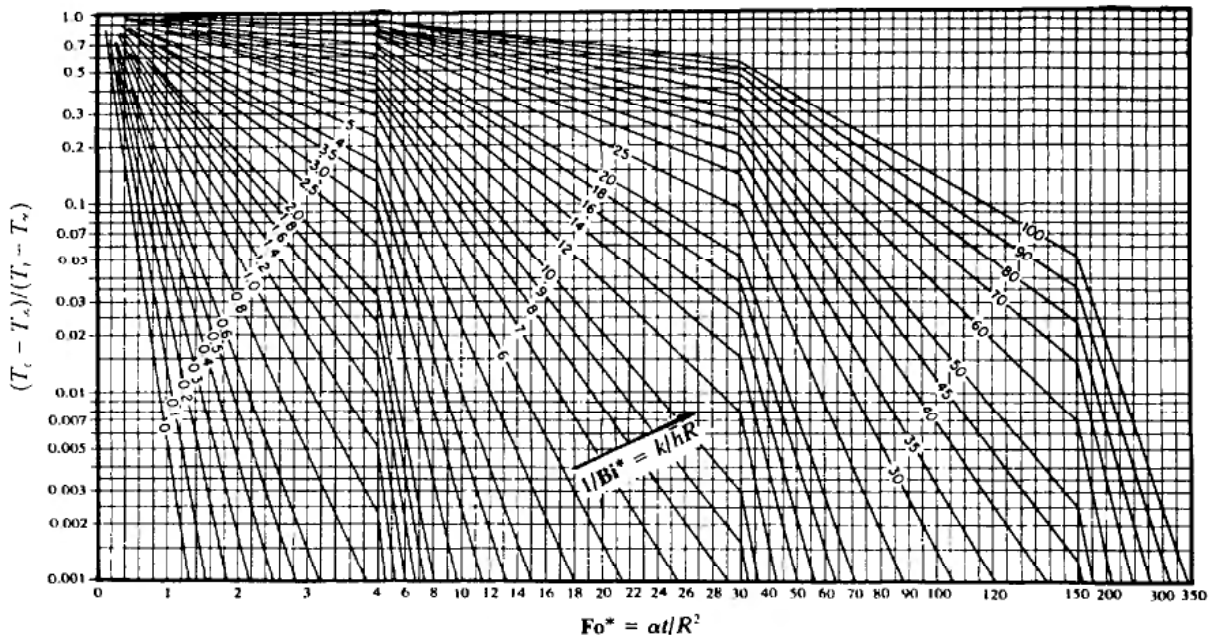


Fig. 4-9. Centerline temperature for a solid cylinder. [From M. P. Heisler, ©1947, The American Society of Mechanical Engineers, *Trans. ASME*, 69: 227, New York. Used with permission.]

Solid Sphere

The problem of determining the transient temperature distribution within a solid sphere of radius R which is initially at a uniform temperature and is suddenly exposed to a convective heat transfer at its surface has been studied extensively also. Dimensionless temperatures are presented in the Heisler

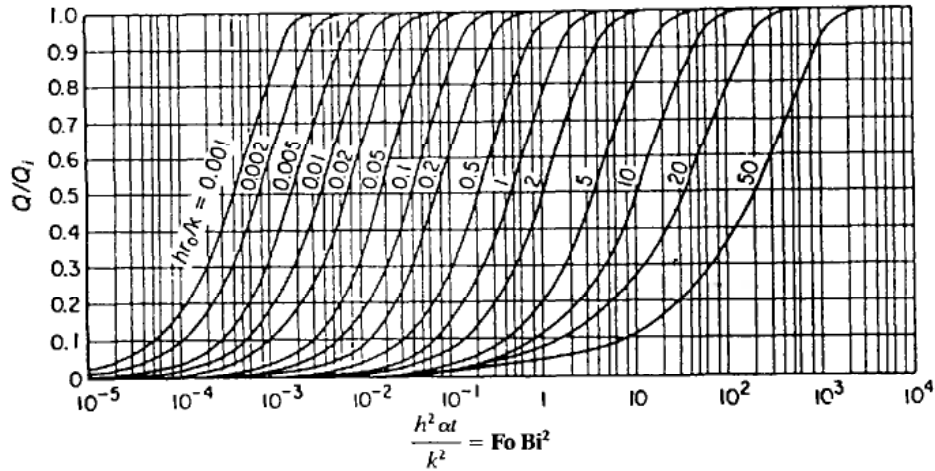


Fig. 4-10. Total heat flow for a solid cylinder. [From H. Gröber, S. Erk and U. Grigull (1961), *Fundamentals of Heat Transfer*, 3rd edn, Courtesy of the McGraw-Hill Book Company, New York, NY.]

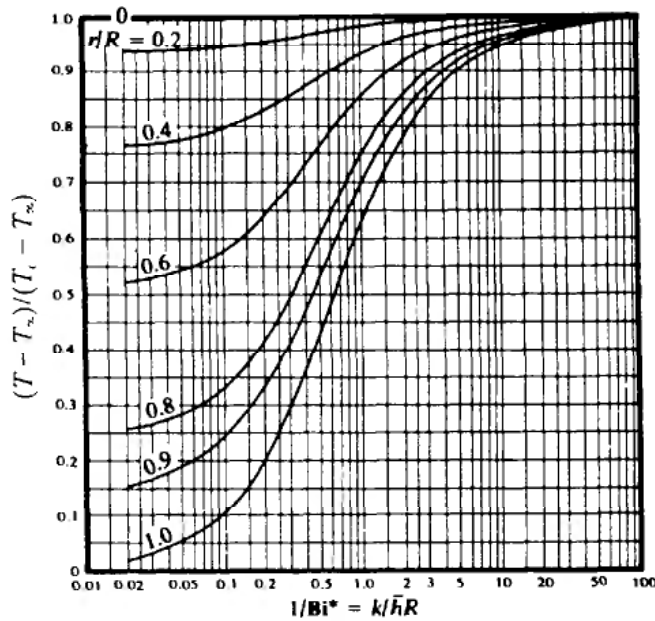


Fig. 4-11. Temperature correction chart for a solid cylinder. [From M. P. Heisler, ©1947, The American Society of Mechanical Engineers, *Trans. ASME*, 69: 227, New York. Used with permission.]

charts of Figs. 4-12 and 4-13. Here the moduli are defined as

$$\mathbf{Bi}^* = \frac{\bar{h}R}{k} \quad \mathbf{Fo}^* = \frac{\alpha t}{R^2}$$

and T_c denotes the temperature at the center. The dimensionless total heat transfer is given by the Gröber chart of Fig. 4-14.

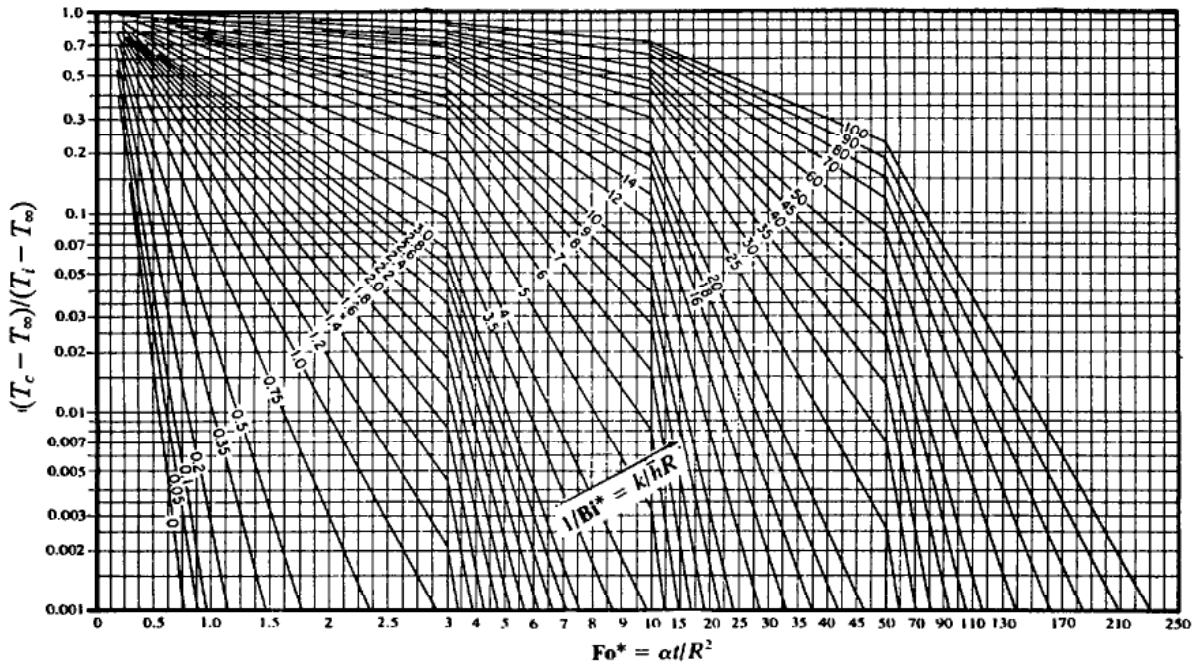


Fig. 4-12. Center temperature for a solid sphere. [From M. P. Heisler, ©1947, The American Society of Mechanical Engineers, *Trans. ASME*, 69: 227, New York. Used with permission.]

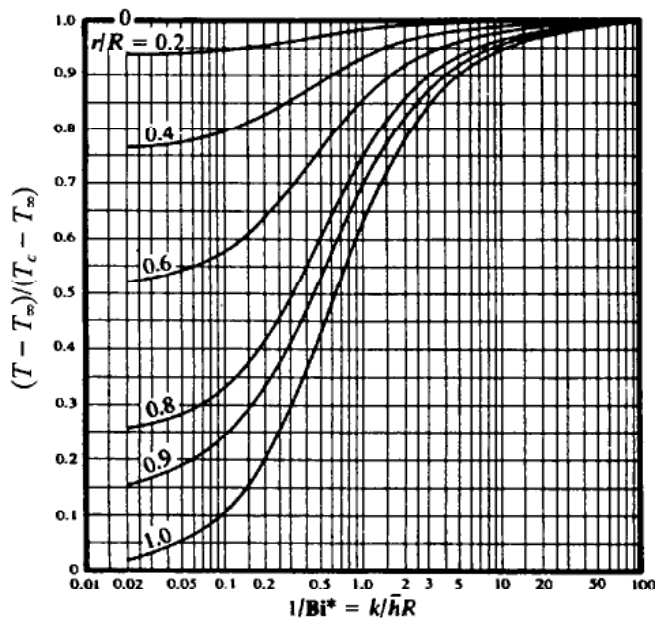


Fig. 4-13. Temperature correction chart for a solid sphere. [From M. P. Heisler, ©1947, The American Society of Mechanical Engineers, *Trans. ASME*, 69: 227, New York. Used with permission.]

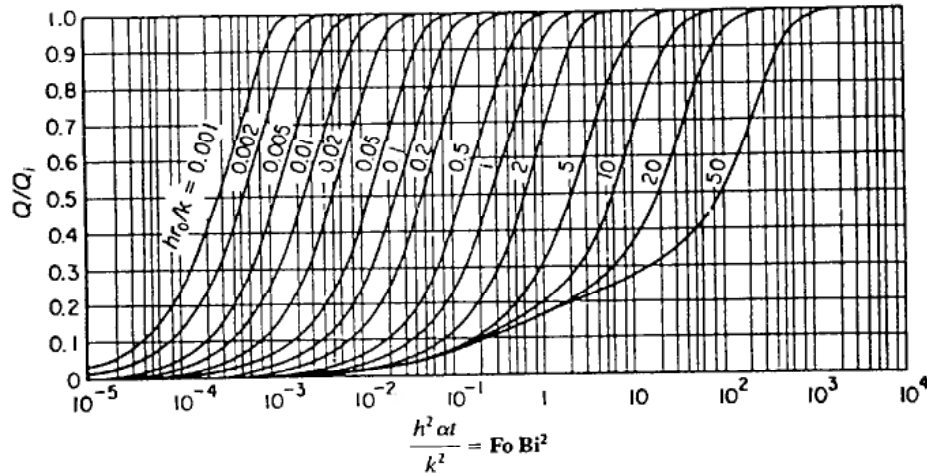


Fig. 4-14. Total heat flow for a solid sphere. [From H. Gröber, S. Erk and U. Grigull (1961), *Fundamentals of Heat Transfer*, 3rd edn, Courtesy of the McGraw-Hill Book Company, New York, NY.]

4.7 MULTIDIMENSIONAL SYSTEMS

Consider the temperature distribution during heat treatment of a long rectangular bar (Fig. 4-15). If such a body is initially at a high temperature and is suddenly exposed to a cooler surrounding fluid, there will be two-dimensional heat transfer within the body, assuming the z -direction length is sufficient to result in negligible temperature gradients in that direction.

Applying the separation-of-variables method to the conduction equation for $\theta = T - T_\infty$,

$$\frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2} = \frac{1}{\alpha} \frac{\partial \theta}{\partial t}$$

we assume that $\theta(x, y, t) = X(x, t) Y(y, t)$ and realizing that the x - and y -solutions must have the same form, we easily reduce the problem to two one-dimensional problems of the type resulting in (4.28). Thus,

$$\frac{\theta}{\theta_i} \equiv \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{\text{long bar}} = \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{2a\text{-slab}} \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{2b\text{-slab}} \quad (4.37)$$

where the $2a$ -slab and the $2b$ -slab solutions may be taken from Figs. 4-6 and 4-7. It can also be shown that the transient temperature in a cylinder with both radial and axial heat transfer is given by

$$\left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{\text{short cyl}} = \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{\text{inf cyl}} \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{2L\text{-slab}} \quad (4.38)$$

and that in a rectangular parallelepiped (box-shaped object) it is given by

$$\left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{\text{box}} = \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{2a\text{-slab}} \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{2b\text{-slab}} \left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{2c\text{-slab}} \quad (4.39)$$

where $2L$ is the total length of the cylinder and $2c$ is the total z -dimension of the parallelepiped.

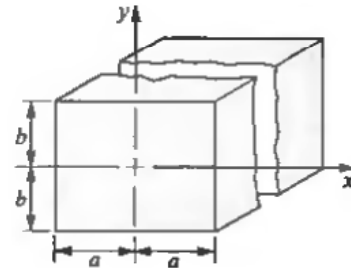


Fig. 4-15

4.8 NUMERICAL ANALYSIS

The fundamental approach to numerical analysis of a transient conduction problem lies in the replacement of the differential equation, which represents a continuous temperature distribution in both space and time, with a finite-difference equation, which can yield results only at discrete locations and at specified times within the body.

For the partial derivatives of $T(\xi, \tau)$ at the point (ξ, τ) , these being independent variables, we employ either the *forward finite-difference approximations*

$$\left(\frac{\partial T}{\partial \xi}\right)_{\xi, \tau, \text{fwd}} \approx \frac{1}{\delta \xi} [T(\xi + \delta \xi, \tau) - T(\xi, \tau)] \quad (4.40)$$

$$\left(\frac{\partial T}{\partial \tau}\right)_{\xi, \tau, \text{fwd}} \approx \frac{1}{\delta \tau} [T(\xi, \tau + \delta \tau) - T(\xi, \tau)] \quad (4.41)$$

or the *backward finite-difference approximations*

$$\left(\frac{\partial T}{\partial \xi}\right)_{\xi, \tau, \text{bkwd}} \approx \frac{1}{\delta \xi} [T(\xi, \tau) - T(\xi - \delta \xi, \tau)] \quad (4.42)$$

$$\left(\frac{\partial T}{\partial \tau}\right)_{\xi, \tau, \text{bkwd}} \approx \frac{1}{\delta \tau} [T(\xi, \tau) - T(\xi, \tau - \delta \tau)] \quad (4.43)$$

By definition of the derivative, these approximations become exact as $\delta \xi$ and $\delta \tau$ approach zero.

Second partial derivatives in the conduction equation are usually replaced by their *central finite-difference approximation*:

$$\left(\frac{\partial^2 T}{\partial \xi^2}\right)_{\xi, \tau, \text{cent}} \approx \frac{1}{(\delta \xi)^2} [T(\xi + \delta \xi, \tau) - 2T(\xi, \tau) + T(\xi - \delta \xi, \tau)] \quad (4.44)$$

Again, the approximation becomes exact as $\delta \xi \rightarrow 0$.

Explicit Finite-Difference Conduction Equation

Let us apply the above to the two-dimensional conduction equation

$$\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} = \frac{1}{\alpha} \frac{\partial T}{\partial t} \quad (4.45)$$

From (4.44), with $\xi = x$, $\delta \xi = \Delta x$, and $\tau = t$,

$$\left(\frac{\partial^2 T}{\partial x^2}\right)_{x, t, \text{cent}} \approx \frac{1}{(\Delta x)^2} [T(x + \Delta x, t) - 2T(x, t) + T(x - \Delta x, t)]$$

which for the general nodal point n of Fig. 4-16 results in

$$\left(\frac{\partial^2 T}{\partial x^2}\right)_{n, t, \text{cent}} \approx \frac{1}{(\Delta x)^2} [T_3^t - 2T_n^t + T_1^t] \quad (4.46)$$

where, for example, T_3^t is the temperature at node 3 at time t . Similarly,

$$\left(\frac{\partial^2 T}{\partial y^2}\right)_{n, t, \text{cent}} \approx \frac{1}{(\Delta y)^2} [T_4^t - 2T_n^t + T_2^t] \quad (4.47)$$

The forward finite-difference formulation of the time derivative is obtained from (4.41) with $\tau = t$ and $\delta \tau = \Delta t$ at point n :

$$\left(\frac{\partial T}{\partial t}\right)_{n, t, \text{fwd}} \approx \frac{1}{\Delta t} [T_n^{t+1} - T_n^t] \quad (4.48)$$

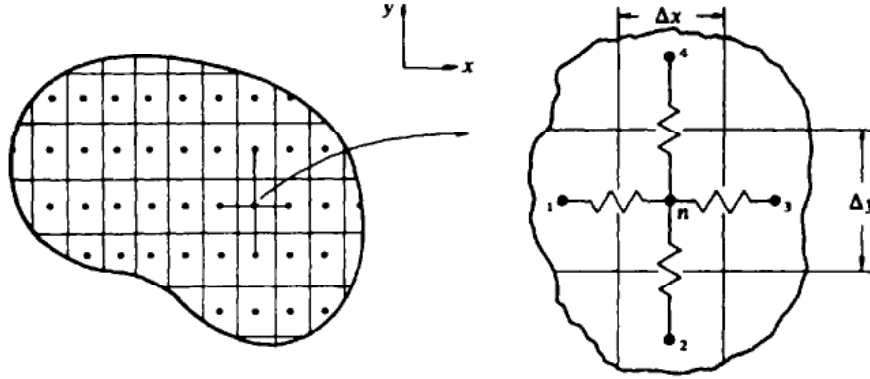


Fig. 4-16

where $T_n^{t+\Delta t}$ is the value of T_n at time $t + \Delta t$. Substituting (4.46), (4.47), and (4.48) into (4.45) yields

$$\frac{1}{(\Delta x)^2} [T_3^t - 2T_n^t + T_1^t] + \frac{1}{(\Delta y)^2} [T_4^t - 2T_n^t + T_2^t] = \frac{1}{\alpha \Delta t} [T_n^{t+\Delta t} - T_n^t] \quad (4.49)$$

Note that this equation expresses the *future* temperature at node n in terms of the *present* temperatures of node n and its adjacent nodes. This gives rise to the notation “explicit formulation,” since the future temperature is explicitly specified in terms of temperatures existing one time increment earlier.

To this point, the increments Δx and Δy may be different; and indeed, they may vary with location within the body. For simplification, we now choose

$$\Delta x = \Delta y = \Delta s$$

and (4.49) reduces to

$$T_n^{t+\Delta t} = \frac{\alpha \Delta t}{(\Delta s)^2} (T_1^t + T_2^t + T_3^t + T_4^t) + \left[1 - 4 \frac{\alpha \Delta t}{(\Delta s)^2} \right] T_n^t \quad (4.50)$$

Defining the parameter M by

$$M \equiv \frac{(\Delta s)^2}{\alpha \Delta t} \quad (4.51)$$

the one-, two-, and three-dimensional explicit nodal equations for uniform and equal spatial increments are, respectively,

$$T_n^{t+\Delta t} = \frac{1}{M} (T_1^t + T_3^t) + \left(1 - \frac{2}{M} \right) T_n^t \quad (4.52)$$

$$T_n^{t+\Delta t} = \frac{1}{M} (T_1^t + T_2^t + T_3^t + T_4^t) + \left(1 - \frac{4}{M} \right) T_n^t \quad (4.53)$$

$$T_n^{t+\Delta t} = \frac{1}{M} (T_1^t + T_2^t + T_3^t + T_4^t + T_5^t + T_6^t) + \left(1 - \frac{6}{M} \right) T_n^t \quad (4.54)$$

Note that (4.52) implies that the surrounding nodes in the one-dimensional case are nodes 1 and 3, whereas (4.54) implies that the z -direction nodes in the three-dimensional case are nodes 5 and 6.

Stability of the numerical solution during repetitive computations for succeeding time steps is assured by requiring the coefficient of T_n^t in (4.52), (4.53), or (4.54) to be nonnegative. (A negative coefficient of T_n^t would mean that a larger value of T_n^t would result in a smaller value of $T_n^{t+\Delta t}$; this would

in return result in a larger value of T_n^{i+2} , etc., yielding unstable fluctuations in the numerical solution.) To assure all coefficients being nonnegative we require

$$\begin{aligned} M &\geq 2 && \text{for one-dimensional problems} \\ M &\geq 4 && \text{for two-dimensional problems} \\ M &\geq 6 && \text{for three-dimensional problems} \end{aligned} \tag{4.55}$$

Equations (4.52) through (4.55) are appropriate for interior nodes of a body. For an exterior nodal point subjected to convective boundary conditions in a one-dimensional system, as shown in Fig. 4-17, an energy balance on the shaded area having unit depth is

$$\rho c \frac{(\Delta s)^2}{2} \left(\frac{T_n^{i+1} - T_n}{\Delta t} \right) = k \Delta s \left(\frac{T_1^i - T_n^i}{\Delta s} \right) + \bar{h} \Delta s (T_\infty - T_n^i)$$

or

$$T_n^{i+1} = \frac{2}{M} \left(T_1^i + \frac{\bar{h} \Delta s}{k} T_\infty \right) + \left[1 - \frac{2}{M} \left(\frac{\bar{h} \Delta s}{k} + 1 \right) \right] T_n^i \tag{4.56}$$

For an exterior nodal point subjected to a convective boundary condition in a two-dimensional system, as shown in Fig. 4-18, a similar approach yields

$$T_n^{i+1} = \frac{1}{M} \left(T_1^i + 2T_2^i + T_3^i + 2 \frac{\bar{h} \Delta s}{k} T_\infty \right) + \left[1 - \frac{2}{M} \left(\frac{\bar{h} \Delta s}{k} + 2 \right) \right] T_n^i \tag{4.57}$$

Sufficient stability requirements for convective boundary conditions are

$$\begin{aligned} M &\geq 2 \left(\frac{\bar{h} \Delta s}{k} + 1 \right) && \text{for one-dimensional problems} \\ M &\geq 2 \left(\frac{\bar{h} \Delta s}{k} + 2 \right) && \text{for two-dimensional problems} \end{aligned} \tag{4.58}$$

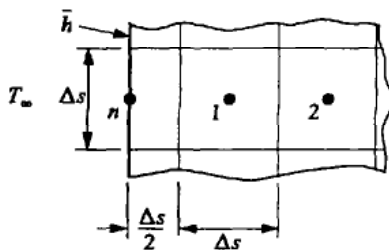


Fig. 4-17

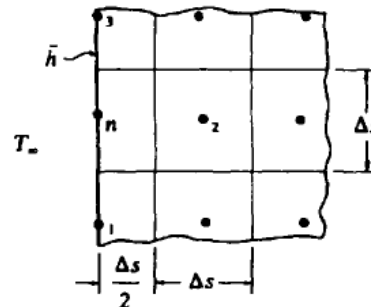


Fig. 4-18

Additional nodal equations for cases involving interior or exterior corners and/or surface heat flux such as that due to radiation can be derived in similar fashion. The stability requirement for each such situation can be obtained by requiring the grouped coefficient of T_n^i to be nonnegative. The most stringent of the stability requirements applicable in a given problem dictates, through (4.51), the maximum time increment that can be used in the numerical solution.

The numerical solution proceeds by writing a nodal equation for each interior and each exterior nodal point not having fixed (constant) temperature, determining the maximum time increment Δt for the selected grid size and specified material thermal diffusivity, and then using the nodal equations to advance the solution in steps of Δt until the desired total time is reached.

Implicit Finite-Difference Conduction Equation

In the explicit formulation, the nodal equations were obtained by replacing (4.45) by

$$\left(\frac{\partial^2 T}{\partial x^2}\right)_{n,t,\text{cent}} + \left(\frac{\partial^2 T}{\partial y^2}\right)_{n,t,\text{cent}} = \frac{1}{\alpha} \left(\frac{\partial T}{\partial t}\right)_{n,t,\text{fwd}}$$

If, instead, (4.45) is replaced by

$$\left(\frac{\partial^2 T}{\partial x^2}\right)_{n,t+\Delta t,\text{cent}} + \left(\frac{\partial^2 T}{\partial y^2}\right)_{n,t+\Delta t,\text{cent}} = \frac{1}{\alpha} \left(\frac{\partial T}{\partial t}\right)_{n,t+\Delta t,\text{bkwd}}$$

one obtains the implicit form of the nodal equations:

$$\frac{1}{(\Delta x)^2} (T_3^{i+1} - 2T_n^{i+1} + T_1^{i+1}) + \frac{1}{(\Delta y)^2} (T_3^{i+1} - 2T_n^{i+1} + T_2^{i+1}) = \frac{1}{\alpha \Delta t} (T_n^{i+1} - T_n^i) \quad (4.59)$$

or, when $\Delta x = \Delta y = \Delta s$,

$$\left(1 + \frac{4}{M}\right) T_n^{i+1} = \frac{1}{M} (T_1^{i+1} + T_2^{i+1} + T_3^{i+1} + T_4^{i+1}) + T_n^i \quad (4.60)$$

In (4.59) or (4.60) the *future* temperature of node n is seen to depend upon the *future* temperatures of the adjacent nodes in addition to its *present* temperature. Consequently, a set of simultaneous algebraic equations must be solved for each time step, there being the same number of equations as the number of nodes. For more than three or four nodes, the implicit formulation normally requires computer solution using matrix inversion (Gaussian elimination) for each time step. Because all coefficients are positive in (4.60) there is no stability restriction on the size of M .

In order to treat boundary conditions in the implicit approach, we multiply (4.59) by $k(\Delta x)(\Delta y)$ and rearrange, to obtain

$$\frac{T_1^{i+1} - T_n^{i+1}}{R_{1n}} + \frac{T_2^{i+1} - T_n^{i+1}}{R_{2n}} + \frac{T_3^{i+1} - T_n^{i+1}}{R_{3n}} + \frac{T_4^{i+1} - T_n^{i+1}}{R_{4n}} = C_n \left(\frac{T_n^{i+1} - T_n^i}{\Delta t} \right) \quad (4.61)$$

where, per unit depth,

$$R_{1n} = \frac{\Delta x}{k \Delta y}, \quad \text{etc.} \quad (4.62)$$

and

$$C_n = \rho c (\Delta x)(\Delta y) \quad (4.63)$$

Generalizing (4.61) through (4.63) to any number of spatial dimensions and to a grid spacing Δs that may vary with position and direction, we have:

$$\text{implicit: } T_n^{i+1} = T_n^i + \Delta t \left[\sum_m \frac{T_m^{i+1} - T_n^{i+1}}{R_{mn} C_n} \right] \quad (4.64)$$

where m represents the nodes adjacent to node n ;

$$R_{mn} = \frac{\Delta s}{k A_{k,mn}} \quad \text{for conduction} \quad (4.65)$$

$$R_{mn} = \frac{1}{h_{mn} A_{c,mn}} \quad \text{for convection}$$

$$C_n = \rho c V_n \quad (4.66)$$

Here, $A_{k,mn}$ represents the area for conductive heat transfer between nodes m and n ; $A_{c,mn}$ is the area

for convective heat transfer between nodes m and n ; and V_n is the volume element determined by the value(s) of Δs at node n . Boundary nodes are simply included by proper formulation of the R_{mn} and C_n .

The corresponding generalization of the explicit formulation is

$$\text{explicit: } T_n^{i+1} = T_n^i + \Delta t \left[\sum_m \frac{T_m^i - T_n^i}{R_{mn} C_n} \right] \quad (4.67)$$

The advantage of the implicit formulation is that relatively large time steps can be taken even though the nodal spacing (or the thermal capacitance of a node) is small. This advantage is accompanied by the disadvantage of requiring a simultaneous solution of the complete set of nodal equations for each time step. Thus one is usually faced with a choice between large computer core storage (required for implicit solution by matrix inversion—Gaussian elimination) and large computational time (required for explicit solution with small nodal thermal capacity).

Solved Problems

- 4.1.** Determine the Biot modulus for a 2.5 cm diameter, 1% carbon steel sphere at 100 °C subjected to a convective air flow resulting in $\bar{h} = 55 \text{ W/m} \cdot \text{K}$.

From Table B-1 (SI), $k = 43 \text{ W/m} \cdot \text{K}$. The characteristic linear dimension is

$$L = \frac{V}{A_s} = \frac{4\pi R^3/3}{4\pi R^2} = \frac{R}{3}$$

Thus,

$$\text{Bi} = \frac{\bar{h}(R/3)}{k} = \frac{(55 \text{ W/m} \cdot \text{K})(1.25 \text{ cm}/3)(\text{m}/100 \text{ cm})}{43 \text{ W/m} \cdot \text{K}} = 0.0053 \ll 0.1$$

Clearly, internal temperature gradients are small, and a lumped thermal analysis would be quite accurate.

- 4.2.** An iron ($k = 64 \text{ W/m} \cdot \text{K}$) billet measuring $20 \times 16 \times 80 \text{ cm}$ is subjected to free convective heat transfer resulting in $\bar{h} = 2 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$. Determine the Biot number and the suitability of a lumped analysis to represent the cooling rate if the billet is initially hotter than the environment.

The characteristic length is $L = V/A_s$.

$$A_s = 2(20 \times 16) + 2(16 \times 80) + 2(20 \times 80) = 6400 \text{ cm}^2$$

so

$$L = \frac{(20 \times 16 \times 80) \text{ cm}^3}{6400 \text{ cm}^2} = 4.0 \text{ cm}$$

Using conversion factors of Appendix A,

$$\bar{h} = \frac{2 \text{ Btu}}{\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F}} \times \frac{3.1525 \text{ W/m}^2}{\text{Btu/h} \cdot \text{ft}^2} \times \frac{9^\circ\text{F}}{5 \text{ K}} = 11.35 \text{ W/m}^2 \cdot \text{K}$$

Thus

$$\text{Bi} = \frac{\bar{h}L}{k} = \frac{(11.35 \text{ W/m}^2 \cdot \text{K})(0.04 \text{ m})}{64 \text{ W/m} \cdot \text{K}} = 0.0071$$

and a lumped analysis will represent the transient temperature quite well.

- 4.3.** Determine the time required for a 1.25 cm diameter carbon steel (1% C) sphere to cool from $T_i = 500^\circ\text{C}$ to 100°C if exposed to a cooling air flow at $T_\infty = 25^\circ\text{C}$ resulting in $\bar{h} = 110 \text{ W/m}^2\cdot\text{K}$.

The characteristic linear dimension is $L = R/3$ (Problem 4.1). From Table B-1 (SI), the thermal conductivity of 1% C steel at the average temperature, $(500 + 100)/2 = 300 \text{ K}$ is $40 \text{ W/m}\cdot\text{K}$. Thus,

$$\text{Bi} = \frac{\bar{h}L}{k} = \frac{(110 \text{ W/m}^2\cdot\text{K})(0.0125 \text{ m}) \div (3 \times 2)}{40 \text{ W/m}\cdot\text{K}} = 0.0057$$

and a “lumped analysis” is suitable. By (4.9) the time (Fo) for $T(t)$ to reach 100°C satisfies

$$\frac{(100 - 25)^\circ\text{C}}{(500 - 25)^\circ\text{C}} = 0.1579 = e^{-(\text{Bi})(\text{Fo})}$$

Solving

$$(\text{Bi})(\text{Fo}) = 1.845$$

$$\text{Fo} = \frac{1.845}{0.0057} = 323.7 = \frac{\alpha t}{L^2}$$

$$t = \frac{(323.7)(R/3)^2}{\alpha}$$

From Table B-1 (SI),

$$\alpha = \frac{40 \text{ W/m}\cdot\text{K}}{(7801 \text{ kg/m}^3)(473 \text{ W}\cdot\text{s/kg}\cdot\text{K})} = 1.084 \times 10^{-5} \text{ m}^2/\text{s}$$

Thus

$$t = \frac{323.7(0.0125 \text{ m}/6)^2}{1.084 \times 10^{-5} \text{ m}^2/\text{s}} = 129 \text{ s} = 2.16 \text{ min}$$

- 4.4.** Determine the time constant for a spherically shaped, copper–constantan thermocouple at an average temperature of 32°F , exposed to a convective environment where $\bar{h} = 8 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$, for (a) bead diameter 0.005 in and (b) bead diameter 0.010 in.

For a spherical object of radius a , $L = V/A_s = a/3$. The properties of the two metals may be taken as:

$$\begin{array}{ll} k_{\text{cu}} = 224 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F} & k_{\text{con}} = 12.4 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F} \\ c_{\text{cu}} = 0.091 \text{ Btu/lb}_m\cdot^\circ\text{F} & c_{\text{con}} = 0.10 \text{ Btu/lb}_m\cdot^\circ\text{F} \\ \rho_{\text{cu}} = 558 \text{ lb}_m/\text{ft}^3 & \rho_{\text{con}} = 557 \text{ lb}_m/\text{ft}^3 \end{array}$$

Assuming linear averaging to be valid, the thermocouple bead properties are

$$\begin{aligned} k &= (224 + 12.4)/2 = 118.2 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F} \\ c &= (0.091 + 0.10)/2 = 0.096 \text{ Btu/lb}_m\cdot^\circ\text{F} \\ \rho &= (558 + 557)/2 = 557.5 \text{ lb}_m/\text{ft}^3 \end{aligned}$$

(a) From (4.8)

$$\begin{aligned} (RC)_{\text{th}} &= \frac{\rho c V}{\bar{h} A_s} = \frac{\rho c a/3}{\bar{h}} = \frac{(557.5 \text{ lb}_m/\text{ft}^3)(0.096 \text{ Btu/lb}_m\cdot^\circ\text{F})[(0.0025/3 \times 12) \text{ ft}]}{8 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}} \\ &= 4.646 \times 10^{-4} \text{ h} = 1.6725 \text{ s} \end{aligned}$$

(b) The only difference from part (a) is that the radius is twice the previous value. Since $(RC)_{\text{th}}$ is linear in a ,

$$(RC)_{\text{th}} = 2(1.6725 \text{ s}) = 3.345 \text{ s}$$

Before leaving this problem, we should verify that the Biot modulus is sufficiently small to insure the validity of a lumped analysis. Checking for the larger thermocouple,

$$\text{Bi} = \frac{\bar{h}L}{k} = \frac{(8 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F})[0.005/(3)(12)] \text{ ft}}{118.2 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}} = 9.4 \times 10^{-6}$$

and the lumped analysis is certainly suitable.

- 4.5.** If the initial temperature is 32 °F and the surrounding air temperature is 45 °F, how long will it take the 0.005 in diameter thermocouple of Problem 4.4 to reach (a) 44 °F, (b) 44.5 °F, (c) 44.9 °F, and (d) 44.99 °F? Assume all property values remain unchanged.

In general, the time required for the thermocouple junction to reach a given temperature is obtained by use of (4.9). Thus,

$$\ln \left[\frac{T(t) - T_\infty}{T_i - T_\infty} \right] = - \frac{t}{(RC)_{\text{th}}}$$

or

$$t = - (1.6725 \text{ s}) \ln \left[\frac{T(t) - T_\infty}{T_i - T_\infty} \right]$$

where the numerical value of $(RC)_{\text{th}}$ was taken from Problem 4.4(a).

(a) For $T_i = 32$ °F, $T_\infty = 45$ °F, and $T(t) = 44$ °F,

$$t = - 1.6725 \ln \left(\frac{44 - 45}{32 - 45} \right) = 4.29 \text{ s}$$

(b) $t = - 1.6725 \ln \left(\frac{44.5 - 45}{32 - 45} \right) = 5.45 \text{ s}$

(c) $t = - 1.6725 \ln \left(\frac{44.9 - 45}{32 - 45} \right) = 8.14 \text{ s}$

(d) $t = - 1.6725 \ln \left(\frac{44.99 - 45}{32 - 45} \right) = 11.99 \text{ s}$

Notice that (4.9) indicates that a body subjected to a warming or cooling convective fluid can never reach the surrounding fluid temperature. While this is mathematically correct, it is important to realize that the difference in temperature between the body and the convective fluid can be reduced to an insignificantly small value by allowing a sufficient time period, as illustrated by the present problem.

- 4.6.** A 7.5 cm diameter orange is subjected to a cold environment. Assuming that the orange has properties similar to those of water at 20 °C and that $\bar{h} = 11 \text{ W/m}^2 \cdot ^\circ\text{C}$, determine the suitability of a lumped analysis for predicting the temperature of the orange during cooling.

From Table B-3 (SI), the thermal conductivity of water at 20 °C is 0.597 W/m · K. Also, for a sphere

$$L = \frac{V}{A_s} = \frac{R}{3} \quad (\text{see Problem 4.1})$$

and

$$\text{Bi} = \frac{\bar{h}L}{k} = \frac{(11 \text{ W/m}^2 \cdot \text{K})(0.0375 \text{ m})/3}{0.587 \text{ W/m} \cdot \text{K}} = 0.23$$

Consequently a lumped analysis would not be highly accurate.

- 4.7.** What is the maximum edge dimension of a solid aluminum cube at 100 °C subjected to a convective heat transfer with $\bar{h} = 25 \text{ W/m}^2 \cdot \text{K}$ for a lumped analysis to be accurate to within 5%?

For an object of this shape, the lumped approach is accurate to $\pm 5\%$ if the Biot modulus is less than 0.1. From Table B-1 (SI), $k = 206 \text{ W/m} \cdot \text{K}$. Thus,

$$\text{Bi} = 0.1 = \frac{\bar{h}L}{k} = \frac{(25 \text{ W/m}^2 \cdot \text{K})L}{206 \text{ W/m} \cdot \text{K}} \quad \text{or} \quad L = 0.824 \text{ m}$$

Now

$$L = \frac{V}{A_s} = \frac{l^3}{6l^2}$$

$$l = 6L = 6(0.824 \text{ m}) = 4.94 \text{ m}$$

- 4.8.** For the situation of Problem 4.3, determine (a) the instantaneous heat transfer rate 2 minutes after the start of cooling and (b) the total energy transferred from the sphere during the first 2 minutes.

Either we could calculate the numerical value of the temperature of the sphere at the instant specified and use this in Newton's law of cooling to determine q and Δu , or we could use the more general approach of substituting (4.9) into Newton's law of cooling to obtain an analytical expression for q . Choosing the latter,

$$(a) \quad q = \bar{h}A_s(T - T_\infty) = \bar{h}A_s(T_i - T_\infty)e^{-t/(RC)_{th}}$$

From Problem 4.3, at $t = 2.16 \text{ min}$, $\text{Bi} \cdot \text{Fo} = 1.845$, and $T_i - T_\infty = 475^\circ\text{C}$. Thus at $t = 2.0 \text{ minutes}$,

$$\frac{t_2}{(RC)_{th}} = (\text{Bi} \cdot \text{Fo})_2 = \frac{t_2}{t_{2.16}} (\text{Bi} \cdot \text{Fo})_{2.16} = \frac{2}{2.16} (1.845) = 1.708$$

and

$$q = (110 \text{ W/m}^2 \cdot \text{K})[(4\pi)(0.00625 \text{ m})^2](500 - 25)^\circ\text{C} \times e^{-1.708} = 4.65 \text{ W}$$

- (b) The total energy transferred is

$$Q = \int_0^{t_2} q dt = \int_0^{t_2} \bar{h}A_s(T_i - T_\infty)e^{-t/(RC)_{th}} dt = C_{th}(T_i - T_\infty)(1 - e^{-t_2/(RC)_{th}})$$

where $C_{th} = \rho cV$. Using property data of Table B-1 (SI) at 20°C (no higher temperature data available for ρ and c),

$$C_{th} = \rho cV = \left(7801 \frac{\text{kg}}{\text{m}^3}\right) \left(\frac{0.473 \text{ kJ}}{\text{kg} \cdot \text{K}}\right) \left(\frac{4\pi}{3}\right) (0.00625 \text{ m})^3 = 3.773 \times 10^{-3} \text{ kJ/K}$$

and

$$Q = \left(3.773 \times 10^{-3} \frac{\text{kJ}}{\text{K}}\right) (500 - 25)^\circ\text{C} (1 - e^{-1.708}) = 1.467 \text{ kJ}$$

- 4.9.** Consider the container of fluid shown in Fig. 4-19. The system is brought to a uniform initial temperature $T_i > T_\infty$ by wrapping it in an insulating blanket (which corresponds to opening switch S_2), running the electric heater (close switch S_1), and waiting until both T_1 and T_2 reach T_i (at which point open S_1 and close S_2). Give a lumped analysis of the ensuing process, which is one of convective heat transfer from container to environment and from inner fluid to container.

The rate at which thermal energy (heat) leaves each body is equal to the negative of the rate of change of its stored thermal energy. Hence, the energy balances on the two lumps are

$$\text{lump } a: \quad \bar{h}_a A_a (T_a - T_b) = -\rho_a c_a V_a \frac{dT_a}{dt} \quad (1)$$

$$\text{lump } b: \quad \bar{h}_a A_a (T_b - T_a) + \bar{h}_b A_b (T_b - T_\infty) = -\rho_b c_b V_b \frac{dT_b}{dt} \quad (2)$$

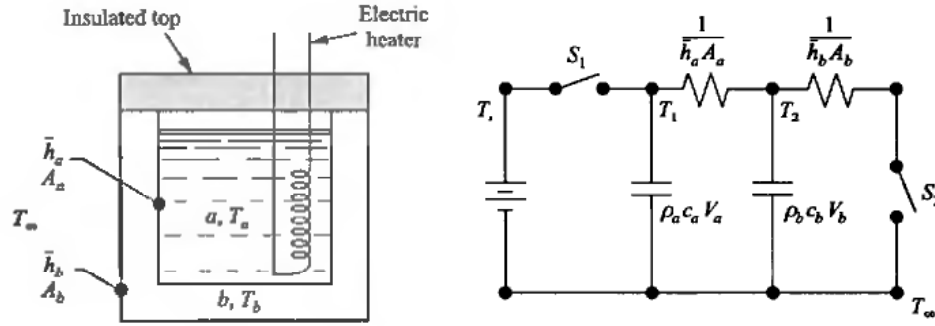


Fig. 4-19

These constitute a pair of simultaneous linear differential equations for $T_a(t)$ and $T_b(t)$. The initial conditions are

$$T_a(0) = T_b(0) = T_i \quad (3)$$

To solve (1) and (2) subject to (3), we first use (1) to obtain T_b in terms of T_a and dT_a/dt . Substituting this expression into (2) gives the following second-order equation for T_a :

$$\frac{d^2 T_a}{dt^2} + C_1 \frac{dT_a}{dt} + C_2 T_a = C_2 T_\infty \quad (4)$$

where

$$C_1 = \frac{\bar{h}_a A_a}{\rho_a c_a V_a} + \frac{\bar{h}_a A_a}{\rho_b c_b V_b} + \frac{\bar{h}_b A_b}{\rho_b c_b V_b}$$

$$C_2 = \left(\frac{\bar{h}_a A_a}{\rho_a c_a V_a} \right) \left(\frac{\bar{h}_b A_b}{\rho_b c_b V_b} \right)$$

The steady state solution (particular integral) of (4) is clearly $T_a = T_\infty$, while the transient solution (general solution of the homogeneous equation) is

$$T_a = A e^{m_1 t} + B e^{m_2 t}$$

where A and B are arbitrary constants and

$$m_1 = \frac{-C_1 + [C_1^2 - 4C_2]^{1/2}}{2} \quad m_2 = \frac{-C_1 - [C_1^2 - 4C_2]^{1/2}}{2}$$

Thus,

$$T_a = A e^{m_1 t} + B e^{m_2 t} + T_\infty \quad (5)$$

Finally, A and B are determined by applying to (5) the initial conditions $T_a(0) = T_i$ and

$$\left. \frac{dT_a}{dt} \right|_{t=0} = 0$$

which is implied by (3) and (1). The results are

$$A = \frac{m_2}{m_2 - m_1} (T_i - T_\infty) \quad B = -\frac{m_1}{m_2 - m_1} (T_i - T_\infty)$$

so that, in dimensionless form,

$$\frac{T_a - T_\infty}{T_i - T_\infty} = \frac{m_2}{m_2 - m_1} e^{m_1 t} - \frac{m_1}{m_2 - m_1} e^{m_2 t} \quad (6)$$

The simplest way to obtain the container temperature, $T_b(t)$, is to substitute (6) into (1).

- 4.10.** Consider a lumped system consisting of two metal blocks in perfect thermal contact (there is negligible contact resistance between the two blocks at their interface). Only one block is exposed to a convective environment at T_∞ , as shown in Fig. 4-20. Both blocks are initially at T_i . Determine an analytical expression for the temperature of block a .

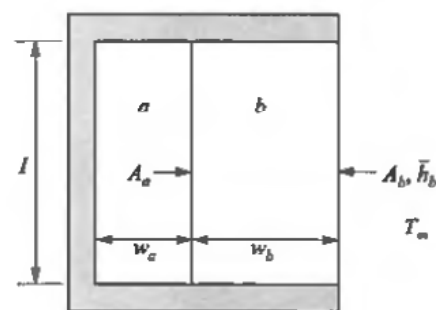


Fig. 4-20

The heat transfer rate from block a and to block b is

$$\frac{q}{A} = -k_a \left(\frac{T_{\text{int}} - T_a}{w_a/2} \right) = -k_b \left(\frac{T_b - T_{\text{int}}}{w_b/2} \right) \quad (1)$$

Eliminating T_{int} , the interfacial temperature, between these two equations for q/A gives

$$\frac{q}{A} = \frac{q_a}{A_a} = K(T_a - T_b) \quad (2)$$

where

$$K = \frac{2(k_a/w_a)(k_b/w_b)}{(k_a/w_a) + (k_b/w_b)} \quad (3)$$

Using (2) to write the energy balances on the two blocks, we find them to be identical to (1) and (2) of Problem 4.9 with \bar{h}_a replaced by K . Furthermore, the initial conditions are identical to (3) of Problem 4.9. It follows that all the results of Problem 4.9—in particular, (6)—apply to the present problem if \bar{h}_a is everywhere replaced by K .

- 4.11.** For a system consisting of two metallic blocks as shown in Fig. 4-20, with only block b exposed to the convective environment ($\bar{h}_b = 5 \text{ Btu/h} \cdot \text{ft}^2 \cdot \text{F}$), the following approximate data apply:

Material a	Material b
Brass	Type 304 stainless steel
$c_a = 0.092 \text{ Btu/lb}_m \cdot \text{F}$	$c_b = 0.11 \text{ Btu/lb}_m \cdot \text{F}$
$k_a = 60.0 \text{ Btu/h} \cdot \text{ft} \cdot \text{F}$	$k_b = 9.4 \text{ Btu/h} \cdot \text{ft} \cdot \text{F}$
$w_a = 3.0 \text{ in}$	$w_b = 2.0 \text{ in}$
$\rho_a = 532 \text{ lb}_m/\text{ft}^3$	$\rho_b = 488 \text{ lb}_m/\text{ft}^3$
$T_i = 300 \text{ F}$	$T_\infty = 100 \text{ F}$

(a) Is a lumped analysis suitable? (b) If the answer to (a) is yes, plot the temperature–time history of lump a from 360 F down to 150 F .

(a) An appropriate Biot modulus for material b is

$$\text{Bi}_b = \frac{\bar{h}_b L_b}{k_b}$$

where

$$L_b = \frac{V_b}{A_s} = \frac{(l)(w_b)(1)}{(l)(1)} = w_b$$

if we neglect the heat transfer to body *a*. So

$$Bi_b = \frac{(5)(2/12)}{9.4} = 0.09$$

As for Bi_a , the resistance for heat transfer from lump *a* to the environment at T_∞ is clearly greater than that for heat transfer from lump *b*, hence a suitable $\bar{h}_a < \bar{h}_b$. Also,

$$\frac{w_a}{k_a} = \frac{3/12}{60} < \frac{2/12}{9.4} = \frac{w_b}{k_b}$$

so that $Bi_a < Bi_b$. As both moduli are smaller than 0.1, a lumped analysis of the system is suitable.

(b) Determining the constants to use in the solution given in Problem 4.10,

$$K = \frac{2(k_a/w_a)(k_b/w_b)}{(k_a/w_a) + (k_b/w_b)} = \frac{2[60(12)/3][9.4(12)/2]}{[60(12)/3] + [9.4(12)/2]} = 91.34 \text{ Btu/h} \cdot \text{ft}^2 \cdot \text{°F}$$

$$C_1 = \frac{KA_a}{\rho_a c_a V_a} + \frac{KA_a}{\rho_b c_b V_b} + \frac{\bar{h}_b A_b}{\rho_b c_b V_b} = \frac{K}{\rho_a c_a w_a} + \frac{K}{\rho_b c_b w_b} + \frac{\bar{h}_b}{\rho_b c_b w_b}$$

$$= \frac{(91.34)(12)}{532(0.092)(3)} + \frac{(91.34)(12)}{488(0.11)(2)} + \frac{5(12)}{488(0.11)(2)}$$

$$= 7.46 + 10.21 + 0.56 = 18.23 \text{ h}^{-1}$$

$$C_2 = (7.46)(0.56) = 4.18 \text{ h}^{-2}$$

$$m_1 = \frac{-18.23 + [(18.23)^2 - 4(4.18)]^{1/2}}{2} = -0.23 \text{ h}^{-1}$$

$$m_2 = \frac{-18.23 - [(18.23)^2 - 4(4.18)]^{1/2}}{2} = -18.00 \text{ h}^{-1}$$

Then, by (6) of Problem 4.9,

$$\frac{T_a - 100}{300 - 100} = \frac{-18.0}{-18.0 - (-0.23)} e^{-0.23t} - \frac{(-0.23)}{-18.0 - (-0.23)} e^{-18.0t}$$

$$T_a = 100 + 202.59 e^{-0.23t} - 2.59 e^{-18.0t}$$

where *t* is in hours and T_a has units of °F. Plotting, we obtain Table 4-1 and Fig. 4-21.

Table 4-1

<i>t</i> (h)	T_a (°F)
0	300.00
0.5	280.58
1.0	260.96
1.5	243.48
2.0	227.89
2.5	214.00
3.0	201.61
3.5	190.58
4.0	180.74
5.0	164.15
6.0	150.97
6.1	149.81
7.0	140.50

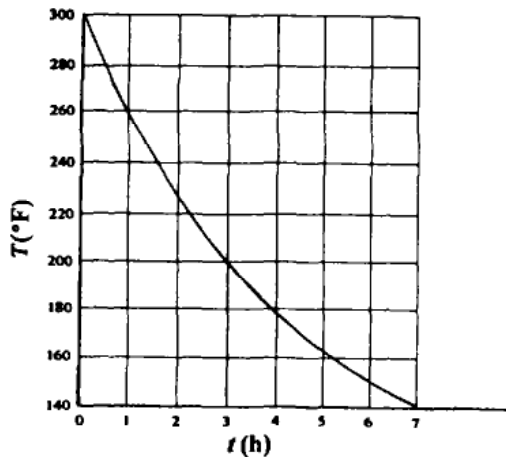


Fig. 4-21

- 4.12.** At what depth should a water pipe be buried in wet soil ($\alpha = 7.75 \times 10^{-7} \text{ m}^2/\text{s}$) initially at a uniform soil temperature of 5°C , for the surrounding soil temperature to remain above 2°C if the soil surface temperature suddenly drops to -20°C and remains at this value for 10 hours?

Treating the soil as a semi-infinite body, (4.13) applies. At the critical depth the temperature will just reach 2°C after 10 h. Thus

$$\frac{T_{(x,0)} - T_s}{T_i - T_s} = \frac{2 - (-20)}{5 - (-20)} = 0.88 = \text{erf}\left(\frac{x}{\sqrt{4\alpha t}}\right)$$

From Fig. 4-3, $x/\sqrt{4\alpha t} \approx 1.1$, so

$$x \approx 1.1[4(7.75 \times 10^{-7} \text{ m}^2/\text{s})(10 \text{ h})(3600 \text{ s/h})]^{1/2} \approx 0.37 \text{ m}$$

- 4.13.** A large aluminum slab 10 cm thick and at a uniform initial temperature of 300°C has its surface temperature on one side of the slab suddenly lowered to 60°C and maintained at that temperature. What is the maximum time that this slab can be treated as one of infinite thickness with $(T - T_s) \geq 0.99(T - T_s)$?

This problem is schematically shown in Fig. 4-22, where there are material and temperature symmetry about the centerline. Thus, the half thickness is 10 cm. From Table B-1 (SI) we have

$$\alpha = 8.418 \times 10^{-5} \text{ m}^2/\text{s} \text{ (at } 20^\circ\text{C)}$$

The criterion

$$\frac{x}{\sqrt{4\alpha t}} \geq 1.825$$

where $x = 10 \text{ cm}$ applies. Thus

$$\frac{10 \text{ cm}(\text{m}/100 \text{ cm})}{[4(8.418 \times 10^{-5} \text{ m}^2/\text{s})t]^{1/2}} \geq (1.825)$$

Solving for t , $t \leq 8.92 \text{ s}$, which is the maximum time.

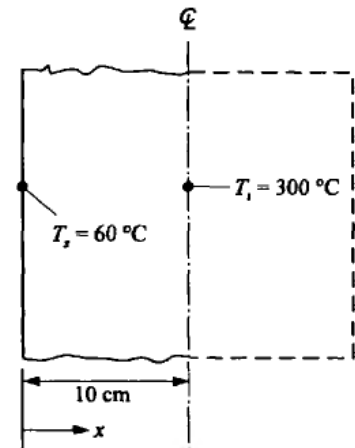


Fig. 4-22

- 4.14.** To illustrate the significance of the criterion $x \geq 3.65\sqrt{\alpha t}$, return to Problem 4.13. Determine the temperature at $x = 0.06 \text{ m}$ at
- the maximum time criterion of (4.17a) or (4.17b) and
 - an arbitrary choice of $t = 16 \text{ s}$ which violates the criterion.
- (a) Applying (4.17a) to determine the maximum time for treating the slab as semi-infinite yields, with α from Problem 4.13,

$$\sqrt{\alpha t} \leq (x/3.65) \tag{4.17a}$$

Hence,

$$t \leq [(x/3.65)^2(1/\alpha)]$$

or,

$$t \leq \left[\left(\frac{0.06 \text{ m}}{3.65} \right)^2 \left(\frac{1}{8.418 \times 10^{-5} \text{ m}^2/\text{s}} \right) \right]$$

$$t \leq 3.21 \text{ s}$$

Forming the argument of the error function,

$$\frac{x}{\sqrt{4\alpha t}} = \frac{0.06 \text{ m}}{[4(8.418 \times 10^{-5} \text{ m}^2/\text{s})(3.21 \text{ s})]^{1/2}} = 1.825$$

as expected since this part of the problem agrees with the criterion (4.17). From Fig. 4-3 we find the error function of 1.825 to be approximately 0.99. Then, with

$$\frac{T - T_s}{T_i - T_s} = \frac{(T - 60)^\circ\text{C}}{(300 - 60)^\circ\text{C}} = \text{erf}(1.825)$$

we obtain

$$T = T(0.06 \text{ m}, 3.21 \text{ s}) = 60^\circ\text{C} + 0.99(300 - 60)^\circ\text{C} = 297^\circ\text{C}$$

(b) For $x = 0.06 \text{ m}$ and $t = 16 \text{ s}$, we have

$$\frac{x}{\sqrt{4\alpha t}} = \frac{0.06 \text{ m}}{[4(8.418 \times 10^{-5} \text{ m}^2/\text{s})(16 \text{ s})]^{1/2}} = 0.8174$$

From Fig. 4-3,

$$\text{erf}(0.8174) \approx 0.75$$

Then,

$$T(0.06 \text{ m}, 16 \text{ s}) = 60^\circ\text{C} + 0.75(300 - 60)^\circ\text{C} = 240^\circ\text{C}$$

Clearly, failure to take the non-infinite nature of this slab temperature at 16 seconds results in a significant error in the temperature of the body.

- 4.15.** A water pipe is buried 0.37 m (cf. Problem 4.12) below ground in wet soil ($\alpha = 7.75 \times 10^{-7} \text{ m}^2/\text{s}$ and $k = 2.59 \text{ W/m}\cdot\text{K}$). The soil is initially at a uniform temperature of 5°C . For sudden application of a convective surface condition of wind with $\bar{h} = 57 \text{ W/m}^2\cdot\text{K}$ and $T_\infty = -21^\circ\text{C}$, will the pipe be exposed to freezing temperature (0°C) in a 10 hour period?

We may treat this as a convective boundary condition applied to a semi-infinite body initially at T_i ; thus (4.19) applies. The arguments of the erf terms in (4.19) are:

$$\frac{\bar{h}\sqrt{\alpha t}}{k} = \frac{57 \text{ W/m}^2\cdot\text{K}\sqrt{(7.75 \times 10^{-7} \text{ m}^2/\text{s})(36\,000 \text{ s})}}{2.59 \text{ W/m}\cdot\text{K}} = 3.68$$

$$\xi = \frac{x}{\sqrt{4\alpha t}} = \frac{0.37 \text{ m}}{\sqrt{4(7.75 \times 10^{-7} \text{ m}^2/\text{s})(36\,000 \text{ s})}} = 1.11$$

Using Fig. 4-3

$$\text{erf } \xi = \text{erf}(1.11) \approx 0.89$$

$$\text{erf}\left(\xi + \frac{\bar{h}\sqrt{\alpha t}}{k}\right) = \text{erf}(1.11 + 3.68) \approx 1.0$$

Thus, we need only keep the first two terms on the right of (4.19):

$$\frac{T - T_i}{T_\infty - T_i} \approx 1 - \text{erf } \xi$$

$$T \approx T_i + (1 - \text{erf } \xi)(T_\infty - T_i) \approx 5^\circ\text{C} + (1 - 0.89)(-21 - 5)^\circ\text{C} \approx 2.14^\circ\text{C}$$

Freezing will not occur.

- 4.16.** Using the temperature expression (4.28), develop (4.29).

The energy transferred to or from the slab in the time interval from 0 to t_1 is

$$Q = \int_0^{t_1} q \, dt$$

where

$$q = -kA \left. \frac{\partial T}{\partial x} \right|_{x=L} = -kA \left. \frac{\partial \theta}{\partial x} \right|_{x=L}$$

Thus

$$Q = -kA \int_0^{t_1} \left. \frac{\partial \theta}{\partial x} \right|_{x=L} dt \quad (1)$$

From (4.28),

$$\frac{\partial \theta}{\partial x} = 2\theta_1 \sum_{n=1}^{\infty} e^{-\lambda_n^2 \alpha t} \left[\frac{\sin \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} \right] (-\sin \lambda_n x) \lambda_n$$

and consequently

$$\left. \frac{\partial \theta}{\partial x} \right|_{x=L} = -2\theta_1 \sum_{n=1}^{\infty} \frac{\lambda_n \sin^2 \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} e^{-\lambda_n^2 \alpha t} \quad (2)$$

Substituting (2) into (1),

$$Q = 2kA\theta_1 \sum_{n=1}^{\infty} \frac{\lambda_n \sin^2 \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} \int_0^{t_1} e^{-\lambda_n^2 \alpha t} dt \quad (3)$$

The integral in (3) has the value $(1 - e^{-\lambda_n^2 \alpha t_1})/\lambda_n^2 \alpha$. Hence, noting that $\alpha = k/\rho c$,

$$Q = \frac{2kA\theta_1}{k/\rho c} \left(\frac{L}{L} \right) \sum_{n=1}^{\infty} \frac{1}{\lambda_n^2} \left[\frac{\lambda_n \sin^2 \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} \right] (1 - e^{-\lambda_n^2 \alpha t_1})$$

Noting that $Q_1 = AL\rho c\theta_1$ and replacing t_1 by t ,

$$\frac{Q}{Q_1} = 2 \sum_{n=1}^{\infty} \frac{1}{\lambda_n L} \left[\frac{\sin^2 \lambda_n L}{\lambda_n L + (\sin \lambda_n L)(\cos \lambda_n L)} \right] (1 - e^{-\lambda_n^2 \alpha t})$$

which is (4.29).

- 4.17.** A large steel plate (1.0% carbon) 5.0 cm thick is initially at a temperature of 425 °C. It is suddenly exposed on both sides to a convective environment with $\bar{h} = 285 \text{ W/m}^2 \cdot \text{°C}$, and $T_\infty = 65 \text{ °C}$. Determine the centerline temperature and the temperature inside the body 1.25 cm from the surface after 24 minutes.

From Appendix Table B-1 (SI), assuming an average temperature of 250 °C,

$$k = 41 \text{ W/m} \cdot \text{K} \quad \alpha = 1.172 \times 10^{-5} \text{ m}^2/\text{s} \text{ (at } 20 \text{ °C)}$$

Correcting α for the temperature of $k(43 \text{ W/m} \cdot \text{K})$ at 20 °C

$$\alpha = \frac{41}{43} (1.172 \times 10^{-5}) = 1.117 \times 10^{-5} \text{ m}^2/\text{s}$$

Then

$$\text{Fo} = \frac{\alpha t}{L^2} = \frac{(1.117 \times 10^{-5})(\text{m}^2/\text{s})(24 \times 60) \text{ s}}{(2.5 \text{ cm})^2 (1 \text{ m}/100 \text{ cm})^2} = 25.7$$

$$\frac{1}{\text{Bi}} = \frac{k}{\bar{h}L} = \frac{41 \text{ W/m} \cdot \text{K}}{(285 \text{ W/m}^2 \cdot \text{K})(2.5/100) \text{ m}} = 5.75$$

Note that $\text{Bi} = 0.15$. This is too large for a lumped analysis, although one would not expect large

temperature differences at a given time within the body. From Fig. 4-6 using the values of Fo and $1/Bi$, the centerline slab temperature is

$$\frac{T_c - T_\infty}{T_i - T_\infty} \approx 0.015, \quad T_c \approx 65^\circ\text{C} + 0.015(425 - 65)^\circ\text{C} \approx 70.4^\circ\text{C}$$

From Fig. 4-7 at $x/L = 0.5$,

$$\frac{T - T_\infty}{T_c - T_\infty} \approx 0.98 \quad \text{or} \quad T \approx 65^\circ\text{C} + 0.98(70.4 - 65)^\circ\text{C} \approx 70.3^\circ\text{C}$$

The closeness of the two temperatures is in keeping with the relatively small Biot number. Note also that the average temperature of the slab is $(425 + 70.3)^\circ\text{C}/2$ or 248°C , very close to the assumed temperature for property evaluation.

- 4.18.** A large wall made of 4 in thick common brick is originally at a uniform temperature of 80°F . It is well insulated on one side, as shown in Fig. 4-23. The uninsulated surface is suddenly exposed to free convective air flow at 30°F , resulting in a heat transfer coefficient $\bar{h} = 2.0 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$. Determine (a) the temperature of both surfaces ($x = 0$, $x = 4$) after 5.5 h and (b) the total thermal energy removed per unit area of wall during this period.

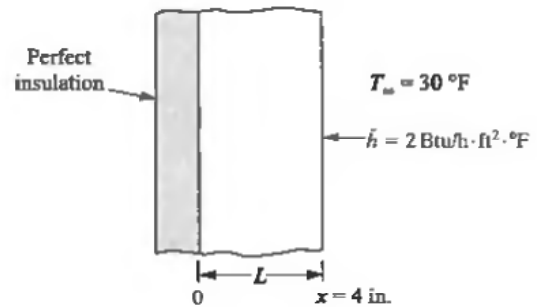


Fig. 4-23

This problem may be treated as 1/2 of the similar problem of an 8 in thick wall (with no insulation) exposed to the same convective environment on each surface. Clearly the Heisler chart for a slab of thickness $2L$ is suitable. From Table B-2 (SI), converted to (Engl.) units,

$$k = 0.4 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F} \quad \alpha = 0.02 \text{ ft}^2/\text{h}$$

$$c = 0.2 \text{ Btu/lb}_m\cdot^\circ\text{F} \quad \rho = 100 \text{ lb}_m/\text{ft}^3$$

The dimensionless parameters are

$$Fo = \frac{\alpha t}{L^2} = \frac{(0.02 \text{ ft}^2/\text{h})(5.5 \text{ h})}{(4/12)^2 \text{ ft}^2} = 0.99$$

$$\frac{1}{Bi} = \frac{k}{\bar{h}L} = \frac{0.4 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}}{(2 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F})(4/12) \text{ ft}} = 0.6$$

Note that $Bi = 1.67$; clearly a lumped analysis is inappropriate.

- (a) From Fig. 4-6, using the above Fo and $1/Bi$,

$$\frac{T_c - T_\infty}{T_i - T_\infty} = \frac{T_0 - T_\infty}{T_i - T_\infty} \approx 0.41 \quad \text{or} \quad T_0 \approx 30 + (0.41)(80 - 30) \approx 50.5^\circ\text{F}$$

where T_0 is the surface temperature adjacent to the insulation. From Fig. 4-7 at $x/L = 1.0$ and $1/Bi = 0.6$,

$$\frac{T - T_\infty}{T_c - T_\infty} = \frac{T_4 - T_\infty}{T_0 - T_\infty} \approx 0.52 \quad \text{or} \quad T_4 \approx 30 + (0.52)(50.5 - 30) \approx 40.7^\circ\text{F}$$

and this is the exposed surface temperature.

- (b) The thermal energy removed per square foot of wall surface is found with the aid of Fig. 4-8. At $Fo = 0.99$ and $Bi = 1.67$, $Q/Q_i \approx 0.68$. Now

$$\frac{Q_i}{A} = \rho c L \theta_i = \left(100 \frac{\text{lb}_m}{\text{ft}^3}\right) \left(\frac{0.2 \text{ Btu}}{\text{lb}_m\cdot^\circ\text{F}}\right) \left(\frac{4}{12} \text{ ft}\right) [(80 - 30)^\circ\text{F}] = 333.33 \text{ Btu/ft}^2$$

and

$$\frac{Q}{A} \approx (0.68)(333.33) = 226.7 \text{ Btu/ft}^2$$

As a very crude check, the linear average temperature of the brick is

$$T_{\text{avg}} = \frac{50.5 + 40.7}{2} = 45.6 \text{ }^\circ\text{F}$$

and

$$\frac{Q}{A} \approx \rho c L (T_i - T_{\text{avg}}) = (100)(0.2) \left(\frac{4}{12} \right) (80 - 45.9) = 229.3 \text{ Btu/ft}^2$$

The linear average temperature is, of course, too low during transient cooling (see Problem 4.29); it would likewise be too high during transient heating.

- 4.19.** A long, 6.50 cm diameter, solid cylinder is made of Cr–Ni steel, 18% Cr, 8% Ni. It is initially at a uniform temperature $T_i = 150 \text{ }^\circ\text{C}$. It is suddenly exposed to a convective environment at $T_\infty = 50 \text{ }^\circ\text{C}$, and the surface convective heat transfer coefficient is $\bar{h} = 285 \text{ W/m}^2 \cdot \text{K}$. Calculate the temperature at (a) the axis of the cylinder and (b) a 2.5 cm radial distance, after 5 minutes of exposure to the cooling flow. (c) Determine the total energy transferred from the cylinder per foot of length during the first 5 minutes of cooling. (Since ρ and c are available only at $20 \text{ }^\circ\text{C}$ in Table B-1 (SI), this temperature will also be used for k .)

First, check the Biot modulus based upon

$$L = \frac{V}{A_s} = \frac{\pi R^2 l}{2\pi R l} = \frac{R}{2}$$

With $k = 16.3 \text{ W/m} \cdot \text{K}$ from Table B-1 (SI),

$$\text{Bi} = \frac{(285 \text{ W/m}^2 \cdot \text{K})(3.25 \text{ cm})(\text{m}/100 \text{ cm})/2}{16.3 \text{ W/m} \cdot \text{K}} = 0.284$$

Clearly a lumped analysis is inappropriate. The problem can be solved with the aid of the transient conduction charts. The dimensionless terms for use with Fig. 4-9 are

$$\text{Fo}^* = \frac{\alpha t}{R^2} = \frac{(0.444 \times 10^{-5} \text{ m}^2/\text{s})(5 \times 60 \text{ s})}{(3.25 \times 10^{-2} \text{ m})^2} = 1.26$$

where α is from Table B-1 (SI), and

$$\frac{1}{\text{Bi}^*} = \frac{k}{\bar{h}R} = \frac{16.3 \text{ W/m} \cdot \text{K}}{(285 \text{ W/m}^2 \cdot \text{K})(3.25 \times 10^{-2} \text{ m})} = 1.76$$

(a) From Fig. 4-9

$$\frac{T_c - T_\infty}{T_i - T_\infty} \approx 0.35 \quad \text{or} \quad T_c = 50 \text{ }^\circ\text{C} + 0.35(150 - 50) \text{ }^\circ\text{C}$$

$$T_c \approx 85 \text{ }^\circ\text{C}$$

(b) From Fig. 4-11 at $1/\text{Bi}^* = 1.76$ and $r/R = 2.5/3.25 = 0.77$

$$\frac{T - T_\infty}{T_c - T_\infty} \approx 0.86 \quad \text{or} \quad T \approx 50 \text{ }^\circ\text{C} + 0.86(85 - 50) \text{ }^\circ\text{C} \approx 80 \text{ }^\circ\text{C}$$

(c) From Fig. 4-10 at $\text{Fo}^* = 1.26$ and $\text{Bi}^* = 0.57$

$$\frac{Q}{Q_i} \approx 0.69$$

Now with ρ and c from Table B-1 (SI),

$$\begin{aligned}\frac{Q_i}{L} &= \pi R^2 \rho c (T_i - T_\infty) = \pi (0.0325 \text{ m})^2 (7817 \text{ kg/m}^3) (460 \text{ J/kg} \cdot \text{K}) (150 - 50) \text{ K} \\ &= 1\,193\,000 \text{ W} \cdot \text{s/m}\end{aligned}$$

During the first 5 minutes of cooling,

$$Q/Q_i \approx 0.69$$

So

$$(Q/L)_5 \approx 0.69(1\,193\,000 \text{ W} \cdot \text{s/m}) \approx 823\,170 \text{ W} \cdot \text{s/m}$$

- 4.20.** A solid, mild steel, 2 in diameter by 2.5 in long cylinder, initially at 1200 °F, is quenched during heat treatment in a fluid at 200 °F. The surface heat transfer coefficient is 150 Btu/h·ft²·°F. Determine the centerline temperature at the midpoint of length 2.7 min after immersion in the fluid.

Checking for suitability of a lumped analysis (length = $2a$),

$$\begin{aligned}L &= \frac{V}{A_s} = \frac{\pi R^2 (2a)}{2\pi R (2a) + 2\pi R^2} = \frac{R(2a)}{2(2a) + 2R} \\ &= \frac{1(2.5)}{2(2.5) + 2} = 0.36 \text{ in}\end{aligned}$$

and, using k for 0.5% carbon mild steel at $T_{\text{avg}} = 700$ °F to be 25 Btu/h·ft·°F,

$$\text{Bi} = \frac{\bar{h}L}{k} = \frac{(150 \text{ Btu/h} \cdot \text{ft}^2 \cdot \text{°F})(0.36/12) \text{ ft}}{25 \text{ Btu/h} \cdot \text{ft} \cdot \text{°F}} = 0.18$$

A lumped thermal capacity analysis is not suitable.

An appropriate visualization of this problem is shown in Fig. 4-24. The axial conduction is treated by assuming the cylinder to be a slab of thickness $2a$ (the length of the cylinder), but infinite in the y - and z -directions. The radial conduction is treated by assuming the cylinder to be of finite radius R and infinite

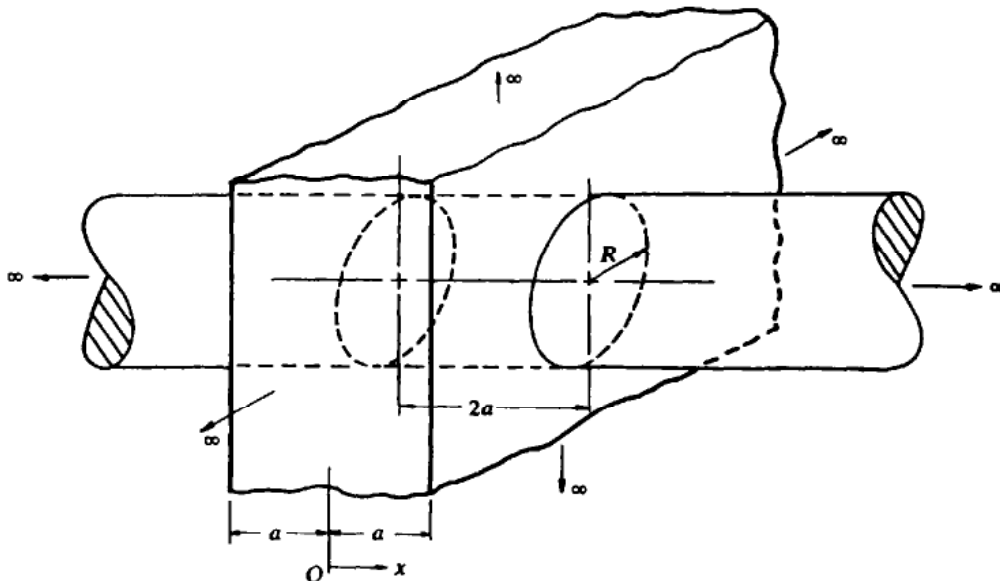


Fig. 4-24

in length. From the solutions of the slab and cylinder subproblems, the dimensionless temperature is given by the product equation (4.38). The material properties are, from Table B-1 (Engl.),

$$k_{700} = 25 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F} \quad k_{68} = 31 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$$

$$\alpha = \alpha_{68} \frac{k}{k_{68}} = (0.57) \frac{25}{31} = 0.46 \text{ ft}^2/\text{h}$$

Cylindrical Subproblem

$$\frac{1}{\text{Bi}^*} = \frac{k}{\bar{h}R} = \frac{25}{(150)(1/12)} = 2.0 \quad \text{Fo}^* = \frac{\alpha t}{R^2} = \frac{(0.46)(2.7/60)}{(1/12)^2} = 2.99$$

From Fig. 4-9,

$$\left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{\text{inf cyl}} \approx 0.079$$

Slab Subproblem

$$\frac{1}{\text{Bi}} = \frac{k}{\bar{h}a} = \frac{25}{(150)(1.25/12)} = 1.6 \quad \text{Fo} = \frac{\alpha t}{a^2} = \frac{(0.46)(2.7/60)}{(1.25/12)^2} = 1.92$$

From Fig. 4-6,

$$\left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{2a\text{-slab}} \approx 0.4$$

Complete Solution

$$\left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{\text{short cyl}} \approx (0.079)(0.4) = 0.032$$

and

$$T_c = 200^\circ\text{F} + (0.032)(1200 - 200)^\circ\text{F} = 232^\circ\text{F}$$

which is the temperature at the axial and radial center of the cylinder.

- 4.21.** For the conditions of Problem 4.20, determine the temperature at a location within the cylinder 0.5 in from one flat face and at $r = 0.5$ in, 2.7 min after immersion.

Cylindrical Subproblem

From Problem 4.20,

$$\frac{1}{\text{Bi}^*} = 2.0 \quad \text{Fo}^* = 2.99 \quad \frac{T_c - T_\infty}{T_i - T_\infty} = 0.079$$

At $r/R = 0.5/1.0 = 0.5$, from Fig. 4-11,

$$\left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{\text{inf cyl}} \approx 0.94$$

Now

$$\frac{T - T_\infty}{T_i - T_\infty} = \left(\frac{T - T_\infty}{T_i - T_\infty} \right) \left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)$$

so

$$\left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{\text{inf cyl}} \approx (0.94)(0.079) = 0.074$$

at $r = 0.5$ in.

Slab Subproblem

From Problem 4.20,

$$\frac{1}{\mathbf{Bi}} = 1.6 \quad \mathbf{Fo} = 1.92 \quad \frac{T_c - T_\infty}{T_i - T_\infty} \approx 0.4$$

Using Fig. 4-7 with

$$\frac{x}{a} = \frac{1.25 - 0.5}{1.25} = 0.6$$

yields

$$\left(\frac{T - T_\infty}{T_c - T_\infty} \right)_{2a\text{-slab}} \approx 0.905$$

Thus

$$\left(\frac{T - T_\infty}{T_i - T_\infty} \right)_{2a\text{-slab}} \approx (0.905)(0.4) = 0.36$$

at 0.5 in from an end.

Complete Solution:

By (4.38),

$$\frac{T - T_\infty}{T_i - T_\infty} \approx (0.074)(0.36) = 0.0266$$

$$T \approx 200^\circ\text{F} + (0.0266)(1200 - 200)^\circ\text{F} = 226.6^\circ\text{F}$$

An important consideration in applying (4.38), or any of the multidimensional equations, is that the dimensionless temperatures used to form the product must be at the correct locations in the one-dimensional subproblems. In the present problem, the location is the circular curve formed by the intersection of the thin cylinder $r = 0.5$ in with the plane $x = 0.75$ in, the plane being normal to the cylinder.

- 4.22.** For the configuration and conditions of Problem 4.20, determine the time required for the temperature at the center (radially and axially) of the solid cylinder to reach 205 °F.

To find the time required to attain a given temperature in a transient multidimensional problem, a trial-and-error solution is required. From Problem 4.20, we know that the time is greater than 2.7 minutes. A logical approach is to use this as a beginning point and to calculate T_c for several larger values of time. A graph of the results will yield the required answer.

Try $t = 3.25$ min

$$\text{Cyl. Solution: } \frac{1}{\mathbf{Bi}^*} = 2.0; \quad \mathbf{Fo}^* = \frac{(0.46)(3.25/60)}{(1/12)^2} = 3.6$$

$$\text{From Fig. 4-9, } \left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{\text{inf cyl}} \approx 0.047$$

$$\text{Slab Solution: } \frac{1}{\mathbf{Bi}} = 1.6; \quad \mathbf{Fo} = \frac{(0.46)(3.25/60)}{(1.25/12)^2} = 2.3$$

$$\text{From Fig. 4-6, } \left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{2a\text{-slab}} \approx 0.33$$

$$\text{Complete Solution: } \frac{T - T_\infty}{T_i - T_\infty} \approx (0.047)(0.33) = 0.016$$

$$T \approx 200^\circ\text{F} + (0.016)(1200 - 200)^\circ\text{F} = 215.5^\circ\text{F}$$

Try $t = 3.9$ min

$$\text{Cyl. Solution: } \frac{1}{\text{Bi}^*} = 2.0; \quad \text{Fo}^* = \text{Fo}_{3.25}^* \left(\frac{3.9}{3.25} \right) = 4.32$$

$$\text{From Fig. 4-9, } \left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{\text{inf cyl}} \approx 0.025$$

$$\text{Slab Solution: } \frac{1}{\text{Bi}} = 1.6; \quad \text{Fo} = \text{Fo}_{3.25} \left(\frac{3.9}{3.25} \right) = 2.76$$

$$\text{From Fig. 4-6, } \left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{2s\text{-slab}} \approx 0.26$$

$$\text{Complete Solution: } \frac{T - T_\infty}{T_i - T_\infty} \approx (0.025)(0.26) = 0.0065$$

$$T \approx 200^\circ\text{F} + (0.0065)(1200 - 200)^\circ\text{F} = 206.5^\circ\text{F}$$

Try $t = 4.3$ min

$$\text{Cyl. Solution: } \frac{1}{\text{Bi}^*} = 2.0; \quad \text{Fo}^* = \text{Fo}_{3.25}^* \left(\frac{4.3}{3.25} \right) = 4.76$$

$$\text{From Fig. 4-9, } \left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{\text{inf cyl}} \approx 0.017$$

$$\text{Slab Solution: } \frac{1}{\text{Bi}} = 1.6; \quad \text{Fo} = \text{Fo}_{3.25} \left(\frac{4.3}{3.25} \right) = 3.04$$

$$\text{From Fig. 4-6, } \left(\frac{T_c - T_\infty}{T_i - T_\infty} \right)_{2s\text{-slab}} \approx 0.22$$

$$\text{Complete Solution: } \frac{T - T_\infty}{T_i - T_\infty} \approx (0.017)(0.22) = 0.0037$$

$$T \approx 200^\circ\text{F} + (0.0037)(1200 - 200)^\circ\text{F} = 203.7^\circ\text{F}$$

Plotting these results in Fig. 4-25, we find $t = 4.07$ min.

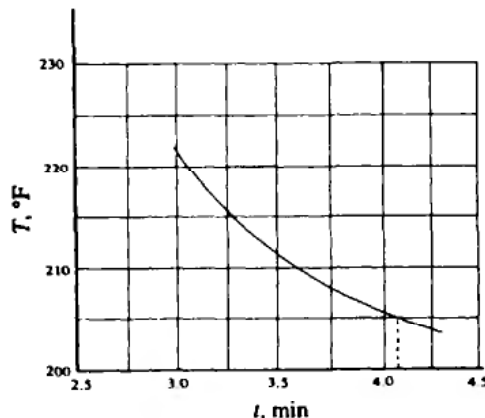


Fig. 4-25

- 4.23.** An 8.0 cm thick concrete slab having very large dimensions in the plane normal to the thickness is initially at a uniform temperature of 20°C . Both surfaces of the slab are suddenly raised to and held at 100°C . The material properties are $k = 1.40 \text{ W/m}\cdot\text{K}$ and $\alpha = 0.0694 \times 10^{-5} \text{ m}^2/\text{s}$. Using a nodal spacing of 1 cm, numerically determine by the explicit method the temperature history in the slab during a $1/4$ h period.

The nodal designations are given in Fig. 4-26; since the problem is symmetrical about the centerline, only one-half of the slab is treated. The stability requirement for the explicit method, one-dimensional case, is

$$M \equiv \frac{(\Delta s)^2}{\alpha \Delta t} \geq 2$$

from which

$$(\Delta t)_{\max} = \frac{(\Delta s)^2}{2\alpha} = \frac{(0.01 \text{ m})^2}{2(0.0694 \times 10^{-5}) \text{ m}^2/\text{s}} = 72.05 \text{ s} = 0.020 \text{ h}$$

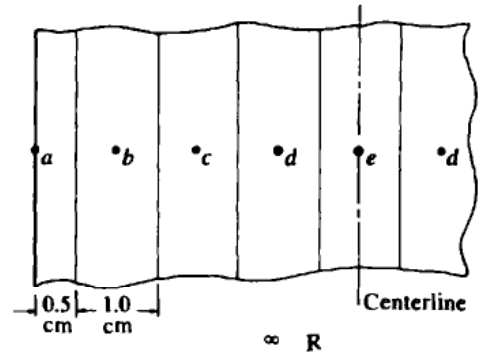


Fig. 4-26

For this time increment, $M = 2$ and (4.52) simplifies to

$$T_n^{i+1} = \frac{T_1^i + T_3^i}{2}$$

where the subscripts 1 and 3 are for the two nodes adjacent to node n . Thus, for the present problem the nodal equations are

$$\begin{aligned} T_b^{i+1} &= (T_a^i + T_c^i)/2 \\ T_c^{i+1} &= (T_b^i + T_d^i)/2 \\ T_d^{i+1} &= (T_c^i + T_e^i)/2 \\ T_e^{i+1} &= (T_d^i + T_d^i)/2 = T_d^i \end{aligned}$$

No equation is required for node a since it has constant temperature. Since T_a is initially 20°C and is suddenly changed to 100°C , an appropriate value for T_a during the first time increment is the average of these two extremes. The solution is carried out in Table 4-2, where the units are h and $^\circ\text{C}$. In this solution we chose the maximum time step for simplicity of the resulting equations. In practice, especially when using a digital computer, a smaller time step is preferable since this would (i) reduce truncation (round-off) error and (ii) further ensure stability.

Table 4-2

Node \ Time	a	b	c	d	e
0.0	60	20	20	20	20
0.02	100	40	20	20	20
0.04	100	60	30	20	20
0.06	100	65	40	25	20
0.08	100	70	45	30	25
0.10	100	72.5	50	35	30
0.12	100	75	53.8	40	35
0.14	100	76.9	57.5	44.4	40
0.16	100	78.8	60.6	48.8	44.4
0.18	100	80.3	63.8	52.5	48.8
0.20	100	81.9	66.4	56.3	52.5
0.22	100	83.2	69.1	59.4	56.3
0.24	100	84.6	71.3	62.7	59.4
0.26	100	85.6	73.6	65.4	62.7

- 4.24.** A cylindrical tube of metallic impregnated, ceramic material is 1.2 cm long and has inner and outer radii of 0.6 and 0.9 cm, respectively. It is subjected to a convective airflow at $T_\infty = 30^\circ\text{C}$ and $\bar{h} = 400\text{ W/m}^2\cdot\text{K}$. The tube material contains copper particles resulting in an average thermal conductivity of $85\text{ W/m}\cdot\text{K}$. Form a table for a cooling process from 0.1 s to 10.0 s for initial temperature of 800°C . Other properties are: $\rho = 1922\text{ kg/m}^3$, $c = 878\text{ J/kg}\cdot\text{K}$, and $\alpha = 5.037 \times 10^{-5}\text{ m}^2/\text{s}$.

First, examine the possibility of using a lumped thermal analysis. Finding the surface area and volume with $r_1 = 0.9\text{ cm}$, $r_2 = 0.6\text{ cm}$, and $l = 1.2\text{ cm}$

$$\begin{aligned} A_s &= [\pi(2r_1) + \pi(2r_2)]l + 2(\pi)(r_2^2 - r_1^2) \\ &= 2\pi(0.6 + 0.9)(\text{cm})(1.2\text{ cm}) + 2\pi[(0.9)^2 - (0.6)^2]\text{ cm}^2 \\ &= 11.310\text{ cm}^2 + 2.827\text{ cm}^2 = 14.137\text{ cm}^2 \end{aligned}$$

or

$$A_s = 14.137\text{ cm}^2 \times \frac{\text{m}^2}{10^4\text{ cm}^2} = 14.137 \times 10^{-4}\text{ m}^2$$

$$V = \pi(r_2^2 - r_1^2)l = \pi[(0.9\text{ cm})^2 - (0.6\text{ cm})^2] \times 1.2\text{ cm}$$

$$V = 1.695\text{ cm}^3 = 1.695 \times 10^{-6}\text{ m}^3$$

$$L = \frac{V}{A_s} = \frac{1.695\text{ cm}^3}{14.137\text{ cm}^2} = 0.1198\text{ cm}$$

or

$$L = \frac{1.695 \times 10^{-6}\text{ m}^3}{14.137 \times 10^{-4}\text{ m}^2} = 1.198 \times 10^{-3}\text{ m}$$

The Biot number is

$$\text{Bi} = \frac{\bar{h}L}{k} = \frac{(400\text{ W/m}\cdot\text{K})(1.2 \times 10^{-3}\text{ m})}{85\text{ W/m}\cdot\text{K}} = 0.00565$$

and a lumped analysis is clearly suitable. Forming the Fourier modulus,

$$\text{Fo} = \frac{\alpha t}{L^2} = \frac{(5.037 \times 10^{-5}\text{ m}^2/\text{s})t}{(1.198 \times 10^{-3}\text{ m})^2} = 35.09t$$

Thus,

$$\text{Bi} \cdot \text{Fo} = (0.00565)(35.09t) = 0.196t$$

By (4.9),

$$\frac{T - T_\infty}{T_i - T_\infty} = \exp(-\text{Bi} \cdot \text{Fo})$$

and consequently

$$T = T_\infty^\circ\text{C} + (T_i - T_\infty)^\circ\text{C}[\exp(-0.196t)] = 30^\circ\text{C} + 770^\circ\text{C}e^{-0.196t}$$

For

$$t = 0.5\text{ s}, \quad T = 30^\circ\text{C} + 770^\circ\text{C}e^{-(0.196)(0.5)} = 728^\circ\text{C}$$

and

$$\frac{T - T_\infty}{T_i - T_\infty} = \frac{728 - 30}{800 - 30} = 0.906$$

Values of T , $\text{Bi} \cdot \text{Fo}$ and $(T - T_\infty)/(T_i - T_\infty)$ are presented in Table 4-3 for $t = 0$ to 10.0 seconds.

Table 4-3

t (s)	$\text{Bi} \cdot \text{Fo}$	$\frac{T - T_\infty}{T_i - T_\infty}$	T (°C)
0.0	0	1.000	800
0.1	0.0196	0.980	785
0.5	0.098	0.906	728
1.0	0.196	0.822	663
2.0	0.392	0.676	551
5.0	0.980	0.375	319
10.0	1.960	0.141	138

- 4.25. A 7.5 cm diameter orange originally at $T_i = 26^\circ\text{C}$ is placed in a refrigerator where the air temperature (T_∞) is 2°C and the average convective heat transfer coefficient over the surface of the orange is $\bar{h} = 57 \text{ W/m}^2 \cdot \text{K}$. Estimate the time required for the center temperature (T_c) of the orange to reach 4°C .

Since an orange is mainly water, we will take the properties to be those of water at $T_{\text{avg}} = (26 + 2)^\circ\text{C}/2 = 14^\circ\text{C}$. Thus from Table B-3 (SI), by linear interpolation,

$$\alpha \approx 1.393 \times 10^{-7} \text{ m}^2/\text{s} \quad k \approx 0.584 \text{ W/m} \cdot \text{K}$$

The dimensionless parameters for the Heisler chart are

$$\frac{1}{\text{Bi}^*} = \frac{k}{\bar{h}R} = \frac{0.584 \text{ W/m} \cdot \text{K}}{(57 \text{ W/m}^2 \cdot \text{K})(0.0375 \text{ m})} = 0.27 \quad \frac{T_c - T_\infty}{T_i - T_\infty} = \frac{4 - 2}{26 - 2} = 0.083\bar{3}$$

From Fig. 4-12, $\text{Fo}^* \approx 0.48$ and thus

$$t = \frac{\text{Fo}^* R^2}{\alpha} = \frac{(0.48)(0.0375 \text{ m})^2}{1.393 \times 10^{-7} \text{ m}^2/\text{s}} = 4.84 \times 10^3 \text{ s} = 1.35 \text{ h}$$

Although we intuitively believe that the above solution is the correct approach, we should re-examine the Biot number for the lumped capacity approach. Since

$$L = \frac{V}{A_s} = \frac{4\pi R^3/3}{4\pi R^2} = \frac{R}{3}$$

$$\text{Bi} = \frac{\bar{h}(R/3)}{k} = \frac{(57 \text{ W/m}^2 \cdot \text{K})(0.0375/3 \text{ m})}{0.584 \text{ W/m} \cdot \text{K}} = 1.22$$

and clearly a "lumped" analysis is not suitable.

- 4.26. A wrought iron ingot at an initial uniform temperature of 1200°C is formed into the shape of a rectangular parallelepiped with dimensions of 0.3 m by 0.15 m by 3.0 m. The ingot is air cooled in a room where the air temperature T_∞ is 50°C . The average heat transfer coefficient is $\bar{h} = 55 \text{ W/m}^2 \cdot \text{K}$. Can a lumped analysis be used to find the time required for the center temperature at $x = 0.15 \text{ m}$, $y = 0.075 \text{ m}$, and $z = 1.5 \text{ m}$ of the ingot to reach 200°C ?

At $T_{\text{avg}} = \frac{1}{2}(1200 + 200)^\circ\text{C} = 700^\circ\text{C}$, $k = 34.5 \text{ W/m} \cdot \text{K}$ from Table B-1 (SI). Moreover

$$V = (0.3 \times 0.15 \times 15) \text{ m}^3 = 0.0675 \text{ m}^3$$

$$A_s = (0.3 \times 1.5) \text{ m}^2 + (0.3 \times 0.15) \text{ m}^2 + (0.15 \times 3.0) \text{ m}^2 = 1.89 \text{ m}^2$$

$$L = \frac{V}{A_s} = \frac{0.0675 \text{ m}^3}{1.89 \text{ m}^2} = 0.0357 \text{ m}$$

and

$$\mathbf{Bi} = \frac{\bar{h}L}{k} = \frac{(55 \text{ W/m}^2 \cdot \text{K})(0.0357 \text{ m})}{34.5 \text{ W/m} \cdot \text{K}} = 0.0569$$

$$\mathbf{Bi} = 0.0569 < 0.1$$

Therefore, the internal resistance can be neglected and the bar considered to maintain a uniform temperature.

Supplementary Problems

- 4.27.** A magnesium cube 20 cm along each edge is exposed to a convective flow resulting in $\bar{h} = 300 \text{ W/m}^2 \cdot \text{K}$. The initial metal temperature is 100°C . Determine the Biot number, using the conductivity from Table B-1 (SI) evaluated at the initial temperature. *Ans.* $\mathbf{Bi} = 0.0595$
- 4.28.** Repeat Problem 4-12 for dry soil ($\alpha = 0.01 \text{ ft}^2/\text{h}$) and $T_i = 50^\circ\text{F}$. *Ans.* $x = 0.46 \text{ ft}$
- 4.29.** In the solution to Problem 4-18, it was stated that the linear average temperature was too low because this was a cooling problem. Show this by determining temperatures throughout the slab at $t = 5.5 \text{ h}$ and compare these with the linear representation obtained in Problem 4.18(b) with the two surface temperatures only.

Ans.

$x \text{ (in)}$	0.8	1.6	2.0	2.4	3.2	3.6
$T \text{ (}^\circ\text{F)}$	50.1	48.8	47.8	46.8	44.0	42.4

- 4.30.** Determine the temperature at the center of a lead cube, having edge dimension 3.0 in, one minute after exposure to a convective fluid at 100°F with $\bar{h} = 75 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$. The initial uniform temperature of the cube is 300°F . Is a lumped thermal capacity analysis suitable? Use properties at $T_{\text{avg}} = 212^\circ\text{F}$, i.e., $k = 19 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}$, $\alpha = 0.9 \text{ ft}^2/\text{h}$.

Ans. \mathbf{Bi} , based upon $L = V/A_s$, is 0.16; \mathbf{Fo} , based upon $L_{\text{slab}} = 1.5 \text{ in}$, is 0.96; \mathbf{Bi} , based upon $L = 1.5 \text{ in}$, is 0.49;

$$\left(\frac{T_i - T_\infty}{T_1 - T_\infty} \right)_{2\text{-slab}} \approx 0.7; \quad T_i \approx 168.6^\circ\text{F at } t = 1 \text{ min}$$

Fluid Mechanics

5.1 FLUID STATICS

In the study of convective heat transfer (Chapters 6, 7, and 8) we shall be primarily concerned with the behavior of fluids in motion. However, we must also be able to analyze static fluids—fluids at rest or moving at constant velocity—to understand many flow situations.

Pascal's Law

The pressure at a point in a static or uniformly moving fluid is equal in all directions. Pascal's law is also valid for an accelerating, frictionless ($\mu = 0$) fluid.

Hydrostatics

The pressure differential, $p_2 - p_1$, between two points in a static or uniformly moving fluid is proportional to the difference in elevation, $y_2 - y_1$, between the points, the fluid density ρ , and the local acceleration of gravity g .

$$p_2 - p_1 = -\frac{\rho g}{g_c}(y_2 - y_1) \quad (5.1)$$

If elevation y_2 is taken as a datum at zero pressure, (5.1) simplifies to

$$p = \gamma h \quad (5.2)$$

where $\gamma = \rho g/g_c$; (5.2) is known as the *hydrostatic equation*.

It is often more convenient to use *gauge pressure*, the pressure above that of the atmosphere, $p - p_{\text{atm}}$, since many pressure-measuring devices indicate pressure with respect to the surroundings. Figure 5-1 shows the relationship among absolute, gauge, and vacuum pressures.

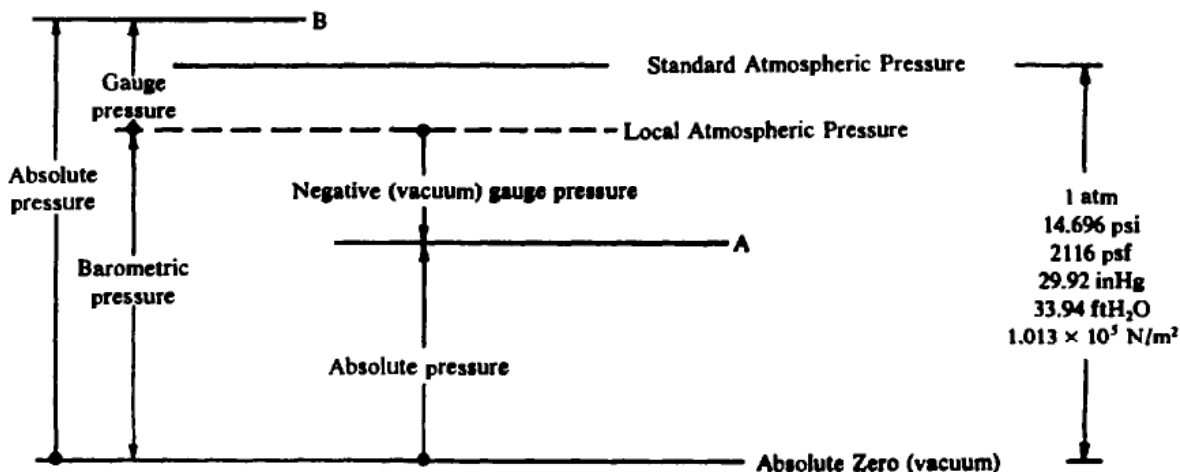


Fig. 5-1

Manometry

Problems 5-7 and 5-8 illustrate the use of the hydrostatic equation in manometry.

Buoyancy

A body seems to weigh less when partially or wholly immersed in a fluid. This apparent loss of weight is the *buoyant force*, F_B , which is the vertical resultant of the pressure distribution exerted by the fluid on the body.

Buoyancy, which is central in natural convection (parcels of lesser density are buoyed upward), is governed by *Archimedes' principle*. *The buoyant force is equal to the weight of fluid displaced.* The line of action of the buoyant force is through the centroid of the volume of fluid displaced.

5.2 FLUID DYNAMICS

Analogous to the heat flow lines of the preceding chapters are *streamlines* in the flow of fluids. Shown in Fig. 5-2, a streamline is an imaginary line, taken at an instant of time in a flow field, such that the fluid velocity at every point of the line is tangent to it. Since movement occurs only in the direction of the velocity vector, no mass crosses a stream tube surface.

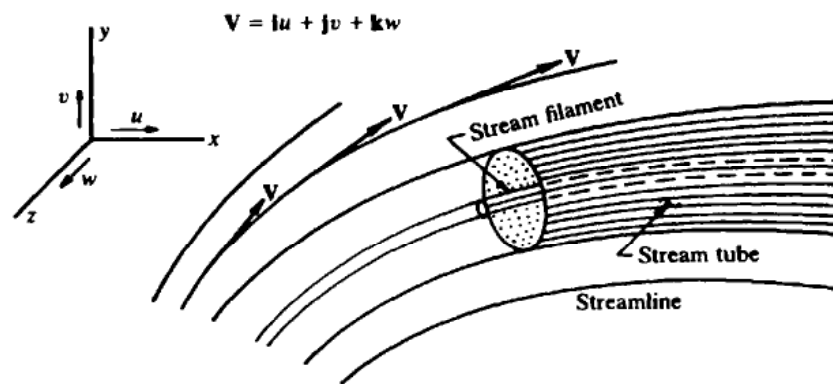


Fig. 5-2

A family of streamlines which forms a cylinder of infinitesimal cross-section is a *stream filament*. A *stream tube* is a finite surface, made up of an infinite number of streamlines, across which there is no flow. The concept of a stream tube simplifies the analysis of fluid flow, since fluid which enters a stream tube must leave it, assuming no creation or destruction of mass within.

By noting that the velocity components in the x - and y -directions are

$$u = \frac{dx}{dt} \quad v = \frac{dy}{dt} \quad (5.3)$$

we can get the differential equations of a streamline by eliminating dt , giving

$$u \, dy = v \, dx \quad (5.4)$$

Similarly,

$$v \, dz = w \, dy \quad (5.5)$$

$$w \, dx = u \, dz \quad (5.6)$$

If, at the specified instant, u , v , and w are known functions of position, any two of (5.4) through (5.6) may be integrated to give the equation of the streamlines.

Substantial Derivative

When concentrating attention on a fixed region in space without regard to the identities of the fluid particles within it at a given time—known as the *Eulerian approach*, as contrasted with the *Lagrangian method*, which focuses on the motion of individual particles—the velocity field is given in cartesian coordinates by

$$\mathbf{V} = iu + jv + kw \quad (5.7)$$

where the velocity components are functions of space and time, i.e.

$$\begin{aligned} u &= u(x, y, z, t) \\ v &= v(x, y, z, t) \\ w &= w(x, y, z, t) \end{aligned} \quad (5.8)$$

Using the chain rule for partial differentiation, the rate of change of the velocity \mathbf{V} is given by

$$\mathbf{a} = \frac{d\mathbf{V}}{dt} = \frac{\partial\mathbf{V}}{\partial x} \frac{dx}{dt} + \frac{\partial\mathbf{V}}{\partial y} \frac{dy}{dt} + \frac{\partial\mathbf{V}}{\partial z} \frac{dz}{dt} + \frac{\partial\mathbf{V}}{\partial t} \quad (5.9)$$

Since, for a moving particle, $u = dx/dt$, $v = dy/dt$, and $w = dz/dt$, (5.9) may be written

$$\mathbf{a} = \frac{d\mathbf{V}}{dt} = \left(u \frac{\partial\mathbf{V}}{\partial x} + v \frac{\partial\mathbf{V}}{\partial y} + w \frac{\partial\mathbf{V}}{\partial z} \right) + \frac{\partial\mathbf{V}}{\partial t} \quad (5.10)$$

which is known as the *substantial, total, or fluid derivative*, designated $D\mathbf{V}/Dt$. The influence of time on a particle's behavior is given by the *local acceleration*, $\partial\mathbf{V}/\partial t$; space dependence is given by the *convective acceleration*, the terms in parentheses.

Types of Motion

When the local acceleration is zero, $\partial\mathbf{V}/\partial t = 0$, the motion is *steady*. Even though the velocity may change with respect to space, it does not change with respect to time. Streamlines are fixed in steady flow. A flow which is time dependent, $\partial\mathbf{V}/\partial t \neq 0$, is *unsteady*.

Uniform flow occurs when the convective acceleration is zero. The velocity vector is identical at every point in the flow field. The flow may be unsteady, but the velocity must change identically at every point. Streamlines are straight. An example is a frictionless fluid flowing through a long straight pipe. *Nonuniform* flow is space dependent. A frictionless fluid would flow nonuniformly in a pipe elbow.

In *laminar* flow, fluid particles move very smoothly parallel to each other. A dye stream injected in a laminar flow field would move in a thin line. Low velocities in smooth channels can produce laminar flow. At high velocities, however, *turbulent* flow, characterized by random motion of fluid particles, occurs. A dye injected in the stream would break up and diffuse throughout the flow field. Turbulent flow is always unsteady in the strict sense. We sometimes, however, think in terms of steady and unsteady turbulent flow, illustrated in Fig. 5-3, which also shows steady and unsteady laminar flow.

In discovering the difference between laminar and turbulent flow in 1883, Osborne Reynolds noted that the type of flow depended upon the dimensionless parameter VD/ν , where V is the average fluid velocity in a pipe of diameter D and $\nu \equiv \mu_m/\rho$ is the kinematic viscosity of the flowing fluid. More generally, the *Reynolds number* is defined as

$$\mathbf{Re} \equiv \frac{Vl}{\nu} \quad (5.11)$$

where l is a characteristic length. In pipe flow the motion is usually turbulent for $\mathbf{Re} > 2000$. In flow over a flat plate, when the plate length is taken as the characteristic length, the transition from laminar to turbulent flow commonly occurs at $300\,000 < \mathbf{Re} < 600\,000$.

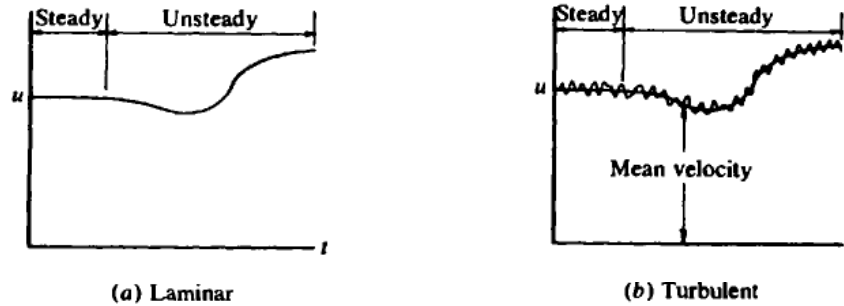


Fig. 5-3

The velocity in turbulent flow consists of the average value \bar{V} and a fluctuating part V' :

$$V = \bar{V} + V' \quad (5.12)$$

Taking the time average over a long period of time, we get

$$\bar{V} = \lim_{\Delta t \rightarrow \infty} \frac{1}{\Delta t} \int_{t_0}^{t_0 + \Delta t} V dt \quad (5.13)$$

i.e., the fluctuations cancel out in the long term. Any fluid property, say viscosity μ , may be similarly time-averaged: $\mu = \bar{\mu} + \mu'$.

The simple equation for shear stress in laminar flow

$$\text{laminar: } \tau = \mu_f \frac{du}{dy} \quad (5.14)$$

is not valid in turbulent flow. The relation is complicated by the *eddy viscosity* ϵ , which is a function of the fluid motion as well as its density.

$$\text{turbulent: } \tau = \left(\mu_f + \frac{\rho}{g_c} \epsilon \right) \frac{du}{dy} \quad (5.15)$$

Eddy viscosity ϵ is not a fluid property as the absolute viscosity μ is.

A *perfect fluid* has zero viscosity or negligible viscosity; a *viscous fluid* is a real fluid.

Similitude

Because of the impossibility of individually varying the several parameters in fluid mechanics and heat transfer studies, it is often desirable to group variables in order to compare one system (*model*) with another system (*prototype*). Three techniques of methodically grouping variables are in common use:

1. An algebraic method known as the *Rayleigh* or *Buckingham Pi theorem*.
2. Use of the governing differential equations. This technique will be illustrated in Section 7.2.
3. Similitude. Requiring geometric, kinematic, and dynamic similarity, this method is the most commonly practiced technique.

For *geometric similarity* between model and prototype the fields and boundaries of both systems must be in the same geometric proportions and have the same orientation. *Kinematic similarity* requires that the velocity fields of the corresponding systems be proportional in magnitude and be identical in orientation, producing streamlines, or heat flow lines, of the same pattern for model and prototype. These two modes of similarity are adequate for describing flows which involve nearly perfect fluids ($\mu \approx 0$).

Real fluids, however, additionally require *dynamic similarity*. In dynamically similar systems each of several force ratios is respectively equal at corresponding points in the model and prototype fields. Some ratios which occur often enough in dimensionless form to warrant special designation are:

$$\text{Reynolds number: } \mathbf{Re} \equiv \frac{Vl}{\nu} = \frac{\text{inertial force, } [\rho V^2 A]}{\text{viscous force, } [lV\mu_f]} \quad (5.16)$$

$$\text{Mach number: } \mathbf{M} \equiv \frac{V}{c} = \sqrt{\frac{\text{inertial force, } [\rho V^2 A]}{\text{elastic force, } [EA]}} \quad (5.17)$$

$$\text{Froude number: } \mathbf{Fr} \equiv \frac{V}{\sqrt{gl}} = \sqrt{\frac{\text{inertial force, } [\rho V^2 A]}{\text{weight, } [\rho(lA)g]}} \quad (5.18)$$

$$\text{Euler number: } \mathbf{Eu} \equiv \frac{p}{\rho V^2} = \frac{\text{pressure force, } [pA]}{\text{inertial force, } [\rho V^2 A]} \quad (5.19)$$

$$\text{Weber number: } \mathbf{We} \equiv \frac{V^2 l \rho}{\sigma} = \frac{\text{inertial force, } [\rho V^2 A]}{\text{surface force, } [\sigma l]} \quad (5.20)$$

Here, l is a characteristic length, $A = l^2$, c is the local speed of sound, E is the bulk modulus, σ is the surface tension, and square brackets denote dimensions.

Often two of the dimensionless numbers suffice to assure similarity. In wind tunnel testing, for example, flows are similar when the Reynolds and Mach numbers are each identical in model and prototype. Equality of Reynolds numbers is sufficient in geometrically similar, incompressible pipe flow.

5.3 CONSERVATION OF MASS

For steady flow the mass entering a stream tube is equal to the mass leaving. Thus, if \dot{m} denotes the rate of mass transport through a cross-section,

$$\blacksquare \quad \dot{m} = \rho_1 A_1 V_1 = \rho_2 A_2 V_2 = \text{constant} \quad (5.21)$$

where V is the average velocity taken normal to the cross-sectional area A , and ρ is the density, assumed uniform over a cross-section. This equation is known as the *continuity equation*. The *mass velocity*, $G \equiv \rho V$, is often used in heat transfer calculations, giving

$$\dot{m} = AG = \text{constant} \quad (5.22)$$

If, in addition to being steady, the flow is *incompressible* ($\rho = \text{constant}$), the continuity equation reduces to

$$Q = A_1 V_1 = A_2 V_2 = \text{constant} \quad (5.23)$$

where Q is termed the *volumetric flow rate*.

The differential form of the continuity equation, which holds for steady or unsteady flow, is derived in Problem 5.20. In cartesian coordinates, it is

$$\frac{\partial \rho}{\partial t} + \frac{\partial(\rho u)}{\partial x} + \frac{\partial(\rho v)}{\partial y} + \frac{\partial(\rho w)}{\partial z} = 0 \quad (5.24)$$

and in general vector form,

$$\blacksquare \quad \frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{V}) = 0 \quad (5.25)$$

where $\nabla \cdot$ is the *divergence*, which may be conveniently expressed in any orthogonal coordinate system. If the flow is steady and incompressible, the continuity equation in the cartesian coordinate system reduces to

$$\nabla \cdot \mathbf{V} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0 \quad (5.26)$$

5.4 EQUATION OF MOTION ALONG A STREAMLINE

In Problem 5.23 Newton's second law is used to derive an equation for the motion of any fluid along a streamline. It is:

$$\frac{1}{\rho} \frac{\partial p}{\partial s} + \frac{g}{g_c} \frac{\partial z}{\partial s} + \frac{\tau}{\rho R_h} + \frac{1}{g_c} \frac{\partial}{\partial s} \left(\frac{V^2}{2} \right) + \frac{1}{g_c} \frac{\partial V}{\partial t} = 0 \quad (5.27)$$

Here, s is the arc length along the streamline and z is the vertical coordinate. Equation (5.27) is valid for viscous or frictionless fluid and for steady or unsteady flow.

The frictional term in the equation of motion is referred to as the *head loss*, i.e.

$$\frac{\partial h_L}{\partial s} = \frac{\tau}{\rho R_h}$$

In this book we shall suppose it is given in its integrated form, h_L , and use empirical data to evaluate it in engineering calculations.

Assuming a uniform gravitational field ($g = \text{constant}$) and steady, incompressible flow ($\partial V/\partial t = 0$, $\rho = \text{constant}$), we can integrate (5.27) along the streamline from $s = s_1$ to $s = s_2$. The result is:

$$\begin{array}{l} \text{steady,} \\ \text{incompressible:} \end{array} \quad \frac{p_2 - p_1}{\rho} + \frac{g}{g_c} (z_2 - z_1) + \frac{V_2^2 - V_1^2}{2g_c} + h_L = 0 \quad (5.28)$$

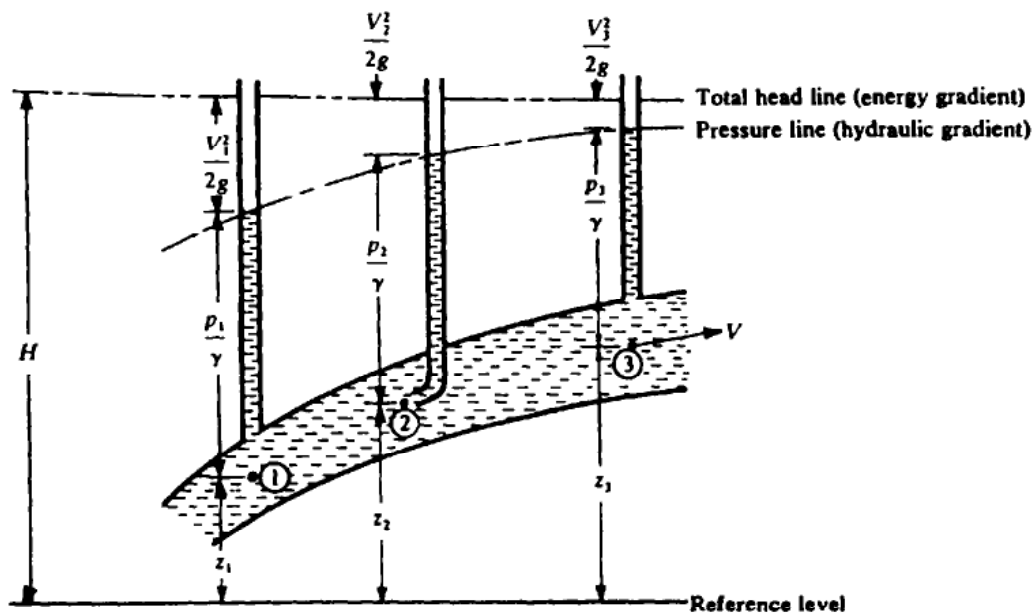


Fig. 5-4

in which head loss is measured relative to station 1. If the flow is also frictionless ($h_L = 0$), (5.28) reduces to *Bernoulli's equation*:

$$\blacksquare \quad \frac{p_1}{\gamma} + z_1 + \frac{V_1^2}{2g} = \frac{p_2}{\gamma} + z_2 + \frac{V_2^2}{2g} = \text{constant} \quad (5.29)$$

where $\gamma = \rho g/g_c$. The "constant" in (5.29) will, in general, vary from streamline to streamline.

Figure 5-4 depicts the physical significance of the terms in Bernoulli's equation: the *pressure head*, p/γ ; the *elevation head*, z ; and the *velocity head*, $V^2/2g$. The sum of these three heads is called the *total head*, H . The hydraulic and energy grade lines are also defined in the figure. The hydraulic and energy gradients are parallel for sections of pipe of equal cross-sectional area where frictional effects are negligible.

5.5 CONSERVATION OF ENERGY

The terms of Bernoulli's equation represent mechanical energy possessed by the flowing fluid due to pressure, position, and velocity. The concept of the energy gradient reflects this. In (5.28) the head loss term results from energy lost (dissipated into internal energy) in the flow process. If, in addition to these energy terms, we permit energy to be added to or extracted from a given flowing mass, an energy balance requires that

$$\left[\begin{array}{c} \text{energy at} \\ \text{station 1} \end{array} \right] + \left[\begin{array}{c} \text{energy} \\ \text{added} \end{array} \right] - \left[\begin{array}{c} \text{energy} \\ \text{lost} \end{array} \right] - \left[\begin{array}{c} \text{useful} \\ \text{energy} \\ \text{extracted} \end{array} \right] = \left[\begin{array}{c} \text{energy at} \\ \text{station 2} \end{array} \right] \quad (5.30)$$

where the "energy added" and "energy extracted" terms have meaning only when energy is transmitted across the boundaries of the system. The heat generation term q''' in Chapter 2 is an example of energy addition.

In algebraic form (5.30) may be expressed as

$$\left(\frac{p_1}{\rho} + \frac{gz_1}{g_c} + \frac{V_1^2}{2g_c} \right) + q - h_L - w_s = \left(\frac{p_2}{\rho} + \frac{gz_2}{g_c} + \frac{V_2^2}{2g_c} \right) \quad (5.31)$$

where q is the heat transfer, positive when added to the system, and w_s is the work transfer, positive when done by the system. Each term in (5.31) is an energy per unit mass. The work term is often called *shaft work* to distinguish it from the *flow work*, p/ρ , which is the work required to maintain the flow.

Identifying the head loss with the gain in internal energy between stations 1 and 2, i.e., $h_L = u_2 - u_1$, puts (5.31) into the more convenient form

$$\left(\frac{p_1}{\rho} + u_1 + \frac{gz_1}{g_c} + \frac{V_1^2}{2g_c} \right) + q - w_s = \left(\frac{p_2}{\rho} + u_2 + \frac{gz_2}{g_c} + \frac{V_2^2}{2g_c} \right) \quad (5.32)$$

Both the internal energy u and the *enthalpy*

$$h \equiv u + \frac{p}{\rho}$$

are tabulated for common fluids.

Solved Problems

- 5.1. Demonstrate Pascal's law by taking a force balance on the triangular fluid element shown in Fig. 5-5.

Assume the pressures are uniformly distributed over the faces of the element. The force on each face is the product of the pressure on that face and its area. The forces on the vertical xy -faces are equal and opposite, and the weight W is the product of specific weight, $\gamma = \rho g/g_c$, and volume.

Summing forces in the x -direction,

$$p_x \Delta y (1) = \left[p(1) \frac{\Delta x}{\cos \alpha} \right] \sin \alpha$$

and, since

$$W = \gamma \frac{\Delta x \Delta y (1)}{2}$$

the y -direction force balance yields

$$p_y \Delta x (1) = \left[p(1) \frac{\Delta x}{\cos \alpha} \right] \cos \alpha + \gamma \frac{\Delta x \Delta y (1)}{2}$$

Noting that $(\sin \alpha)/(\cos \alpha) = \tan \alpha = \Delta y/\Delta x$, we have

$$p_x = p \quad p_y = p + \gamma \frac{\Delta y}{2}$$

and the latter equation reduces to $p_y = p$ as Δx and Δy approach zero, i.e., as the element approaches a point in the limit. Therefore, the pressure at a point in a static fluid is equal in all directions, which is Pascal's law.

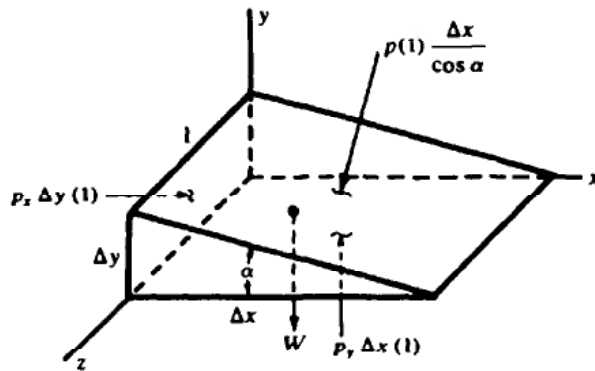


Fig. 5-5

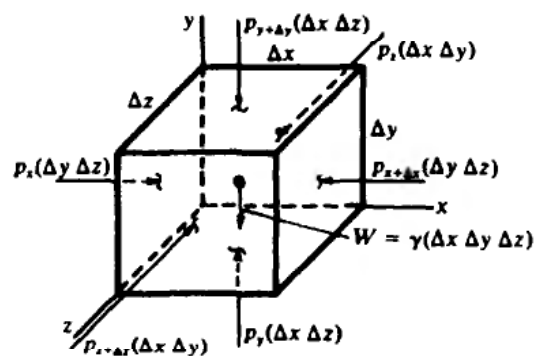


Fig. 5-6

- 5.2. Determine the pressure variations in the x -, y - (vertical), and z -directions at an arbitrary point in an unaccelerated fluid.

Figure 5-6 shows a small fluid parallelepiped centered on the given point. The forces acting on this element consist of *surface forces* (pressure times area) and *body forces* (weight).

The conditions for equilibrium in the x -, y -, and z -directions are

$$\begin{aligned} p_x(\Delta y \Delta z) - p_{x+\Delta x}(\Delta y \Delta z) &= 0 \\ p_y(\Delta x \Delta z) - p_{y+\Delta y}(\Delta x \Delta z) - \gamma(\Delta x \Delta y \Delta z) &= 0 \\ p_z(\Delta x \Delta y) - p_{z+\Delta z}(\Delta x \Delta y) &= 0 \end{aligned}$$

Dividing each equation by the volume, $\Delta x \Delta y \Delta z$, and taking the limit as Δx , Δy , and Δz approach zero, we get

$$\frac{\partial p}{\partial x} = 0 \quad \frac{\partial p}{\partial y} = -\gamma \quad \frac{\partial p}{\partial z} = 0$$

Thus, the pressure is independent of x and z . To determine its dependence on y it is necessary to know the variation of γ , i.e., the variation of ρ and g .

- 5.3.** How does the pressure vary with depth in an unaccelerated incompressible fluid in a constant gravitational field (with gravity acting in the negative y -direction)?

By Problem 5.2, $p = p(y)$ and

$$\frac{dp}{dy} = -\gamma = \text{constant}$$

since ρ and g are both constant. Integrating,

$$\int_{p_0}^p dp = -\gamma \int_{y_0}^y dy$$

$$p - p_0 = -\gamma(y - y_0)$$

which is the form (5.1) of the hydrostatic equation.

- 5.4.** How deep can a diver descend in ocean water ($\gamma = 1.005 \times 10^4 \text{ N/m}^3$) without damaging his watch, which will withstand an absolute pressure of $5.50 \times 10^5 \text{ Pa}$?

Assuming a standard atmospheric pressure of $1.01325 \times 10^5 \text{ Pa}$, the hydrostatic equation,

$$p - p_{\text{atm}} = \gamma \cdot h$$

gives

$$(5.50 - 1.013) \times 10^5 \text{ N/m}^2 = h(1.005 \times 10^4) \text{ N/m}^3$$

thus,

$$h = \frac{(5.50 - 1.013) \times 10^5}{1.005 \times 10^4} \text{ m} = 44.6 \text{ m}$$

- 5.5.** How might an ordinary garden hose be used to establish whether the corners of a building under construction are at the same level?

With its ends by a pair of corners, fill the hose with water and expose the ends to the atmosphere. Because the pressures at the water surfaces will be equal, the surfaces will be at the same height ($p = \gamma h$). This principle holds regardless of the length of the hose or its shape.

- 5.6.** A mercury ($\gamma = 13.59\gamma_{\text{water}}$) barometer, depicted schematically in Fig. 5-7, has a column height h of 728.2 mm at 20°C . What is the barometric pressure (a) in kPa and (b) in meters of water?

(a) A force balance on the fluid column gives

$$p_b = p_{\text{atm}} = p_v + (\gamma \cdot h)$$

But the vapor pressure of mercury is negligible; therefore,

$$p_b = \gamma_{\text{Hg}} \cdot h$$

From Table B-3 (SI) at 20°C

$$\rho_{\text{Hg}} = 13\,579 \text{ kg/m}^3$$

and

$$\gamma_{\text{Hg}} = g\rho_{\text{Hg}} = (9.807 \text{ m/s}^2)(13\,579 \text{ kg/m}^3)$$

$$= 133\,165 \text{ kg/m}^2 \text{ s}^2$$

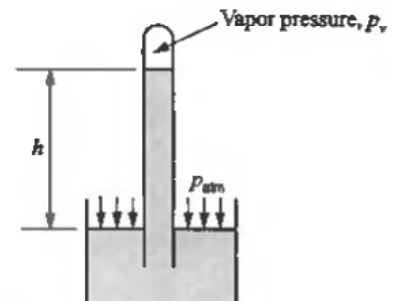


Fig. 5-7

Thus,

$$\begin{aligned} p_b &= \gamma_{\text{Hg}} \cdot h = (133\,165 \text{ kg/m}^2 \cdot \text{s}^2)(0.728 \text{ m}) \\ &= 96\,944 \text{ kg/m} \cdot \text{s}^2 = 96.9 \text{ kPa.} \end{aligned}$$

(b) Converting with the equality from Table A-2

$$1 \text{ N/m}^2 = (98.0638)^{-1} \text{ cm H}_2\text{O}$$

results in

$$p_b = 9.88 \text{ meters of water.}$$

5.7. For the manometer shown in Fig. 5-8, what is the pressure at D ? Express in terms of the column heights given and the specific gravity $S \equiv \gamma/\gamma_w$, where γ_w is the specific weight of water.

For this class of problems it is convenient to begin at some point (any point, usually an interface) and add pressures resulting from fluid columns when going downward; subtract when going upward. Beginning at D , we get

$$p_D + \gamma_w h_2 - \gamma_{\text{Hg}} h_1 = p_{\text{atm}}$$

or

$$p_D - p_{\text{atm}} = \gamma_w (S_{\text{Hg}} h_1 - h_2)$$

or

$$p_D|_{\text{gauge}} = \gamma_w (S_{\text{Hg}} h_1 - h_2)$$

since the point B and the interface C are at the same elevation and joined by a common fluid, making their pressures identical.

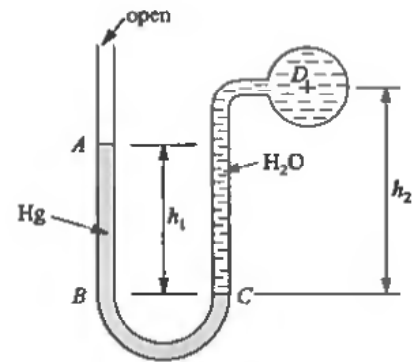


Fig. 5-8

5.8. A differential manometer (Fig. 5-9) is used to measure the pressure drop across a porous plug in a horizontal oil ($S_1 = 0.8$) line. For a deflection of 30 cm in the mercury ($S_2 = 13.6$) column, what is the pressure drop?

Beginning at A and proceeding through the manometer to point E , we have

$$p_A - \gamma_1 h_1 - \gamma_2 h_2 + \gamma_1 (h_1 + h_2) = p_E$$

or

$$\begin{aligned} p_A - p_E &= h_2(\gamma_2 - \gamma_1) = \gamma_w h_2 (S_2 - S_1) \\ &= \left[\left(\frac{10^3 \text{ kg}}{\text{m}^3} \right) \left(9.8 \frac{\text{m}}{\text{s}^2} \right) \right] (0.30 \text{ m})(13.6 - 0.8) = 0.376 \times 10^5 \text{ N/m}^2 \end{aligned}$$

where we have used $\rho_w = 10^3 \text{ kg/m}^3$ and $\gamma = 9.8 \text{ m/s}^2$.

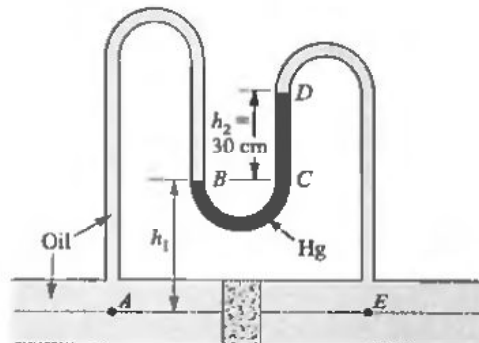


Fig. 5-9

(See Table A-1 for the definition of the newton.) It should be noted that it was unnecessary to know the height h_1 .

- 5.9.** The hydrometer shown in Fig. 5-10 has a stem diameter of 0.5 cm and a mass of 0.040 kg. What is the distance on the scale between specific gravity (S) markings 1.0 and 1.04?




Fig. 5-10

Let V_w be the volume displaced when the hydrometer floats in water ($S = 1$). The buoyant force is then $\gamma_w V_w$, which is equal to the weight of the hydrometer. In a fluid of unknown specific gravity S , the buoyant force is $\gamma(V_w - A \Delta y)$, where A is the stem cross-sectional area and Δy is the decrease in depth. Therefore,

$$\gamma_w V_w = \gamma(V_w - A \Delta y)$$

or

$$\Delta y = \frac{V_w}{A} \frac{S - 1}{S}$$

Substituting

$$A = \frac{\pi d^2}{4} = \frac{\pi(0.5 \text{ cm})^2}{4} = 0.1963 \text{ cm}^2$$

$$V_w = \frac{W}{\gamma_w} = \frac{M}{\rho_w} = \frac{0.040 \text{ kg}}{10^{-3} \text{ kg/cm}^3} = 40 \text{ cm}^3$$

(M is mass) and $S = 1.04$ yields

$$\Delta y = \frac{40 \text{ cm}^3}{0.1963 \text{ cm}^2} \frac{1.04 - 1.0}{1.04} = 7.837 \text{ cm}$$

- 5.10.** For the flow field described by $\mathbf{V} = 2xy\mathbf{i} + x\mathbf{j}$ determine (a) the equation of a streamline, (b) the equation of the streamline which passes through the point (1,2).

(a) From (5.4)

$$\frac{dy}{dx} = \frac{v}{u} = \frac{x}{2xy} \quad \text{or} \quad 2 \int y \, dy = \int dx$$

$$\text{or } y^2 = x + C.$$

(b)

$$C(1,2) = 4 - 1 = 3 \quad \text{whence} \quad y^2 = x + 3$$

- 5.11.** Find (a) the velocity and (b) the acceleration of a particle at $x = 1, y = 2, t = 1$ in a field described by $\mathbf{V} = 3y^2\mathbf{i} + x^3y\mathbf{j}$.

(a) $\mathbf{V}(1,2,1) = 12\mathbf{i} + 2\mathbf{j}$

(b) The acceleration is given by (5.10).

$$\begin{aligned} \mathbf{a}(x, y, t) &= u \frac{\partial \mathbf{V}}{\partial x} + v \frac{\partial \mathbf{V}}{\partial y} + \frac{\partial \mathbf{V}}{\partial t} \\ &= 3y^2(3x^2 y\mathbf{j}) + x^3 y t(6y\mathbf{i} + x^3 t\mathbf{j}) + x^3 y\mathbf{j} \\ &= 6x^3 y^2 t\mathbf{i} + (9x^2 y^3 t + x^6 y t^2 + x^3 y)\mathbf{j} \end{aligned}$$

$$\text{Hence, } \mathbf{a}(1,2,1) = 24\mathbf{i} + 76\mathbf{j}.$$

- 5.12.** Describe the motion produced by an airplane flying through quiescent air at a velocity \mathbf{V} .

The fluid velocity at a point in the path of the aircraft is unsteady. It is zero before the plane reaches it, varies widely as the plane passes, and settles back to zero as the plane leaves.

If the same airplane is fixed in a large wind tunnel with the air blowing past it at velocity $\mathbf{V}_\infty = -\mathbf{V}$, the same effects are produced on the aircraft. But the flow is now steady, since the local acceleration is zero at each point.

- 5.13.** What is the maximum discharge in liters per second of glycerin at 30 °C and standard atmospheric pressure from a 20 mm i.d. (inside diameter) tube if laminar flow is maintained?

To assure laminar flow the Reynolds number should not exceed 2000. Therefore,

$$\mathbf{Re} = \frac{DV}{\nu} \leq 2000 \quad \text{or} \quad V \leq \frac{2000\nu}{D}$$

From Table B-3 (SI), $\nu = 0.0005 \text{ m}^2/\text{s}$, so

$$V \leq \frac{2000(0.0005 \text{ m}^2/\text{s})}{20 \times 10^{-3} \text{ m}} = 50 \text{ m/s}$$

and the maximum discharge is

$$Q = VA = (50 \text{ m/s}) \left(\frac{\pi}{4} \right) (0.02 \text{ m})^2 \left(\frac{1000 \text{ liters}}{\text{m}^3} \right) = 15.7 \text{ liters/s}$$

- 5.14.** Water having a temperature of 60 °C flows through a long, 50.0 mm i.d. tube at a rate of 1.5 liters per second. Is the flow laminar or turbulent?

Since Reynolds number is an indicator of whether the flow is laminar or turbulent, determining it will suffice. We will need the property, viscosity. Choosing to work with μ and ρ , we obtain from Table B-3 (SI)

$$\begin{aligned} \mu &= \rho\nu = (985.46 \text{ kg/m}^3)(0.478 \times 10^{-6} \text{ m}^2/\text{s}) \\ &= 4.71 \times 10^{-4} \text{ kg/m}\cdot\text{s} \\ \rho &= 985.46 \text{ kg/m}^3 \end{aligned}$$

Forming velocity,

$$V = Q/A = \frac{(1.5 \text{ liters/s})(\text{m}^3/1000 \text{ liters})}{(\pi/4)(0.05 \text{ m})^2} = 0.764 \text{ m/s}$$

The Reynolds number is

$$\mathbf{Re} = \frac{DV\rho}{\mu} = \frac{(0.05 \text{ m})(0.764 \text{ m/s})(985.46 \text{ kg/m}^3)}{4.71 \times 10^{-4} \text{ kg/m}\cdot\text{s}} = 7.99 \times 10^4$$

and this flow is clearly turbulent.

- 5.15.** Atmospheric air heated to 350 K flows over a long, flat plate at 12 m/s. At what length will the flow cease to be laminar?

Under average conditions, laminar flow over a flat plate can be expected at Reynolds numbers up to 300 000. Hence

$$\mathbf{Re} = \frac{Vl}{\nu} \quad \text{so} \quad l = \frac{\mathbf{Re}\cdot\nu}{V}$$

From Table B-4 (SI), $\nu = 20.76 \times 10^{-6} \text{ m}^2/\text{s}$, so

$$l = \frac{(300\,000)(20.76 \times 10^{-6} \text{ m}^2/\text{s})}{12 \text{ m/s}} = 0.519 \text{ m}$$

- 5.16.** A model is used in the design of a spillway for a dam. For a model-to-prototype ratio of 1:10, what is the velocity at a point in the prototype when the velocity at the corresponding point in the model is 1.4 m/s?

Assuming geometric similarity of model and prototype, equal Froude numbers assure dynamic similarity; i.e., from eq. (5.18),

$$\frac{V_m}{\sqrt{g_m l_m}} = \frac{V_p}{\sqrt{g_p l_p}}$$

Since $g_m = g_p$

$$V_p = V_m \sqrt{\frac{l_p}{l_m}} = (1.4 \text{ m/s})\sqrt{10} = 4.43 \text{ m/s}$$

- 5.17.** A flow meter model is 1/6 the size of its prototype. The model is tested with 20 °C water ($\nu = 1.006 \times 10^{-6} \text{ m}^2/\text{s}$) while the prototype operates at 80 °C, ($\nu = 0.364 \times 10^{-6} \text{ m}^2/\text{s}$). (These viscosity values should be verified with Table B-3 (SI).) For a velocity of 3.05 m/s in the 0.3 m diameter throat (minimum flow area) of the prototype, what discharge is required in the model for similitude?

For incompressible flow, identical Reynolds numbers will assure similarity, assuming geometrical similarity; therefore,

$$\begin{aligned} \mathbf{Re}_m &= \mathbf{Re}_p \\ \frac{V_m D_m}{\nu_m} &= \frac{V_p D_p}{\nu_p} \end{aligned}$$

or

$$\begin{aligned} V_m &= \frac{D_p \nu_m}{D_m \nu_p} V_p = 6 \left(\frac{1.006 \times 10^{-6}}{0.364 \times 10^{-6}} \right) (3.05 \text{ m/s}) \\ V_m &= 50.57 \approx 50.6 \text{ m/s} \end{aligned}$$

This velocity results in a discharge volumetric flow rate of

$$Q_m = V_m A_m = (50.6 \text{ m/s}) \left(\frac{\pi}{4} \right) \left(\frac{0.3 \text{ m}}{6} \right)^2 = 0.099 \text{ m}^3/\text{s} \approx 0.1 \text{ m}^3/\text{s}$$

- 5.18.** Derive the continuity equation for steady compressible flow, considering flow through the stream tube of Fig. 5-11.

Taking sections 1 and 2 normal to the streamlines forming the stream tube, the mass passing section 1 per unit time is $\rho_s A_s V_s$, or $(\rho AV)_s$; similarly, $(\rho AV)_{s+\Delta s}$ passes section 2. For steady flow

$$\dot{m} = (\rho AV)_{s+\Delta s} = (\rho AV)_s$$

Dividing by Δs and taking the limit as Δs approaches zero, we get

$$\lim_{\Delta s \rightarrow 0} \frac{(\rho AV)_{s+\Delta s} - (\rho AV)_s}{\Delta s} = 0$$

But this is

$$\frac{d}{ds}(\rho AV) = 0$$

from the definition of a derivative. Therefore,

$$\rho AV = \text{constant}$$

which is (5.21). By taking the natural logarithm,

$$\ln \rho + \ln A + \ln V = \ln C$$

and differentiating, we get the useful form

$$\frac{d\rho}{\rho} + \frac{dA}{A} + \frac{dV}{V} = 0$$

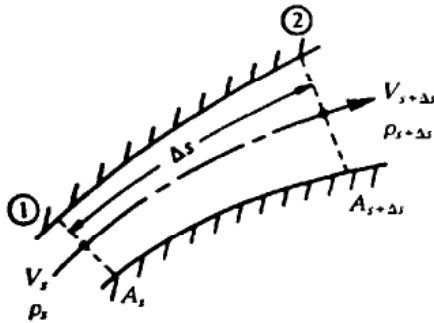


Fig. 5-11

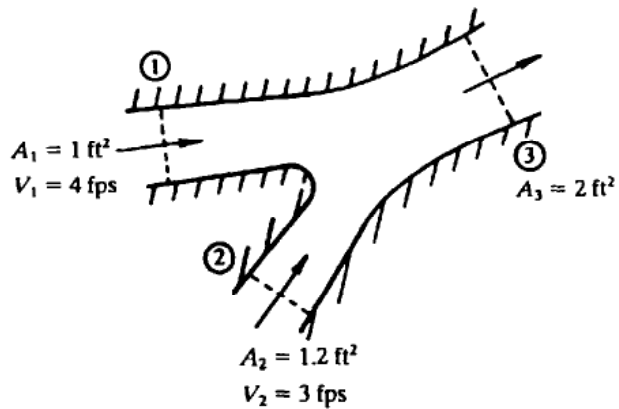


Fig. 5-12

- 5.19. Water flows through the Y-section shown in Fig. 5-12. What is the velocity at section 3 for one-dimensional flow (i.e., flow in which the fluid properties may be expressed in terms of one space coordinate and time)?

Equation (5.21) modified for multiple inlets and outlets is

$$\sum (\rho AV)_{in} = \sum (\rho AV)_{out}$$

Therefore, $A_1 V_1 + A_2 V_2 = A_3 V_3$, where the constant density ρ has been canceled out. Using the given values, we get

$$(1)(4) + (1.2)(3) = 2V_3 \quad \text{or} \quad V_3 = 3.8 \text{ fps}$$

- 5.20. Develop the differential form of the continuity equation by considering the unsteady flow of a fluid through an element having mutually orthogonal dimensions Δx , Δy , and Δz (Fig. 5-13).

The mass accumulated within the parallelepiped, due to the unsteady flow, is equal to the mass flowing into the element minus the mass flowing out of it.

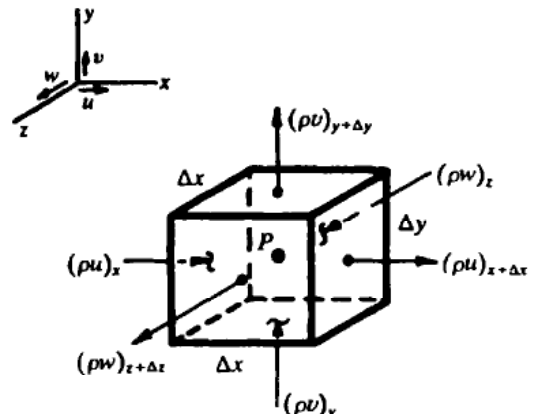


Fig. 5-13

Using an average value of density over the volume element, the mass accumulation per unit time is

$$\text{accumulation} = \frac{\partial \rho_{av}}{\partial t} \Delta x \Delta y \Delta z$$

and the respective fluxes are

$$\begin{aligned} \text{influx} &= (\rho u)_x \Delta y \Delta z + (\rho v)_y \Delta x \Delta z + (\rho w)_z \Delta x \Delta y \\ \text{efflux} &= (\rho u)_{x+\Delta x} \Delta y \Delta z + (\rho v)_{y+\Delta y} \Delta x \Delta z + (\rho w)_{z+\Delta z} \Delta x \Delta y \end{aligned}$$

Thus,

$$\begin{aligned} \frac{\partial \rho_{av}}{\partial t} \Delta x \Delta y \Delta z &= [(\rho u)_x \Delta y \Delta z + (\rho v)_y \Delta x \Delta z + (\rho w)_z \Delta x \Delta y] \\ &\quad - [(\rho u)_{x+\Delta x} \Delta y \Delta z + (\rho v)_{y+\Delta y} \Delta x \Delta z + (\rho w)_{z+\Delta z} \Delta x \Delta y] \end{aligned}$$

Dividing by the volume $\Delta x \Delta y \Delta z$ and rearranging, we have

$$\frac{\partial \rho_{av}}{\partial t} + \frac{(\rho u)_{x+\Delta x} - (\rho u)_x}{\Delta x} + \frac{(\rho v)_{y+\Delta y} - (\rho v)_y}{\Delta y} + \frac{(\rho w)_{z+\Delta z} - (\rho w)_z}{\Delta z} = 0$$

By letting Δx , Δy , and Δz approach zero, the volume element approaches point P , and the average value of density approaches the local value. From the definition of the derivative the flux terms become gradients in their respective directions, giving (5.24):

$$\frac{\partial \rho}{\partial t} + \frac{\partial(\rho u)}{\partial x} + \frac{\partial(\rho v)}{\partial y} + \frac{\partial(\rho w)}{\partial z} = 0$$

- 5.21.** Does the velocity field $\mathbf{V}(x, y, z) = (2x + \cos y)\mathbf{i} + (\sin x - 2y)\mathbf{j} - 4z\mathbf{k}$ represent a possible incompressible flow?

The incompressible continuity equation,

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

must be satisfied for the flow to be possible. In this case,

$$\begin{aligned} u &= 2x + \cos y & v &= \sin x - 2y & w &= -4z \\ \frac{\partial u}{\partial x} &= 2 & \frac{\partial v}{\partial y} &= -2 & \frac{\partial w}{\partial z} &= -4 \end{aligned}$$

so the flow is possible.

- 5.22.** (a) If the velocity field satisfies the condition

$$\nabla \times \mathbf{V} \equiv \text{curl } \mathbf{V} = \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ u & v & w \end{vmatrix} = 0$$

the flow is *irrotational*; the fluid does not rotate as it translates. (For example, a toothpick placed on the surface of an irrotational stream will have the same orientation at every point downstream.) Show that the flow field described by

$$\mathbf{V}(x, y) = (x^2 - y^2)\mathbf{i} - 2xy\mathbf{j}$$

is irrotational. (b) In two-dimensional irrotational flow a *velocity potential*, $\phi(x,y)$, exists such that

$$u = \frac{\partial \phi}{\partial x} \quad v = \frac{\partial \phi}{\partial y}$$

Determine the velocity potential for the flow of part (a).

$$(a) \quad \text{curl } \mathbf{V} = \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ x^2 - y^2 & -2xy & 0 \end{vmatrix} = \mathbf{k} \begin{vmatrix} \frac{\partial}{\partial x} & \frac{\partial}{\partial y} \\ x^2 - y^2 & -2xy \end{vmatrix} = \mathbf{k}(-2y + 2y) = 0$$

so the flow is irrotational.

(b) The velocity potential must satisfy

$$\frac{\partial \phi}{\partial x} = x^2 - y^2 \quad \frac{\partial \phi}{\partial y} = -2xy$$

Integrating the first equation with respect to x , and the second with respect to y , gives

$$\phi = \frac{x^3}{3} - y^2x + P(y) \quad \phi = -xy^2 + Q(x)$$

These two expressions for ϕ will be equal only if

$$\frac{x^3}{3} - Q(x) = -P(y) = \text{constant}$$

Therefore,

$$\phi = \frac{x^3}{3} - y^2x - \text{constant}$$

and the constant may be equated to zero, since only the derivatives of ϕ have significance.

5.23. Develop (5.27), the equation of motion along a streamline.

Figure 5-14 is the free-body diagram for an element of fluid, of average length Δs , within a stream tube. The pressure forces act normally on the ends of the element. The frictional force, which acts on the circumferential surface to retard motion, is the product of shearing stress τ , the mean circumference c , and the average length Δs . The weight is given by

$$W = \gamma \Delta V = \gamma \Delta s \left[\frac{A_{s+\Delta s} + A_s}{2} \right] \quad (1)$$

where $\gamma = \rho g/g_c$; the component of the weight in the $+s$ -direction is

$$-W \cos \theta = -W \frac{\Delta z}{\Delta s}$$

Writing Newton's second law for a fixed mass, (1.19), in the $+s$ -direction,

$$(pA)_s - (pA)_{s+\Delta s} - W \frac{\Delta z}{\Delta s} - \tau c \Delta s = \frac{W}{g} \frac{dV}{dt} \quad (2)$$

or, substituting (1) into (2),

$$(pA)_{s+\Delta s} - (pA)_s + \gamma \Delta s \left[\frac{A_{s+\Delta s} + A_s}{2} \right] \frac{\Delta z}{\Delta s} + \tau c \Delta s = \frac{\gamma}{g} \Delta s \left[\frac{A_{s+\Delta s} + A_s}{2} \right] \frac{dV}{dt} \quad (3)$$

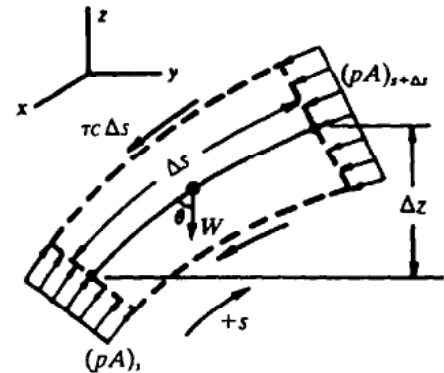


Fig. 5-14

Using the *hydraulic radius*, $R_h = A/c$, defined as the cross-sectional area divided by the wetted perimeter, replacing γ by $\rho g/g_c$, and dividing by $\rho \Delta s$, we get

$$\frac{1}{\rho} \frac{(pA)_{s+\Delta s} - (pA)_s}{\Delta s} + \frac{g}{g_c} \left[\frac{A_{s+\Delta s} + A_s}{2} \right] \frac{\Delta z}{\Delta s} + \frac{\tau A}{\rho R_h} = - \frac{1}{g_c} \left[\frac{A_{s+\Delta s} + A_s}{2} \right] \frac{dV}{dt} \quad (4)$$

Taking the limit as $\Delta s \rightarrow 0$, and noting that $A_{s+\Delta s} \rightarrow A_s$ so that in the limit the area divides out, we have

$$\frac{1}{\rho} \frac{\partial p}{\partial s} + \frac{g}{g_c} \frac{\partial z}{\partial s} + \frac{\tau}{\rho R_h} + \frac{1}{g_c} \frac{dV}{dt} = 0 \quad (5)$$

In (5) the independent variables are arc length s and time t . However, by definition, $ds/dt = V$ along the streamline. Therefore,

$$\frac{dV}{dt} = \frac{\partial V}{\partial t} + \frac{\partial V}{\partial s} \frac{ds}{dt} = \frac{\partial V}{\partial t} + V \frac{\partial V}{\partial s} = \frac{\partial V}{\partial t} + \frac{\partial}{\partial s} \left(\frac{V^2}{2} \right)$$

and (5) becomes

$$\frac{1}{\rho} \frac{\partial p}{\partial s} + \frac{g}{g_c} \frac{\partial z}{\partial s} + \frac{\tau}{\rho R_h} + \frac{1}{g_c} \frac{\partial}{\partial s} \left(\frac{V^2}{2} \right) + \frac{1}{g_c} \frac{\partial V}{\partial t} = 0$$

which is (5.27).

5.24. A Pitot-static tube (Fig. 5-15) is used with a mercury manometer to measure the flow of an inviscid fluid with $S = 1$ in a 4 in diameter pipe. What is the flow rate through the duct?

Assume that the flow is steady, incompressible and frictionless, making Bernoulli's equation valid.

$$\frac{p_1}{\gamma} + z_1 + \frac{V_1^2}{2g} = \frac{p_2}{\gamma} + z_2 + \frac{V_2^2}{2g} \quad (1)$$

Station 2 is a stagnation point, where the flow is completely stopped ($V_2 = 0$), and the two stations are at the same elevation ($z_1 = z_2$); therefore,

$$\frac{V_1^2}{2g} = \frac{p_2 - p_1}{\gamma} \quad (2)$$

The pressure differential can be determined by using the hydrostatic equation, $p = \gamma h$, along the path 1 \rightarrow 3 \rightarrow 4 \rightarrow 2 through the manometer.

$$p_1 + \gamma h + \gamma_{Hg} h_0 - \gamma(h + h_0) = p_2$$

or

$$\frac{p_2 - p_1}{\gamma} = \frac{\gamma_{Hg}}{\gamma} h_0 - h_0 = h_0(S_{Hg} - 1) \quad (3)$$

Substituting (3) into (2),

$$V_1 = \sqrt{2gh_0(S_{Hg} - 1)} = \sqrt{2 \left(32.2 \frac{\text{ft}}{\text{s}^2} \right) \left(\frac{2}{12} \text{ft} \right) (13.6 - 1)} = 11.63 \text{ fps}$$

and

$$Q = AV = \left[\frac{\pi(4/12)^2 \text{ft}^2}{4} \right] \left(11.63 \frac{\text{ft}}{\text{s}} \right) \left(\frac{7.48 \text{ gal}}{\text{ft}^3} \right) \left(\frac{60 \text{ s}}{\text{min}} \right) = 455.49 \text{ gpm}$$

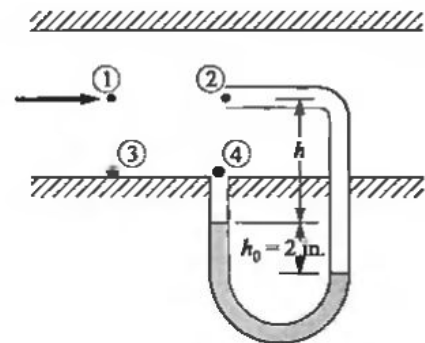


Fig. 5-15

- 5.25. A simple Pitot tube, sometimes called an *impact tube*, may be used to measure the velocity in a flowing stream as shown in Fig. 5-16. Derive an expression for the velocity in terms of the given quantities.

Writing Bernoulli's equation along the streamline between 1 and 2, we get

$$\frac{V_1^2}{2g} + \frac{p_1}{\gamma} = \frac{p_2}{\gamma}$$

But, from the hydrostatic equation, $p_1 = p_{\text{atm}} + \gamma h$, $p_2 = p_{\text{atm}} + \gamma(h_0 + h)$, whence

$$\frac{p_2 - p_1}{\gamma} = h_0$$

Therefore, $V_1 = \sqrt{2gh_0}$.

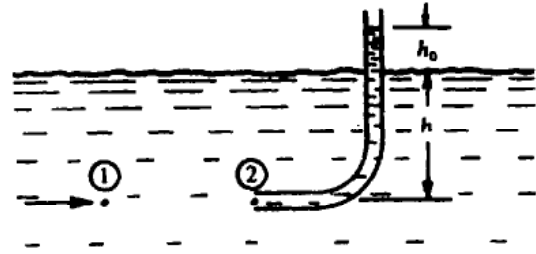


Fig. 5-16

- 5.26. A liquid discharges through a small orifice in a large tank (Fig. 5-17) which is kept full. What is the discharge velocity?

For flow along a streamline from the surface to the orifice, Bernoulli's equation gives

$$\frac{p_1}{\gamma} + z_1 + \frac{V_1^2}{2g} = \frac{p_2}{\gamma} + z_2 + \frac{V_2^2}{2g}$$

But $V_1 \approx 0$, $p_1 = p_2 = p_{\text{atm}}$, and $z_1 - z_2 = h$; hence

$$V_2 = \sqrt{2gh}$$




Fig. 5-17

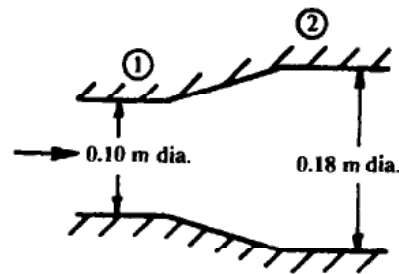


Fig. 5-18

- 5.27. Gasoline with a specific gravity $S = 0.82$ flows with negligible loss through a divergent section (Fig. 5-18) at a rate of $0.028 \text{ m}^3/\text{s}$. What is the pressure at station 2 if the pressure at section 1 is $1.8 \times 10^5 \text{ N/m}^2$? The gasoline temperature is 20°C .

The volumetric flow rate Q is constant and

$$Q = V_1 A_1 = V_2 A_2$$

so

$$V_1 = \frac{0.028 \text{ m}^3/\text{s}}{(\pi/4)(0.10 \text{ m})^2} = 3.56 \text{ m/s}$$

$$V_2 = \frac{0.028 \text{ m}^3/\text{s}}{(\pi/4)(0.18 \text{ m})^2} = 1.10 \text{ m/s}$$

Then, by the Bernoulli equation

$$p_2 = p_1 + \gamma \left(\frac{V_1^2 - V_2^2}{2} \right)$$

From Table B-3 (SI), $\rho = 1000 \text{ kg/m}^3$ (water at 20°C) and with $S = 0.82$, $\rho = 820 \text{ kg/m}^3$ (gasoline). Since $\gamma = \rho g$ the Bernoulli equation becomes

$$p_2 = p_1 + \rho g \left(\frac{V_1^2 - V_2^2}{2g} \right)$$

or

$$p_2 = p_1 + \rho \left(\frac{V_1^2 - V_2^2}{2} \right)$$

Substituting values yields

$$\begin{aligned} p_2 &= (1.8 \times 10^5 \text{ N/m}^2) + (820 \text{ kg/m}^3) \left(\frac{3.56^2 - 1.10^2}{2} \right) \text{ m}^2/\text{s}^2 \\ &= (1.8 \times 10^5 \text{ N/m}^2) + 4700 \text{ kg/m} \cdot \text{s}^2 = 1.847 \times 10^5 \text{ N/m}^2 \end{aligned}$$

- 5.28.** A gas turbine operates with an average inlet velocity of 122 m/s and an inlet temperature of 1477 K. The exit velocity and temperature are 275 m/s and 1033 K. For a mass flow rate of 0.3023 kg/s and a heat loss of 59 J/s, what power does it develop in kW? In horsepower?

By eq. (5.32) in rate form we have

$$\dot{Q} - \dot{W}_s = \dot{m} \left[(h_2 - h_1) + g(z_2 - z_1) + \left(\frac{V_2^2 - V_1^2}{2} \right) \right]$$

Often the potential energy term and the kinetic energy term are negligible. With this assumption the rate equation becomes

$$\dot{W}_s = \dot{Q} - \dot{m} c_p (T_2 - T_1)$$

From Table B-4 (SI) at $T_{\text{avg}} = 1255 \text{ K}$, for air

$$c_p = 1.1827 \times 10^3 \text{ J/kg} \cdot \text{K}$$

Thus,

$$\begin{aligned} \dot{W}_s &= -59 \text{ J/s} - (0.3023 \text{ kg/s})(1.1827 \times 10^3 \text{ J/kg} \cdot \text{K})(1033 - 1477) \text{ K} \\ &= +158\,684 \text{ W} = +158.7 \text{ kW} (212.7 \text{ hp}) \end{aligned}$$

Return to the complete equation and consider the kinetic energy term, $-\dot{m}(V_2^2 - V_1^2)/2$. With $V_2 = 275 \text{ m/s}$ and $V_1 = 122 \text{ m/s}$, this term gives -9181 W lowering \dot{W}_s to $149\,503 \text{ W} = 149.50 \text{ kW} (200.41 \text{ hp})$, which is 6% lower. The kinetic energy term is negligible.

- 5.29.** A centrifugal air compressor receives ambient air at 1 atmosphere pressure and 300 K. At a discharge pressure of 4.0 atmospheres, a temperature of 477 K, and a velocity of 90 m/s, what power is required to drive the compressor for a mass flow rate of 90 kg/min?

Assume the inlet velocity so low that its effect is negligible. Take the flow as steady, assume the process is adiabatic (no heat transfer), and neglect elevation changes. The energy equation (5.32) reduces to

$$w_s = h_1 - h_2 - \frac{V_2^2}{2}$$

The corresponding rate equation is, assuming constant specific heat,

$$\dot{W}_s = \dot{m} \left[c_p(T_1 - T_2) - \frac{V^2}{2} \right]$$

The specific heat for an average air temperature of 388.5 K is, from Table B-4 (SI), 1012.9 J/kg·K.

Proceeding,

$$\begin{aligned} \dot{W}_s &= (1.5 \text{ kg/s}) \left[\frac{1012.9 \text{ J}}{\text{kg} \cdot \text{K}} (300 - 477) \text{ K} - \frac{(90 \text{ m/s})^2}{2} \right] \\ &= 1.5 \left[-179\,283 - \frac{8100}{2} \right] \text{ J/s (W)} \\ &= -274\,999 \text{ J/s (W)} \quad \text{or} \quad -369 \text{ hp} \end{aligned}$$

Supplementary Problems

- 5.30. A 3 m by 3 m tank contains hydraulic fluid ($S = 0.84$). With the deflection of mercury shown in the manometer (Fig. 5-19), what pressure exists at A in the tank. *Ans.* 9675 Pa gauge
- 5.31. Neglecting friction, what pressure is required to pump water to the top of the Empire State building, 381 m high? *Ans.* 3.73×10^6 Pa




Fig. 5-19




Fig. 5-20

- 5.32. An inverted conical tank contains water as shown in Fig. 5-20. What force is exerted on the tank bottom by the water? *Ans.* 20 760 N
- 5.33. What is the maximum depth from which water may be pumped by a suction-type (shallow well) pump? *Ans.* 10.35 m (33.95 ft)
- 5.34. In a flood two people jump onto an empty 208 liter (55 gal) oil drum, which then floats barely, but totally, submerged. What is the combined weight of the two people if the drum weighs 222.4 N? *Ans.* 1818.5 N
- 5.35. What is the acceleration of a particle at the point (2, 1) in the two-dimensional field described by $\mathbf{V} = 2xy^2\mathbf{i} + x^3y\mathbf{j}$? *Ans.* $72\mathbf{i} + 112\mathbf{j}$
- 5.36. Determine the maximum flow rate of gasoline ($\mu_f = 7 \times 10^{-6}$ lb_f-s/ft²; $S = 0.68$) for laminar flow in a 1 in dia. tube. *Ans.* 6.95×10^{-4} cfs

- 5.37.** Air at 300 K ($\nu = 16.84 \times 10^{-6} \text{ m}^2/\text{s}$) flows parallel with a 5.0 m long flat plate at 5.0 m/s. Assume the flow to remain laminar until the Reynolds number, based on the distance from the leading edge, reaches 300 000. Over what fraction of the plate is the flow laminar? *Ans.* $l_{\text{laminar}}/l = 0.202$
- 5.38.** A model of a river is one-hundredth scale. Predict the surface velocity in the river if the model surface velocity is 0.3 m/s. *Ans.* 3.0 m/s
- 5.39.** A jet engine burns 4000 lb_m of fuel per hour while inducting air at 150 lb_m/s in flight at 500 mph. The combustion products exhaust at 2000 fps relative to the engine. Determine the engine thrust, assuming $p_1 A_1 = p_2 A_2$. *Ans.* $T = (\dot{m}_a + \dot{m}_f)V_2 - \dot{m}_a V_1 = 5969.6 \text{ lb}_f$
- 5.40.** What gauge pressure is required in a 3 in i.d. fire hose just upstream of a horizontal nozzle to result in a 1 in dia. water jet having a velocity of 60 ft/s at the nozzle exit plane? Assume standard gravitational acceleration and $\gamma = 62.4 \text{ lb}_f/\text{ft}^3$. *Ans.* 23.92 psig
- 5.41.** Water flows through a turbine at the rate of 10 cfs. Inlet and outlet pressures are 25 psia and -4 psig, respectively. The 12 in dia. inlet is 6 ft above the 24 in dia. outlet. What horsepower is delivered by the water to the turbine? *Ans.* 46.93 hp
- 5.42.** What power is available from a 3 in dia. jet of water discharging into the atmosphere at 100 fps?
Ans. 173.1 hp

Forced Convection: Laminar Flow

The primary resistance to heat transfer by convection is normally controlled within a thin layer of the fluid, adjacent to the immersed body, in which viscous effects are important. The quantity of heat transferred is highly dependent upon the fluid motion within this *boundary layer*, being determined chiefly by the thickness of the layer. While greatly affecting heat transfer, the boundary layer and the general velocity field can be treated independently of it, provided fluid properties do not vary with temperature. Otherwise, the heat transfer and fluid flow processes are interlinked.

6.1 HYDRODYNAMIC (ISOTHERMAL) BOUNDARY LAYER: FLAT PLATE

Fundamentals of boundary layer flow can best be understood from laminar flow along a flat plate, since the fluid motion can be visualized and since an exact solution exists for the fluid's behavior.

Consider a very thin, flat plate with an unbounded, incompressible, viscous fluid flowing parallel to it with an approach (free-stream) velocity V_∞ . This is shown in Fig. 6-1, with the y -dimensions greatly exaggerated with respect to the x -dimensions. Shown also are velocity profiles at two stations, indicating how the velocity varies from zero at the surface (*no-slip condition*) to $0.99 V_\infty$ at what, by convention, is taken as the edge of the boundary layer. A streamline is shown for reference in the inviscid region, where Bernoulli's equation is valid. Continuity requires that streamlines diverge as the fluid is retarded more and more in moving along the plate. The divergence of streamlines suggests motion in the y -direction, normal to the plate. (At this point it should be noted that a mirror profile exists underneath our hypothetically thin plate.)

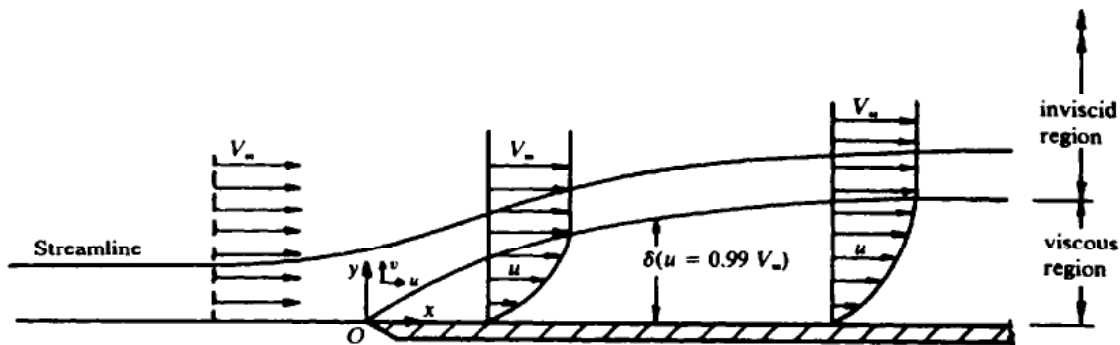


Fig. 6-1

Prandtl's Boundary Layer Equations

By applying Newton's second law and the continuity equation to an infinitesimal, two-dimensional control volume within the boundary layer, and assuming that

1. fluid viscosity is constant
2. shear in the y -direction is negligible
3. the flow is steady, and the fluid is incompressible
4. the vertical pressure gradient is negligible ($\partial p / \partial y = 0$)

we obtain (see Problem 6.1):

$$\text{x-momentum: } u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{g_c}{\rho} \frac{dp}{dx} + \nu \frac{\partial^2 u}{\partial y^2} \quad (6.1)$$

$$\text{y-momentum: } \frac{\partial p}{\partial y} = 0 \quad (6.2)$$

$$\text{continuity: } \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (6.3)$$

Since the pressure can be determined in the inviscid region from Bernoulli's equation,

$$\frac{p}{\rho} + \frac{V^2}{2g_c} = \text{constant}$$

the pressure at a given lengthwise location within the boundary layer is known from (6.2). Equations (6.1) and (6.3) can then be solved simultaneously to give the velocity distribution.

Blasius' Solution (Exact)

Problem 6.2 establishes the order-of-magnitude relationship

$$\frac{\delta}{x} \sim \sqrt{\frac{\nu}{V_\infty x}} \quad (6.4)$$

Experiments have shown that velocity profiles at different locations along the plate are geometrically similar, i.e., they differ only by a *stretching factor* in the *y*-direction. (Refer again to Fig. 6-1.) This means that the dimensionless velocity u/V_∞ can be expressed at any location x as a function of the dimensionless distance from the wall, y/δ :

$$\frac{u}{V_\infty} = \phi\left(\frac{y}{\delta}\right) \quad (6.5)$$

or, using (6.4),

$$\frac{u}{V_\infty} = g(\eta) \quad (6.6)$$

where $\eta \equiv y\sqrt{V_\infty/\nu x}$ denotes the stretching factor.

We seek the function $g(\eta)$ which will satisfy Prandtl's equations. To this end let us define a continuous *stream function* ψ , having continuous first partial derivatives, such that

$$u = \frac{\partial \psi}{\partial y} \quad v = -\frac{\partial \psi}{\partial x} \quad (6.7)$$

Then (6.3) is automatically satisfied. Holding x constant,

$$\begin{aligned} \psi &= \int u \, dy + C(x) = V_\infty \int g(\eta) \frac{dy}{d\eta} \, d\eta + C(x) = \sqrt{V_\infty \nu x} \int g(\eta) \, d\eta + C(x) \\ &= \sqrt{V_\infty \nu x} f(\eta) + \dot{C}(x) \end{aligned} \quad (6.8)$$

where we have dropped the integration "constant" on dimensional grounds (ψ and $\sqrt{V_\infty \nu x}$ have the same units, e.g., m^2/s). We now use the chain rule with (6.8) to express u and v and their derivatives in terms of f and its derivatives. Substituting the results in (6.1), and further assuming constant pressure ($dp/dx = 0$), we obtain

■
$$f \frac{d^2 f}{d\eta^2} + 2 \frac{d^3 f}{d\eta^3} = 0 \quad (6.9)$$

an ordinary (but nonlinear) differential equation for f . The boundary conditions are:

Physical System	Transformed System
$u = 0$ at $y = 0$	$\frac{df}{d\eta} = 0$ at $\eta = 0$
$v = 0$ at $y = 0$	$f = 0$ at $\eta = 0$
$\frac{\partial u}{\partial y} \rightarrow 0$ as $y \rightarrow \infty$	$\frac{df}{d\eta} \rightarrow 1.0$ as $\eta \rightarrow \infty$

Blasius' numerical solution of (6.9), with the corresponding values of u and v , is plotted in Fig. 6-2. It is seen that the boundary layer edge, $u/V_\infty = 0.99$, corresponds to $\eta \approx 5.0$; hence, since the edge is also given by $y = \delta$,

$$\delta \sqrt{\frac{V_\infty}{\nu x}} \approx 5.0$$

or

$$\frac{\delta}{x} \approx \frac{5.0}{\sqrt{\frac{V_\infty x}{\nu}}} = \frac{5.0}{\sqrt{\text{Re}_x}} \quad (6.10)$$

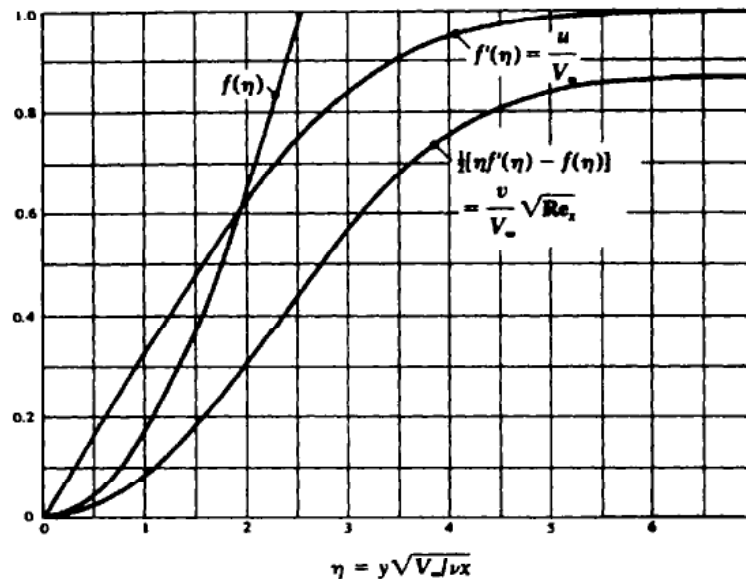


Fig. 6-2. Flat plate boundary layer functions. [From H. Blasius, *Z. Math. Phys.*, 56: 1 (1908). English translation in NACA Tech. Memo No. 1256.]

Using the fundamental equation for shear stress, $\tau = \mu_f(\partial u/\partial y)$, we can get the drag on the plate by evaluating the local shear stress at the surface, $\tau_s(x)$:

$$\tau_s(x) = \mu_f \frac{\partial u}{\partial y} \Big|_{y=0} = \mu_f V_\infty \sqrt{\frac{V_\infty}{\nu x}} f''(0) = \mu_f V_\infty \sqrt{\frac{V_\infty}{\nu x}} (0.332)$$

in which Fig. 6-2 has been used to evaluate $f''(0)$, equal to the slope of the f' curve at $\eta = 0$. The *local skin-friction coefficient* is defined by

$$c_f \equiv \frac{\tau_s}{\rho_\infty V_\infty^2 / 2g_c} \quad (6.11)$$

Substituting for τ_s , and using $\nu = \mu_m/\rho = g_c \mu_f/\rho$ and $\rho = \rho_\infty$ (incompressible flow),

$$c_f = \frac{0.664}{\sqrt{\frac{V_\infty x}{\nu}}} = \frac{0.664}{\sqrt{\text{Re}_x}} \tag{6.12}$$

The average skin-friction coefficient for $0 < x < L$ is then

■
$$C_f \equiv \frac{1}{L} \int_0^L c_f dx = \frac{1.328}{\sqrt{\text{Re}_L}} \tag{6.13}$$

where $\text{Re}_L = V_\infty L/\nu$.

Integral Momentum Equation (Approximate)

The technique of the Blasius solution is limited by one's ingenuity in discovering transformations which satisfy the boundary conditions. And, of course, the Blasius solution was for the simplest of cases. Although approximate, there is a simpler, more general method which yields good engineering results.

The *von Kármán integral technique* involves the application of Newton's second law to a finite control volume, as opposed to the infinitesimal element of Blasius. Problem 6.7 obtains the result for the flat-plate case, cited here.

$$\tau_s = \frac{\rho}{g_c} \frac{d}{dx} \left[\int_0^\delta (V_\infty - u)u dy \right] + \frac{\rho}{g_c} \frac{dV_\infty}{dx} \int_0^\delta (V_\infty - u) dy \tag{6.14}$$

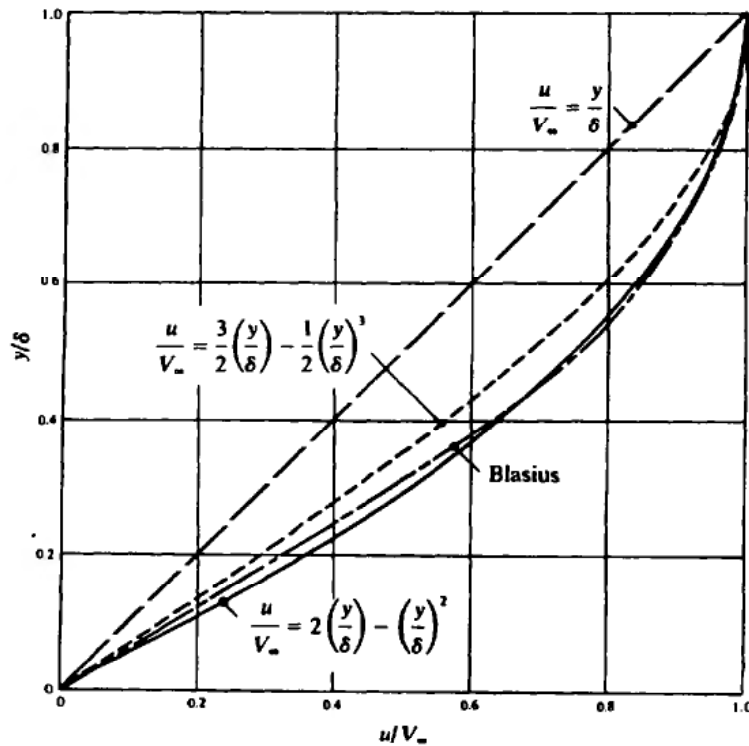


Fig. 6-3. Several assumed velocity profiles used in the von Kármán integral technique. [From E. Pohlhausen, *Z. Angew. Math. Mech.*, 1: 115 (1921).]

If, as in the Blasius solution, a constant pressure is assumed, then V_x is also constant and the second term in (6.14) vanishes. In that case, equating τ_x to

$$\mu_f \frac{\partial u}{\partial y} \Big|_{y=0}$$

gives the following integral equation for the boundary layer thickness:

$$\blacksquare \quad \nu \frac{\partial u}{\partial y} \Big|_{y=0} = \frac{d}{dx} \left[\int_0^\delta (V_x - u)u \, dy \right] \quad (6.15)$$

To solve (6.15), or the more general (6.14), requires knowing, or assuming, a velocity distribution within the boundary layer that satisfies the boundary conditions

$$\begin{aligned} \text{at } y = 0: \quad (1) \quad u = 0; \quad (2) \quad \frac{\partial^2 u}{\partial y^2} = 0 \\ \text{at } y = \delta: \quad (3) \quad u = V_x; \quad (4) \quad \frac{\partial u}{\partial y} = 0 \end{aligned} \quad (6.16)$$

Boundary conditions (1), (3), and (4) arise from the physics of the velocity profile; boundary condition (2) then comes from (6.1) for a constant-pressure condition.

At first glance the mere suggestion of assuming a velocity profile seems ridiculous. In actuality, however, the thinness of the boundary layer helps to lessen the significance of errors inherent in assumptions. Figure 6-3 shows three possible assumptions, ranging from a simple linear to a cubic profile; the Blasius exact profile is shown for reference. The results yielded by these three profiles for the boundary layer thickness and the average skin-friction coefficient are displayed in Table 6-1. Problems 6.8 and 6.9 show how these results are obtained.

Table 6-1. Integral Momentum Equation Results.

Velocity Profile	Boundary Conditions Satisfied		$\frac{\delta}{x} \sqrt{\text{Re}_x}$	$C_f \sqrt{\text{Re}_L}$
	at $y = 0$	at $y = \delta$		
$\frac{u}{V_x} = 2 \frac{y}{\delta} - \left(\frac{y}{\delta}\right)^2$	$u = 0$	$u = V_x$ $\frac{\partial u}{\partial y} = 0$	5.47	1.462
$\frac{u}{V_x} = \frac{3}{2} \frac{y}{\delta} - \frac{1}{2} \left(\frac{y}{\delta}\right)^3$	$u = 0$ $\frac{\partial^2 u}{\partial y^2} = 0$	$u = V_x$ $\frac{\partial u}{\partial y} = 0$	4.64	1.292
Blasius solution (exact)			5.0	1.328

6.2 THERMAL BOUNDARY LAYER: FLAT PLATE

When a fluid at one temperature flows along a surface which is at another temperature, the behavior of the fluid cannot be described by the hydrodynamic equations alone. In addition to the hydrodynamic boundary layer, a thermal boundary layer develops.

Figure 6-4 shows temperature distributions within the thermal boundary layer, having a gradient which is infinite at the leading edge and approaches zero as the layer develops downstream. Shown also is a heat balance at the plate's surface, where the heat conducted from the plate must equal the heat convected into the fluid; thus,

$$-k \frac{\partial T}{\partial y} \Big|_s = h_x(T_s - T_\infty)$$

or

$$h_x = - \frac{k}{T_s - T_\infty} \frac{\partial T}{\partial y} \Big|_s \tag{6.17}$$

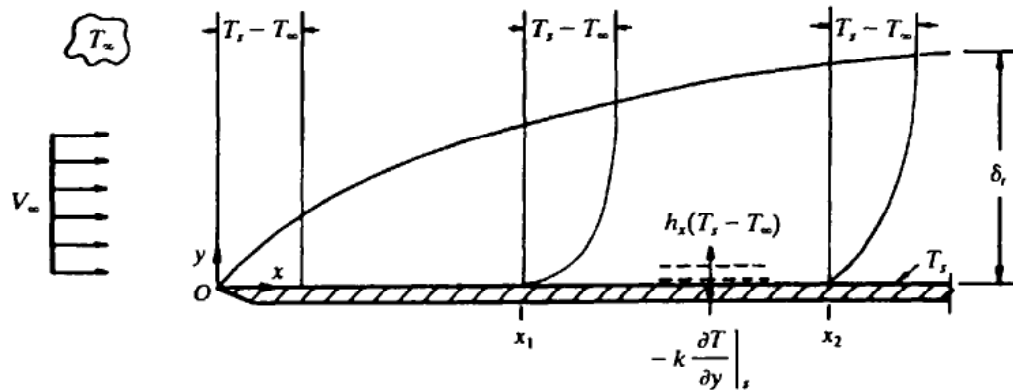


Fig. 6-4

Our problem in this section is to obtain an expression for the convective heat transfer coefficient h_x , which obviously reduces to finding the temperature distribution. To that end, in Problem 6.12 an energy balance is made on an infinitesimal control volume within the boundary layer, giving

$$\blacksquare \quad u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} \tag{6.18}$$

with boundary conditions, analogous to (6.16),

$$\begin{aligned} \text{at } y = 0: \quad & (1) \quad T = T_s; \quad (2) \quad \frac{\partial^2 T}{\partial y^2} = 0 \\ \text{at } y = \delta: \quad & (3) \quad T = T_\infty; \quad (4) \quad \frac{\partial T}{\partial y} = 0 \end{aligned} \tag{6.19}$$

Analogous to the hydrodynamic case, the thermal boundary layer thickness δ_t is defined as the distance required for the temperature T to reach 99% of its free-stream value T_∞ . The assumptions underlying (6.18) are:

1. steady, incompressible flow

2. constant fluid properties evaluated at the *film temperature*,

$$T_f \equiv \frac{T_s + T_\infty}{2}$$

3. negligible body forces, viscous heating (low velocity), and conduction in the flow direction

Recalling that the x -momentum equation for a constant-pressure field is

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \nu \frac{\partial^2 u}{\partial y^2} \quad (6.20)$$

we note the similarity between this and the energy equation (6.18). The temperature and velocity variations are identical when the thermal diffusivity α is equal to the kinematic viscosity ν . Complete analogy exists when the temperature is nondimensionalized by

$$\theta \equiv \frac{T - T_s}{T_\infty - T_s}$$

and the velocities are nondimensionalized by dividing by V_∞ , making the thermal boundary condition $\theta = 0$ at $y = 0$ analogous to $u/V_\infty = 0$ at $y = 0$. Temperature and velocity profiles are identical when the dimensionless *Prandtl number*,

$$\text{Pr} \equiv \frac{\nu}{\alpha} \quad (6.21)$$

is unity, which is approximately the case for most gases ($0.6 < \text{Pr} < 1.0$). The Prandtl number for liquids, however, varies widely, ranging from very large values for viscous oils to very small values (on the order of 0.01) for liquid metals which have high thermal conductivities.

Pohlhausen Solution (Exact)

The similarity between the momentum and energy equations led Pohlhausen [Pohlhausen, E., *Z. Angew. Math. Mech.*, 1: 115 (1921)] to follow Blasius' assumption of a similarity parameter and stream function,

$$\eta \equiv y \sqrt{\frac{V_\infty}{\nu x}} \quad \psi = \sqrt{\nu x V_\infty} f(\eta)$$

giving the ordinary linear differential equation

$$\frac{d^2 \theta}{d\eta^2} + \frac{\text{Pr}}{2} f \frac{d\theta}{d\eta} = 0 \quad (6.22)$$

with boundary conditions $\theta(0) = 0$, $\theta(\infty) = 1$. The solution is

$$\theta(\eta) = \frac{\int_0^\eta \exp\left(-\frac{\text{Pr}}{2} \int_0^\beta f(\alpha) d\alpha\right) d\beta}{\int_0^\infty \exp\left(-\frac{\text{Pr}}{2} \int_0^\beta f(\alpha) d\alpha\right) d\beta} \quad (6.23)$$

where $f(\alpha)$ is known (in numerical form at least) from the Blasius solution. The temperature distribution (6.23) is plotted in Fig. 6-5 for $\text{Pr} = 0.6$. Similar plots of θ for $0.6 < \text{Pr} < 1000$ are available in several heat transfer textbooks.

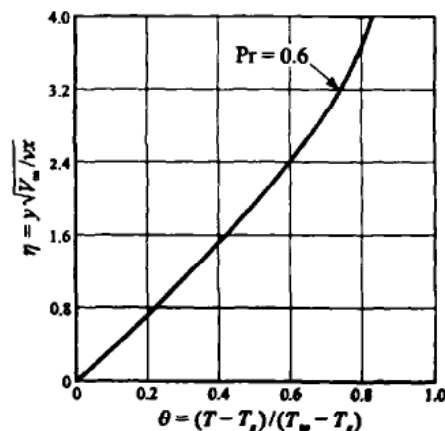


Fig. 6-5

The slope of the temperature profile at the surface, $y = 0$, is well represented by

$$\left(\frac{\partial T}{\partial y}\right)_{y=0} = (T_\infty - T_s) \sqrt{\frac{V_\infty}{\nu x}} \left(\frac{d\theta}{d\eta}\right)_{\eta=0} \approx (T_\infty - T_s) \sqrt{\frac{V_\infty}{\nu x}} (0.332) \text{Pr}^{1/3} \quad (6.24)$$

for $0.6 < \text{Pr} < 15$. Substitution of this expression into (6.17) yields

$$h_x = (0.332)k \sqrt{\frac{V_\infty}{\nu x}} \text{Pr}^{1/3} \quad (6.25)$$

Multiplying through by x/k , we get the local dimensionless *Nusselt number*,

$$\text{Nu}_x \equiv \frac{h_x x}{k} = (0.332) \text{Re}_x^{1/2} \text{Pr}^{1/3} \quad (6.26)$$

Taking averages over the interval $0 < x < L$, we find the average heat transfer coefficient and Nusselt number to be

$$\bar{h} = 2h_x|_{x=L} \quad (6.27)$$

$$\overline{\text{Nu}} \equiv \frac{\bar{h}L}{k} = (0.664) \text{Re}_L^{1/2} \text{Pr}^{1/3} \quad (6.28)$$

(For constant q_s'' , the coefficient 0.322 in eq. (6.26) becomes 0.453, effecting an increase of the coefficient in eq. (6.28).)

Integral Energy Equation (Approximate)

The von Kármán integral technique can be applied to the thermal–hydrodynamic boundary layer just as it was to the hydrodynamic layer alone. As shown in Problem 6.14, the result for the flat plate is

$$\blacksquare \quad \alpha \frac{\partial T}{\partial y} \Big|_{y=0} = \frac{d}{dx} \left[\int_0^{\delta_t} (T_\infty - T)u \, dy \right] \quad (6.29)$$

which should be compared with (6.15). To solve (6.29) for δ_t we need to know, or to assume, a velocity profile and a temperature distribution within the boundary layer that respectively satisfy the boundary conditions (6.16) and (6.19). If third-degree polynomials are used for u/V_∞ and θ (see Problem 6.15), the resultant local Nusselt number for convective heat transfer from a flat plate is

$$\text{Nu}_x \equiv \frac{h_x x}{k} = (0.332) \text{Re}_x^{1/2} \text{Pr}^{1/3} \left[1 - \left(\frac{x_i}{x}\right)^{3/4} \right]^{-1/3} \quad (6.30)$$

Here, x_i is the length of an unheated leading section of the plate; when $x_i = 0$, (6.30) is identical to the Pohlhausen solution, (6.26).

6.3 ISOTHERMAL PIPE FLOW

If we imagine the flat plate of the preceding sections to be rolled into a duct, we can apply the concepts of the boundary layer to flow in pipes. There is one major difference, however. Whereas the boundary layer continues to increase in thickness as a fluid passes along a flat plate, the boundary layer thickness in a pipe is physically limited to the radius of the pipe.

Figure 6-6 shows the successive stages of development of the boundary layer of an incompressible viscous fluid in the entrance region of a circular tube. At the tube's entrance *slug flow*, or uniform flow at the free-stream velocity, exists. As the fluid moves down the tube, shear between the fluid and the wall, and between adjacent fluid particles, retards the motion, causing the boundary layer to grow until it is *fully developed* at station 3. From this point on, the velocity profile remains unchanged.

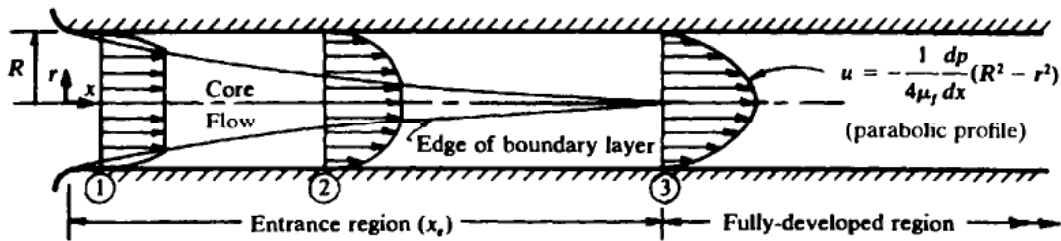


Fig. 6-6. Laminar hydrodynamic boundary layer in the developing region in a round tube.

Entrance Region

The length required for the velocity profile to become invariant with axial position is known as the *entry length*, x_e . It may be approximated by the simple *Langhaar equation*

$$x_e \approx (0.05) \text{Re}_D D \quad (6.31)$$

In most cases the entry length of a pipe is negligible when compared with its total length. Most engineering calculations are, therefore, made assuming fully developed flow throughout.

Fully Developed Region

For steady, fully developed, laminar flow in a tube, the velocity profile is parabolic:

$$u = -\frac{1}{4\mu_f} \frac{dp}{dx} (R^2 - r^2) \quad (6.32)$$

where the minus sign is required because the pressure decreases in the flow direction. This result is obtained from a force balance in Problem 6-17. The maximum velocity, which obviously occurs when $r = 0$, is

$$V_0 = -\frac{1}{4\mu_f} \frac{dp}{dx} R^2$$

The average velocity, V , may be obtained by equating the volumetric flow to the integrated paraboloidal flow, i.e.,

$$V\pi R^2 = \int_0^R u(2\pi r) dr$$

giving

$$V = \frac{V_0}{2} = -\frac{1}{8\mu_f} \frac{dp}{dx} R^2 \quad (6.33)$$

In engineering practice it is customary to express the pressure gradient in terms of a *friction factor*, f , defined by

$$-\frac{dp}{dx} = \frac{f}{D} \frac{\rho V^2}{2g_c} \quad (6.34)$$

where $\rho V^2/2g_c$ is the dynamic pressure of the mean flow and D is the tube diameter. Integrating this expression, we get the *Darcy-Weisbach equation*,

$$\frac{\Delta p}{L} = \frac{f}{D} \frac{\rho V^2}{2g_c} \quad (6.35)$$

where $\Delta p = p_1 - p_2$ and $L = x_2 - x_1$. By (5.28) the head loss between stations 1 and 2 is $h_L = (p_1 - p_2)/\rho$; thus,

$$h_L = f \frac{L}{D} \frac{V^2}{2g_c} \tag{6.36}$$

Together, (6.33) and (6.34) give the friction factor as a simple function of Reynolds number, i.e.,

$$f = \frac{64}{\text{Re}_D} \tag{6.37}$$

which is valid for laminar tube flow, $\text{Re} < 2000$.

In terms of volumetric flow rate, $Q = AV$, the head loss is given by

$$h_L = \frac{\Delta p}{\rho} = 128 \frac{QL\mu_f}{\pi D^4 \rho} \tag{6.38}$$

Or, the volumetric flow rate may be conveniently expressed in terms of the pressure drop, i.e.,

$$Q = \frac{\pi}{8\mu_f} \frac{R^4}{L} (p_1 - p_2) \tag{6.39}$$

a result known as the *Hagen-Poiseuille equation*.

Noncircular Ducts

The Darcy-Weisbach equation, (6.35), is valid for noncircular ducts when the geometric diameter is replaced by the *hydraulic diameter* D_h defined by

$$D_h \equiv \frac{4A}{P} \tag{6.40}$$

where A is the cross-sectional area and P is the wetted duct perimeter (the perimeter touched by the fluid). The friction factor must, of course, be evaluated for the particular duct configuration. Values of the product of friction factor and Reynolds number for the two most important industrial duct configurations were reported by F. M. White, and are given in Tables 6-2 and 6-3.

Table 6-2. Laminar flow friction factors for a concentric annulus. [From F. M. White, *Fluid Mechanics*, 2nd edn, ©1986, McGraw-Hill Book Company, New York, NY, p. 328. Reproduced with permission of the McGraw-Hill Companies.]

Ratio of Radii	$f \cdot \text{Re}$
0.001	74.68
0.01	80.11
0.05	86.27
0.10	89.37
0.20	92.35
0.40	94.71
0.60	95.59
0.80	95.92
1.00	96.00

Table 6-3. Laminar flow friction factors for rectangular ducts. [From F. M. White, *Fluid Mechanics*, 2nd edn, ©1986, McGraw-Hill Book Company, New York, NY, p. 331. Reproduced with permission of the McGraw-Hill Companies.]

Ratio of Sides	$f \cdot \text{Re}$
0.05	89.91
0.10	84.68
0.125	82.34
0.166	78.81
0.25	72.93
0.40	65.47
0.50	62.19
0.75	57.89
1.00	56.91

6.4 HEAT TRANSFER IN PIPE FLOW

A large class of heat transfer problems of engineering importance involves the flow of fluids through pipes, particularly in heat exchangers. The thermal boundary layer, which develops similarly to the hydrodynamic boundary layer shown in Fig. 6-6, is significant in the heat transfer process. Although heat transfer in laminar flow is not too common because the rate is lower than that encountered in turbulent flow, it is sometimes desirable due to the lower pumping power required in the laminar case.

For both laminar and turbulent flow, Newton's Law of Cooling is

$$q_s'' = h(T_s - T_b) \text{ at any location, } x \quad (6.41)$$

Over a finite length of tube, the convective heat transfer is

$$q_{\text{conv}} = q = \dot{m}c_p(T_{b,o} - T_{b,i}) \quad (6.42)$$

where T_b is the enthalpy-average temperature of the fluid bulk,

$$T_b \int_0^R \rho c_p u 2\pi r dr = \int_0^R \rho c_p u T 2\pi r dr$$

which, for an incompressible fluid having constant specific heat, reduces to

$$T_b = \frac{\int_0^R u T r dr}{\int_0^R u r dr} \quad (6.42a)$$

In engineering practice, a simple approximate average value,

$$\bar{T}_b = \frac{T_{b,\text{inlet}} + T_{b,\text{outlet}}}{2} \quad (6.43)$$

is used in the calculation of average heat transfer coefficients.

For internal flow in a tube, the differential conservation of energy expression for an ideal gas or incompressible liquid is

$$dq_{\text{conv}} = \dot{m}c_p dT_b \quad (6.44)$$

and using this with Newton's Law of Cooling yields

$$\frac{dT_b}{dx} = \frac{q_s'' P}{\dot{m}c_p} = \frac{P}{\dot{m}c_p} h(T_s - T_b) \quad (6.45)$$

where for a circular tube, $P = \pi D$. There are two frequently encountered cases: (a) $q_s'' = \text{constant}$ and (b) $T_s = \text{constant}$ as shown in Fig. 6-7(a) and 6-7(b). For either case the laminar thermal entry region for fully developed laminar flow (velocity profile) is

$$x_{e,t} = 0.05 \text{Re}_D \text{Pr} D \quad (6.46)$$

In practice we frequently encounter situation (b) where $T_{b,\text{inlet}}$ is known, and we cannot immediately calculate \bar{T}_b since $T_{b,\text{outlet}}$ is unknown. To proceed we can guess a value of $T_{b,\text{outlet}}$ and then use (6.43) to obtain a trial \bar{T}_b for property evaluation to apply equations (6.41) through (6.45).

The exponential nature of $T_b(x)$ in the case (b) dictates the use of a logarithmic temperature expression, which will be explained in the applied solved problems with T_s constant. For uniform (constant) heat flux, no logarithmic temperature is necessary since $(T_b \pm T_s)$ is constant.

In purely laminar flow the heat transfer mechanism is conduction, resulting in large heat transfer coefficients for fluids with high thermal conductivities, such as liquid metals. Figure 6-8 shows the variation of entrance region Nusselt numbers with axial distance along a tube in fully developed

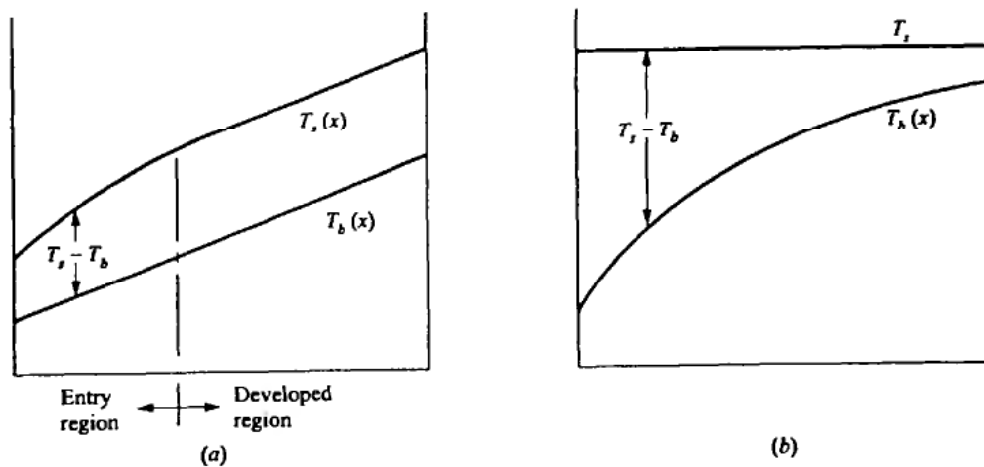


Fig. 6-7. Axial temperature representations for heat transfer inside a tube. (a) Constant surface heat flux; (b) constant surface temperature.

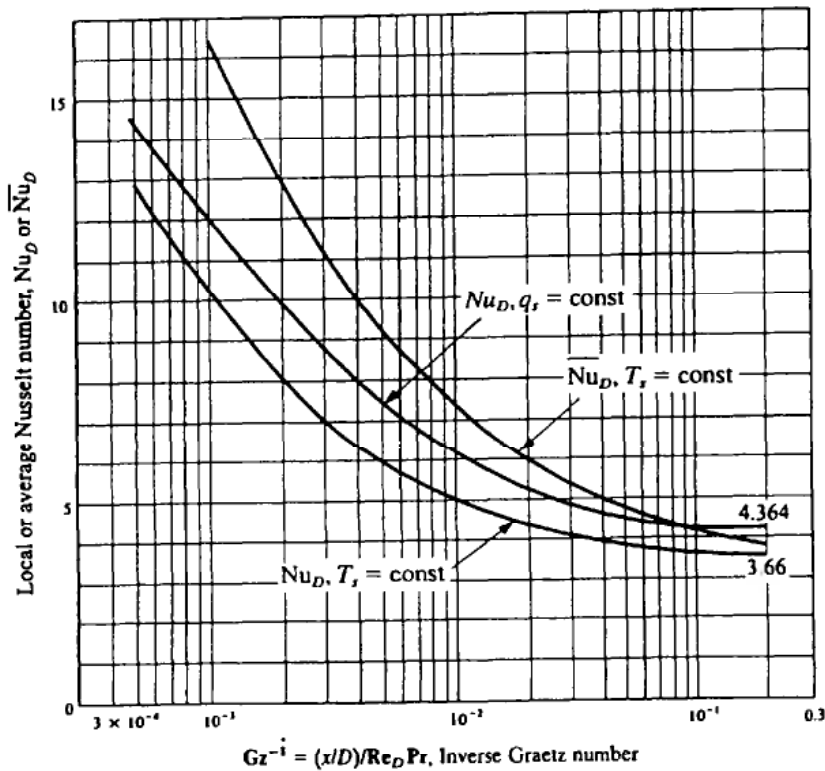


Fig. 6-8. Local and average Nusselt numbers for circular tube thermal entrance regions in fully developed laminar flow. [From J. P. Holman, *Heat Transfer*, 8th edn, ©1997, McGraw-Hill Book Company, New York, NY, p. 294. Reproduced with permission of McGraw-Hill Companies.]

laminar flow. Three cases of boundary conditions are shown. Note that these conditions yield two local and one average Nusselt number curves. Also note that as the thermal profile becomes developed (leaves the entry region) the asymptotic values of the Nusselt numbers are approached, viz, \bar{Nu}_D for q_s' constant approaches 4.364 while that for constant T_s approaches 3.656.

Figure 6-8 introduces the inverse Graetz number, $Gz^{-1} = (x/D)/(\text{Re}_D \text{Pr})$ and the Peclet number, $\text{Pe} = \text{Re}_D \text{Pr}$.

Constant Heat Flux, q_s''

Here the local value of q_s'' is constant in the thermally developed region, so we have over the thermally developed length L

$$q = q_{\text{conv}} = q_s''(P \cdot L) \quad (6.47)$$

Combining this with eq. (6.42) we have

$$q = q_s''(P \cdot L) = \dot{m}c_p(T_{b,o} - T_{b,i}) \quad (6.48)$$

which allows determination of the temperature change ($T_{b,o} - T_{b,i}$).

For constant q_s'' the right side of (6.45) is constant, yielding

$$\frac{dT_b}{dx} = \frac{q_s'' P}{\dot{m}c_p} = \text{constant} \quad (6.49)$$

Integrating over 0 to arbitrary x , there results

$$T_b(x) = T_{b,i} + \frac{q_s'' P}{\dot{m}c_p} x \quad (q_s'' = \text{const.}) \quad (6.50)$$

Convective correlations for constant q_s'' in laminar flow are dependent upon whether or not the flow is fully developed. These include

1. Fully developed velocity and thermal profiles

$$\text{Nu}_D = 4.364 \quad (6.51)$$

2. Fully developed velocity profiles with developing (entrance region) thermal profiles

Use Fig. 6-8

All properties in these correlations are to be evaluated at \bar{T}_b as given by eq. (6.43).

Constant Surface Temperature, T_s

Defining ΔT as $T_s - T_b$, eq. (6.46) can be written

$$\frac{dT_b}{dx} = -\frac{d(\Delta T)}{dx} = \frac{P}{\dot{m}c_p} h \Delta T \quad (6.52)$$

Separating variables and integrating with respect to x over the length 0 to L yields

$$\int_{\Delta T_i}^{\Delta T_o} \frac{d(\Delta T)}{\Delta T} = \frac{-P}{\dot{m}c_p} \int_0^L h dx$$

Thus

$$\ln \frac{\Delta T_o}{\Delta T_i} = \frac{-PL}{\dot{m}c_p} \int_0^L \frac{1}{L} h dx = \frac{-PL}{\dot{m}c_p} \bar{h} \quad (6.53)$$

where \bar{h} is the average value of the convective coefficient over the tube length, L . This can be expressed as

$$\frac{\Delta T_o}{\Delta T_i} = \frac{T_s - T_{b,o}}{T_s - T_{b,i}} = \exp\left(\frac{-PL}{\dot{m}c_p} \bar{h}\right) \quad (T_s = \text{const.}) \quad (6.54)$$

Integration of eq. (6.53) from 0 to x would yield an expression for $T_b(x)$, viz.

$$\frac{T_s - T_b(x)}{T_s - T_{b,i}} = \exp\left(-\frac{Px}{\dot{m}c_p} \bar{h}\right) \quad (T_s = \text{const.}) \quad (6.55)$$

Combining (6.55) with (6.42) we obtain

$$q_{\text{conv}} = \bar{h} A_s \Delta T_{lm} \quad (T_s = \text{const.}) \quad (6.56)$$

where

$$\Delta T_{lm} \equiv \frac{\Delta T_o - \Delta T_i}{\ln(\Delta T_o/\Delta T_i)} \quad (6.57)$$

Convective correlations for the constant surface temperature laminar case also depend on whether or not the flow is fully developed and include:

1. Fully developed velocity and thermal profiles

$$\mathbf{Nu}_D = 3.66 \quad (6.58)$$

2. Developing thermal profile and developed velocity profile

$$\overline{\mathbf{Nu}}_D = 3.66 + \frac{0.0668 (D/L) \mathbf{Re}_D \mathbf{Pr}}{1 + 0.04[(D/L) \mathbf{Re}_D \mathbf{Pr}]^{2/3}} \quad (\text{Hausen equation}) \quad (6.59)$$

$$\mathbf{Nu}_D \text{ or } \overline{\mathbf{Nu}}_D \quad (\text{From Fig. 6-8})$$

3. Combined entry lengths (Sieder-Tate equation)

$$\overline{\mathbf{Nu}}_D = 1.86 + \left(\frac{\mathbf{Re}_D \mathbf{Pr}}{L/D} \right)^{1/3} \left(\frac{\mu}{\mu_s} \right)^{0.14} \quad (6.60)$$

$$T_s = \text{constant}$$

$$0.48 \leq \mathbf{Pr} < 16\,700$$

$$0.0044 < \left(\frac{\mu}{\mu_s} \right) < 9.75$$

All properties in these average $\overline{\mathbf{Nu}}$ correlations, with the exception of the μ_s , are evaluated at \bar{T}_b given by eq. (6.43). The μ_s term is evaluated at T_s . Local \mathbf{Nu} expressions use properties at T_o .

6.5 SUMMARY OF TEMPERATURES FOR PROPERTY EVALUATIONS

In general, the temperatures for property evaluations are:

- External isothermal flow
 - properties at T_b or T_x
- External flow with heat transfer
 - properties at $T_f = (T_x + T_s)/2$
- Internal isothermal flow
 - properties at T_b
- Internal flow with heat transfer
 - properties at local T_b for local \mathbf{Nu}
 - properties at average $\bar{T}_b = (T_{b,i} + T_{b,o})/2$ for average $\overline{\mathbf{Nu}}$ approximation

Other specific temperatures for use in property evaluations are given in the text or solved problems.

These guidelines for property evaluations are generally valid for Chapters 6, 7, and 8.

Solved Problems

- 6.1.** Determine the x -direction equation of motion for steady flow in a laminar boundary layer. Assume ρ and μ are constant.

For a fixed control volume and steady flow, Newton's second law, for the x -direction, states that the resultant applied x -force equals the net rate of x -momentum transfer out of the volume, i.e.,

$$\sum F_x = \frac{1}{g_c} [(x\text{-momentum efflux}) - (x\text{-momentum influx})] \quad (1)$$

We apply this equation to an infinitesimal control volume (Δx by Δy by unit depth) from within the boundary layer (see Fig. 6-9). Mass enters the left face at the rate $\rho u_x \Delta y$, producing an x -momentum influx of $(\rho u_x \Delta y) u_x$. Similarly, momentum

$$\begin{aligned} \text{efflux through right face:} & \quad (\rho u_{x+\Delta x} \Delta y) u_{x+\Delta x} \\ \text{influx through bottom face:} & \quad (\rho v_y \Delta x) u_y \\ \text{efflux through top face:} & \quad (\rho v_{y+\Delta y} \Delta x) u_{y+\Delta y} \end{aligned}$$

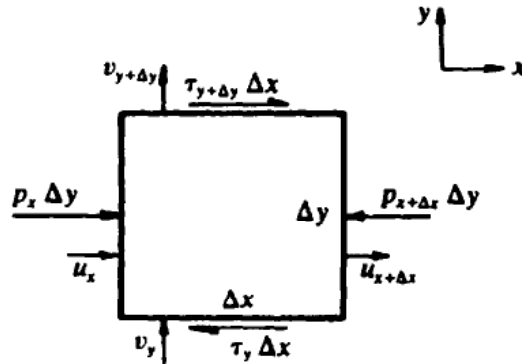


Fig. 6-9

The acting pressure and shear forces are as shown in the figure. Substituting in (1), for constant ρ ,

$$p_x \Delta y - p_{x+\Delta x} \Delta y + \tau_{y+\Delta y} \Delta x - \tau_y \Delta x = \frac{\rho}{g_c} [(uu)_{x+\Delta x} \Delta y + (vu)_{y+\Delta y} \Delta x] - \frac{\rho}{g_c} [(uu)_x \Delta y + (vu)_y \Delta x]$$

Rearranging, dividing by $\Delta x \Delta y$, and taking the limit as Δx and Δy approach zero, the result is

$$-\frac{\partial p}{\partial x} + \frac{\partial \tau}{\partial y} = \frac{\rho}{g_c} \left[\frac{\partial}{\partial x} (uu) + \frac{\partial}{\partial y} (vu) \right]$$

But

$$\frac{\partial}{\partial x} (uu) + \frac{\partial}{\partial y} (vu) = u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} \right) u$$

and the term in the parentheses vanishes, by the continuity equation. Moreover, $\tau = \mu_f \partial u / \partial y$; therefore,

$$\frac{\rho}{g_c} \left(u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = -\frac{\partial p}{\partial x} + \mu_f \frac{\partial^2 u}{\partial y^2} \quad (2)$$

since μ_f is constant. Assuming that $p = p(x)$ in agreement with Prandtl's boundary layer assumptions, and recalling that $\nu \equiv \mu_m / \rho = g_c \mu_f / \rho$, we see that (2) is equivalent to (6.1).

- 6.2.** By use of an order-of-magnitude analysis find a functional relationship for the boundary layer thickness δ , assuming constant fluid properties and zero pressure gradient.

The governing equations are:

$$\text{continuity:} \quad \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0$$

$$\text{x-momentum:} \quad u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \nu \frac{\partial^2 u}{\partial y^2}$$

Except very close to the surface, the velocity u within the boundary layer is of the order of the free-stream velocity V_∞ , i.e., $u \sim V_\infty$. And the y -dimension within the boundary layer is of the order of the boundary layer thickness, $y \sim \delta$. We can then approximate the continuity equation as

$$\frac{V_\infty}{x} + \frac{v}{\delta} \approx 0$$

giving

$$v \sim -\frac{V_\infty \delta}{x}$$

Using the estimates of u , y , and v in the x -momentum equation gives

$$V_\infty \frac{V_\infty}{x} + \frac{V_\infty \delta}{x} \frac{V_\infty}{\delta} \approx \nu \frac{V_\infty}{\delta^2} \quad \text{or} \quad \delta^2 \sim \frac{\nu x}{V_\infty}$$

Dividing by x^2 to make dimensionless,

$$\frac{\delta}{x} \sim \sqrt{\frac{\nu}{V_\infty x}} = \sqrt{\frac{1}{\text{Re}_x}}$$

which is (6.4).

- 6.3.** Air at 350 K and standard atmospheric pressure ($\nu = 20.76 \times 10^{-6} \text{ m}^2/\text{s}$) flows along a smooth flat plate at 12 m/s. For laminar flow, at what length from the leading edge does the boundary layer thickness reach 0.5 cm?

For laminar flow (6.10) can be solved for x :

$$\begin{aligned} \frac{\delta}{x} &= \frac{5.0}{\sqrt{V_\infty x / \nu}} \\ x &= \frac{\delta^2 V_\infty}{25 \nu} = \frac{(0.5 \times 10^{-2} \text{ m})(12 \text{ m/s})}{25(20.76 \times 10^{-6} \text{ m}^2/\text{s})} \\ x &= 5.78 \times 10^{-1} \text{ m} \end{aligned}$$

- 6.4.** A Pitot tube, located on the undercarriage of an airship 0.1 m aft of its leading edge, is to be used to monitor airspeed which varies from 32 to 130 kmh (kilometers per hour). The undercarriage is approximately flat, making the pressure gradient negligible. Air temperature is 4°C and the pressure is 24.8 inHg. To be outside of the boundary layer, at what distance should the Pitot tube be located from the undercarriage?

From Table B-4 (SI), the dynamic viscosity and density for air at standard atmospheric pressure and 277 K are

$$\begin{aligned} \mu &= 1.7553 \times 10^{-5} \text{ kg/m}\cdot\text{s} \\ \rho &= 1.2856 \text{ kg/m}^3 \end{aligned}$$

The ideal gas law is

$$\rho = \frac{p}{RT}; \quad \rho_1 = \frac{p_1}{RT}$$

and forming the ratio

$$\frac{\rho}{\rho_1} = \frac{p/RT}{p_1/RT} = \frac{p}{p_1}$$

Since p_1 is standard atmospheric pressure ($101\,325\text{ N/m}^2$) and p is $24.8\text{ inHg} = (8.398 \times 10^4\text{ N/m}^2)$ we obtain

$$\rho = 1.2856\text{ kg/m}^3 \left(\frac{8.398 \times 10^4\text{ N/m}^2}{101\,325\text{ N/m}^2} \right) = 1.065\text{ kg/m}^3$$

The kinematic viscosity is

$$\nu = \frac{\mu}{\rho} = \frac{1.7553 \times 10^{-5}\text{ kg/m}\cdot\text{s}}{1.065\text{ kg/m}^3} = 1.647 \times 10^{-5}\text{ m}^2/\text{s}$$

Assuming the flow is laminar, which must be checked, the boundary layer thickness at a given location varies inversely with the square root of Reynolds number, see (6.10). The critical case occurs, therefore, at the minimum speed.

$$\text{Re} = \frac{V_\infty x}{\nu} = \frac{(130\text{ km/h})(10^3\text{ m/km})(0.1\text{ m})}{(1.647 \times 10^{-5}\text{ m}^2/\text{s})(3600\text{ s/h})} = 219\,254 \approx 219\,000$$

and the flow is laminar.

Thus,

$$\text{Re}_{\min} = \frac{32 \times 10^3 \times 0.1}{1.647 \times 10^{-5}(3600)} = 53\,970 \approx 54\,000$$

Therefore

$$\delta_{\max} = \frac{5.0x}{\sqrt{\text{Re}_{\min}}} = \frac{5.0(0.1\text{ m})}{\sqrt{53\,970}} = 2.152 \times 10^{-3}\text{ m}$$

The Pitot tube must be located at some distance greater than this, which is easy to do since the boundary layer is so thin at this point.

- 6.5.** Approximate the skin friction drag on a 1 m long by 60 cm diameter cylinder, located axially in a wind tunnel, when the air speed is 4.5 m/s. The pressure is atmospheric and the temperature is 50°C .

From Appendix Fig. B-2, $\nu = 1.9 \times 10^{-5}\text{ m}^2/\text{s}$. Since the cylinder is located axially, the characteristic length for the calculation of Reynolds number is the length of the cylinder rather than its diameter; therefore,

$$\text{Re}_L = \frac{V_\infty L}{\nu} = \frac{(4.5\text{ m/s})(1\text{ m})}{1.9 \times 10^{-5}\text{ m}^2/\text{s}} = 236\,000$$

Note that from the Table B-4 (SI), $\nu = 18.02 \times 10^{-6}\text{ m}^2/\text{s}$ which is very close to the value from Fig. B-2. The flow is laminar, and the average skin friction coefficient, from (6.13), is

$$C_f = \frac{1.328}{\sqrt{\text{Re}_L}} = \frac{1.328}{\sqrt{236\,000}} = 2.728 \times 10^{-3}$$

The skin-friction drag force, F_f , is given by the product of average shear stress and total area, i.e.,

$$F_f = C_f \left(\frac{\rho_\infty V_\infty^2}{2} \right) A$$

where $\rho_\infty = 1.0949\text{ kg/m}^3$ from Table B-4 (SI). Hence

$$\begin{aligned} F_f &= \frac{2.728 \times 10^{-3}}{2} \left(\frac{1.0949\text{ kg}}{\text{m}^3} \right) \left(\frac{4.5\text{ m}}{\text{s}} \right)^2 (\pi)(0.6\text{ m})(1.0\text{ m}) \\ &= 5.700 \times 10^{-2} \frac{\text{kg}\cdot\text{m/s}^2}{\text{m}^2} = 5.700 \times 10^{-2}\text{ N} \end{aligned}$$

Conversely, we may express the friction force equation using $g_c = 1 \text{ (kg}\cdot\text{m)/(N}\cdot\text{s}^2)$ as

$$F_f = C_f \left(\frac{\rho_\infty V_\infty^2}{2g_c} \right) A = \frac{2.728 \times 10^{-3}}{2 \text{ (kg}\cdot\text{m/N}\cdot\text{s}^2)} \left(\frac{1.0949 \text{ kg}}{\text{m}^3} \right) \left(\frac{4.5 \text{ m}}{\text{s}} \right)^2 \\ \times (\pi)(0.6 \text{ m})(1.0 \text{ m}) \\ = 5.70 \times 10^{-2} \text{ N}$$

Note that this is a very small skin-friction force due to the small Reynolds number and velocity.

- 6.6.** A thermal sensor is to be located 2 m from the leading edge of a flat plate along which 10 °C glycerine flows at 19 m/s. The pressure is atmospheric. In order to calibrate the sensor the velocity components, u and v , must be known. At $y = 4.5 \text{ cm}$ determine the velocity components.

From Appendix Fig. B-2, $\nu = 2.79 \times 10^{-3} \text{ m}^2/\text{s}$. The Reynolds number is

$$\text{Re}_x = \frac{V_\infty x}{\nu} = \frac{(19 \text{ m/s})(2 \text{ m})}{2.79 \times 10^{-3} \text{ m}^2/\text{s}} = 13\,620$$

and the flow is laminar. But is the sensor within the boundary layer? From (6.10), at $x = 2 \text{ m}$,

$$\delta = \frac{5.0x}{\sqrt{\text{Re}_x}} = \frac{5(2 \text{ m})}{\sqrt{13\,620}} = 8.57 \text{ cm} > 4.5 \text{ cm}$$

so that the sensor is within the boundary layer.

The velocity components are obtained from the Blasius solution (Fig. 6-2). At

$$\eta = y \sqrt{\frac{V_\infty}{\nu x}} = (0.045 \text{ m}) \sqrt{\frac{19 \text{ m/s}}{(2.79 \times 10^{-3} \text{ m}^2/\text{s})(2 \text{ m})}} = 2.63$$

we have

$$\frac{u}{V_\infty} \approx 0.775 \quad \frac{v}{V_\infty} \sqrt{\text{Re}_x} \approx 0.48$$

giving

$$u \approx (0.775) V_\infty = (0.775)(19 \text{ m/s}) = 14.73 \text{ m/s}$$

$$v \approx \frac{(0.48) V_\infty}{\sqrt{\text{Re}_x}} = \frac{(0.48)(19)}{\sqrt{13\,620}} = 0.078 \text{ m/s}$$

- 6.7.** Derive (6.14) for steady, incompressible, laminar flow over a flat plate.

Consider the dashed control volume in Fig. 6-10, which is infinitesimal in the x -direction but finite in the y -direction. The forces acting on the volume are shown (there is no shear at the upper face, which is outside the boundary layer), as well as the mass fluxes through the faces. Notice that the mass efflux through the upper face exactly cancels the net mass influx through the other two faces; this is required by the equation of continuity. The corresponding x -momentum fluxes are:

$$\begin{aligned} \text{influx through left face:} & \int_0^h \rho u^2 dy \Big|_x \\ \text{efflux through right face:} & \int_0^h \rho u^2 dy \Big|_{x+\Delta x} \\ \text{efflux through upper face:} & V_\infty \left[\int_0^h \rho u dy \Big|_x - \int_0^h \rho u dy \Big|_{x+\Delta x} \right] \end{aligned}$$

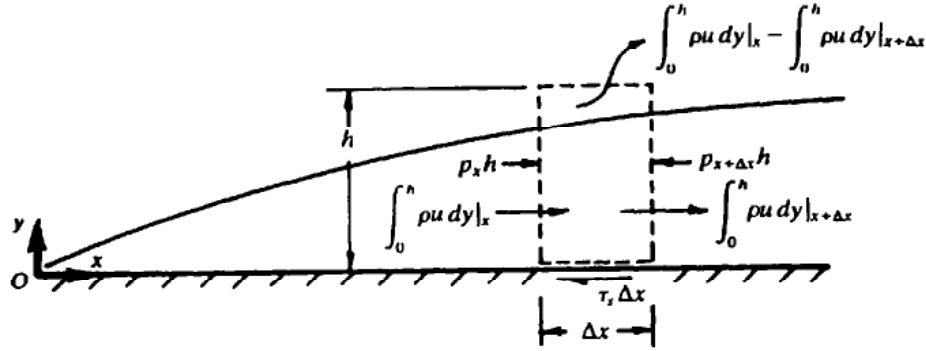


Fig. 6-10

where, in the last expression, V_∞ is evaluated at some point between x and $x + \Delta x$. Newton's law, (1) of Problem (6.1), then gives

$$p_x h - p_{x+\Delta x} h - \tau_s \Delta x = \frac{1}{g_c} \left\{ \int_0^h \rho u^2 dy \Big|_{x+\Delta x} + V_\infty \left[\int_0^h \rho u dy \Big|_x - \int_0^h \rho u dy \Big|_{x+\Delta x} \right] - \int_0^h \rho u^2 dy \Big|_x \right\}$$

Rearranging, dividing by Δx , and taking the limit as Δx approaches zero, we get ($\rho = \text{constant}$):

$$h \frac{dp}{dx} + \tau_s = \frac{\rho}{g_c} \left\{ -\frac{d}{dx} \int_0^h u^2 dy + V_\infty \frac{d}{dx} \int_0^h u dy \right\} \quad (1)$$

But, outside the boundary layer, Bernoulli's equation gives

$$\frac{dp}{dx} = -\frac{\rho}{g_c} V_\infty \frac{dV_\infty}{dx} \quad (2)$$

Also,

$$V_\infty \frac{d}{dx} \int_0^h u dy = \frac{d}{dx} \int_0^h V_\infty u dy - \frac{dV_\infty}{dx} \int_0^h u dy \quad (3)$$

Substituting (2) and (3) into (1) and recombining terms, we get

$$\tau_s = \frac{\rho}{g_c} \frac{d}{dx} \left[\int_0^h (V_\infty - u) u dy \right] + \frac{\rho}{g_c} \frac{dV_\infty}{dx} \int_0^h (V_\infty - u) dy \quad (4)$$

The upper limit of integration in (4) may be replaced by δ , yielding (6.14), since $V_\infty - u$ is zero outside the boundary layer.

6.8. Assuming a velocity profile of the form

$$\frac{u}{V_\infty} = C + C_1 \frac{y}{\delta} + C_2 \left(\frac{y}{\delta} \right)^2 + C_3 \left(\frac{y}{\delta} \right)^3$$

within the boundary layer, evaluate the constants subject to the boundary conditions (6.16).

Since $u = 0$ for $y = 0$, $C = 0$. Applying $u = V_\infty$ when $y = \delta$ gives

$$1 = C_1 + C_2 + C_3 \quad (1)$$

Differentiating the assumed profile (V_∞ and δ are functions of x alone),

$$\frac{1}{V_\infty} \frac{\partial u}{\partial y} = \frac{C_1}{\delta} + \frac{2C_2}{\delta} \left(\frac{y}{\delta} \right) + \frac{3C_3}{\delta} \left(\frac{y}{\delta} \right)^2 \quad (2)$$

But $\partial u/\partial y = 0$ when $y = \delta$; therefore,

$$0 = C_1 + 2C_2 + 3C_3 \quad (3)$$

A second differentiation of the velocity profile gives

$$\frac{1}{V_\infty} \frac{\partial^2 u}{\partial y^2} = \frac{2C_2}{\delta^2} + \frac{6C_3}{\delta^2} \left(\frac{y}{\delta}\right) \quad (4)$$

from which (at $y = 0$, $\partial^2 u/\partial y^2 = 0$) we get

$$0 = C_2 \quad (5)$$

Solving (1), (3), and (5) simultaneously, the resulting constants are:

$$C_1 = \frac{3}{2} \quad C_3 = -\frac{1}{2}$$

giving the cubic velocity profile cited in Fig. 6-3 and Table 6-1, viz.

$$\frac{u}{V_\infty} = \frac{3}{2} \frac{y}{\delta} - \frac{1}{2} \left(\frac{y}{\delta}\right)^3$$

- 6.9.** Using the cubic velocity profile from Problem 6.8 in the von Kármán integral equation (6.15), determine the boundary layer thickness and the average skin-friction coefficient for laminar flow over a flat plate.

From (2) of Problem 6.8,

$$\left. \frac{1}{V_\infty} \frac{\partial u}{\partial y} \right|_{y=0} = \frac{C_1}{\delta} = \frac{3}{2\delta} \quad (1)$$

where now, by hypothesis, V_∞ is constant. Equation (6.15) becomes

$$\frac{3\nu}{2V_\infty \delta} = \frac{d}{dx} \int_0^\delta \left[1 - \frac{3}{2} \frac{y}{\delta} + \frac{1}{2} \left(\frac{y}{\delta}\right)^3 \right] \left[\frac{3}{2} \frac{y}{\delta} - \frac{1}{2} \left(\frac{y}{\delta}\right)^3 \right] dy$$

which integrates to give

$$\frac{3\nu}{2V_\infty \delta} = \frac{39}{280} \frac{d\delta}{dx}$$

which is a first-order differential equation for δ . Separating the variables and integrating ($\delta = 0$ at $x = 0$),

$$\frac{140\nu}{13V_\infty} \int_0^x dx = \int_0^\delta \delta d\delta$$

and this gives

$$\frac{\delta^2}{x^2} = \frac{280/13}{V_\infty x/\nu} \quad \text{or} \quad \frac{\delta}{x} = \frac{4.64}{\sqrt{\text{Re}_x}} \quad (2)$$

as shown in Table 6-1.

From the definition of local skin-friction coefficient, (6.11),

$$c_f \equiv \frac{\tau_s}{\rho V_\infty^2/2g_c}$$

and Newton's law of viscosity,

$$\tau_s = \mu_f \left. \frac{\partial u}{\partial y} \right|_{y=0}$$

we get, using (1),

$$c_f = \frac{3\nu}{V_\infty \delta} = \frac{3}{(\text{Re}_x)(\delta/x)}$$

Substituting for δ/x from (2), we get

$$c_f = \frac{0.646}{\sqrt{\text{Re}_x}} \quad (3)$$

from which the average value may be determined as

$$C_f = \frac{1}{L} \int_0^L c_f dx = \frac{1.292}{\sqrt{\text{Re}_L}} \quad (4)$$

- 6.10.** Air at 20°C and one atmosphere flows parallel to a flat plate at a velocity of 3.5 m/s. Compare the boundary layer thickness and the local skin-friction coefficient at $x = 1$ m from the exact Blasius solution and from the approximate von Kármán integral technique assuming the cubic velocity profile.

From Appendix Fig. B-2, $\nu = 1.5 \times 10^{-5}$ m²/s and the Reynolds number is

$$\text{Re}_x = \frac{V_\infty x}{\nu} = \frac{(3.5 \text{ m/s})(1 \text{ m})}{1.5 \times 10^{-5} \text{ m}^2/\text{s}} = 233\,300$$

Therefore, from the exact solution, (6.10) and (6.12):

$$\delta = \frac{(5.0)x}{\sqrt{\text{Re}_x}} = \frac{(5.0)(1 \text{ m})}{\sqrt{233\,300}} = 0.010\,35 \text{ m} = 1.035 \text{ cm}$$

$$c_f = \frac{0.664}{\sqrt{\text{Re}_x}} = \frac{0.664}{\sqrt{233\,300}} = 1.37 \times 10^{-3}$$

From the approximate solution, (2) and (3) of Problem 6.9:

$$\delta = \frac{(4.64)x}{\sqrt{\text{Re}_x}} = 0.961 \text{ cm} \quad c_f = \frac{0.646}{\sqrt{\text{Re}_x}} = 1.34 \times 10^{-3}$$

We note that the approximate solution deviates from the exact solution by 7.2% for the boundary layer thickness and 2.9% for the local skin-friction coefficient, deviations which are quite acceptable for the usual engineering accuracy.

- 6.11.** What is the drag per unit width on one side of the plate of Problem 6.10 for a 1 m length beginning at the leading edge?

The drag force F_f is given by

$$F_f = C_f \left(\frac{\rho_\infty V_\infty^2}{2g_c} \right) A \quad (1)$$

From Table B-4 (SI), $\rho_\infty = 1.210$ kg/m³, and in SI units

$$g_c = 1.00 \frac{\text{kg} \cdot \text{m}}{\text{N} \cdot \text{s}^2}$$

The average coefficient of friction (Blasius solution) is given by (6.13):

$$C_f = \frac{1.328}{\sqrt{\text{Re}_L}} = \frac{1.328}{\sqrt{233\,300}} = 2.75 \times 10^{-3}$$

where the Reynolds number based on $L = 1$ is the same as that based on $x = 1$. Therefore,

$$F_f = (2.75 \times 10^{-3}) \frac{(1.210 \text{ kg/m}^3)(3.5 \text{ m/s})^2}{2(1 \text{ kg} \cdot \text{m/N} \cdot \text{s}^2)} (1 \text{ m}) = 0.02038 \text{ N/m}$$

- 6.12.** Assuming constant fluid properties (k, c_p, μ), determine the energy equation for a steady, incompressible laminar boundary layer by making an energy balance on a small control volume from within the boundary layer. Neglect conduction in the flow direction.

Choosing an element, Δx by Δy by unit depth, from the boundary layer of Fig. 6-4, the respective energy terms are shown in the enlarged view of Fig. 6-11. The convective terms q_h may be written in terms of the specific heat, assumed constant, i.e.,

$$q_h = \dot{m}c_p(T - T_{ref})$$

where $\dot{m} = \rho u$ in the x -direction and $\dot{m} = \rho v$ in the y -direction. The conductive terms are, from Fourier's law,

$$q_k = -k \frac{\partial T}{\partial y}$$

The remaining terms, designated $u\tau\Delta x$, account for the heat generated by fluid friction—a work rate in which $\tau\Delta x$ is the force and u is the velocity at which the shear occurs. This term arises because fluid on the top face of the control volume moves faster than fluid on the bottom face.

Equating the rate of energy entering the control volume to the rate of energy leaving, we get

$$q_h|_x \Delta y + q_h|_y \Delta x + q_k|_y \Delta x + u_{y+\Delta y} \tau_{y+\Delta y} \Delta x = q_h|_{x+\Delta x} \Delta y + q_h|_{y+\Delta y} \Delta x + q_k|_{y+\Delta y} \Delta x + u_y \tau_y \Delta x$$

Rearranging, dividing by $\Delta x \Delta y$, and taking the limit as Δx and Δy approach zero, the equation simplifies to

$$\frac{\partial q_h}{\partial x} + \frac{\partial q_h}{\partial y} + \frac{\partial q_k}{\partial y} = \frac{\partial(u\tau)}{\partial y}$$

or, in terms of measurable parameters, where $\tau = \mu_f \partial u / \partial y$,

$$\frac{\partial}{\partial x} (\rho u c_p T) + \frac{\partial}{\partial y} (\rho v c_p T) + \frac{\partial}{\partial y} \left(-k \frac{\partial T}{\partial y} \right) = \frac{\partial}{\partial y} \left(u \mu_f \frac{\partial u}{\partial y} \right)$$

Further simplification yields

$$\rho c_p \left[\left(u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) + T \left(\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} \right) \right] = k \frac{\partial^2 T}{\partial y^2} + \frac{\partial}{\partial y} \left(u \mu_f \frac{\partial u}{\partial y} \right)$$

where the term multiplying T is zero from continuity and the last term is negligible except in high-speed flows; therefore,

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2}$$

where $\alpha = k / \rho c_p$. This is (6.18).

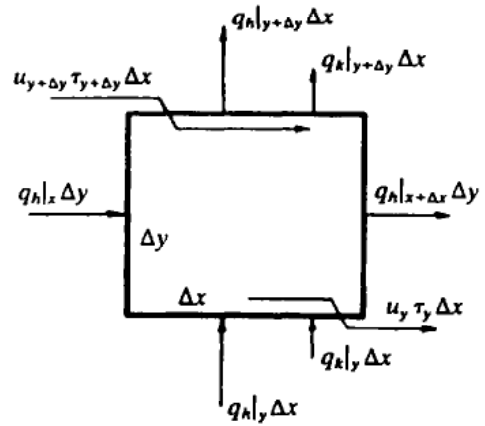


Fig. 6-11

- 6.13.** How do the thermal and hydrodynamic boundary layer thicknesses from the Pohlhausen and Blasius results compare?

From Fig. 6-2,

$$\left. \frac{\partial(u/V_\infty)}{\partial\eta} \right|_{\eta=0} = 0.332$$

But this can be approximated as

$$\left. \frac{\partial(u/V_\infty)}{\partial\eta} \right|_{\eta=0} \approx \frac{1}{\delta} = 0.332 \quad (1)$$

From (6.24),

$$\left. \frac{d\theta}{d\eta} \right|_{\eta=0} = 0.332\text{Pr}^{1/3}$$

which can be approximated as

$$\left. \frac{d\theta}{d\eta} \right|_{\eta=0} \approx \frac{\theta_\infty - \theta_s}{\delta_t} = \frac{1}{T_\infty - T_s} \frac{T_\infty - T_s}{\delta_t} = \frac{1}{\delta_t} = 0.332\text{Pr}^{1/3} \quad (2)$$

Combining (1) and (2), we get

$$\blacksquare \quad \delta_t = \frac{\delta}{\text{Pr}^{1/3}}$$

- 6.14.** By making an energy balance on the finite control volume shown in Fig. 6-12, find an expression for the heat conducted into the laminar, incompressible boundary layer at the surface of a flat plate, assuming ρ , c_p , and k are constant.

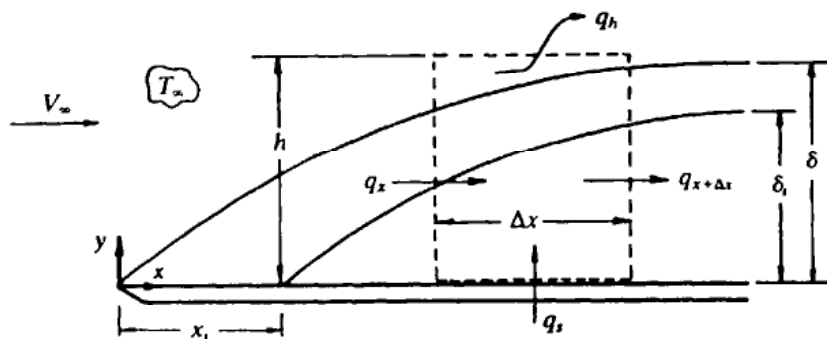


Fig. 6-12

Mass enters the left face of the control volume, of unit depth, at the rate

$$\int_0^h \rho u dy \Big|_x$$

carrying with it (convecting) energy (enthalpy)

$$q_x = \int_0^h \rho u (c_p T) dy \Big|_x$$

Similarly, at $x + \Delta x$ the enthalpy flux is

$$q_{x+\Delta x} = \int_0^h \rho u (c_p T) dy \Big|_{x+\Delta x}$$

The mass leaving the top face of the volume is, by continuity,

$$\int_0^h \rho u dy \Big|_x - \int_0^h \rho u dy \Big|_{x+\Delta x}$$

and the temperature is constant at T_∞ , since this face is outside the thermal boundary layer. Hence, the energy flux is

$$q_h = c_p T_\infty \left[\int_0^h \rho u dy \Big|_x - \int_0^h \rho u dy \Big|_{x+\Delta x} \right]$$

Energy is conducted into the lower face of the control volume at the rate

$$q_s = -k \frac{\partial T}{\partial y} \Big|_{y=0} \Delta x$$

Balancing these individual energy terms for the element, we get

$$q_x + q_s = q_{x+\Delta x} + q_h$$

$$\rho c_p \int_0^h u T dy \Big|_x - k \frac{\partial T}{\partial y} \Big|_{y=0} \Delta x = \rho c_p \int_0^h u T dy \Big|_{x+\Delta x} + \rho c_p T_\infty \left[\int_0^h u dy \Big|_x - \int_0^h u dy \Big|_{x+\Delta x} \right]$$

Transposing the first term to the right-hand side, dividing by $-\rho c_p \Delta x$, and letting $\Delta x \rightarrow 0$, we obtain (6.29):

$$\alpha \frac{\partial T}{\partial y} \Big|_{y=0} = -\frac{d}{dx} \int_0^h u T dy + T_\infty \frac{d}{dx} \int_0^h u dy$$

$$= \frac{d}{dx} \left[\int_0^h (T_\infty - T) u dy \right] = \frac{d}{dx} \left[\int_0^{\delta_i} (T_\infty - T) u dy \right]$$

since $T_\infty - T = 0$ for $y > \delta_i$.

6.15. Using cubic velocity and temperature distributions in the integral boundary layer energy equation, (6.29), determine the convective heat transfer coefficient for laminar flow over a flat plate that has an unheated starting length x_i .

The cubic velocity profile was obtained in Problem 6.8. Since the boundary conditions on

$$\theta \equiv \frac{T - T_s}{T_\infty - T_s}$$

[see (6.19)] have the same form as those on u/V_∞ , the cubic temperature distribution is simply

$$\theta = \frac{3}{2} \frac{y}{\delta_i} - \frac{1}{2} \left(\frac{y}{\delta_i} \right)^3 \tag{1}$$

and (6.29) becomes

$$\alpha \frac{\partial T}{\partial y} \Big|_{y=0} = (T_\infty - T_s) V_\infty \frac{d}{dx} \int_0^{\delta_i} \left[1 - \frac{3}{2} \frac{y}{\delta_i} + \frac{1}{2} \left(\frac{y}{\delta_i} \right)^3 \right] \left[\frac{3}{2} \frac{y}{\delta_i} - \frac{1}{2} \left(\frac{y}{\delta_i} \right)^3 \right] dy$$

Multiplying and simplifying, we get

$$\alpha \frac{\partial T}{\partial y} \Big|_{y=0} = (T_\infty - T_s) V_\infty \frac{d}{dx} \int_0^{\delta_i} \left[\frac{3}{2\delta_i} y - \frac{9}{48\delta_i^2} y^2 - \frac{1}{2\delta_i^3} y^3 + \left(\frac{3}{48\delta_i^3} + \frac{3}{4\delta_i^3} \right) y^4 - \frac{1}{48\delta_i^3} y^6 \right] dy$$

$$= (T_\infty - T_s) V_\infty \frac{d}{dx} \left[\frac{3}{4} \frac{\delta_i^2}{\delta_i} - \frac{3}{4} \frac{\delta_i^2}{\delta_i} - \frac{1}{8} \frac{\delta_i^4}{\delta_i^3} + \frac{3}{20} \left(\frac{\delta_i^2}{\delta_i} + \frac{\delta_i^4}{\delta_i^3} \right) - \frac{1}{28} \frac{\delta_i^4}{\delta_i^3} \right]$$

Differentiating (1) to get the temperature gradient for the left side of the equation, and letting $\zeta \equiv \delta_i/\delta$, the result simplifies to

$$\frac{3\alpha}{2\zeta\delta} = V_\infty \frac{d}{dx} \left[\delta \left(\frac{3}{20} \zeta^2 - \frac{3}{280} \zeta^4 \right) \right] \quad (2)$$

From Problem 6.13, $\delta_i = \delta/\text{Pr}^{1/3}$. Since Pr is close to unity for most gases and quite large for most viscous fluids (except for liquid metals), $\zeta \leq 1$, and $\zeta^4 \ll \zeta^2$; hence, we may neglect the ζ^4 -term, yielding

$$\frac{10\alpha}{\zeta\delta} = V_\infty \frac{d}{dx} (\delta\zeta^2) = V_\infty \left(2\delta\zeta \frac{d\zeta}{dx} + \zeta^2 \frac{d\delta}{dx} \right)$$

or

$$\frac{10\alpha}{V_\infty} dx = 2\zeta^2 \delta^2 d\zeta + \zeta^3 \delta d\delta \quad (3)$$

From Problem 6.9, the hydrodynamic solution,

$$\delta^2 = \frac{280}{13} \frac{\nu x}{V_\infty}$$

Using this and $\delta d\delta = (140/13)(\nu/V_\infty) dx$ in (3) yields

$$\frac{\alpha}{V_\infty} dx = 2\zeta^2 \frac{28}{13} \frac{\nu x}{V_\infty} d\zeta + \zeta^3 \frac{14}{13} \frac{\nu}{V_\infty} dx$$

which simplifies to

$$\zeta^3 + 4x\zeta^2 \frac{d\zeta}{dx} = \frac{13}{14} \frac{\alpha}{\nu}$$

This equation can be expressed as an ordinary differential equation in ζ^3 :

$$\frac{4x}{3} \frac{d\zeta^3}{dx} + \zeta^3 = \frac{13}{14} \text{Pr} \quad (4)$$

with boundary condition

$$\text{at } x = x_i: \quad \zeta^3 = \left(\frac{\delta_i}{\delta} \right)^3 = 0 \quad (5)$$

The general solution of (4) is

$$\zeta^3 = Cx^{-3/4} + \frac{13}{14} \text{Pr}^{-1}$$

and (5) gives

$$C = -\frac{13}{14} \frac{x_i^{3/4}}{\text{Pr}}$$

Therefore,

$$\zeta = \frac{\delta_i}{\delta} = \frac{0.976}{\text{Pr}^{1/3}} \left[1 - \left(\frac{x_i}{x} \right)^{3/4} \right]^{1/3} \quad (6)$$

The local heat-transfer coefficient h_x is defined by

$$q_s'' = h_x(T_s - T_\infty) = -k \frac{\partial T}{\partial y} \Big|_{y=0}$$

or

$$h_x = -\frac{k}{(T_s - T_\infty)} \frac{3}{2\delta_i} (T_\infty - T_s) = \frac{3k}{2\delta_i}$$

Substituting the expression (6) for δ , and (2) of Problem 6.9 for δ , the local heat transfer coefficient is

$$h_x = \frac{3}{2} \frac{k}{x} \left[1 - \left(\frac{x_t}{x} \right)^{3/4} \right]^{-1/3} \frac{\text{Pr}^{1/3} \text{Re}_x^{1/2}}{(0.976)(4.46)}$$

which, upon multiplying both sides by x/k , gives (6.30):

$$\text{Nu}_x \equiv \frac{h_x x}{k} = (0.332) \text{Re}_x^{1/2} \text{Pr}^{1/3} \left[1 - \left(\frac{x_t}{x} \right)^{3/4} \right]^{-1/3}$$

- 6.16.** Castor oil at 38°C flows over a wide, 6 m long, heated plate at 0.06 m/s. For a surface temperature of 93°C, determine: (a) the hydrodynamic boundary layer thickness δ at the end of the plate, (b) the total drag on the surface per unit width, (c) the thermal boundary layer thickness δ_t at the end of the plate, (d) the local heat transfer coefficient h_x at the end of the plate, and (e) the total heat flux from the surface per unit width. Assume the thermal diffusivity α to be $7.22 \times 10^{-8} \text{ m}^2/\text{s}$ and the thermal conductivity to be 0.213 W/m·K at the film temperature.

For moderate temperature differences between the free stream and surface, good results are obtained by assuming constant fluid properties evaluated at film temperature T_f ; therefore,

$$T_f = \frac{T_s + T_\infty}{2} = 65.5^\circ\text{C}$$

At the end of the plate the Reynolds number is

$$\text{Re}_L = \frac{V_\infty L}{\nu} = \frac{(0.06 \text{ m/s})(6.0 \text{ m})}{6.0 \times 10^{-5} \text{ m}^2/\text{s}} = 6000$$

where the kinematic viscosity is taken from Appendix B, Fig. B-2. The flow is laminar throughout. Using the dynamic viscosity from Appendix B, Fig. B-1 at the film temperature, the density is

$$\rho = \frac{\mu_m}{\nu} = \frac{6.0 \times 10^{-2} \text{ kg/m}\cdot\text{s}}{6.0 \times 10^{-5} \text{ m}^2/\text{s}} = 1000 \text{ kg/m}^3$$

Note that the round numbers such as 6000, 1000, are merely a circumstance of the author's reading of property values in Figs. B-1 and B-2.

- (a) From (6.10),

$$\delta = \frac{5.0L}{\sqrt{\text{Re}_L}} = \frac{5.0(6.0 \text{ m})}{\sqrt{6000}} = 0.387 \text{ m}$$

- (b) The average skin-friction coefficient is given by (6.13):

$$C_f = \frac{1.328}{\sqrt{\text{Re}_L}} = \frac{1.328}{\sqrt{6000}} = 0.01714$$

and the drag F_f is given by

$$\begin{aligned} F_f &= C_f A \frac{\rho_\infty V_\infty^2}{2} = 0.01714 \left(\frac{6 \text{ m}^2}{\text{m}} \right) \frac{(1000 \text{ kg/m}^3)(0.06 \text{ m/s})^2}{2} \\ &= 0.185 \frac{\text{kg/m}\cdot\text{s}^2}{\text{m}} = 0.185 \text{ N/m} \end{aligned}$$

- (c) To get the thermal boundary layer thickness the Prandtl number is needed; it is

$$\text{Pr} = \frac{\nu}{\alpha} = \frac{6.0 \times 10^{-5} \text{ m}^2/\text{s}}{7.22 \times 10^{-8} \text{ m}^2/\text{s}} = 8.31 \times 10^2$$

From Problem 6.13, the δ and δ_t relationship is

$$\delta_t = \frac{\delta}{\text{Pr}^{1/3}} = \frac{0.387 \text{ m}}{(831)^{1/3}} 0.041 \text{ m}$$

and we see that the thermal boundary layer thickness is an order of magnitude less than the hydrodynamic boundary layer thickness.

(d) The local heat transfer coefficient at $x = L$ is given by (6.25) as

$$\begin{aligned} h_L &= (0.332)k \sqrt{\frac{V_\infty}{\nu L}} \text{Pr}^{1/3} \\ &= 0.332(0.213 \text{ W/m}\cdot\text{K}) \sqrt{\frac{0.06 \text{ m/s}}{(6 \times 10^{-5} \text{ m}^2/\text{s}) 6 \text{ m}}} (8.31 \times 10^2)^{1/3} \\ &= 8.58 \text{ W/m}^2\cdot\text{K} \end{aligned}$$

(e) From (6.27) we can get the average heat transfer coefficient required in evaluating the total heat flux, i.e.,

$$\bar{h} = 2h_L = 2(8.58) = 17.16 \text{ W/m}^2\cdot\text{K}$$

The total heat transfer is then given by

$$\begin{aligned} q_s' &= \bar{h}A_s'(T_s - T_\infty) \\ &= \left(17.16 \frac{\text{W}}{\text{m}^2\cdot\text{K}}\right) \left(\frac{6 \text{ m}^2}{\text{m}}\right) [(93 - 38)^\circ\text{C}] \\ &= 5665 \text{ W/m} \end{aligned}$$

6.17. Find the velocity distribution for fully developed, steady, laminar flow in a tube by considering the force equilibrium of a cylindrical element of fluid.

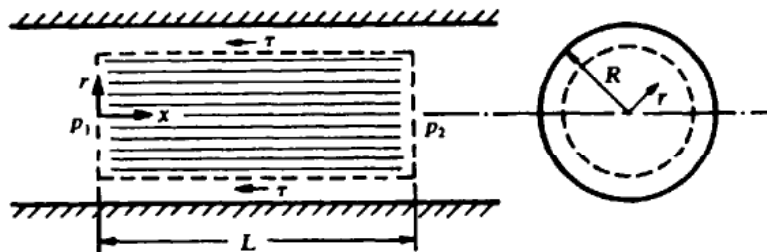


Fig. 6-13

Taking the element shown in Fig. 6-13, the forces are (1) shear on the cylindrical surface and (2) normal forces due to pressure on the ends. There is no change in momentum since the velocity is the same at stations 1 and 2. Therefore, a force balance gives

$$(p_1 - p_2) \pi r^2 = \tau(2\pi rL)$$

But

$$\tau = -\mu_f \frac{du}{dr}$$

so

$$\frac{du}{dr} = -\frac{p_1 - p_2}{2\mu_f L} r$$

Separating variables and integrating,

$$\int_u^0 du = -\frac{p_1 - p_2}{2\mu_f L} \int_r^R r dr$$

$$u = \frac{1}{4\mu_f} \frac{p_1 - p_2}{L} (R^2 - r^2)$$

which is equivalent to (6.32) with

$$\frac{dp}{dx} = -\frac{p_1 - p_2}{L}$$

- 6.18.** What is the pressure drop in an 18 m length of smooth 1.0 cm i.d. tubing when 25 °C benzene flows at an average velocity of 0.12 m/s?

Assume fully developed flow. The Reynolds number is

$$\mathbf{Re}_D = \frac{VD}{\nu} = \frac{(0.12 \text{ m/s})(0.01 \text{ m})}{7 \times 10^{-7} \text{ m}^2/\text{s}} = 1714$$

where the kinematic viscosity is from Appendix Fig. B-2. Since $\mathbf{Re}_D < 2000$, (6.37) gives the friction factor as

$$f = \frac{64}{\mathbf{Re}_D} = \frac{64}{1714} = 3.73 \times 10^{-2} = 0.0373$$

and the pressure drop is given by (6.35),

$$\Delta p = f \frac{L}{D} \frac{\rho V^2}{2}$$

where $\rho = \mu/\nu$. From Fig. B-1, $\mu \approx 6 \times 10^{-4} \text{ kg/m}\cdot\text{s}$, so

$$\rho = \frac{6 \times 10^{-4} \text{ kg/m}\cdot\text{s}}{7 \times 10^{-7} \text{ m}^2/\text{s}} = 8.57 \times 10^2 \text{ kg/m}^3$$

and

$$\Delta p = (0.0373) \left(\frac{18 \text{ m}}{0.01 \text{ m}} \right) \left(\frac{8.57 \times 10^2 \text{ kg}}{\text{m}^3} \right) \left(\frac{1}{2} \right) (0.12 \text{ m/s})^2$$

$$= 4.14 \times 10^2 \text{ kg/m}\cdot\text{s}^2 = 414 \text{ Pa}$$

Note: We could write the Δp expression to include g_c , i.e.,

$$\Delta p = f \frac{L}{D} \frac{\rho V^2}{2g_c} \text{ yielding } \frac{414 \text{ kg/m}\cdot\text{s}^2}{1 \text{ kg}\cdot\text{m/N}\cdot\text{s}^2}$$

$$= 414 \text{ N/m}^2$$

- 6.19.** What volumetric flow rate of 50 °C water can be developed in 20 m of smooth 2 cm i.d. tubing by a pump having a total head capacity of 0.60 N/m²?

Assuming laminar flow, the Hagen–Poiseuille equation, (6.39), holds. Using the data of Table B-3 (SI), the dynamic viscosity is

$$\mu_m = \rho\nu = [(61.80)(16.018)][(6.11 \times 10^{-6})(0.0929)] = 0.00056 \text{ kg/m}\cdot\text{s}$$

or $\mu_f = 0.00056 \text{ N}\cdot\text{s}/\text{m}^2$. Hence,

$$Q = \frac{\pi}{8(0.00056 \text{ N}\cdot\text{s}/\text{m}^2)} \frac{(0.01 \text{ m})^4}{20 \text{ m}} (0.60 \text{ N}/\text{m}^2) = 4.2 \times 10^{-6} \text{ m}^3/\text{s}$$

or

$$Q = \left(4.2 \times 10^{-6} \frac{\text{m}^3}{\text{s}}\right) \left(\frac{1000 \text{ liter}}{\text{m}^3}\right) \left(\frac{3600 \text{ s}}{\text{h}}\right) = 15.1 \text{ liter/h}$$

To check the assumption of laminar flow, the mean velocity is required.

$$V = \frac{Q}{A} = \frac{4.2 \times 10^{-6} \text{ m}^3/\text{s}}{(\pi/4)(0.02 \text{ m})^2} = 0.0134 \text{ m/s}$$

and the kinematic viscosity is $\nu = 5.7 \times 10^{-7} \text{ m}^2/\text{s}$, from Table B-3 (SI), giving a Reynolds number of

$$\text{Re}_D = \frac{VD}{\nu} = \frac{(0.0134 \text{ m/s})(0.02 \text{ m})}{5.7 \times 10^{-7} \text{ m}^2/\text{s}} = 470$$

Since $\text{Re}_D < 2000$, the assumption of laminar flow was valid.

- 6.20.** What is the pressure drop in 100 feet of 1/2 in by 1 in rectangular duct when 125 °F water flows at 0.2 fps?

Assuming the duct flows full, the hydraulic diameter is

$$D_h = \frac{4A}{P} = \frac{4(0.5 \text{ in})(1 \text{ in})}{3 \text{ in}} = 0.667 \text{ in}$$

The Reynolds number is

$$\text{Re} = \frac{VD_h}{\nu} = \frac{(0.2 \text{ ft/s})(0.667/12 \text{ ft})}{6 \times 10^{-6} \text{ ft}^2/\text{s}} = 1853$$

where the kinematic viscosity is taken from Appendix Fig. B-2; the flow is laminar. Hence, the Darcy-Weisbach equation, (6.35), is valid when the friction factor is taken from Table 6-3 at the ratio 0.50, i.e.,

$$f \cdot \text{Re} = 62.19 \quad \text{or} \quad f = \frac{62.19}{1853} = 0.03356$$

Therefore,

$$\Delta p = f \frac{L}{D_h} \frac{\rho V^2}{2g_c} = (0.03356) \frac{100}{0.667/12} \frac{(62.4 \text{ lb}_m/\text{ft}^3)(0.2 \text{ ft/s})^2}{2(32.2 \text{ lb}_m \cdot \text{ft}/\text{lb}_f \cdot \text{s}^2)} = 2.340 \text{ psf}$$

- 6.21.** Derive an expression for Nusselt number for fully developed laminar flow in a tube with constant heat flux.

Neglecting axial conduction, Fig. 6-14 shows the radial conduction and the axial enthalpy transport in an annular control element of length Δx and thickness Δr . An energy balance on the annular element gives

$$-2\pi r k \frac{\partial T}{\partial r} \Big|_r \Delta x + (2\pi r \Delta r \rho c_p u \theta)_x = -2\pi(r + \Delta r) k \frac{\partial T}{\partial r} \Big|_{r+\Delta r} \Delta x + (2\pi r \Delta r \rho c_p u \theta)_{x+\Delta x}$$

where $\theta = T - T_{\text{ref}}$. Rearranging, dividing by $2\pi \Delta x \Delta r$, and taking the limit as Δr and Δx approach zero, we obtain the governing energy equation

$$\frac{\partial}{\partial r} \left(r \frac{\partial T}{\partial r} \right) = \frac{ur}{\alpha} \frac{\partial T}{\partial x} \quad (1)$$

for constant fluid properties and $\alpha \equiv k/\rho c_p$.

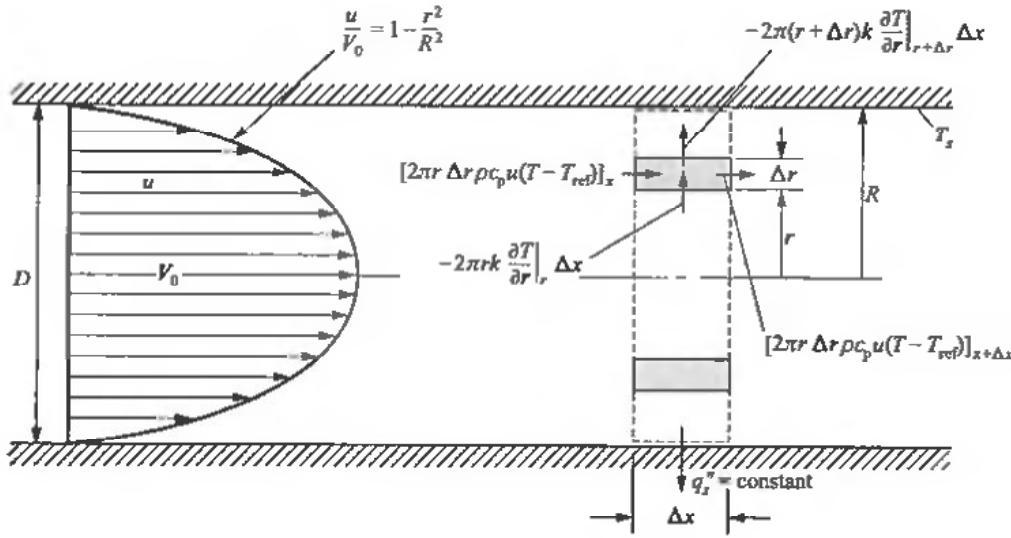


Fig. 6-14. Fully Developed Laminar Flow in a Tube with Constant Heat Flux

In order to solve the energy equation, an expression for the local velocity u is needed. This is furnished by combining (6.32) with the expression for V_0 , giving

$$\frac{u}{V_0} = 1 - \frac{r^2}{R^2} \tag{2}$$

where V_0 is the centerline velocity. We then have

$$\frac{\partial}{\partial r} \left(r \frac{\partial T}{\partial r} \right) = \frac{1}{\alpha} \frac{\partial T}{\partial x} V_0 \left(1 - \frac{r^2}{R^2} \right) r \tag{3}$$

For a fully developed thermal field and constant heat flux, $\partial T/\partial x$ is constant. Thus (3) integrates to give

$$r \frac{\partial T}{\partial r} = \frac{1}{\alpha} \frac{\partial T}{\partial x} V_0 \left(\frac{r^2}{2} - \frac{r^4}{4R^2} \right) + C_1 \tag{4}$$

$$T = \frac{1}{\alpha} \frac{\partial T}{\partial x} V_0 \left(\frac{r^2}{4} - \frac{r^4}{16R^2} \right) + C_1 \ln r + C_2 \tag{5}$$

The boundary conditions are

$$\begin{aligned} \text{at } r = 0: \quad & T \text{ is finite} \\ \text{at } r = R: \quad & -k \frac{\partial T}{\partial r} = q_s'' = \text{constant} \end{aligned}$$

The first boundary condition requires $C_1 = 0$, whence $C_2 = T_c$, the centerline temperature. The second boundary condition could be used to determine T_c as a function of x (see Problem 6.31), but an explicit expression is not needed here. Therefore,

$$T - T_c = \frac{V_0}{\alpha} \frac{\partial T}{\partial x} \left(\frac{r^2}{4} - \frac{r^4}{16R^2} \right) \tag{6}$$

The bulk temperature T_b , which is needed in order to get the heat transfer coefficient, may be obtained using (6.46):

$$T_b = \frac{\int_0^R V_0 \left(1 - \frac{r^2}{R^2} \right) \left[T_c + \frac{V_0}{\alpha} \frac{\partial T}{\partial x} \left(\frac{r^2}{4} - \frac{r^4}{16R^2} \right) \right] r dr}{\int_0^R V_0 \left(1 - \frac{r^2}{R^2} \right) r dr} = T_c + \frac{7}{96} \frac{V_0 R^2}{\alpha} \frac{\partial T}{\partial x} \tag{7}$$

The heat transfer coefficient may be determined from the fundamental convection and conductance equations,

$$q = hA(T_s - T_b) = kA \left. \frac{\partial T}{\partial r} \right|_R \quad \text{or} \quad h = \frac{k}{T_s - T_b} \left. \frac{\partial T}{\partial r} \right|_R \quad (8)$$

Making use of (6) and (7), the heat transfer coefficient is given by

$$h = \frac{\frac{k V_0 R}{4 \alpha} \frac{\partial T}{\partial x}}{\left(T_c + \frac{3 V_0 R^2}{16 \alpha} \frac{\partial T}{\partial x} \right) - \left(T_c + \frac{7 V_0 R^2}{96 \alpha} \frac{\partial T}{\partial x} \right)} = \frac{24 k}{11 R} = \frac{48 k}{11 D}$$

or, in terms of Nusselt number,

$$\text{Nu}_D = \frac{hD}{k} = 4.364$$

which is the asymptotic value cited in (6.51).

- 6.22.** Compare the hydrodynamic and thermal entry lengths of mercury (liquid metal) and a light oil flowing at 3.0 mm/s in a 25.0 mm diameter smooth tube at a bulk temperature of 75°C. The pertinent parameters of the fluids at that temperature are: $\nu_{\text{Hg}} = 1.0 \times 10^{-7} \text{ m}^2/\text{s}$, $\nu_{\text{oil}} = 6.5 \times 10^{-6} \text{ m}^2/\text{s}$; $\text{Pr}_{\text{Hg}} = 0.019$, $\text{Pr}_{\text{oil}} = 85$.

The Reynolds numbers based on the tube diameter are:

$$\text{Re}_{\text{Hg}} = \frac{VD}{\nu_{\text{Hg}}} = \frac{(3.0 \times 10^{-3} \text{ m/s})(25.0 \times 10^{-3} \text{ m})}{1.0 \times 10^{-7} \text{ m}^2/\text{s}} = 750$$

$$\text{Re}_{\text{oil}} = \frac{VD}{\nu_{\text{oil}}} = \frac{(3.0 \times 10^{-3} \text{ m/s})(25.0 \times 10^{-3} \text{ m})}{6.5 \times 10^{-6} \text{ m}^2/\text{s}} = 11.53$$

The hydrodynamic entry lengths are given by (6.31) as

$$x_{e,\text{Hg}} \approx (0.05)(750)(25.0 \text{ mm}) = 937.5 \text{ mm}$$

$$x_{e,\text{oil}} \approx (0.05)(11.53)(25.0 \text{ mm}) = 14.4 \text{ mm}$$

For the thermal entry lengths, (6.46) gives, assuming fully developed flow at start of heating,

$$x_{e,\text{th,Hg}} \approx (0.05)(750)(0.019)(25.0 \text{ mm}) = 17.8 \text{ mm}$$

$$x_{e,\text{th,oil}} \approx (0.05)(11.53)(85)(25.0 \text{ mm}) = 1225 \text{ mm}$$

The short thermal entry of mercury compared to the hydrodynamic entry gives rise to the assumption often made in solving liquid metal problems—that the flow is uniform across the tube when solving the temperature inlet problem.

- 6.23.** For heating water from 20°C to 60°C an electrically heated tube resulting in a constant heat flux of 10 kW/m² is proposed. The mass flow rate is to be such that $\text{Re}_D = 2000$, and consequently the flow must remain laminar. The tube inside diameter is 25 mm. The flow is fully developed (velocity profile). Determine (a) the length of tube required and (b) if this proposed heating system is feasible with regard to wall temperature.

From Table B-3 (SI), at

$$\bar{T}_b = \frac{(20 + 60)}{2} \text{ °C} = 40 \text{ °C}$$

we obtain

$$\begin{aligned}\rho &= 994.6 \text{ kg/m}^3 & c_p &= 4.1784 \text{ kJ/kg} \cdot \text{K} \\ \text{Pr} &= 4.34 & k &= 0.628 \text{ W/m} \cdot \text{K} \\ \nu &= 0.658 \times 10^{-6} \text{ m}^2/\text{s}\end{aligned}$$

(a) The required tube length is obtained by an energy balance, i.e.,

$$q_{\text{conv}} = \dot{m}c_p(T_{b,o} - T_{b,i}) = q_s''(A_s) \quad (i)$$

To determine \dot{m} we need V . Since $\text{Re}_D = 2000$,

$$\frac{DV}{\nu} = 2000; \quad V = \frac{2000 \nu}{D} = \frac{2000(0.658 \times 10^{-6} \text{ m}^2/\text{s})}{0.025 \text{ m}} = 0.0526 \text{ m/s}$$

and

$$\begin{aligned}\dot{m}c_p &= \rho V \left(\frac{\pi D^2}{4} \right) (c_p) = \left(\frac{994.6 \text{ kg}}{\text{m}^3} \right) (0.0526 \text{ m/s}) \left(\frac{\pi}{4} \right) \\ &\quad \times (0.025 \text{ m})^2 (4178 \text{ J/kg} \cdot \text{K}) \\ &= 107.3 \text{ W/K}\end{aligned} \quad (ii)$$

Rearranging expression (i) we have

$$A_s = \pi D L q_s'' = \dot{m}c_p(T_{b,o} - T_{b,i}); \quad L = \frac{\dot{m}c_p(T_{b,o} - T_{b,i})}{\pi D q_s''}$$

Inserting numerical values with $\dot{m}c_p$ from expression (ii) yields

$$L = \frac{(107.3 \text{ W/K})(60^\circ\text{C} - 20^\circ\text{C})}{\pi(0.025 \text{ m})(10\,000 \text{ W/m}^2)} = 5.46 \text{ m}$$

(b) Is this flow feasible? Is the wall temperature realistic?

With the flow developed, we check the length of the thermal entry section, viz., eq. (6.46) gives

$$\begin{aligned}x_{e,t} &= 0.05 \text{ Re}_D \text{ Pr} D = 0.05(2000)(4.34)(0.025 \text{ m}) \\ &= 10.85 \text{ m}\end{aligned}$$

and clearly this is a case of constant q_s'' ; developed velocity and developing thermal profile. The Nusselt number may be obtained with Fig. 6-8. The inverse Graetz number at the exit is

$$\begin{aligned}\text{Gz}^{-1} - (x/D)/\text{Re}_D \cdot \text{Pr} &= \left(\frac{5.46 \text{ m}}{0.025 \text{ m}} \right) / (2000)(4.34) \\ &= 0.0252 = 2.52 \times 10^{-2}\end{aligned}$$

and from Fig. 6-8

$$\text{Nu} = 5.0$$

where this is the local value at the tube exit where the wall temperature will be maximum. Hence,

$$h = \frac{k}{D} \text{Nu}_D = \left(\frac{0.628 \text{ W/m} \cdot \text{K}}{0.025 \text{ m}} \right) (5.0) = 125.6 \text{ W/m}^2 \cdot \text{K}$$

Then with known q_s'' , $T_{b,o}$, and h , the exit plane surface temperature is

$$q_s'' = h(T_s - T_{b,o}); \quad T_s = \frac{q_s''}{h} + T_{b,o}$$

$$T_s = \frac{10 \text{ kW}}{\text{m}^2} \left(\frac{1}{125.6 \text{ W/m}^2 \cdot \text{K}} \right) + 60^\circ\text{C}$$

$$T_s = 139.6^\circ\text{C} \approx 412 \text{ K}$$

which requires a pressurized water heater at approximately 3 atmospheres. This low pressure should be satisfactory. If necessary, the wall heat flux could be reduced thereby lengthening the tube, increasing the $Graetz^{-1}$ number, and lowering Nu_D and h very slightly. The T_s is more affected by the q'' than the h , so, for example, a 50% reduction in q'' would lower $T_{s,w}$ by approximately 35 °C.

- 6.24.** For a fully developed velocity profile, approximate the length of 0.10 in i.d. tube required to raise the bulk temperature of benzene from 60 °F to 100 °F. The tube wall temperature is constant at 150 °F, and the average velocity is 1.6 fps.

At an average bulk temperature of

$$\bar{T}_b = \frac{T_1 + T_2}{2} = \frac{60 + 100}{2} = 80 \text{ °F}$$

the fluid properties are

$$\begin{aligned} \rho &= 54.6 \text{ lb}_m/\text{ft}^3 & k &= 0.092 \text{ Btu/h}\cdot\text{ft}\cdot\text{°F} & c_p &= 0.42 \text{ Btu/lb}_m\cdot\text{°F} \\ \mu_m &= 3.96 \times 10^{-4} \text{ lb}_m/\text{ft}\cdot\text{s} & Pr &= 6.5 \end{aligned}$$

The Reynolds number is

$$Re_D = \frac{VD\rho}{\mu_m} = \frac{(1.6 \text{ ft/s})[(0.10/12) \text{ ft}](54.6 \text{ lb}_m/\text{ft}^3)}{3.96 \times 10^{-4} \text{ lb}_m/\text{ft}\cdot\text{s}} = 1838$$

which is laminar.

The average Nusselt number is given by (6.59)

$$\overline{Nu}_D = 3.66 + \frac{(0.0668)[(D/L)Re_D Pr]}{1 + (0.04)[(D/L)Re_D Pr]^{2/3}}$$

Equating \overline{Nu}_D to $\bar{h}D/k$,

$$\frac{\bar{h}[(0.10/12) \text{ ft}]}{0.092 \text{ Btu/h}\cdot\text{ft}\cdot\text{°F}} = 3.66 + \frac{(0.0668)[(0.10/12L)(1838)(6.5)]}{1 + (0.04)[(0.10/12L)(1838)(6.5)]^{2/3}}$$

we have an equation in two unknowns, \bar{h} and L , which can be simplified to give

$$\bar{h} = 40.406 + \frac{(73.42/L)}{1 + (0.04)[99.56/L]^{2/3}} \quad (1)$$

where the units for \bar{h} are $\text{Btu/h}\cdot\text{ft}^2\cdot\text{°F}$ when L has units of ft. Another equation must now be found. Making an energy balance on the fluid, we get

$$q = \dot{m}c_p\Delta T_b = \bar{h}\pi DL(T_s - T_b)$$

or

$$\begin{aligned} \bar{h} &= \frac{\rho V(\pi D^2/4)c_p\Delta T_b}{\pi DL(T_s - T_b)} = \frac{\rho V D c_p \Delta T_b}{4L(T_s - T_b)} \\ &= \frac{(54.6 \text{ lb}_m/\text{ft}^3)(1.6 \text{ ft/s})[(0.10/12) \text{ ft}](0.42 \text{ Btu/lb}_m\cdot\text{°F})(40\text{°F})}{4L[(150 - 80)\text{°F}]} \left(\frac{3600 \text{ s}}{\text{h}}\right) \\ &= \frac{157.25}{L} \text{ Btu/h}\cdot\text{ft}\cdot\text{°F} \end{aligned} \quad (2)$$

Eliminating \bar{h} between (1) and (2), we get

$$\frac{157.25}{L} = 40.406 + \frac{(73.42/L)}{1 + 0.04[99.56/L]^{2/3}}$$

which can be readily solved by trial and error to give $L = 2.64 \text{ ft}$.

Before leaving this problem, it is instructive to note the influence of the viscosity variation. At the surface temperature $T_s = 150^\circ\text{F}$, the viscosity is $\mu_s = 2.60 \times 10^{-4} \text{ lb}_m/\text{ft}\cdot\text{s}$; therefore,

$$\left(\frac{\mu}{\mu_s}\right)^{0.14} = \left(\frac{3.96 \times 10^{-4}}{2.60 \times 10^{-4}}\right)^{0.14} = 1.061$$

Multiplying the second term of (6.59) by this factor and solving simultaneously with the energy balance equation, the resulting length is 2.57 ft, 2.7% less than that given by ignoring the viscosity correction.

It is also interesting to note that the asymptotic solution (6.58),

$$\frac{\bar{h}D}{k} = 3.66 \quad \text{or} \quad \bar{h} = 40.406 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$$

coupled with the energy balance equation (2) gives $L = 3.89 \text{ ft}$. It should be pointed out, however, that this result neglects axial conduction, buoyancy effects and the influence of viscosity variations.

The best answer, therefore, is 2.57 ft.

- 6.25.** Air at 1.0 atmosphere pressure and 77°C enters a 5.0 mm i.d. tube with a bulk average velocity of 2.5 m/s. The velocity profile is developed and the thermal profile is “developing.” The tube length is 1.0 m, and a constant (uniform) heat flux is imposed by the tube surface on the air over the entire length. An exit air bulk average temperature, $T_{b,e} = 127^\circ\text{C}$, is required. Determine (a) the exit h value, h_L , (b) the uniform q_s'' , and (c) the exit tube surface temperature.

We will need air properties at the bulk average temperature inside the tube,

$$\frac{T_{b,i} + T_{b,e}}{2} = \frac{(77 + 127)}{2} = 102^\circ\text{C} = 375 \text{ K}$$

From Table B-4 (SI) we obtain

$$\begin{aligned} \rho &= 0.9403 \text{ kg/m}^3 & c_p &= 1.0115 \text{ kJ/kg}\cdot\text{K} \\ \mu &= 2.1805 \times 10^{-5} \text{ kg/m}\cdot\text{s} & \nu &= 23.33 \times 10^{-6} \text{ m}^2/\text{s} \\ k &= 0.03184 \text{ W/m}\cdot\text{K} & \text{Pr} &= 0.693 \end{aligned}$$

The Reynolds number is

$$\text{Re}_D = \frac{DV}{\nu} = \frac{(0.005 \text{ m})(2.5 \text{ m/s})}{23.33 \times 10^{-6} \text{ m}^2/\text{s}} = 536$$

and the flow is laminar. The thermal entry length is by eq. (6.46)

$$(x_{e,t}/D) = 0.05\text{Re}_D(\text{Pr}) = 26.8(0.693) = 18.6$$

The L/D for this tube is $(1.0/0.005)$ which is 200. A reasonable approach is to consider the flow, both velocity and temperature, to be fully developed over its entire tube length, since only about 10% is experiencing entry effects. For fully developed flow, constant q_s'' , the Nusselt number is 4.364, so

$$\begin{aligned} \text{Nu}_D &= \frac{hD}{k} = 4.364 \\ h &= 4.364 \frac{k}{D} = 4.364 \frac{(0.03184 \text{ W/m}\cdot\text{K})}{0.005 \text{ m}} \\ &= 27.79 \text{ W/m}^2\cdot\text{K} = h_L = h = \text{constant} \end{aligned} \quad \text{ans. (a)}$$

Use an overall energy balance

$$q_{\text{conv}} = q_s''(A_s) = \dot{m}c_p(T_{b,e} - T_{b,i})$$

where:

$$A_s = \pi DL = \pi(0.005 \text{ m})(1 \text{ m}) = 1.57 \times 10^{-2} \text{ m}^2$$

and

$$\begin{aligned}\dot{m} &= \rho A_c V = \left(\frac{0.9403 \text{ kg}}{\text{m}^3} \right) \left(\frac{\pi}{4} \right) (0.005 \text{ m})^2 (2.5 \text{ m/s}) \\ &= 4.615 \times 10^{-5} \text{ kg/s}\end{aligned}$$

Thus,

$$\begin{aligned}q_{\text{conv}} &= q_s''(A_s) = \dot{m} c_p (T_{b,o} - T_{b,i}) \\ &= q_s'' (1.57 \times 10^{-2} \text{ m}^2) = (4.615 \times 10^{-5} \text{ kg/s}) \left(\frac{1011.5 \text{ J}}{\text{kg} \cdot \text{K}} \right) (127 - 77)^\circ\text{C} \\ q_s'' &= \frac{148.7 \text{ J}}{\text{s} \cdot \text{m}^2} = 148.7 \text{ W/m}^2 \quad \text{ans. (b)}\end{aligned}$$

At the exit plane

$$\begin{aligned}h &= (T_s - T_{b,o}) = q_s''; \quad T_s = T_{b,o} + \frac{q_s''}{h} \\ T_s &= 127^\circ\text{C} + \frac{148.7 \text{ W/m}^2}{27.79 \text{ W/m}^2 \cdot \text{K}} = 127 + 5.35 \\ &= 132.4^\circ\text{C} \quad \text{ans. (c)}\end{aligned}$$

Notice that we found q_{conv} and q_s'' without the use of the heat transfer coefficient. However, to determine T_s from q_s'' , h is needed at $x = L$.

- 6.26.** Repeat Problem 6.25 with the tube heated length shortened to 0.08 m. All other parameters, including questions to be answered, are unchanged. The flow is fully developed before entering the heated length.

From Problem 6.25 we have

$$\begin{aligned}\bar{T}_b &= 375 \text{ K} & c_p &= 1.0115 \text{ kJ/kg} \cdot \text{K} \\ \rho &= 0.9403 \text{ kg/m}^3 & \nu &= 23.33 \times 10^{-6} \text{ m}^2/\text{s} \\ k &= 0.03184 \text{ W/m} \cdot \text{K} & \text{Pr} &= 0.693\end{aligned}$$

The Reynolds number is unchanged, $\text{Re}_D = 536$. The tube dimensionless length is

$$(x/D) = (0.08 \text{ m}/0.005 \text{ m}) = 16$$

but the thermal entrance length remains unchanged at

$$(x_{e,t}/D) = 18.6$$

from eq. (6.46). Thus, this flow is in the developed velocity and developing temperature region. To use Fig. 6-8, we calculate the inverse Graetz number at $x = L = 0.08 \text{ m}$

$$\begin{aligned}\text{Gz}^{-1} &= \left(\frac{x}{D} \right) \left(\frac{1}{\text{Re}_D \cdot \text{Pr}} \right) = \left(\frac{0.08 \text{ m}}{0.005 \text{ m}} \right) \left(\frac{1}{536 \times 0.693} \right) \\ &= 4.30 \times 10^{-2}\end{aligned}$$

From Fig. 6-8 at the exit for constant q_s'' the local Nu_D is

$$\text{Nu}_D \approx 4.7$$

and the local, exit value, of the heat transfer coefficient is

$$h = h_L = \frac{k}{D} \text{Nu}_D \approx \frac{0.03184 \text{ W/m} \cdot \text{K}}{0.005 \text{ m}} (4.7) \quad (4.7)$$

or

$$h_L \approx 29.9 \text{ W/m}^2 \cdot \text{K} \quad \text{ans. (a)}$$

The value of q_s'' may be determined with

$$q_{\text{conv}} = q_s''(PL) = q_s''(\pi DL) \quad (i)$$

and

$$q_{\text{conv}} = \dot{m}c_p(T_{b,o} - T_{b,i}) \quad (ii)$$

From Problem 6.25,

$$\dot{m} = \rho AV = 4.615 \times 10^{-5} \text{ kg/s}$$

and

$$(T_{b,o} - T_{b,i}) = 50^\circ\text{C}$$

so by (i) and (ii)

$$\begin{aligned} q_{\text{conv}} &= q_s''(\pi)(0.005 \text{ m})(0.08 \text{ m}) = 1.25 \times 10^{-3} \text{ m}^2 \cdot q_s'' \\ &= (4.615 \times 10^{-5} \text{ kg/s}) \left(\frac{1011.5 \text{ J}}{\text{kg} \cdot \text{K}} \right) (50^\circ\text{C}) \\ q_s'' &= 1.86 \times 10^3 \text{ W/m}^2 \quad \text{ans. (b)} \end{aligned}$$

At the exit,

$$\begin{aligned} h_L(T_s - T_{b,o}) &= q_s''; \quad T_s - T_{b,o} = q_s''/h_L \\ T_{s,e} &= T_{b,o} + q_s''/h_L = 127^\circ\text{C} + \frac{1.86 \times 10^3 \text{ W/m}^2}{29.9 \text{ W/m}^2 \cdot \text{K}} \\ &= 127 + 62.2 = 189^\circ\text{C} \quad \text{ans. (c)} \end{aligned}$$

Notice that this tube length is only 8% of the length of the previous one in Problem 6.25, so for similar h values it requires about 12 times the temperature difference, $T_s - T_{b,o}$, of Problem 6.25.

- 6.27.** Nitrogen gas at atmospheric pressure and a bulk inlet temperature of 27°C is heated in a 2.5 cm i.d. tube having a constant surface temperature of 100°C . The bulk average velocity is 1.2 m/s and the tube is 1.5 m long. Determine the net heat transfer rate to the nitrogen, q_{conv} .

Trial 1: The exit temperature $T_{b,o}$ is unknown, so an iterative approach is needed to determine suitable property values. Try $T_{b,o} = 53^\circ\text{C}$; then

$$\bar{T}_{b,i} = \frac{27 + 53}{2} = 40^\circ\text{C} = 313 \text{ K}$$

Then, from Table B-4(SI) we obtain

$$\begin{aligned} \rho &= 1105 \text{ kg/m}^3 & k &= 0.0271 \text{ W/m} \cdot \text{K} \\ c_p &= 1.0415 \times 10^3 \text{ J/kg} \cdot \text{K} & \text{Pr} &= 0.710 \\ \nu &= 16.94 \times 10^{-6} \text{ m}^2/\text{s} & \mu &= 18.37 \times 10^{-6} \text{ kg/m} \cdot \text{s} \\ \mu_s &= \mu_{100} = 20.86 \times 10^{-6} \text{ kg/m} \cdot \text{s} \end{aligned}$$

The first trial Reynolds number is

$$\text{Re}_{D1} = \frac{DV}{\nu} = \frac{(0.025 \text{ m})(1.2 \text{ m/s})}{16.94 \times 10^{-6} \text{ m}^2/\text{s}} = 1771$$

and the flow is laminar. The entry region lengths are, by eqs. (6.31) and (6.46),

$$\begin{aligned}(x_e/D)_1 &= 0.05\text{Re}_{D1} = 0.05(1771) = 88.6 \\ (x_{e,t}/D)_1 &= 0.05\text{Re}_{D,1}(\text{Pr}_1) = 88.6(0.710) = 62.9\end{aligned}$$

(The second of these expressions is accurate only for fully developed flow (velocity profile). It is used here to determine that the temperature is developing over much of the length.)

Since the 1.5 m long, 0.025 m i.d. tube has $(x/D) = (1.5/0.025) = 60$, both the velocity and temperature profiles are "developing." For this case (combined entry lengths) we can use the Sieder-Tate eq. (6.60) to determine the average Nusselt number. Thus,

$$\begin{aligned}\overline{\text{Nu}}_{D1} &= 1.86 \left(\frac{\text{Re}_D \cdot \text{Pr}}{L/D} \right)_1^{1/3} \left(\frac{\mu}{\mu_s} \right)_1^{0.14} \\ &= 1.86 \left(\frac{1771 \times 0.710}{60} \right)^{1/3} \left(\frac{18.37}{20.86} \right)^{0.14} = 5.037\end{aligned}$$

Then

$$\bar{h}_1 = \frac{k_1}{D} (\overline{\text{Nu}}_{D,1}) = \left(\frac{0.0271 \text{ W/m}\cdot\text{K}}{0.025 \text{ m}} \right) (5.037) = 5.46 \text{ W/m}^2\cdot\text{K}$$

By eq. (6.54) for constant surface temperature we can now determine the exponential term allowing determination of $T_{s,1}$. Obtaining $\dot{m}c_p$,

$$\begin{aligned}\dot{m}c_p &= \frac{\pi}{4} (D^2)(V)(\rho)(c_p) = \left(\frac{\pi}{4} \right) (0.025 \text{ m})^2 (1.2 \text{ m/s})(1.105 \text{ kg/m}^3)(1041.5 \text{ J/kg}\cdot\text{K}) \\ &= 0.678 \text{ W/K}\end{aligned}$$

Then

$$\begin{aligned}\frac{100^\circ\text{C} - T_{b,o}}{100^\circ\text{C} - 27^\circ\text{C}} &= \exp \left[\frac{-\pi(0.025 \text{ m})(1.5 \text{ m})(5.46 \text{ W/m}^2\cdot\text{K})}{0.678 \text{ W/K}} \right] \\ T_{b,o,1} &= 100^\circ\text{C} - 73^\circ\text{C}(0.387) = 71.7^\circ\text{C}\end{aligned}$$

To obtain a more accurate answer, we now assume a new trial $T_{b,o}$. Use $T_{b,o} = 72^\circ\text{C}$ and $\bar{T}_{b,2} = (27 + 72)/2 = 49.5 \approx 50^\circ\text{C}$.

The property values at 50°C are (from Table B-4(SI), at 323 K)

$$\begin{aligned}\rho &= 1076 \text{ kg/m}^3 & k &= 0.0278 \text{ W/m}\cdot^\circ\text{C} \\ c_p &= 1.0419 \times 10^3 \text{ J/kg}\cdot^\circ\text{C} & \text{Pr} &= 0.708 \\ \nu &= 17.95 \times 10^{-6} \text{ m}^2/\text{s} & \mu &= 18.79 \times 10^{-6} \text{ kg/m}\cdot\text{s}\end{aligned}$$

and the viscosity at the surface temperature (373 K) is

$$\mu_s = 20.86 \times 10^{-6} \text{ kg/m}\cdot\text{s}$$

unchanged from Trial 1. Proceeding as in Trial 1,

Trial 2:

$$\begin{aligned}\text{Re}_{D,2} &= \frac{DV}{\nu} = \frac{(0.025 \text{ m})(1.2 \text{ m/s})}{17.95 \times 10^{-6} \text{ m}^2/\text{s}} = 1671 \\ (x_e/D)_2 &= 0.05(1671) = 83.5 \\ (x_{e,t}/D)_2 &= 0.05(1671)(0.708) = 59.1 \\ \text{Nu}_{D,2} &= 1.86 \left(\frac{1671 \times 0.708}{60} \right)_2^{1/3} \left(\frac{18.79 \times 10^{-6}}{20.86 \times 10^{-6}} \right)_2^{0.14} = 4.95 \\ \bar{h}_2 &= \frac{k_2}{D} (\text{Nu}_{D,2}) = \left(\frac{0.0278 \text{ W/m}\cdot\text{K}}{0.025 \text{ m}} \right) (4.95) = 5.504 \text{ W/m}^2\cdot\text{K}\end{aligned}$$

$$\begin{aligned}\dot{m}c_p &= \frac{\pi}{4}(0.025 \text{ m})^2(1.2 \text{ m/s})(1.076 \text{ kg/m}^3) \\ &\quad \times 1.0419 \times 10^3 \text{ J/kg}\cdot^\circ\text{C} \\ &= 0.660 \text{ W/K}\end{aligned}$$

At this point, notice the small difference in $\dot{m}c_p$ for Trials 1 and 2 as well as in \bar{h} for the two trials. Proceeding,

$$\begin{aligned}\frac{100^\circ\text{C} - T_{h,o}}{100^\circ\text{C} - 27^\circ\text{C}} &= \exp\left[\frac{-\pi(0.025 \text{ m})(1.5 \text{ m})(5.504 \text{ W/m}^2\cdot\text{K})}{0.660 \text{ W/K}}\right] \\ \frac{100^\circ\text{C} - T_{h,o,2}}{73^\circ\text{C}} &= 0.374 \\ T_{h,o,2} &= 100^\circ\text{C} - 73^\circ\text{C}(0.374) = 72.7^\circ\text{C}\end{aligned}$$

Since $T_{h,o,2}$ changed only 1°C from $T_{h,o,1}$, the second value is a suitable answer. Turning to determination of q_{conv} , we can use either eq. (6.56) or eq. (6.42). Choosing the latter

$$\begin{aligned}q_{\text{conv}} &= \dot{m}c_p(T_{h,o} - T_{h,i}) = (0.660 \text{ W/K})(72.7 - 27)^\circ\text{C} \\ &= 30.2 \text{ W}\end{aligned}$$

Checking by eq. (6.56)

$$q_{\text{conv}} = \bar{h}A_s\Delta T_{lm}$$

where by eq. (6.57)

$$\begin{aligned}\Delta T_{lm} &= \frac{\Delta T_o - \Delta T_i}{\ln(\Delta T_o/\Delta T_i)} = \frac{(100 - 72.7) - (100 - 27)}{\ln[(100 - 72.7)/(100 - 27)]}^\circ\text{C} \\ &= \frac{27.3 - 73}{\ln(27.3/73)} = \frac{-45.7}{\ln 0.374} = 46.5^\circ\text{C}\end{aligned}$$

and

$$\begin{aligned}q_{\text{conv}} &= \frac{5.504 \text{ W}}{\text{m}^2\cdot\text{K}}(\pi)(0.025 \text{ m})(1.5 \text{ m})(46.5^\circ\text{C}) \\ &= 30.2 \text{ W}\end{aligned}$$

- 6.28.** Saturated ammonia liquid at 30°C bulk average temperature \bar{T}_b flows inside a 20 mm i.d. circular tube. The bulk average velocity is 0.03 m/s and the tube is 1.5 m long. The inside tube surface temperature is 40°C , constant. The flow begins at the heated tube inlet with no upstream developing section. Determine (a) the velocity and thermal entry lengths and (b) the average heat transfer coefficient over the 1.5 m length.

Since the fluid bulk average temperature is given (30°C) we can obtain properties from Table B-3(SI) without interpolation, yielding:

$$\begin{aligned}k &= 0.507 \text{ W/m}\cdot\text{K} & c_p &= 4890 \text{ J/kg}\cdot\text{K} \\ \rho &= 596.37 \text{ kg/m}^3 & \nu &= 0.349 \times 10^{-6} \text{ m}^2/\text{s} \\ \rho_s &= 580.99 \text{ kg/m}^3 & \nu_s &= 0.340 \times 10^{-6} \text{ m}^2/\text{s} \\ \text{Pr} &= 2.01\end{aligned}$$

where these are at \bar{T}_b , except ρ_s and ν_s which are at T_s .

The Reynolds number is

$$\text{Re}_D = \frac{DV}{\nu} = \frac{(0.02 \text{ m})(0.03 \text{ m/s})}{0.349 \times 10^{-6} \text{ m}^2/\text{s}} = 1719$$

and the flow is clearly laminar.

The entry lengths are, by eqs. (6.31) and (6.46),

$$x_e = 0.05 \text{Re}_D D = 0.05(1719)(0.02 \text{ m}) = 1.72 \text{ m}$$

$$x_{e,t} = 0.05 \text{Re}_D D \text{Pr} = 1.72 \text{ m}(2.01) = 3.45 \text{ m}$$

where the thermal entry length equation is based on fully developed flow (velocity), so the problem is one of developing velocity and temperature profiles. The Sieder-Tate eq. (6.60) is applicable for determining \bar{h} .

Thus with $\mu = \rho\nu$

$$\begin{aligned} \overline{\text{Nu}}_D &= 1.86 \left(\frac{1719 \times 2.01}{1.5 \text{ m}/0.02 \text{ m}} \right)^{1/3} \left(\frac{596.37 \times 0.349 \times 10^{-6}}{580.99 \times 0.340 \times 10^{-6}} \right)^{0.14} \\ &= 6.717; \quad \bar{h} = \frac{k \overline{\text{Nu}}_D}{D} \\ \bar{h} &= \frac{(0.507 \text{ W/m}\cdot\text{K})(6.717)}{0.02 \text{ m}} = 170 \text{ W/m}^2\cdot\text{K} \end{aligned}$$

Notice that the ratio of viscosities did not markedly change the result. This is because the ammonia liquid viscosity is not highly temperature dependent.

Supplementary Problems

- 6.29.** What is the drag on a thin model airfoil, of 0.3 m chord length, in a 38 °C airstream moving at 6 m/s? Treat the airfoil as a flat plate. *Ans.* 5.12×10^{-2} N/m
- 6.30.** Glycerin at 104 °F flows over a flat plate at a free-stream velocity of 25 fps. What is the thickness of the hydrodynamic boundary layer 2 ft from the leading edge? *Ans.* 0.069 ft = 21.0 mm
- 6.31.** What is the thickness of the thermal boundary layer in Problem 6.30, at the same location? *Ans.* 1.55 mm
- 6.32.** Using the linear velocity profile $u/V_\infty = y/\delta$ in the integral momentum equation, verify the expression for boundary layer thickness given in Table 6-1.
- 6.33.** For the linear velocity profile of Problem 6.32, verify the average skin-friction coefficient shown in Table 6-1.
- 6.34.** What is the heat loss from both sides of a 1 m square plate maintained at 90 °C when air at 64 °C flows parallel to it with a free-stream velocity of 6.0 m/s? *Ans.* 494 W
- 6.35.** For the flow of Problem 6.21 show that

$$T_c = T_0 - \frac{4\alpha q_s''}{kV_0 R} x$$

where T_0 is the centerline temperature at $x = 0$.

- 6.36.** Glycerin at 0 °C flows at V_∞ of 50 ft/s parallel to both sides of a 0.3 m square, thin flat plate at 20 °C, which is suspended from a balance. (a) What drag should be indicated by the balance? (b) Determine the heat transfer to the glycerin. *Ans.* (a) 886.3 N; (b) 2753 W

- 6.37.** A parallel flow of liquid water at 40°C and $V_\infty = 1.5\text{ m/s}$ over a flat plate 1.8 m long, experiences a constant heat flux from the plate over the laminar region. Compute h_x for $x = x_{\text{crit}}$, if $\text{Re}_{\text{crit}} = 5 \times 10^5$. (See note following eq. (6.28). *Ans.* $1498\text{ W/m}^2\cdot\text{K}$)
- 6.38.** Repeat Problem 6.24 using the logarithmic temperature difference expression of eq. (6.57) to replace $(T_s - T_b)$. *Ans.* 2.74 ft

Forced Convection: Turbulent Flow

Turbulent flow is characterized by random motion of fluid particles, disrupting the fluid's movement in lamina as discussed in the preceding chapters. It is the most common type of motion, however, because of the minimal disturbances which might cause it to occur.

The time-average equation (5.13), written for velocity, is valid for any quantity ϕ which has a time-average value $\bar{\phi}$ and a fluctuating component ϕ' , i.e., $\phi = \bar{\phi} + \phi'$. Thus

$$\bar{\phi} = \lim_{\Delta t \rightarrow \infty} \frac{1}{\Delta t} \int_{t_0}^t \phi dt \quad (7.1)$$

where $\Delta t = t - t_0$. Properties of the time average are:

$$\begin{aligned} \overline{\phi_1 + \phi_2} &= \bar{\phi}_1 + \bar{\phi}_2 \\ \overline{C\phi_1} &= C\bar{\phi}_1 \\ \overline{\bar{\phi}_1} &= \bar{\phi}_1 \\ \overline{\frac{\partial \phi_1}{\partial s}} &= \frac{\partial \bar{\phi}_1}{\partial s} \\ \overline{\phi_1'} &= 0 \end{aligned} \quad (7.2)$$

where C is independent of t and s is any spatial coordinate. In addition, it is almost always the case that $\overline{\phi_1' \phi_2'} \neq 0$ if ϕ_1 and ϕ_2 are turbulent flow properties.

7.1 EQUATIONS OF MOTION

By use of the boundary layer concept the general equations of motion, called the *Navier–Stokes equations* after their formulators, can be simplified to the point of being solved. The x -direction momentum equation for incompressible, laminar, boundary layer flow over a flat plate was derived in Problem 6.1. Since it is a simplified form of the more general x -direction Navier–Stokes equation, we shall extend it to the case of turbulent flow, i.e.,

$$\begin{aligned} \text{laminar:} \quad u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} &= -\frac{g_c}{\rho} \frac{dp}{dx} + \nu \frac{\partial^2 u}{\partial y^2} \\ \text{turbulent:} \quad (\bar{u} + u') \frac{\partial}{\partial x} (\bar{u} + u') + (\bar{v} + v') \frac{\partial}{\partial y} (\bar{u} + u') \\ &= -\frac{g_c}{\rho} \frac{d}{dx} (\bar{p} + p') + \nu \frac{\partial^2}{\partial y^2} (\bar{u} + u') \end{aligned} \quad (7.3)$$

The instantaneous quantities in the laminar equation have been replaced by the sum of their average and fluctuating components in the turbulent equation. Inherent in this move is the assumption that the Navier–Stokes equations are valid for turbulent flow.

Along with the momentum equations, we may consider the two-dimensional incompressible continuity equation:

$$\begin{aligned} \text{laminar:} \quad & \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \\ \text{turbulent:} \quad & \frac{\partial}{\partial x} (\bar{u} + u') + \frac{\partial}{\partial y} (\bar{v} + v') = 0 \end{aligned} \tag{7.4}$$

Combining the turbulent equations (7.3) and (7.4), taking the time average of the resultant equation, and applying the rules (7.2), we obtain

$$\bar{u} \frac{\partial \bar{u}}{\partial x} + \bar{v} \frac{\partial \bar{u}}{\partial y} = -\frac{g_c}{\rho} \frac{d\bar{p}}{dx} + \nu \frac{\partial^2 \bar{u}}{\partial y^2} - \left(\frac{\partial \overline{u'u'}}{\partial x} + \frac{\partial \overline{v'u'}}{\partial y} \right) \tag{7.5}$$

which is the x -direction equation of motion for a viscous incompressible fluid with negligible body forces. This equation can be expected to hold in the turbulent portion of the boundary layer shown in Fig. 7-1(a). The laminar portion at the leading edge and the laminar sublayer are governed by the relations developed in Chapter 6. This chapter deals with the turbulent regime, which is often idealized as shown in Fig. 7-1(b), in which the critical length x_c is taken as that distance required to produce a Reynolds number of 500 000 (although this may vary from 300 000 to 2 800 000 depending upon such factors as surface roughness and free-stream turbulence).

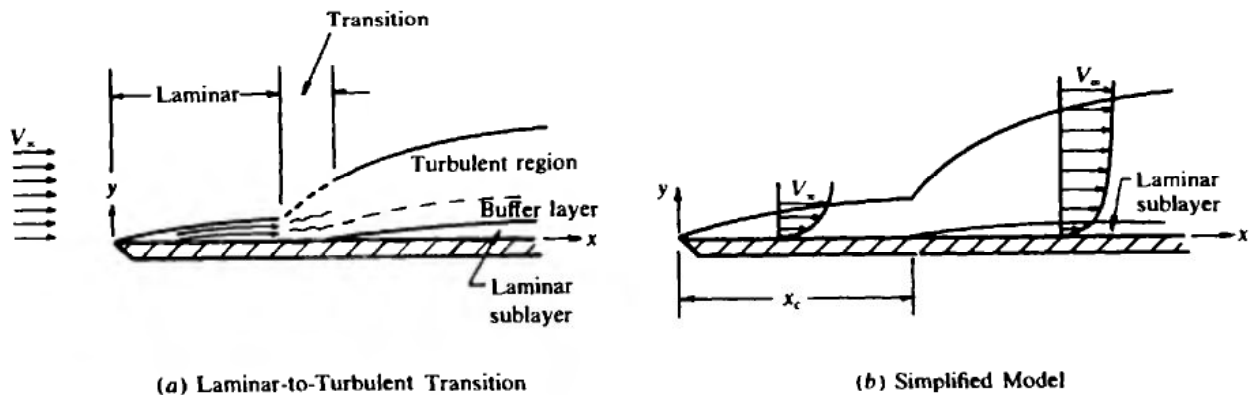


Fig. 7-1

Upon comparing (7.5) with the laminar equation (7.3), we note that an additional term occurs in the equation for turbulent flow. The three terms on the right-hand side of (7.5) express the effects of pressure (normal stress), viscosity (shear stress), and turbulent fluctuations (*Reynolds*, or *apparent*, stress). The last term produces an apparent volume force

$$f_x|_{\text{apparent}} = -\frac{\rho}{g_c} \left(\frac{\partial \overline{u'u'}}{\partial x} + \frac{\partial \overline{v'u'}}{\partial y} \right) \tag{7.6}$$

which will be interpreted in the next subsection.

Eddy Viscosity

Assume turbulent motion along the surface of Fig. 7-2. At a typical plane parallel to the surface, $A-A$, a lump of fluid designated 1 is

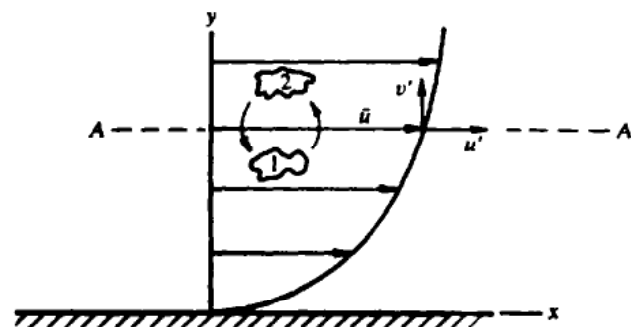


Fig. 7-2

moved by turbulent fluctuations to a region of increased velocity. It is replaced by lump 2 moving downward to a region of lower velocity. Since momentum is the product of mass and velocity, a change in momentum results. This change can be evaluated quantitatively by considering the velocity components

$$u = \bar{u} + u' \quad v = 0 + v'$$

where $\bar{v} = 0$ results from zero mean flow in the y -direction. The instantaneous mass flow per unit area across plane $A-A$ is $\rho v'$. Multiplying by the x -velocity deviation u' gives the rate of momentum change per unit area $\rho v' u'$, whose average value, $\overline{\rho v' u'}$, is negative. Thus there is a shear stress $-(\rho/g_c)\overline{v' u'}$ over and above the laminar shear $(\mu_m/g_c)(\partial\bar{u}/\partial y)$, i.e.,

$$\tau = \tau_{\text{lamin}} + \tau_{\text{turb}} = \frac{1}{g_c} \left(\mu_m \frac{\partial\bar{u}}{\partial y} - \overline{\rho v' u'} \right) \quad (7.7)$$

This result is not readily usable, except through measurement of the fluctuating components, since the fluctuating velocities are not related to fluid properties. It is convenient to assume that the viscosity effect is increased because of the turbulence and define an *eddy viscosity* ϵ such that

$$\tau = \frac{1}{g_c} (\mu_m + \rho\epsilon) \frac{\partial\bar{u}}{\partial y}$$

or, since $\nu = \mu_m/\rho$,

$$\frac{\tau g_c}{\rho} = (\nu + \epsilon) \frac{\partial\bar{u}}{\partial y} \quad (7.8)$$

If, instead of parallel flow, two-dimensional turbulence exists, there is an additional normal stress

$$\tau_x = \frac{1}{g_c} \left(\mu_m \frac{\partial\bar{u}}{\partial x} + \overline{\rho u' u'} \right) \quad (7.9)$$

We see that the time-averaged products of the fluctuating components, $\overline{v' u'}$ and $\overline{u' u'}$, which arose in (7.5), produce shear and normal stresses as shown in (7.7) and (7.9). It is then only necessary to measure the eddy viscosity, which is directional-dependent, in order to effect a solution to the equation of motion.

Eddy Diffusivity

An argument analogous to that of the preceding subsection can be made for the influence of turbulence on heat transfer. If a temperature fluctuation exists in the flow field of Fig. 7-2, so that $T = \bar{T} + T'$, the heat transfer per unit area would be given by

$$q'' = q''_{\text{lamin}} + q''_{\text{turb}} = -k \frac{\partial\bar{T}}{\partial y} + \rho c_p \overline{v' T'} = -(k + \rho c_p \epsilon_H) \frac{\partial\bar{T}}{\partial y}$$

or, since $\alpha = k/\rho c_p$,

$$\frac{q''/c_p}{\rho} = -(\alpha + \epsilon_H) \frac{\partial\bar{T}}{\partial y} \quad (7.10)$$

where the time-averaged product of the fluctuating velocity v' and fluctuating temperature T' has been replaced by an *eddy diffusivity for heat*, ϵ_H . Equations (7.8) and (7.10) are now of identical form, which suggests the analogy between momentum transfer and heat transfer of the following section.

7.2 HEAT TRANSFER AND SKIN FRICTION: REYNOLDS' ANALOGY

In the vicinity of a surface the fluid is essentially stationary, requiring that the transfer of heat take place by conduction. Such is the case in the laminar sublayer, where the heat transfer and shear stress are in the ratio

$$\left(\frac{q''}{\tau}\right)_{\text{lam}} = \frac{-k(\partial T/\partial y)}{(\mu_m/g_c)(\partial u/\partial y)} = -\frac{k g_c}{\mu_m} \frac{dT}{du} \Big|_{x=\text{const}} \quad (7.11)$$

At some distance from the surface, where the random fluctuations transport momentum and heat, the turbulent shear stress and heat transfer (at fixed x) have the instantaneous values

$$\tau_{\text{turb}} = -\frac{\rho}{g_c} v' \Delta u \quad q''_{\text{turb}} = \rho c_p v' \Delta T$$

giving, in the limit,

$$\left(\frac{q''}{\tau}\right)_{\text{turb}} = -c_p g_c \frac{dT}{du} \Big|_{x=\text{const}} \quad (7.12)$$

A comparison of (7.11) and (7.12) shows that when $k/\mu_m = c_p$, i.e., when

$$\mathbf{Pr} \equiv \frac{\mu_m c_p}{k} = 1$$

then the single equation

$$\frac{q''}{\tau} = -c_p g_c \frac{dT}{du} \Big|_{x=\text{const}} \quad (7.13)$$

is valid through the entire boundary layer. *Reynolds' analogy* results from making the approximation that T and u change at proportional rates through the boundary layer. Then each side of (7.13) is a constant, i.e.,

$$\frac{q''}{\tau} = \text{constant} = \frac{q''_s}{\tau_s} = -c_p g_c \frac{dT}{du} \Big|_{x=\text{const}}$$

where q''_s and τ_s are the surface values. Integrating through the boundary layer and applying the known surface boundary condition ($u = 0$, $T = T_s$), we have:

$$-\frac{1}{c_p g_c} \frac{q''_s}{\tau_s} \int_0^u du = \int_{T_s}^T dT \quad (7.14)$$

The condition $\mathbf{Pr} = 1$ necessary for (7.14) is approximated by many real fluids. Most gases at atmospheric pressure have $\mathbf{Pr} \approx 0.7$.

The upper limits of integration in Reynolds' analogy will depend upon the flow configuration. The following sections will complete this relation between heat transfer and fluid friction for external (flat plate) and internal (pipe) flow configurations.

7.3 FLOW OVER A FLAT PLATE

Two unknowns, q''_s and τ_s , are present in (7.14). We shall at first concentrate on determining τ_s for the case of no temperature variation (isothermal). Then we shall use the isothermal result and (7.14) to determine q''_s for the nonisothermal case. The flow configuration is shown in Fig. 7-3.

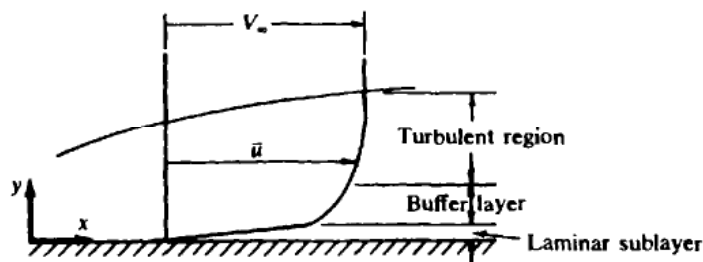


Fig. 7-3

Isothermal Flow

The integral momentum equation, (6.14), is equally valid for turbulent flow since no flow assumption was required when choosing the control volume. Therefore, in the incompressible case,

$$\tau_s = \frac{\rho}{g_c} \frac{d}{dx} \left[\int_0^\delta (V_\infty - \bar{u}) \bar{u} dy \right] \quad (7.15)$$

Observe that the mean turbulent velocity \bar{u} is used over the whole range of integration; this is tantamount to neglecting the laminar sublayer and the buffer zone.

In the fully turbulent portion of the boundary layer the velocity increases approximately as the one-seventh power of distance from the wall, giving

$$\frac{\bar{u}}{V_\infty} = \left(\frac{y}{\delta} \right)^{1/7} \quad (7.16)$$

which is known as the *one-seventh-power law*. For the same regime, Blasius experimentally deduced that the shear stress is related to the boundary layer thickness by

$$\tau_s = (0.0225) \frac{\rho V_\infty^2}{g_c} \left(\frac{\nu}{V_\infty \delta} \right)^{1/4} \quad (7.17)$$

for Reynolds numbers ranging from 5×10^5 to 10^7 . Using (7.16) and (7.17) in (7.15), the boundary layer thickness and the local skin-friction coefficient are found to be

$$\frac{\delta}{x} = \frac{0.376}{(V_\infty x / \nu)^{1/5}} = \frac{0.376}{\mathbf{Re}_x^{1/5}} \quad (7.18)$$

$$c_f \equiv \frac{\tau_s}{\rho V_\infty^2 / 2g_c} = \frac{0.0576}{\mathbf{Re}_x^{1/5}} \quad (7.19)$$

and the average skin-friction coefficient is

$$C_f \equiv \frac{F_f}{(\rho V_\infty^2 / 2g_c) L} = \frac{0.072}{\mathbf{Re}_L^{1/5}} \quad (7.20)$$

where F_f is the friction drag per unit width.

These equations make no allowance for the laminar boundary layer, $0 < x < x_c$, which precedes the turbulent portion. They are quite accurate, however, beyond the critical length x_c when the length is taken as if the turbulent boundary layer begins at the leading edge of the plate. Both laminar and turbulent drag can be accounted for by subtracting the turbulent drag for the critical length and adding the laminar drag for that portion, i.e.,

$$C_f = \frac{0.072}{\mathbf{Re}_L^{1/5}} - \frac{0.072}{\mathbf{Re}_{x_c}^{1/5}} \frac{x_c}{L} + \frac{1.328}{\sqrt{\mathbf{Re}_{x_c}}} \frac{x_c}{L} \quad (7.21)$$

where the last term is from the Blasius solution of Table 6-1. For a critical Reynolds number of 5×10^5 , (7.21) simplifies to

$$\blacksquare \quad C_f = \frac{0.072}{\text{Re}_L^{1/5}} - (0.00334) \frac{x_c}{L} \quad (7.22)$$

Flow With Heat Transfer

Reynolds' analogy—flat plate. At the edge of the boundary layer $u = V_x$ and $T = T_x$, which permits the upper limits of integration to be added to (7.14). The integration yields

$$-\frac{1}{c_p g_c} \frac{q_s''}{\tau_s} V_x = T_x - T_s \quad \text{or} \quad \frac{-q_s''}{T_x - T_s} \frac{1}{\rho c_p V_x} = \frac{1}{2} \frac{\tau_s}{\rho V_x^2 / 2 g_c}$$

which, by use of (6.11) and (6.17), can be put in the form

$$\frac{h_x}{\rho c_p V_x} = \frac{c_f}{2} \quad (7.23)$$

The dimensionless group of terms on the left side of (7.23), called the *Stanton number*, **St**, is the Nusselt number divided by the product of the Reynolds and Prandtl numbers, i.e.,

$$\frac{\text{Nu}_x}{\text{Re}_x \text{Pr}} \equiv \text{St}_x = \frac{c_f}{2} \quad (7.24)$$

which is Reynolds' analogy for the flat plate, relating the skin friction to the heat transfer. A. P. Colburn showed that the analogy may be modified to pertain to Prandtl numbers ranging from 0.6 to 50 by

$$\mathbf{j}_H \equiv \text{St}_x \text{Pr}^{2/3} = \frac{c_f}{2} \quad (7.25)$$

where \mathbf{j}_H is known as the *Colburn factor*, or simply the *j-factor*, for heat transfer.

Taking average values over $0 < x < L$, we obtain

$$\frac{\bar{h}}{\rho c_p V_x} = \frac{C_f}{2} \quad (7.26)$$

$$\blacksquare \quad \bar{\mathbf{j}}_H = \bar{\text{St}} \text{Pr}^{2/3} = \frac{C_f}{2} \quad (7.27)$$

The appropriate expression for the average skin-friction coefficient, either (7.20) or (7.21) or (7.22), may be substituted into the Colburn equation (7.27) to get the average convective heat transfer coefficient. The third choice gives (for a critical Reynolds number of 500 000)

$$\blacksquare \quad \bar{\text{Nu}} \equiv \frac{\bar{h}L}{k} = \text{Pr}^{1/3} (0.036 \text{Re}_L^{0.8} - 836) \quad (7.28)$$

Thus far, we have ignored the laminar sublayer and the buffer zone. T. von Kármán, including both of these, found the local Stanton number for flow over a plane surface to be

$$\text{St}_x \equiv \frac{\text{Nu}_x}{\text{Re}_x \text{Pr}} = \frac{c_f/2}{1 + 5\sqrt{c_f/2} \{(\text{Pr} - 1) + \ln[(5\text{Pr} + 1)/6]\}} \quad (7.29)$$

which reduces to Reynolds' analogy for $\text{Pr} = 1$. If the one-seventh-power friction law, (7.19), is introduced into (7.29), the result is

$$\blacksquare \quad \text{Nu}_x \equiv \frac{h_x x}{k} = \frac{(0.0288) \text{Re}_x^{0.8} \text{Pr}}{1 + (0.849) \text{Re}_x^{-0.10} \{(\text{Pr} - 1) + \ln[(5\text{Pr} + 1)/6]\}} \quad (7.30)$$

In all the equations of this section the pertinent parameters should be evaluated at the film temperature, $T_f = (T_s + T_\infty)/2$.

7.4 FLOW IN PIPES

Isothermal Flow

Smooth pipes. From a series of experiments, J. Nikuradse [*Forsch. Arb. Ing.-Wes.* No. 356 (1932)] concluded that the velocity distribution for turbulent flow in smooth pipes is of the power-law form, i.e.,

$$\frac{u}{V_{\max}} = \left(\frac{y}{R}\right)^{1/n} \quad (7.31)$$

where u is the local time-average velocity, V_{\max} is the time-average velocity at the centerline, R is the pipe radius and $y = R - r$ is the distance from the pipe wall. (For simplicity we shall omit the overbar denoting the time average.) The value of n varies with Re ranging from 6.0 at $Re = 4.0 \times 10^3$ to 10.0 at $Re = 2.0 \times 10^6$. Increasing Re to 3.2×10^6 does not increase n above 10.0. Recall that the isothermal flat plate power law is given by eq. (7.16), whereas the smooth pipe power law is given by eq. (7.31). As shown in Table 7-1, the similarity is noteworthy. [See *Boundary Layer Theory*, by H. Schlichting, McGraw-Hill Book Company, 6th English edn, 1966, p. 563.]

Table 7-1. Flat plate and pipe flow power laws.

Configuration	Power Law
Flat plate flow	$\frac{\bar{u}}{V_\infty} = \left(\frac{y}{\delta}\right)^{1/n}$
Pipe flow	$\frac{u}{V_{\max}} = \left(\frac{y}{R}\right)^{1/n}$

The Darcy–Weisbach equation (6.36),

$$h_L \equiv \frac{\Delta p}{\rho} = f \frac{L}{D} \frac{V^2}{2g_c}$$

is equally valid for turbulent flow, but the friction factor f must be determined experimentally, rather than analytically as for laminar flow. In this equation V is the average velocity over the cross-section, which for the power-law profile is expressed by

$$\frac{V}{V_{\max}} = \frac{2n^2}{(2n+1)(n+1)} \quad (7.32)$$

(see Problem 7.6).

For $10\,000 < Re_D < 100\,000$, the friction factor f is well represented by

$$f = (0.184) Re_D^{-0.2} \quad (7.33)$$

beyond the dimensionless distance given by H. Latzko:

$$\left.\frac{L}{D}\right|_c = (0.623) Re_D^{1/4} \quad (7.34)$$

[From *Z. Angew. Math. Mech.* 1: 268 (1921); English translation *NACA Tech. Memo* 1068, 1944.]

This is the distance required in turbulent flow for the friction factor to become constant, which is much less than the 40 to 50 diameters required for the turbulent velocity profile to develop.

Commercial (rough) pipes. In rough pipes, where surface imperfections extend beyond the laminar sublayer, the friction factor f depends upon both Re_D and the roughness height e . Figure 7-4, commonly referred to as *Moody's diagram*, is a plot of friction factor versus Reynolds number, with the relative roughness e/D as parameter. Included are the results for hydraulically smooth pipes, discussed earlier in this section, as well as the straight-line laminar flow relation (6.37). In the region of complete turbulence (high Reynolds number and/or large e/D) the friction factor depends predominantly upon the relative roughness, as shown by the flatness of the curves. Typical values of e for various kinds of new (i.e., rougher for being unworn) commercial piping are given in Table 7-2.

Pipe fittings and minor losses. In piping systems having short lengths of pipes the pressure drop is sometimes more significant in the fittings than in the straight piping itself. Such *minor losses*, although they are not always small as the name might suggest, are due primarily to flow separation and form drag (Section 7.5).

For convenience, head-loss experimental data are often expressed in the form of dimensionless loss coefficients k_L , where

$$h_L = k_L \frac{V^2}{2g_c} \tag{7.35}$$

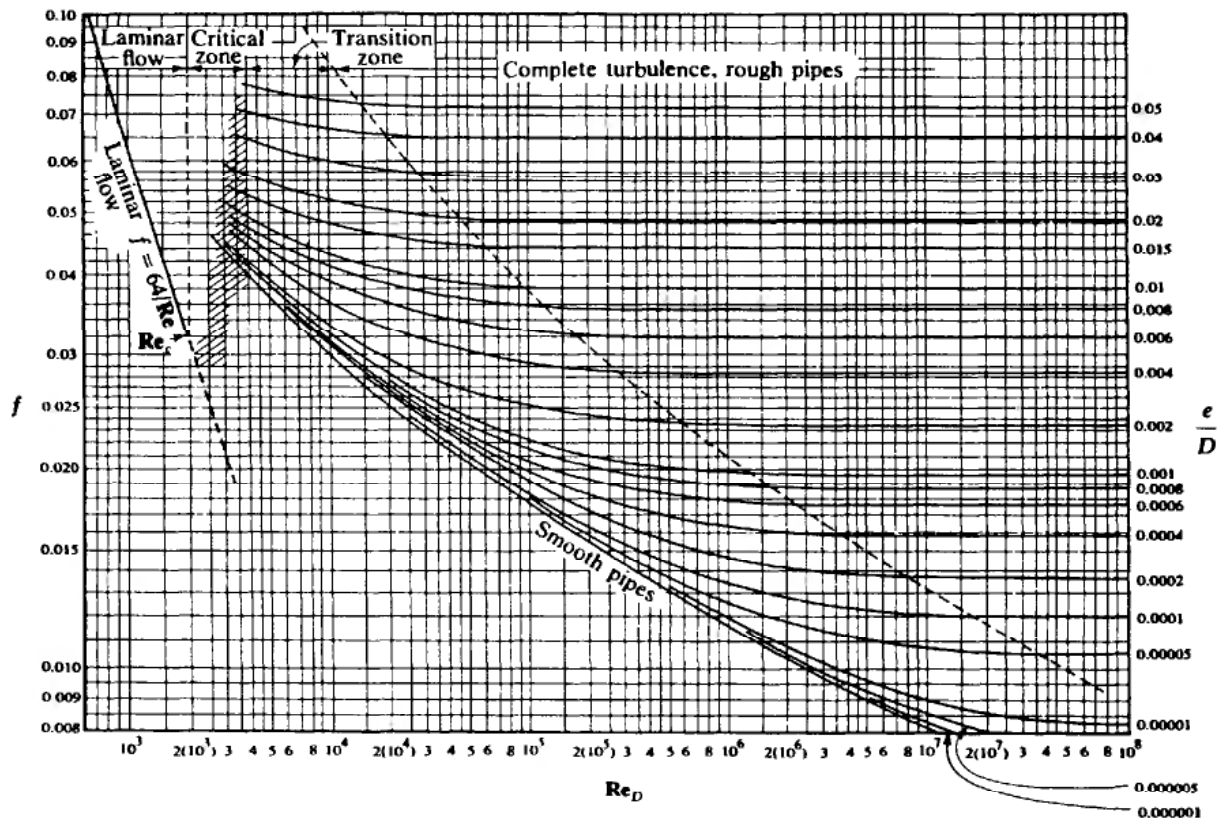


Fig. 7-4. Friction factors for pipe flow. [Adapted by permission from L. F. Moody, *Trans. ASME*, 66: 672, ©1944, The American Society of Mechanical Engineers.]

Table 7-2. Average roughness of commercial pipe.

Type	e (mm)
Drawn tubing	0.0015
Brass, lead, glass, spun cement	0.0076
Commercial steel or wrought iron	0.046
Cast iron (asphalt dipped)	0.12
Galvanized iron	0.15
Wool stave	0.18 to 0.91
Cast iron (uncoated)	0.259
Concrete	0.30 to 3.05
Riveted steel	0.91 to 9.1

Table 7-3. Loss coefficients – 1.0 in. iron pipe size (IPS). [From several sources.]

Item	k_L
Angle valve, fully open, screwed	3.1–5.0
Ball check valve, fully open	4.5–7.0
Gate valve, fully open, screwed	0.19–0.24
Globe valve, fully open, screwed	8.2–10
Swing check valve, fully open, screwed	2.3–3.5
Regular-radius elbow, screwed, 90°	0.9–1.5
Flanged	0.3–0.50
Long-radius elbow, screwed	0.6–0.72
Flanged	0.23–0.40
Close return bend, screwed (180°)	1.5–2.2
Flanged return bend, two elbows, regular radius	0.38–0.41
Long radius	0.25–0.40
Standard tee, screwed, flow through run	0.6–0.90
Flow through side	1.8

Use of an *equivalent length* of pipe,

$$L_{eq} = \frac{k_L D}{f} \quad (7.36)$$

permits minor losses to be accounted for by adding equivalent lengths to the straight pipe length. In any case, the head loss is incorporated in the energy equation, (5.31).

Table 7-3 gives loss coefficients for some common valves and fittings. The values given are valid only when fully turbulent flow exists upstream. Since at least 10 pipe diameters are required downstream of any obstruction for the flow to become fully developed, when fittings or valves are close together actual loss coefficients are less than those tabulated, resulting in conservative calculated values for pressure drop. Equipment manufacturers can provide more accurate k_L data.

Flow With Heat Transfer

Reynolds' analogy—tube flow. Returning to (7.14) for the case of turbulent flow in a tube (Fig. 7-5), we have as the upper limits of integration $u = V$, $T = \bar{T}_b$. Here, V is the mean velocity (as in (7.32)) and \bar{T}_b is the bulk, or mean, temperature of the fluid:

$$\bar{T}_b = \frac{T_{b,i} + T_{b,o}}{2} \tag{7.37}$$

where $T_{b,i}$ and $T_{b,o}$ are the average fluid temperatures at the inlet and outlet. Integrating (7.14), we get, analogous to (7.23),

$$\frac{h_x}{\rho c_p V} = \frac{\tau_s}{\rho V^2 / g_c} \tag{7.38}$$

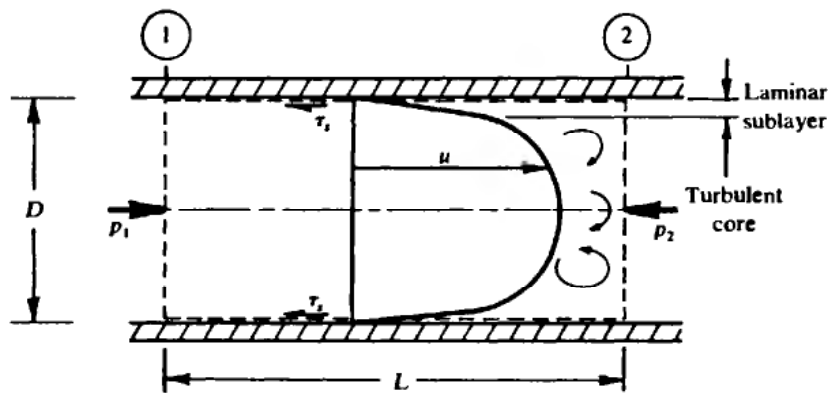


Fig. 7-5

A simple force balance on a cylindrical control volume of length L and diameter D gives

$$\tau_s = \frac{(p_1 - p_2)D}{4L}$$

which can be combined with (6.35) to give

$$\tau_s = f \frac{\rho V^2}{8g_c} \tag{7.39}$$

Substituting (7.39) into (7.38), we get

■
$$\text{St}_x = \frac{h_x}{\rho c_p V} = \frac{f}{8} \tag{7.40}$$

The same form is also valid for average values, i.e.,

$$\bar{\text{St}} = \frac{f}{8} \tag{7.41}$$

Equations (7.40) and (7.41) are, of course, restricted to $\text{Pr} = 1$. The Colburn modification is applicable for the case of internal tube flow, giving

■
$$j_H = \text{St Pr}^{2/3} = \frac{f}{8} \tag{7.42}$$

for fluids with Prandtl numbers from 0.5 to 100.

Substituting the expression (7.33) for f into (7.42) yields a working relation for Nusselt number:

$$\blacksquare \quad \mathbf{Nu}_D \equiv \frac{hD}{k} = (0.023) \mathbf{Re}_D^{0.8} \mathbf{Pr}^{1/3} \quad (7.43)$$

valid for $10\,000 < \mathbf{Re}_D < 100\,000$, $0.5 < \mathbf{Pr} < 100$ and $L/D > 60$. Fluid properties, except specific heat, are evaluated at the average film temperature,

$$T_f = \frac{T_s + T_b}{2} \quad (7.44)$$

while specific heat is evaluated at the bulk temperature T_b .

Entrance-region modifications. For short tubes Latzko recommended the following approximate relations for the average heat transfer coefficient in the entry region, \bar{h}_e :

$$\frac{\bar{h}_e}{\bar{h}} = (1.11) \left[\frac{\mathbf{Re}_D^{1/5}}{(L/D)^{4/5}} \right]^{0.275} \quad \text{for} \quad \left. \frac{L}{D} < \frac{L}{D} \right|_c \quad (7.45)$$

$$\frac{\bar{h}_e}{\bar{h}} = 1 + \frac{C}{L/D} \quad \text{for} \quad \left. \frac{L}{D} \right|_c < \frac{L}{D} < 60 \quad (7.46)$$

Table 7-4 gives some selected values for the coefficient C in (7.46), for $26\,000 < \mathbf{Re}_D < 56\,000$. In (7.45) and (7.46) \bar{h} is the asymptotic heat transfer coefficient for fully developed flow and $(L/D)_c$ is given by (7.34).

Table 7-4. Values of C for use in eq. 7.46.
[From L. M. K. Boelter, G. Young, and H. W. Iverson, *NACA Tech. Note 141* (1948).]

Inlet Configuration	C
Bell-mouthed with screen	1.4
Calming section, $L/D = 11.2$	1.4
$L/D = 2.8$	3.0
45° bend	5.0
90° bend	7.0

Design equations. A relation in which the fluid properties are evaluated at the bulk temperature T_b , making it much easier to use than (7.43), is the widely used *Dittus-Boelter equation*:

$$\blacksquare \quad \mathbf{Nu}_D \equiv \frac{hD}{k} = (0.023) \mathbf{Re}_D^{0.8} \mathbf{Pr}^n \quad (7.47)$$

where

$$n = \begin{cases} 0.4 & \text{for heating the fluid} \\ 0.3 & \text{for cooling the fluid} \end{cases}$$

This equation is valid for $10\,000 < \mathbf{Re}_D < 120\,000$, $0.7 < \mathbf{Pr} < 120$, and $L/D > 60$. Use of this equation should be limited to cases where the pipe surface temperature and the bulk fluid temperature differ by no more than 10 °F for liquids and 100 °F for gases.

For higher Prandtl numbers, $0.7 < \text{Pr} < 16\,700$, and bigger temperature differences the *Sieder-Tate equation*, which accounts for large changes in viscosity, is recommended.

$$\blacksquare \quad \text{Nu}_D \equiv \frac{hD}{k} = (0.027) \text{Re}_D^{0.8} \text{Pr}^{1/3} \left(\frac{\mu_b}{\mu_s} \right)^{0.14} \quad (7.48a)$$

Valid for $\text{Re}_D > 10\,000$ and $L/D > 10$, this equation may be used for both heating and cooling. Except for μ_s , which is evaluated at the surface temperature, all properties are evaluated at the bulk temperature.

A somewhat more accurate equation for turbulent flow inside of tubes is the Petukhov equation

$$\blacksquare \quad \text{Nu}_D = \frac{(f/8) \text{Re}_D \text{Pr}}{1.07 + 12.7(f/8)^{1/2} (\text{Pr}^{2/3} - 1)} \quad (7.48b)$$

where the friction factor can be obtained from the Moody diagram or for smooth tubes from eq. (7.48c).

$$f = (0.790 \ln \text{Re}_{D,b} - 1.64)^{-2} \quad (7.48c)$$

In the Petukhov equation, $n = 0$ for gases, $n = 0.11$ for heating a liquid and $n = 0.25$ for cooling a liquid. This equation is for fully developed, turbulent flow with

$$5000 < \text{Re}_{D,b} < 1.25 \times 10^5; \quad 0 \leq \frac{\mu_b}{\mu_s} \leq 40$$

and

$$2 < \text{Pr}_b < 14.0$$

Equations (7.47), (7.48a), and (7.48b) can be used as a first approximation for average \bar{h} , i.e., for $\overline{\text{Nu}}$ over the tube heated length, by using properties evaluated at the bulk average temperature, $\bar{T}_b = (T_{b,i} + T_{b,o})/2$. These equations can likewise be used for noncircular ducts with D replaced by the hydraulic diameter of eq. (6.40).

7.5 EXTERNAL FLOW OVER SUBMERGED BODIES

Section 7.3 covered a special case of external flow in which the boundary layer remains attached to the surface and grows throughout its length. The results were obtained for a uniform velocity field, $V_\infty = \text{constant}$, producing fully developed flow, $dp/dx = 0$. Such is not the case when the fluid path is oblique to the surface.

For the blunt-nosed body of Fig. 7-6(a) the boundary layer detaches, separating from the surface at the upstream end and producing a *wake*. The boundary layer remains attached to the round-nosed body, Fig. 7-6(b). The airfoil of Fig. 7-7 experiences accelerating flow from *A* to *B* and deceleration from *B* to the trailing edge. At point *C*, known as the *separation point*, the velocity gradient is zero, i.e.,

$$\left. \frac{\partial u}{\partial y} \right|_{y=0} = 0$$

while the flow is actually reversed between *C* and *D*. The corresponding pressure gradients shown in the figure come from Bernoulli's equation of potential flow theory. Separation can only occur in decelerating flow. Beyond the point of separation the pressure gradient is said to be *adverse*.

Isothermal Flow

The drag on submerged bodies, such as those shown in Figs. 7-6 and 7-7, is made up of two components: *skin-friction drag*, F_f , and *form, or profile, drag*, F_p .

$$F_D = F_f + F_p \quad (7.49)$$

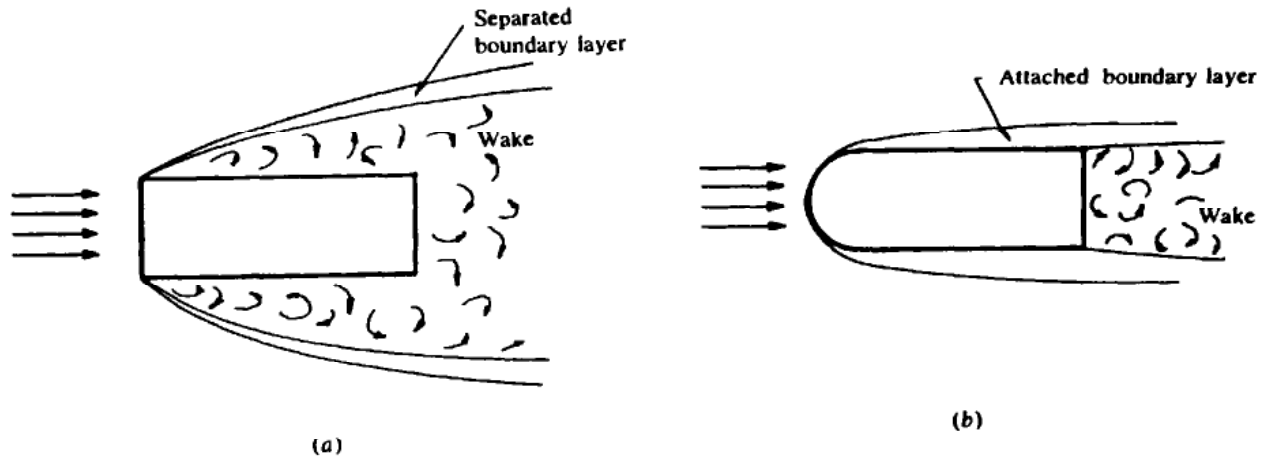


Fig. 7-6

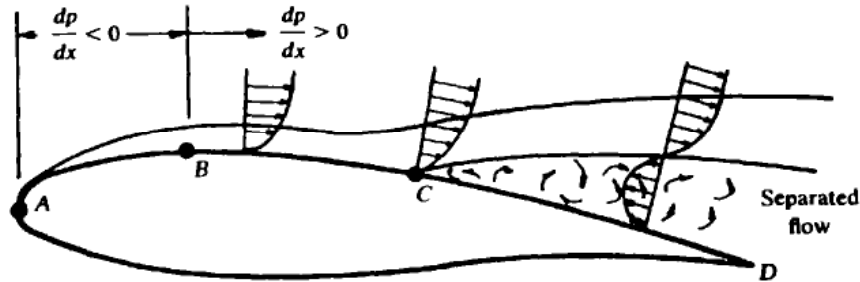


Fig. 7-7

Profile drag is not as amenable to analysis as skin-friction drag, particularly in the case of turbulent flow. Because of this, it is common practice in engineering to evaluate the total drag in terms of an empirical drag coefficient C_D :





$$\blacksquare \quad F_D = C_D \left(\frac{\rho V_\infty^2}{2g_c} \right) A \quad (7.50)$$

where A is the projected frontal area. Drag coefficients for flow over some common submerged bodies are given in Table 7-5. Flow over cylinders is laminar for Reynolds numbers up to approximately 5×10^5 , compared to about 3×10^5 for spheres. The drag for a streamlined body is strongly dependent upon Reynolds number, but for a bluff body is essentially constant over a wide range of Reynolds numbers.

Flow with Heat Transfer

Many heat exchangers are designed to transfer heat from cylinders subjected to crossflow. Pebble-bed heaters involve heat exchange in flow over spherical, or near-spherical, particles. Convective heat exchange in such cases is complicated by the flow separation discussed in the preceding subsection. Reynolds' analogy, which permits the calculation of heat transfer from the skin-friction factor, does not apply, since the profile drag may be substantially larger than the shear drag. Hence most heat transfer calculations for problems of this type are based on empirical correlation equations. The most common cases are considered in the following paragraphs.

Table 7-5. Drag coefficients. [Adapted from several sources.]

Configuration	L/D	$Re_D = V_\infty D/\nu$	C_D
Circular cylinder, axis perpendicular to the flow 	1	10^5	0.63
	5		0.74
	20		0.90
	∞		1.20
	5	$>5 \times 10^5$	0.35
∞		0.33	
Circular cylinder, axis parallel to the flow 	0	$>10^3$	1.12
	1		0.91
	2		0.85
	4		0.87
	7		0.99
Elliptical cylinder 	∞	4×10^4	0.6
		10^5	0.46
		2.5×10^4 to 10^5	0.32
		2.5×10^4	0.29
	2×10^5	0.20	
Airfoil (1:3) [†]	∞	4×10^4	0.07
Rectangular plate, normal to the flow $L = \text{length}$ $D = \text{width}$	1	$>10^3$	1.16
	5		1.20
	20		1.50
	∞		1.90
Square cylinder 	∞	3.5×10^4	2.0
	∞	10^4 to 10^5	1.6

*Ratio of major axis to minor axis
†Ratio of chord to span at zero angle of attack

Single cylinder in crossflow. The local heat transfer coefficient (Nusselt number) for a single cylinder subjected to the crossflow of air at a uniform approach temperature and velocity varies widely from point to point. The average Nusselt number is well represented by the empirical correlations (7.51a) for air and (7.51b) for liquids.

$$\overline{Nu}_{Df} \equiv \frac{\bar{h}D}{k_f} = C_g Re_{Df}^n \tag{7.51a}^*$$

$$\overline{Nu}_{Df} \equiv \frac{\bar{h}D}{k_f} = C_l Pr_f^{1/3} Re_{Df}^n \tag{7.51b}$$

where the constants for the various Reynolds number ranges are given in Table 7-6. As indicated by the subscript f , the parameters are evaluated at the film temperature, $T_f = (T_\infty + T_s)/2$.









Single sphere. For Reynolds numbers less than unity and for $\text{Pr} = 1$, $\overline{\text{Nu}}_D = 2$. For more common flow conditions, the following relations are recommended.

$$\text{gases: } \frac{\bar{h}D}{k_f} = (0.37)(\text{Re}_{Df})^{0.6} \quad (17 < \text{Re}_{Df} < 70\,000) \quad (7.52a)$$

$$\text{falling water drop: } \frac{\bar{h}D}{k_f} = 2 + 0.6 \text{Re}_{D\infty}^{1/2} \text{Pr}_{\infty}^{1/3} \quad (7.52b)$$

$$\text{liquids: } \frac{\bar{h}D}{k_{\infty}} = [1.2 + 0.53(\text{Re}_{D\infty})^{0.54}] \text{Pr}_{\infty}^{0.3} \left(\frac{\mu_{\infty}}{\mu_s} \right)^{0.25} \\ 1 < \text{Re}_{D\infty} < 200\,000 \quad (7.53)$$

Table 7-6. Constants for use in eqs 7.51a and 7.51b. [Data from several sources as reported by M. Jakob, *Heat Transfer*, Vol. 1, ©1949, John Wiley & Sons, Inc., New York, and J. G. Knudsen and D. L. Katz, *Fluid Dynamics and Heat Transfer*, 1958, McGraw-Hill Book Company, New York, NY, p. 505.]

Configuration	Re_{Df}	C_g	n	C_f
	1.0 to 4	0.891	0.330	0.989
	4 to 40	0.821	0.385	0.911
	40 to 4 000	0.615	0.466	0.683
	4 000 to 40 000	0.174	0.618	0.193
	40 000 to 250 000	0.0239	0.805	0.0266
	2 500 to 7 500	0.261	0.624	
	5 000 to 100 000	0.222	0.588	
	2 500 to 8 000	0.160	0.699	
	5 000 to 100 000	0.092	0.675	
	5 000 to 19 500	0.144	0.638	
	19 500 to 100 000	0.035	0.782	
	5 000 to 100 000	0.138	0.638	
	4 000 to 15 000	0.205	0.731	
	2 500 to 15 000	0.224	0.612	
	3 000 to 15 000	0.085	0.804	

*Some sources include $\text{Pr}_{\infty}^{1/3}$ in equation (7.51a) for gases.

In the equations subscript f indicates property evaluation at the film temperature, $T_f = (T_\infty + T_s)/2$, subscript ∞ means properties at the free stream temperature, T_∞ , and subscript s means surface temperature property evaluation.

Tube bundles in crossflow. Closely spaced cylindrical tube bundles are commonly used in heat exchangers. In this situation the wakes from the upstream tubes influence the heat transfer and flow characteristics at downstream tubes. Variations occur from tube to tube for the first 10 tubes, after which no discernible changes take place. Tube arrangement is obviously another influencing factor; the two most common arrangements are shown in Fig. 7-8.

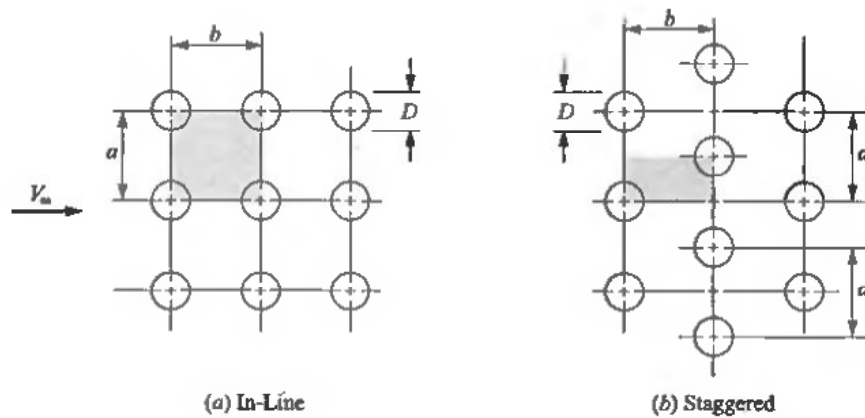


Fig. 7-8

The results of several investigators were evaluated by E. D. Grimison, who found that the average heat transfer coefficient for bundles at least 10 tubes deep in the flow direction is given by the Hilpert equation:

$$\frac{\bar{h}D}{k_f} = C_1 (\text{Re}_{\max})^n \tag{7.54a}$$

This equation is valid for air ($\text{Pr} = 0.7$) only. For fluids with other values of Pr , the following modification of the Hilpert equation is better.

$$\frac{\bar{h}D}{k_f} = 1.13C_1 (\text{Re}_{\max})^n \text{Pr}_f^{1/3} \tag{7.54b}$$

In both of these expressions, $\text{Re}_{\max} = V_{\max}D/\nu_f$ and the constants, C_1 and n , are given in Table 7-7. The maximum velocity, V_{\max} , occurs at the minimum flow passage. Referring to the shaded unit cells of Fig. 7-8, we see that the minimum passage for in-line bundles is $a - D$, so that, by continuity,

$$V_{\max} = \frac{V_\infty a}{a - D}$$

For staggered bundles, the minimum passage is the smaller of $(a - D)/2$ and $\sqrt{(a/2)^2 + b^2} - D$ (the diagonal), and V_{\max} is $(V_\infty a/2)$ divided by this smaller value.

For tube bundles having less than 10 tubes in the flow direction, the correction coefficients given in Table 7-8, where \bar{h}_{10} is given by (7.54a), are widely used.

Table 7-7. Cross flow of gases over tube banks. [From E. D. Grimson, *Trans. ASME*, 69: 590 (1937). Used by permission of the American Society of Mechanical Engineers.]

$\frac{b}{D}$	a/D								
	1.25		1.5		2		3		
	C_1	n	C_1	n	C_1	n	C_1	n	
In-line tubes:									
1.25	0.348	0.592	0.275	0.608	0.100	0.704	0.0633	0.752	
1.5	0.367	0.586	0.250	0.620	0.101	0.702	0.0678	0.744	
2	0.418	0.570	0.299	0.602	0.229	0.632	0.198	0.648	
3	0.290	0.601	0.357	0.584	0.374	0.581	0.286	0.608	
Staggered tubes:									
0.6							0.213	0.636	
0.9					0.446	0.571	0.401	0.581	
1			0.497	0.558					
1.125					0.478	0.565	0.518	0.560	
1.25	0.518	0.556	0.505	0.554	0.519	0.556	0.522	0.562	
1.5	0.451	0.568	0.460	0.562	0.452	0.568	0.488	0.568	
2	0.404	0.572	0.416	0.568	0.482	0.556	0.449	0.570	
3	0.310	0.592	0.356	0.580	0.440	0.562	0.421	0.574	

Table 7-8. Ratio of \bar{h}/\bar{h}_{10} in tube banks. [Attributed to W. M. Kays and R. K. Lo, Stanford University Tech. Report No. 15, Office of Naval Research Contract N6-ONR-251, Aug. 1952. Used by permission.]

	Number of Tubes									
	1	2	3	4	5	6	7	8	9	10
Staggered	0.68	0.75	0.83	0.89	0.92	0.95	0.97	0.98	0.99	1.00
In-line	0.64	0.80	0.87	0.90	0.92	0.94	0.96	0.98	0.99	1.00

7.6 HEAT TRANSFER TO LIQUID METALS

Because of their high thermal conductivity and low viscosity, liquid metals, such as mercury, sodium and lead-bismuth alloys, are ideally suited to transferring large amounts of heat in small spaces.

Flat Plate Analysis

Since the thermal conductivity is so high, the principal mode of energy transfer to liquid metals is conduction, both in laminar and in turbulent flow. Since convection is secondary to conduction,

turbulent fluctuations add little to the transport mechanism. This being the case, we may recall from laminar flow over a flat plate that the hydrodynamic and thermal boundary layer thicknesses are related by

$$\delta_t = \frac{\delta}{\text{Pr}^{1/3}}$$

Since the Prandtl numbers of common liquid metals range from 0.004 to 0.029, the boundary layers may be represented by the relative magnitudes shown in Fig. 7-9. The velocity profile is very blunt over most of the thermal profile. We may, therefore, assume slug flow as a first approximation, i.e., $u = V_x$. Using this value of uniform velocity together with the cubic temperature profile

$$\theta = \frac{T - T_s}{T_x - T_s} = \frac{3y}{2\delta_t} - \frac{1}{2}\left(\frac{y}{\delta_t}\right)^3$$

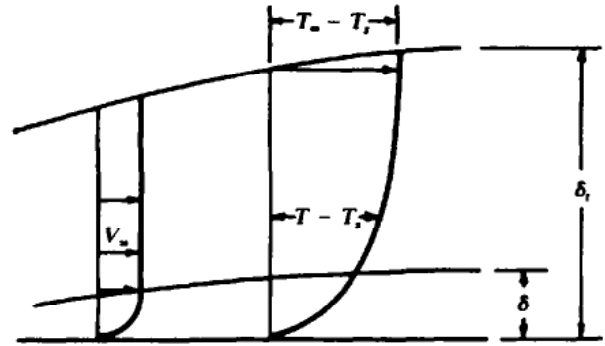


Fig. 7-9

in the integral energy equation (6.29), we solve to find:

$$\delta_t = \sqrt{\frac{8\alpha x}{V_x}} \tag{7.55}$$

whence

$$h_x = \frac{-k(\partial T/\partial y)_{y=0}}{T_s - T_x} = \frac{3k}{2\delta_t} = \frac{3\sqrt{2}}{8} k \sqrt{\frac{V_x}{\alpha x}} \tag{7.56}$$

or, in dimensionless form,

$$\text{Nu}_x = \frac{h_x x}{k} = (0.530)\sqrt{\text{Re}_x \text{Pr}} = (0.530)\sqrt{\text{Pe}_x} \tag{7.57}$$

Here, the *Peclet number*, $\text{Pe} \equiv \text{Re} \cdot \text{Pr}$, is a measure of the ratio of energy transport by convection to that by conduction.

Flow Inside Tubes

A number of correlation equations are available for various flow conditions. Among them, the following are representative.

For constant heat flux at the wall, and with fluid properties evaluated at the bulk temperature, T_b ,

$$\text{Nu}_D = \frac{hD}{k_b} = 4.82 + (0.0185)\text{Pe}_D^{0.827} \tag{7.58}$$

which is valid for $3600 < \text{Re}_D < 9.05 \times 10^5$ and $100 < \text{Pe}_D < 10^4$.

For constant wall temperature,

$$\text{Nu}_D = \frac{hD}{k_b} = 5 + (0.025)\text{Pe}_D^{0.8} \tag{7.59}$$

for $\text{Pe}_D > 100$ and $L/D > 60$. Fluid properties are evaluated at the bulk temperature.

Crossflow Over Tube Banks

For the flow of mercury ($\text{Pr} = 0.022$) over a staggered tube bank 10 tubes deep in the flow direction, with $1/2$ in o.d. tubes arranged in an equilateral triangular array with a 1.375 pitch-to-diameter ratio, the following equation has been recommended:

$$\overline{\text{Nu}}_D = \frac{\bar{h}D}{k_f} = 4.03 + (0.228)\text{Pe}_{D_{\max}}^{0.67} \quad (7.60)$$

where $20\,000 < \text{Re}_{D_{\max}} < 80\,000$ and fluid properties are evaluated at the film temperature, $T_f = (T_\infty + T_s)/2$. The maximum Reynolds number is based on the maximum velocity in the passage.

Solved Problems

7.1. Verify that $\overline{\phi_1' \phi_2'} \neq 0$ for the functions of Fig. 7-10.

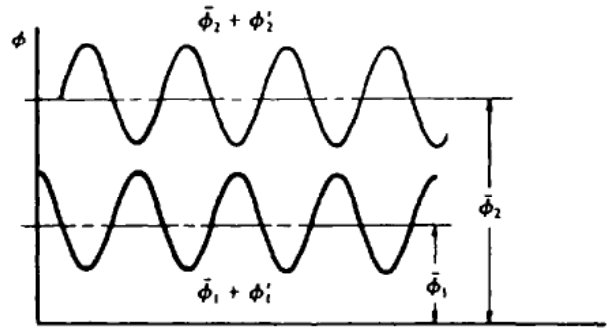


Fig. 7-10

Here, $\phi_2' = -\phi_1'$, so that

$$\overline{\phi_1' \phi_2'} = -\overline{(\phi_1')^2} < 0$$

since ϕ_1' vanishes at only a finite number of points in any finite time interval.

7.2. By using the one-seventh-power law, (7.16), and the experimental expression (7.17) in the integral momentum equation, (7.15), derive expressions for the boundary layer thickness and the skin-friction coefficient for turbulent flow over a flat plate.

The integral momentum equation becomes

$$(0.0225) \frac{\rho V_\infty^2}{g_c} \left(\frac{\nu}{V_\infty \delta} \right)^{1/4} = \frac{\rho}{g_c} \frac{d}{dx} \left[\int_0^\delta V_\infty^2 \left[\left(\frac{y}{\delta} \right)^{1/7} - \left(\frac{y}{\delta} \right)^{2/7} \right] dy \right]$$

Integrating and simplifying, we get

$$(0.0225) \left(\frac{\nu}{V_\infty \delta} \right)^{1/4} = \frac{7}{72} \frac{d\delta}{dx}$$

Separating variables and integrating:

$$\left(\frac{\nu}{V_\infty}\right)^{1/4} \int_0^x dx = (4.321) \int_0^\delta \delta^{1/4} d\delta$$

or

$$\frac{\delta}{x} = \frac{0.376}{(V_\infty x/\nu)^{1/5}} = \frac{0.376}{\mathbf{Re}_x^{1/5}} \quad (I)$$

which is (7.18). It should be noted that in the limits of integration we have tacitly assumed that the turbulent boundary layer begins at the leading edge.

By definition, the skin-friction coefficient is

$$c_f \equiv \frac{\tau_x}{\rho V_\infty^2/2g_c}$$

Using (7.17) for τ_x ,

$$c_f = \frac{(0.0225)(\rho V_\infty^2/g_c)(\nu/V_\infty \delta)^{1/4}}{\rho V_\infty^2/2g_c} = (0.045) \left(\frac{\nu}{V_\infty \delta}\right)^{1/4}$$

But from (I),

$$\delta = \frac{0.376x}{\mathbf{Re}_x^{1/5}}$$

Hence

$$c_f = 0.045 \left(\frac{\nu \mathbf{Re}_x^{1/5}}{0.376 V_\infty x}\right)$$

and

$$c_f = \frac{0.0576}{\mathbf{Re}_x^{1/5}}$$

which is (7.19).

- 7.3.** Hydrogen gas at 60 °C and a pressure of 1 atm flows along a flat plate at 122 m/s. If the plate is at 93 °C and 1.22 m long, determine the following quantities, assuming a critical Reynolds number of 500 000: (a) the thickness of the hydrodynamic boundary layer at the end of the plate, (b) the local skin-friction coefficient at the end of the plate, (c) the average skin-friction coefficient, (d) the drag force per meter of the plate width, (e) the local convective heat transfer coefficient at the end of the plate, (f) the average heat transfer coefficient, and (g) the heat transfer from the plate to the hydrogen per meter of width.

At the film temperature

$$T_f = \frac{60 + 93}{2} = 76.55 \approx 77 \text{ °C} = 350 \text{ K}$$

the appropriate properties from Table B-4 (SI) are

$\rho = 0.0716 \text{ kg/m}^3$	$\nu = 141.9 \times 10^{-6} \text{ m}^2/\text{s}$
$c_p = 14.436 \times 10^3 \text{ J/kg} \cdot \text{K}$	$k = 0.206 \text{ W/m} \cdot \text{K}$
$\mu_s = 10.245 \times 10^{-6} \text{ kg/m} \cdot \text{s}$	$\alpha = 2.031 \times 10^{-4} \text{ m}^2/\text{s}$
$\mu = 9.954 \times 10^{-6} \text{ kg/m} \cdot \text{s}$	$\mathbf{Pr} = 0.697$

At the end of the plate the Reynolds number is

$$\mathbf{Re}_L = \frac{V_\infty L}{\nu} = \frac{(122 \text{ m/s})(1.22 \text{ m})}{141.9 \times 10^{-6} \text{ m}^2/\text{s}} = 1.049 \times 10^6$$

and the transition from laminar to turbulent flow occurs at

$$x_t = \frac{\mathbf{Re}_t \nu}{V_\infty} = \frac{(500\,000)(141.9 \times 10^{-6} \text{ m}^2/\text{s})}{122 \text{ m/s}} = 0.5816 \text{ m}$$

(a) Assuming the boundary layer grows turbulently throughout the length of the plate (which gives good results in the turbulent regime), the hydrodynamic boundary layer thickness is given by (7.18).

$$\delta = \frac{(0.376)L}{\mathbf{Re}_L^{1/5}} = \frac{0.376(1.22 \text{ m})}{(1.049 \times 10^6)^{1/5}} = 0.0287 \text{ m}$$

(b) Equation (7.19) gives

$$c_f = \frac{0.0576}{\mathbf{Re}_L^{1/5}} = \frac{0.0576}{(1.049 \times 10^6)^{1/5}} = 0.003\,60$$

(c) Accounting for both the laminar and the turbulent portions of the boundary layer, the average skin-friction coefficient is given by (7.22).

$$C_f = \frac{0.072}{(1.049 \times 10^6)^{1/5}} - 0.003\,34 \left(\frac{0.5816 \text{ m}}{1.22 \text{ m}} \right) = 0.002\,907$$

(d) Using C_f from (c), the total drag per unit width on one side of the plate is, by (7.20),

$$\begin{aligned} F_f &= C_f \frac{\rho V_\infty^2 L}{2g_c} = 0.002\,907 \frac{(0.0716 \text{ kg/m}^3)(122 \text{ m/s})^2(1.22 \text{ m})}{2(\text{kg} \cdot \text{m})/(\text{N} \cdot \text{s}^2)} \\ &= 1.889 \text{ N/m} \end{aligned}$$

(e) The Colburn equation, (7.25), gives the local convective heat transfer coefficient:

$$\mathbf{St}_x \mathbf{Pr}^{2/3} = \frac{c_f}{2} \quad \text{or} \quad \frac{h_x x}{k} = \mathbf{Re}_x \mathbf{Pr}^{1/3} \frac{c_f}{2}$$

Thus

$$\begin{aligned} h_{1.22} &= \frac{0.206 \text{ W/m} \cdot \text{K}}{1.22 \text{ m}} (1.049 \times 10^6)(0.697)^{1/3} \left(\frac{0.003\,60}{2} \right) \\ &= 282.7 \text{ W/m}^2 \cdot \text{K} \end{aligned}$$

Because this result ignores the effect of the laminar sublayer and the buffer zone, it is appropriate to check their influence by use of (7.30).

$$\begin{aligned} h_{1.22} &= \frac{0.206 \text{ W/m} \cdot \text{K}}{1.22 \text{ m}} \\ &\quad \times \frac{(0.0288)(1.049 \times 10^6)^{0.8}(0.697)}{1 + (0.849)(1.049 \times 10^6)^{-0.10}[(0.697 - 1) + \ln\{[5(0.697) + 1]/6\}]} \\ &= 2.543 \times 10^2 \text{ W/m}^2 \cdot \text{K} \end{aligned}$$

which is approximately 10% smaller than the value given by the Colburn equation.

(f) Since the von Kármán equation is too formidable to integrate, except numerically, we shall be content with the average heat transfer coefficient given by (7.28).

$$\begin{aligned} \frac{\bar{h}L}{k} &= \mathbf{Pr}^{1/3}(0.036 \mathbf{Re}_L^{0.8} - 836) \\ \bar{h} &= \frac{0.206 \text{ W/m} \cdot \text{K}}{1.22 \text{ m}} (0.697)^{1/3} [0.036(1.049 \times 10^6)^{0.8} - 836] \\ &= 2.282 \times 10^2 \text{ W/m}^2 \cdot \text{K} \end{aligned}$$

(g) The heat transfer per meter of width from one side of the plate is given by

$$q' = q_{\text{width}} = \bar{h}L(T_s - T_\infty) = (228.2 \text{ W/m}^2 \cdot \text{K})(1.22 \text{ m})(93 - 60)^\circ\text{C} = 9187 \text{ W/m}$$

7.4. A smooth, thin, model airfoil is to be tested for drag in a wind tunnel. It is symmetrical and can be approximated by a flat plate. Its chord length is 150 mm. At an airstream velocity of 200 m/s and a temperature of 27 °C, what is the drag per unit width?

Assuming the pressure to be approximately atmospheric, the pertinent parameters in SI units from Table B-4 (SI) are:

$$\rho = 1.177 \text{ kg/m}^3$$

$$\nu = 1.684 \times 10^{-5} \text{ m}^2/\text{s}$$

At the trailing edge the Reynolds number is

$$\text{Re}_L = \frac{V_\infty L}{\nu} = \frac{(200 \text{ m/s})(0.15 \text{ m})}{1.684 \times 10^{-5} \text{ m}^2/\text{s}} = 1.781 \times 10^6$$

which is turbulent. Assuming the transition from laminar to turbulent occurs at a Reynolds number of 500 000, the critical length is

$$x_c = \frac{\nu}{V_\infty} \text{Re}_c = \frac{1.684 \times 10^{-5} \text{ m}^2/\text{s}}{200 \text{ m/s}} (500\,000) = 0.0421 \text{ m}$$

The average skin-friction coefficient is given by (7.22).

$$C_f = \frac{0.072}{\text{Re}_L^{1/5}} - (0.003\,34) \frac{x_c}{L}$$

$$= \frac{0.072}{(1.78 \times 10^6)^{1/5}} - (0.003\,34) \left(\frac{0.0421 \text{ m}}{0.15 \text{ m}} \right) = 3.11 \times 10^{-3}$$

If the boundary layer had been assumed turbulent from the leading edge, the average skin-friction coefficient,

$$C_f \Big|_{\text{turb}} \approx 4.048 \times 10^{-3}$$

would be 23% higher than the more accurate value obtained by accounting for the influence of the laminar portion. The drag force per unit width is given by

$$\frac{F_f}{W} = 2 \frac{\rho V_\infty^2}{2g_c} L = (3.11 \times 10^{-3})(1.177 \text{ kg/m}^3)(200 \text{ m/s})^2(0.15 \text{ m})$$

$$\times \left(\frac{\text{N} \cdot \text{s}^2}{\text{kg} \cdot \text{m}} \right) = 21.9 \text{ N/m}$$

where the factor of 2 accounts for both sides of the airfoil.

7.5. (a) In a chemical processing plant glycerin flows over a 1 m long heated flat plate at free-stream conditions $V_\infty = 3 \text{ m/s}$ and $T_\infty = 10^\circ\text{C}$. If the plate is held at 30°C , determine the heat transfer per unit width, assuming $\text{Re}_c = 500\,000$. (b) Repeat for ammonia.

(a) At a film temperature of

$$T_f = \frac{T_\infty + T_s}{2} = \frac{10 + 30}{2} = 20^\circ\text{C}$$

the fluid properties for glycerin, given in Table B-3 (Engl.), are:

$$\begin{aligned}\rho &= (16.018\,46)(78.91) = 1264\text{ kg/m}^3 & k &= (1.729\,577)(0.165) = 0.2854\text{ W/m}\cdot\text{K} \\ \nu &= (0.0929)(0.0127) = 0.001\,18\text{ m}^2/\text{s} & \text{Pr} &= 12\,500\end{aligned}$$

The critical length is

$$x_c = \frac{\nu}{V_\infty} \text{Re}_c = \frac{0.001\,18\text{ m}^2/\text{s}}{3\text{ m/s}} (500\,000) = 196.7\text{ m}$$

Therefore, the flow is laminar throughout, and the average heat transfer coefficient is given by (6.28) as

$$\frac{\bar{h}L}{k} = (0.664)\text{Re}_L^{1/2} \text{Pr}^{1/3}$$

The Reynolds number at the end of the plate is

$$\text{Re}_L = \frac{V_\infty L}{\nu} = \frac{(3\text{ m/s})(1\text{ m})}{0.001\,18\text{ m}^2/\text{s}} = 2542$$

Hence

$$\bar{h} = \frac{0.2854\text{ W/m}\cdot\text{K}}{1\text{ m}} (2542)^{1/2} (12\,500)^{1/3} = 333.9\text{ W/m}^2\cdot\text{K}$$

and the heat transfer is given by

$$\frac{q}{W} = \bar{h}L(T_s - T_\infty) = \left(333.9\frac{\text{W}}{\text{m}^2\cdot\text{K}}\right) (1\text{ m})[(30 - 10)\text{ K}] = 6.679\text{ kW/m}$$

(b) For ammonia at 20°C, properties from Table B-3 (Engl.) are

$$\begin{aligned}\rho &= (16.018\,46)(38.19) = 611.75\text{ kg/m}^3 & k &= (1.729\,577)(0.301) = 0.521\text{ W/m}\cdot\text{K} \\ \nu &= (0.0929)(0.386 \times 10^{-5}) = 3.59 \times 10^{-7}\text{ m}^2/\text{s} & \text{Pr} &= 2.02\end{aligned}$$

and the critical length is

$$x_c = \frac{\nu}{V_\infty} \text{Re}_c = \frac{3.59 \times 10^{-7}\text{ m}^2/\text{s}}{3\text{ m/s}} (500\,000) = 0.0598\text{ m}$$

The Reynolds number at the end of the plate is

$$\text{Re}_L = \frac{V_\infty L}{\nu} = \frac{(3\text{ m/s})(1\text{ m})}{3.59 \times 10^{-7}\text{ m}^2/\text{s}} = 8.36 \times 10^6$$

and the average heat transfer coefficient is given by (7.28).

$$\begin{aligned}\frac{\bar{h}L}{k} &= \text{Pr}^{1/3} (0.036 \text{Re}_L^{0.8} - 836) \\ \bar{h} &= \frac{0.521\text{ W/m}\cdot\text{K}}{1\text{ m}} (2.02)^{1/3} [(0.036)(8.36 \times 10^6)^{0.8} - 836] \\ &= (0.6586)[12\,418 - 836] = 7.628\text{ kW/m}^2\cdot\text{K}\end{aligned}$$

In this case the reduction due to the laminar portion at the leading edge is minor, being only 7.2% of the total.

The heat transfer is

$$\frac{q}{W} = \bar{h}L(T_s - T_\infty) = \left(7.628\frac{\text{kW}}{\text{m}^2\cdot\text{K}}\right) (1\text{ m})[(30 - 10)\text{ K}] = 153\text{ kW/m}$$

This problem illustrates extremes. With glycerin, the flow was laminar throughout. With ammonia, very little of it was laminar—only 5.98%.

- 7.6.** (a) For the power-law velocity profile, (7.31), determine an expression for the ratio of the average velocity to the maximum velocity. (b) Compare the ratio for turbulent flow, with $n = 7$, to that for laminar flow.

(a) In terms of the pipe radius the power-law profile is

$$\frac{u}{V_{\max}} = \left(\frac{y}{R}\right)^{1/n} = \left(\frac{R-r}{R}\right)^{1/n}$$

where r is the radius and R is the pipe radius. The average velocity may be obtained by integrating this velocity over the flow area, i.e.,

$$V = \frac{\int_0^R [(R-r)/R]^{1/n} V_{\max} 2\pi r dr}{\int_0^R 2\pi r dr} = \frac{2V_{\max}}{R^2} \int_0^R \left(1 - \frac{r}{R}\right)^{1/n} r dr$$

Integrating, we get

$$\begin{aligned} \frac{V}{V_{\max}} &= \frac{2}{R^2} \left[\frac{1}{\frac{1}{R^2} \left(\frac{1}{n} + 2\right)} \left(1 - \frac{r}{R}\right)^{(1/n)+2} - \frac{1}{\frac{1}{R^2} \left(\frac{1}{n} + 1\right)} \left(1 - \frac{r}{R}\right)^{(1/n)+1} \right]_0^R \\ &= -2 \left[\frac{n}{2n+1} - \frac{n}{n+1} \right] = \frac{2n^2}{(2n+1)(n+1)} \end{aligned}$$

(b) For turbulent flow with $n = 7$,

$$\frac{V}{V_{\max}} = \frac{2(7)^2}{[2(7)+1](7+1)} = \frac{49}{60}$$

which is considerably greater than the ratio for laminar flow given by (6.33):

$$\frac{V}{V_{\max}} = \frac{1}{2}$$

- 7.7.** Water at 20 °C flows at the rate of 0.028 m³ per minute in a 0.025 m i.d. smooth, drawn copper tube 60 m long. (a) Determine the friction factor and the length required for it to reach a constant value. (b) What is the pressure drop? (c) How would three globe valves, equally spaced in the line, influence the pressure drop?

The average velocity is

$$V = \frac{Q}{A_c} = \frac{(0.028 \text{ m}^3/\text{min})(1 \text{ min}/60 \text{ s})}{(\pi/4)(0.025 \text{ m})^2} = 0.95 \text{ m/s}$$

which gives a Reynolds number of

$$\text{Re} = \frac{DV}{\nu} = \frac{(0.025 \text{ m})(0.95 \text{ m/s})}{1.006 \times 10^{-6} \text{ m}^2/\text{s}} = 23\,608$$

(a) Equation (7.33) gives a friction factor of

$$f = (0.184) \text{Re}_D^{-0.2} = (0.184)(23\,608)^{-0.2} = 0.0246$$

which compares very favorably with the value given by Moody's diagram (Fig. 7-4).

The distance required for the friction factor to reach a constant value is given by eq. (7.34) as

$$\left. \frac{L}{D} \right|_c = 0.623(23\,608)^{1/4} = 7.72$$

or

$$L_t = (7.72)D = 7.72(0.025 \text{ m}) = 0.193 \text{ m}$$

a negligible amount in a total of 60 m; therefore, we shall assume that $f = 0.0246$ throughout.

- (b) The pressure drop is given by the Darcy-Weisbach equation (6.35).

$$\begin{aligned} \Delta p &= f \frac{L}{D} \frac{\rho V^2}{2g_c} = (0.0246) \left(\frac{60 \text{ m}}{0.025 \text{ m}} \right) \frac{(1000.52 \text{ kg/m}^3)(0.95 \text{ m/s})^2}{2(\text{kg}\cdot\text{m}/\text{N}\cdot\text{s}^2)} \\ &= 26\,656 \text{ N/m}^2 \end{aligned}$$

- (c) By (7.36), adding three globe valves in the line would be equivalent to adding tubing of maximum length

$$(3) \frac{k_L D}{f} = (3) \frac{10(0.025 \text{ m})}{0.0246} = 30.5 \text{ m} = L_{eq}$$

where k_L is from Table 7-3. This increases the pressure drop by 50.8% to

$$\Delta p = \frac{(60 + 30.5) \text{ m}}{60 \text{ m}} (26\,656 \text{ N/m}^2) = 20\,206 \text{ N/m}^2 \quad \text{or Pa}$$

In this case, the globe valves cause losses which cannot be ignored.

- 7.8.** What is the pressure drop in a 600 m length of 0.15 m i.d. galvanized iron pipe when 40 °C water flows through it at a velocity of 0.173 m/s?

From Table 7-2, the relative roughness is

$$\frac{e}{D} = \frac{1.52 \times 10^{-4} \text{ m}}{0.15 \text{ m}} = 1.01 \times 10^{-3}$$

The Reynolds number is where ν is from Table B-3 (SI).

$$\text{Re}_D = \frac{VD}{\nu} = \frac{(0.173 \text{ m/s})(0.15 \text{ m})}{0.658 \times 10^{-6} \text{ m}^2/\text{s}} = 3.94 \times 10^4$$

With these values of relative roughness and Reynolds number, Moody's diagram, Fig. 7-4, gives $f = 0.025$, and (6.35) yields the pressure drop.

$$\begin{aligned} \Delta p &= f \frac{L}{D} \frac{\rho V^2}{2g_c} = 0.025 \left(\frac{600 \text{ m}}{0.15 \text{ m}} \right) \frac{(994.59 \text{ kg/m}^3)(0.173 \text{ m/s})^2}{2(\text{kg}\cdot\text{m}/\text{N}\cdot\text{s}^2)} \\ &= 1.488 \times 10^3 \text{ N/m}^2 \end{aligned}$$

where e is from Table B-3 (SI).

- 7.9.** Compare the heat transfer from a 2 in o.d. rod with atmospheric air flowing parallel to it (external flow) with that from a 2 in i.d. tube with air flowing through it (internal flow). In both cases the air velocity is 100 ft/s, and the air temperature is 60 °F. The heated portions of the rod and the tube are each 2 ft long, and both are maintained at 100 °F. The heated section of the tube is located sufficiently downstream that fully developed flow occurs.

Rod: External Flow

For the case of the rod the fluid properties are evaluated at the film temperature,

$$T_f = \frac{T_\infty + T_s}{2} = \frac{60 + 100}{2} = 80 \text{ °F}$$

and the required properties, from Table B-4 (Engl.), are:

$$\nu = 16.88 \times 10^{-5} \text{ ft}^2/\text{s} \quad k = 0.01516 \text{ Btu}/\text{h}\cdot\text{ft}\cdot\text{°F} \quad \text{Pr} = 0.708$$

If the thickness of the boundary layer at the end of the rod is of the same order of magnitude as (or preferably, an order of magnitude less than) the radius of the rod, we may neglect the effects of curvature and treat the external surface of the rod as a flat plate. Assuming that it can be treated as a flat plate, the Reynolds number at the end of the rod is

$$\text{Re}_L = \frac{VL}{\nu} = \frac{(100 \text{ ft/s})(2 \text{ ft})}{16.88 \times 10^{-5} \text{ ft}^2/\text{s}} = 1.185 \times 10^6$$

which gives a boundary layer thickness, from (7.18), of

$$\delta = \frac{(0.376)L}{\text{Re}_L^{1/5}} = \frac{(0.376)(2 \text{ ft})}{(1.185 \times 10^6)^{1/5}} = 0.046 \text{ ft} = 0.55 \text{ in}$$

Since $\delta < R$, we shall use the flat-plate equation (7.28) to get the average Nusselt number.

$$\overline{\text{Nu}} = \frac{\bar{h}L}{k} = \text{Pr}^{1/3}(0.036 \text{Re}_L^{0.8} - 836)$$

or

$$\begin{aligned} \bar{h} &= \frac{0.01516 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}}{2 \text{ ft}} (0.708)^{1/3} [(0.036)(1.185 \times 10^6)^{0.8} - 836] \\ &= 11.93 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F} \end{aligned}$$

Since the surface area is

$$A_s = \pi \left(\frac{2}{12} \text{ ft} \right) (2 \text{ ft}) = 1.047 \text{ ft}^2$$

the heat transfer is

$$q = \bar{h}A_s(T_s - T_\infty) = \left(11.93 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F}} \right) (1.047 \text{ ft}^2) [(100 - 60) ^\circ\text{F}] = 499.7 \text{ Btu/h}$$

Tube: Internal Flow

The case of flow through the tube is not as straightforward as that for the rod above since the tube equations require that properties be evaluated at the mean bulk temperature $\bar{T}_b = (T_{b,i} + T_{b,o})/2$ or at an average film temperature $T_f = (T_s + T_b)/2$. In either case the outlet temperature $T_{b,o}$ is unknown, requiring a trial-and-error solution to the heat balance equation.

The Dittus-Boelter equation, (7.47), gives the heat transfer coefficient

$$\bar{h} = \frac{k}{D} (0.023) \text{Re}_D^{0.8} \text{Pr}^{0.4} \quad (1)$$

required in the heat balance

$$q = \bar{h}A_s(T_s - \bar{T}_b) = \dot{m}c_p(T_{b,o} - T_{b,i})$$

or

$$\bar{h}A_s \left[T_s - \left(\frac{T_{b,i} + T_{b,o}}{2} \right) \right] = \dot{m}c_p(T_{b,o} - T_{b,i})$$

which may be rearranged to give the outlet temperature

$$T_{b,o} = \frac{\bar{h}A_s T_s + [\dot{m}c_p - (\bar{h}A_s/2)]T_{b,i}}{(\dot{m}c_p + \bar{h}A_s/2)} \quad (2)$$

Assuming an outlet temperature $T_{b,o} = 70 ^\circ\text{F}$, the fluid properties, evaluated at $\bar{T}_b = 65 ^\circ\text{F}$, are (from Table B-4 (Engl.))

$$\begin{aligned} \rho &= 0.076 \text{ lb}_m/\text{ft}^3 & \nu &= 15.77 \times 10^{-5} \text{ ft}^2/\text{s} & \text{Pr} &= 0.71 \\ c_p &= 0.24 \text{ Btu/lb}_m \cdot ^\circ\text{F} & k &= 0.0148 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F} \end{aligned}$$

Using these properties, the pertinent parameters are:

$$\begin{aligned}\text{Re}_D &= \frac{VD}{\nu} = \frac{(100 \text{ ft/s})(2/12 \text{ ft})}{15.77 \times 10^{-5} \text{ ft}^2/\text{s}} = 1.057 \times 10^5 \\ \dot{m} &= \rho AV = \left(0.076 \frac{\text{lb}_m}{\text{ft}^3}\right) \left[\frac{\pi}{4} \left(\frac{2}{12} \text{ ft}\right)^2\right] \left(100 \frac{\text{ft}}{\text{s}}\right) \left(\frac{3600 \text{ s}}{\text{h}}\right) = 596.9 \text{ lb}_m/\text{h} \\ \bar{h} &= \frac{(0.0148 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F})}{(2/12) \text{ ft}} (0.023)(1.057 \times 10^5)^{0.8} (0.71)^{0.4} = 18.62 \frac{\text{Btu}}{\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}}\end{aligned}$$

From (2),

$$T_{h,o} = \frac{(18.62)(1.047)(100) + [(596.9)(0.24) - \frac{1}{2}(18.62)(1.047)](60)}{(596.9)(0.24) + \frac{1}{2}(18.62)(1.047)} = 65.09^\circ\text{F}$$

which is approximately 5°F lower than assumed.

For a second trial, take $T_{h,o} = 65^\circ\text{F}$, giving $\bar{T}_b = 62.5^\circ\text{F}$. Properties from Table B-4 (Engl.) are:

$$\begin{aligned}\rho &= 0.0764 \text{ lb}_m/\text{ft}^3 & \nu &= 15.585 \times 10^{-5} \text{ ft}^2/\text{s} & \text{Pr} &= 0.7107 \\ c_p &= 0.24 \text{ Btu/lb}_m\cdot^\circ\text{F} & k &= 0.01471 \text{ Btu/h}\cdot\text{ft}\cdot^\circ\text{F}\end{aligned}$$

These values give

$$\text{Re}_D = 1.07 \times 10^5 \quad \dot{m} = 600.0 \text{ lb}_m/\text{h} \quad \bar{h} = 18.69 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F}$$

Calculating the outlet temperature, we get

$$T_{h,o} = \frac{(18.69)(1.047)(100) + [(600)(0.24) - \frac{1}{2}(18.69)(1.047)](60)}{(600)(0.24) + \frac{1}{2}(18.69)(1.047)} = 65.08^\circ\text{F}$$

We note that the calculated outlet temperature is relatively insensitive to the assumed value because of the small difference in fluid properties.

Taking $T_{h,o}$ to be 65.08°F ,

$$\bar{T}_b = \frac{60 + 65.08}{2} = 62.54^\circ\text{F}$$

and the heat transfer is

$$q = \bar{h}A_s(T_s - \bar{T}_b) = \left(18.69 \frac{\text{Btu}}{\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}}\right) (1.047 \text{ ft}^2) [(100 - 62.54)^\circ\text{F}] = 733.0 \text{ Btu/h}$$

Therefore

$$\frac{q_{\text{tube}}}{q_{\text{rod}}} = \frac{733.0}{499.7} = 1.47$$

- 7.10.** Ethylene glycol enters a 5 m length of 90 mm i.d., hard-drawn copper tube in a cooling system at a velocity of 5 m/s. What is the heat transfer rate if the average bulk fluid temperature is 20°C and the tube wall is maintained at 80°C ? There is a 0.27 m long calming section upstream.

At the outset we note that this is a constant T_s case, but we do not have inlet or outlet fluid temperatures. Consequently we cannot use eqs. (6.56) and (6.57). In lieu of (6.56) we will use the approximate relation

$$q_{\text{conv}} = \bar{h}A_s(T_s - \bar{T}_b)$$

where these temperatures are known, i.e., $T_s = 80^\circ\text{C}$ and $\bar{T}_b = 20^\circ\text{C}$. Proceeding to determine \bar{h} , the fluid properties at 20°C from Table B-3 (SI) are:

$$\begin{aligned}\rho_b &= 1116 \text{ kg/m}^3 & c_{p,b} &= 2382 \text{ J/kg}\cdot\text{K} \\ \mu_s &= (1077)(2.98 \times 10^{-6}) \text{ kg/m}\cdot\text{s} & \nu_b &= 19.18 \times 10^{-6} \text{ m}^2/\text{s} \\ \mu_b &= (1116)(19.18 \times 10^{-6}) \text{ kg/m}\cdot\text{s} & \text{Pr}_b &= 204 \\ k_b &= 0.249 \text{ W/m}\cdot\text{K}\end{aligned}$$

The Reynolds number is

$$\text{Re}_D = \frac{VD}{\nu_b} = \frac{(5 \text{ m/s})(0.09 \text{ m})}{19.18 \times 10^{-6} \text{ m}^2/\text{s}} = 23\,460 - \text{Turbulent}$$

and

$$L/D = \frac{5.0 \text{ m}}{0.09 \text{ m}} = 55.6$$

and by (7.34)

$$\begin{aligned}\left. \frac{L}{D} \right|_c &= (0.623) \text{Re}_D^{1/4} = 7.71 \\ \left. \frac{L}{D} \right|_c &< \frac{L}{D} < 60 \quad (\text{use (7.46)}) \\ \frac{\bar{h}_c}{\bar{h}} &= 1 + \frac{C}{L/D}\end{aligned}$$

The given calming section has its $L/D = 0.27/0.09 = 3.0$, so the C value from Table 7-4 should be approximately 3 (same as for $L/D = 2.8$). Thus

$$\frac{\bar{h}_c}{\bar{h}} = 1 + \frac{3.0}{55.6} = 1.054$$

To obtain \bar{h} , we could choose either the Sieder–Tate (7.48a) or the Petukhov (7.48b) equation. Both of these are valid for large property variations and relatively large temperature differences between T_s and T_b for liquids (and gases). Using eq. (7.48a):

$$\begin{aligned}\overline{\text{Nu}}_D &= \frac{\bar{h}_b D}{k_b} = 0.027(\text{Re}_D)^{0.8}(\text{Pr}_b)^{1/3} \left(\frac{\mu_b}{\mu_s} \right)^{0.14} \\ &= 0.027(23\,460)^{0.8}(204)^{1/3} \left(\frac{2.14 \times 10^{-2}}{3.21 \times 10^{-3}} \right)^{0.14} = 650 \\ \bar{h}_{b,1} &= \frac{0.249 \text{ W/m}\cdot\text{K}}{0.09 \text{ m}}(650) = 1.798 \times 10^3 \text{ W/m}^2\cdot\text{K}\end{aligned}$$

(To use $\overline{\text{Nu}}_D$ as average over entire length, evaluate properties at \bar{T}_b except μ_s .)
Using eq. (7.48b):

$$\overline{\text{Nu}}_D = \frac{(f/8)\text{Re}_D\text{Pr}}{1.07 + 12.7(f/8)^{1/2}(\text{Pr}^{2/3} - 1)} \left(\frac{\mu_b}{\mu_s} \right)^{0.11}$$

where by eq. (7.48c)

$$\begin{aligned}f &= (0.790 \ln \text{Re}_D - 1.64)^{-2} \quad (\text{or}) \quad (1.82 \log_{10} \text{Re}_D - 1.64)^{-2} \\ &= [0.790 \ln(23\,460) - 1.64]^{-2} = 0.251\end{aligned}$$

Thus,

$$\begin{aligned}\overline{\text{Nu}}_{D,2} &= \frac{(0.0251/8)(23\,460)(204)}{1.07 + 12.7(0.0251/8)^{1/2}[(204)^{2/3} - 1]} \left(\frac{2.14 \times 10^{-2}}{3.21 \times 10^{-3}} \right)^{0.11} \\ &= 740\end{aligned}$$

which is 13.8% larger than $\mathbf{Nu}_{D,1}$. Choosing the Sieder–Tate result,

$$\begin{aligned} q_{\text{conv}} &= \bar{h}_{b,1} A_s (T_s - \bar{T}_b) \\ &= (1.798 \times 10^3 \text{ W/m}^2 \cdot \text{K})(5 \text{ m})(\pi)(0.09 \text{ m}) \\ &\quad \times (80 - 20)^\circ \text{C} = 152\,511 \text{ W} \end{aligned}$$

The Petukhov equation result is 173 626 W, 13.8% larger than that obtained with the Sieder–Tate equation. The Sieder–Tate equation is usually no better than 20% error, whereas the Petukhov equation is within 10% error. The advantage of the Sieder–Tate equation is its simplicity, making it easier to use. Note that we have omitted the 5.4% increase in \bar{h}_c over the short entry region which is about 5% of the tube surface area.

- 7.11.** Estimate the heat transfer rate from internal water flow at a mean bulk temperature of 20 °C to a 0.9 m long by 0.15 m diameter pipe at 0 °C. The velocity is 0.16 m/s.

At the bulk temperature the fluid properties, from Table B-3 (SI), are

$$\nu = 1.006 \times 10^{-6} \text{ m}^2/\text{s} \quad k = 0.597 \text{ W/m} \cdot \text{K} \quad \text{Pr} = 7.02$$

The Reynolds number is

$$\mathbf{Re}_D = \frac{VD}{\nu} = \frac{(0.16 \text{ m/s})(0.15 \text{ m})}{1.006 \times 10^{-6} \text{ m}^2/\text{s}} = 2.39 \times 10^4$$

This is a short-tube case, since $L/D = 6$. Equation (7.34) gives the length-to-diameter ratio required to ascertain whether to use (7.45) or (7.46).

$$\left. \frac{L}{D} \right|_c = (0.623)(2.39 \times 10^4)^{1/4} = 7.75 > \frac{L}{D} = 6 \quad \text{or} \quad \frac{L}{D} < \left. \frac{L}{D} \right|_c$$

making (7.45) applicable.

$$\frac{\bar{h}_c}{\bar{h}} = (1.11) \left[\frac{\mathbf{Re}_D^{1/5}}{(L/D)^{0.5}} \right]^{0.275} = 1.11 \left[\frac{(2.39 \times 10^4)^{1/5}}{6^{0.8}} \right]^{0.275} = 1.30$$

For \bar{h} we shall use (7.47):

$$\bar{h} = \frac{k}{D} (0.023) \mathbf{Re}_D^{0.8} \mathbf{Pr}^{0.3}$$

which, to use as an approximate value over the tube length, requires property evaluation at \bar{T}_b .

Then

$$\begin{aligned} \bar{h} &= \frac{(0.597 \text{ W/m} \cdot \text{K})}{0.15 \text{ m}} (0.023)(2.39 \times 10^4)^{0.8} (7.02)^{0.3} \\ &= 5.23 \times 10^2 \text{ W/m}^2 \cdot \text{K} \end{aligned}$$

Therefore, the heat transfer coefficient in this *entrance region* pipe is

$$\bar{h}_c = (1.30)(523 \text{ W/m}^2 \cdot \text{K}) = 680 \text{ W/m}^2 \cdot \text{K}$$

The heat transfer rate from the water is given by

$$q = \bar{h}_c A_s (\bar{T}_b - T_s) = (680 \text{ W/m}^2 \cdot \text{K}) [\pi(0.15 \text{ m})(0.9 \text{ m})] (20 - 0)^\circ \text{C} = 5768 \text{ W}$$

Note that we were forced to use the linear temperature difference for this constant T_s problem since insufficient information is available to use the better ΔT_{lm} , eq. (6.57), (see Problem 7.20). Also, in Problem 7.11 we have *fixed* ($\bar{T}_b - T_s$), area, and parameters determining \bar{h} . Then a single value for q is the result.

- 7.12.** What force is exerted by a 13.5 m/s wind blowing normal to a 1.5 m diameter disk-shaped sign mounted on a 0.15 m diameter by 3.0 m long post? Air temperature is 27 °C (300 K).

At 27°C, from Table B-4 (SI) $\nu = 15.68 \times 10^{-6} \text{ m}^2/\text{s}$ and $\rho = 1.1774 \text{ kg}/\text{m}^3$. The total drag force is found by summing that on the cylindrical post and that on the circular disk, using (7.50).

$$F_D = \frac{\rho V_\infty^2}{2g_c} [(C_D A)_{\text{post}} + (C_D A)_{\text{disk}}]$$

For the post

$$\text{Re}_D = \frac{V_\infty D}{\nu} = \frac{(13.5 \text{ m/s})(0.15 \text{ m})}{15.68 \times 10^{-6} \text{ m}^2/\text{s}} = 1.291 \times 10^5$$

and the drag coefficient for the post is 0.90 (from Table 7-5 with $L/D = 20$). For the disk,

$$\text{Re}_D = \frac{V_\infty D}{\nu} = \frac{(13.5 \text{ m/s})(1.5 \text{ m})}{15.68 \times 10^{-6} \text{ m}^2/\text{s}} = 1.291 \times 10^6$$

Table 7-5 gives $C_D = 1.12$. The total drag is, therefore,

$$F_D = \frac{\rho V_\infty^2}{2g_c} [(C_D A)_{\text{post}} + (C_D A)_{\text{disk}}]$$

where areas are projected frontal areas. Thus

$$\begin{aligned} F_D &= \frac{(1.1774 \text{ kg}/\text{m}^3)(13.5 \text{ m/s})^2}{2(\text{kg} \cdot \text{m}/\text{N} \cdot \text{s}^2)} [0.90(0.15 \text{ m})(3 \text{ m}) + 1.12 \left(\frac{\pi}{4} \right) (1.5 \text{ m})^2] \\ &= 255.8 \text{ N} (57.5 \text{ lb}_f) \end{aligned}$$

- 7.13.** A 6 in diameter by 2 ft long cylinder is located axially with a stream of 68°F water flowing at 10 fps. Compare its profile drag to its skin-friction drag.

From Table B-3 (Engl.), $\rho = 62.46 \text{ lb}_m/\text{ft}^3$, $\nu = 1.083 \times 10^{-5} \text{ ft}^2/\text{s}$, and

$$\text{Re}_D = \frac{V_\infty D}{\nu} = \frac{(10 \text{ ft/s})(\frac{1}{2} \text{ ft})}{1.083 \times 10^{-5} \text{ ft}^2/\text{s}} = 4.62 \times 10^5$$

giving a drag coefficient of 0.87, from Table 7-5, since $L/D = 4$. The total drag is given by (7.50).

$$\begin{aligned} F_D &= C_D \left(\frac{\rho V_\infty^2}{2g_c} \right) A \\ &= (0.87) \left[\frac{(62.46 \text{ lb}_m/\text{ft}^3)(100 \text{ ft}^2/\text{s}^2)}{2(32.2 \text{ lb}_m \cdot \text{ft}/\text{lb}_f \cdot \text{s}^2)} \right] \frac{\pi}{4} \left(\frac{1}{2} \text{ ft} \right)^2 = 16.57 \text{ lb}_f \end{aligned}$$

Considering the shear, the appropriate Reynolds number is

$$\text{Re}_L = \frac{V_\infty L}{\nu} = \frac{(10 \text{ ft/s})(2 \text{ ft})}{1.083 \times 10^{-5} \text{ ft}^2/\text{s}} = 1.85 \times 10^6$$

and the flow is turbulent. Treating the cylindrical surface as a flat plate, the boundary layer thickness at the end of the cylinder is given by (7.18) as

$$\delta = \frac{(0.376)L}{\text{Re}_L^{1/5}} = \frac{(0.376)(2 \text{ ft})}{(1.85 \times 10^6)^{1/5}} = 0.042 \text{ ft}$$

and we may neglect the effects of curvature since $\delta \ll R$. The average skin-friction drag coefficient is given by (7.20):

$$C_f = \frac{0.072}{\text{Re}_L^{1/5}} = \frac{0.072}{(1.85 \times 10^6)^{1/5}} = 0.00402$$

where for simplicity we have assumed a negligible laminar leading edge. The skin-friction drag is

$$F_f = C_f \left(\frac{\rho V_\infty^2}{2g_c} \right) A$$

$$= (0.00402) \left[\frac{(62.46 \text{ lb}_m/\text{ft}^3)(100 \text{ ft}^2/\text{s}^2)}{2(32.2 \text{ lb}_m \cdot \text{ft}/\text{lb}_f \cdot \text{s}^2)} \right] \pi \left(\frac{1}{2} \text{ ft} \right) (2 \text{ ft}) = 1.22 \text{ lb}_f$$

The profile drag may now be determined as

$$F_p = F_D - F_f = 16.57 - 1.22 = 15.35 \text{ lb}_f$$

and

$$\frac{F_p}{F_f} = \frac{15.35}{1.22} = 12.58$$

which gives us some feel for the influence of the wake in Fig. 7-6(a).

- 7.14.** Air at 27 °C flows normal to a 77 °C, 30 mm o.d. water pipe. The air moves at 1.0 m/s. Estimate the heat transfer per unit length.

Assuming atmospheric pressure, the required properties (from Table B-4 (Engl.)), evaluated at

$$T_f = \frac{T_\infty + T_s}{2} = 52 \text{ °C}$$

are:

$$\nu_f = (19.63 \times 10^{-5})(0.0929) = 1.824 \times 10^{-5} \text{ m}^2/\text{s}$$

$$k_f = (0.016255)(1.7296) = 0.0281 \text{ W/m} \cdot \text{K} \quad \text{Pr}_f = 0.702$$

which agree well with values from Table B-4 (SI).

The Reynolds number is

$$\text{Re}_{Df} = \frac{V_\infty D}{\nu_f} = \frac{(1 \text{ m/s})(0.030 \text{ m})}{1.824 \times 10^{-5} \text{ m}^2/\text{s}} = 1645$$

which defines the appropriate constants from Table 7-6 to be used in (7.51a); therefore,

$$\bar{h} = \frac{0.0281 \text{ W/m} \cdot \text{K}}{0.030 \text{ m}} (0.615)(1645)^{0.466} = 18.16 \text{ W/m}^2 \cdot \text{K}$$

Hence, the heat transfer is

$$\frac{q}{L} = \bar{h} \pi D (T_s - T_\infty) = \left(18.16 \frac{\text{W}}{\text{m}^2 \cdot \text{K}} \right) \pi (0.030 \text{ m}) (50 \text{ K}) = 85.58 \text{ W/m}$$

- 7.15.** Estimate the heat transfer from a 40 W incandescent bulb at 127 °C to a 27 °C airstream moving at 0.3 m/s. Approximate the bulb as a 50 mm diameter sphere. What percentage of the power is lost by convection?

From Table B-4 (Engl.) the required parameters, evaluated at $T_f = (T_s + T_\infty)/2 = 77 \text{ °C}$, are:

$$\nu_f = (22.38 \times 10^{-5})(0.0929) = 2.079 \times 10^{-5} \text{ m}^2/\text{s}$$

$$k_f = (0.01735)(1.729) = 0.0300 \text{ W/m} \cdot \text{K} \quad \text{Pr} = 0.697$$

which agree well with values from Table B-4 (SI).

The Reynolds number is

$$\text{Re}_{Df} = \frac{V_\infty D}{\nu_f} = \frac{(0.3 \text{ m/s})(0.050 \text{ m})}{2.079 \times 10^{-5} \text{ m}^2/\text{s}} = 721.5$$

and (7.51a) gives the average heat transfer coefficient as

$$\begin{aligned}\bar{h} &= \frac{k_f}{D} (0.37)(\text{Re}_{Df})^{0.6} \\ &= \frac{0.0300 \text{ W/m}\cdot\text{K}}{0.050 \text{ m}} (0.37)(721.5)^{0.6} = 11.52 \text{ W/m}^2\cdot\text{K}\end{aligned}$$

The heat transfer is given by

$$q = \bar{h}A(T_s - T_\infty) = \left(11.52 \frac{\text{W}}{\text{m}^2\cdot\text{K}}\right) \left(\frac{\pi}{\pi}\right) (0.050 \text{ m})^2 [(127 - 27) \text{ K}] = 9.05 \text{ W}$$

The percentage lost by forced convection is therefore

$$\frac{9.05}{40} (100\%) = 22.61\%$$

In Problem 8.8 it will be shown that the loss by free convection is about the same as this forced convection loss; hence both mechanisms should be considered.

- 7.16.** A 5.0 cm square shaft rotates at a constant velocity. The shaft temperature is 500 K, and 300 K atmospheric air flows normal to it at 6.70 m/s. Estimate the heat transfer.

From Table B-4 (SI), at $T_f = (T_\infty + T_s)/2 = 400 \text{ K}$, the required properties of the air are:

$$\nu_f = 25.90 \times 10^{-6} \text{ m}^2/\text{s} \quad k_f = 0.03365 \text{ W/m}\cdot\text{K} \quad \text{Pr}_f = 0.689$$

Since the shaft is rotating, we shall take the average of the two \bar{h} s given by (7.51a) for the second and third configuration rows of Table 7-6. With the flat face normal, the Reynolds number is

$$\text{Re}_{Df} = \frac{(6.70 \text{ m/s})(0.05 \text{ m})}{25.90 \times 10^{-6} \text{ m}^2/\text{s}} = 1.29 \times 10^4$$

With the shaft in the diamond configuration,

$$\text{Re}_{Df} = \frac{(6.70 \text{ m/s})(0.05\sqrt{2} \text{ m})}{25.90 \times 10^{-6} \text{ m}^2/\text{s}} = 1.83 \times 10^4$$

The respective convective coefficients are:

$$\begin{aligned}\bar{h}_{\text{flat}} &= \frac{0.03365 \text{ W/m}\cdot\text{K}}{0.05 \text{ m}} (0.092)(0.689)^{1/3} (1.29 \times 10^4)^{0.675} \\ &= 32.55 \text{ W/m}^2\cdot\text{K} \\ \bar{h}_{\text{diamond}} &= \frac{0.03365 \text{ W/m}\cdot\text{K}}{0.05 \text{ m}\sqrt{2}} (0.222)(0.689)^{1/3} (1.83 \times 10^4)^{0.588} \\ &= 29.94 \text{ W/m}^2\cdot\text{K}\end{aligned}$$

so that

$$\bar{h} = \frac{32.55 + 29.94}{2} = 31.25 \text{ W/m}^2\cdot\text{K}$$

Then if P is the perimeter of the shaft, the heat transfer is given by

$$\begin{aligned}\frac{q}{L} &= \bar{h}P(T_s - T_\infty) = (31.25 \text{ W/m}^2\cdot\text{K})(4)(0.05 \text{ m})(500 - 300) \text{ K} \\ &= 1250 \text{ W/m}\end{aligned}$$

- 7.17.** Water droplets at 87 °C in a cooling tower have an average diameter of 0.15 cm. The airstream, which moves at a velocity of 0.9 m/s relative to the water drops, is at 17 °C. Determine the heat transfer coefficient from water to air.

At the film temperature, $T_f = (T_s + T_\infty)/2 = 52$ °C, the necessary air properties are taken from Table B-4 (SI):

$$\nu_f = 18.2 \times 10^{-6} \text{ m}^2/\text{s} \quad k_f = 0.02814 \text{ W/m}\cdot\text{K} \quad \text{Pr}_f = 0.703$$

The Reynolds number is

$$\text{Re}_{Df} = \frac{V_\infty D}{\nu_f} = \frac{(0.9 \text{ m/s})(0.15 \times 10^{-2} \text{ m})}{18.2 \times 10^{-6} \text{ m}^2/\text{s}} = 74.2$$

If we assume the interference from adjacent water droplets is negligible, (7.52a) is valid; hence:

$$\begin{aligned} \bar{h} &= \frac{k_f}{D} (0.37)(\text{Re}_{Df})^{0.6} \\ &= \frac{0.02814 \text{ W/m}\cdot\text{K}}{0.15 \times 10^{-2} \text{ m}} (0.37)(71.2)^{0.6} = 91.98 \text{ W/m}^2\cdot\text{K} \end{aligned}$$

- 7.18.** An in-line tube bundle consists of 19 rows of 2.5 cm o.d. tubes with 12 tubes in each row (in the direction of flow). The tube spacing is 3.75 cm in the direction normal to the flow and 5.0 cm parallel to it. The tube surfaces are maintained at 400 K (127 °C). Air at 300 K (27 °C) and 1 standard atmosphere pressure flows through the bundle with a maximum velocity of 9 m/s. Calculate the total heat transfer from the bundle per meter of length.

At the film temperature $T_f = (T_s + T_\infty)/2 = 350$ K, the fluid properties from Table B-4 (SI) are

$$\nu_f = 20.76 \times 10^{-6} \text{ m}^2/\text{s} \quad k_f = 0.03003 \text{ W/m}\cdot\text{K} \quad \text{Pr}_f = 0.697$$

resulting in a maximum Reynolds number of

$$\text{Re}_{\max, f} = \frac{V_{\max} D}{\nu_f} = \frac{(9 \text{ m/s})(0.025 \text{ m})}{20.76 \times 10^{-6}} = 10838$$

and both eqs. (7.54a) and (7.54b) apply. In terms of Fig. 7-8, the geometric configuration is

$$\frac{a}{D} = \frac{3.75}{2.5} = 1.5 \quad \frac{b}{D} = \frac{5.0}{2.5} = 2$$

Table 7-7 gives $C_1 = 0.299$ and $n = 0.602$. Thus

$$C_1 (\text{Re}_{\max})^n = 0.299(10838)^{0.602} = 80.299$$

Then, by the two equations

$$\begin{aligned} (7.54a): \quad \bar{h} &= \frac{k_f}{D} C_1 (\text{Re}_{\max})^n = \frac{0.03003 \text{ W/m}\cdot\text{K}}{0.025 \text{ m}} (80.299) \\ &= 96.45 \text{ W/m}^2\cdot\text{K} \end{aligned}$$

$$\begin{aligned} (7.54b): \quad \bar{h} &= \frac{k_f}{D} C_1 (\text{Re}_{\max})^n (1.13)(\text{Pr}_f)^{1/3} = \frac{0.03003 \text{ W/m}\cdot\text{K}}{0.025 \text{ m}} (80.299)(1.13)(0.697)^{1/3} \\ &= 96.64 \text{ W/m}^2\cdot\text{K} \end{aligned}$$

The closeness of results with these two equations is as expected since both should be equivalent for air with $\text{Pr} = 0.7$.

The total heat transfer per unit length is $qL = \bar{h}\pi DN(T_s - T_\infty)$, where N is the total number of tubes.

Choosing the first result (arbitrarily)

$$\begin{aligned}\frac{q}{L} &= (96.45 \text{ W/m}^2 \cdot \text{K})(\pi)(0.025 \text{ m})(19)(12)(400 - 300) \text{ K} \\ &= 1.727 \times 10^5 \text{ W/m}\end{aligned}$$

7.19. Repeat Problem 7.17 using the $\overline{\text{Nu}}_D$ expression (7.52b) which is for a falling liquid drop.

For eq. (7.52b) properties are evaluated at T_∞ , which in the present case is 17°C (290 K). From Table B-4 (SI)

$$\nu_\infty = 14.79 \times 10^{-6} \text{ m}^2/\text{s} \quad k_\infty = 0.02545 \text{ W/m} \cdot \text{K} \quad \text{Pr}_\infty = 0.7108$$

The Reynolds number is

$$\text{Re}_D = V_\infty D / \nu = \frac{(0.9 \text{ m/s})(0.15 \times 10^{-2} \text{ m})}{14.79 \times 10^{-6} \text{ m}^2/\text{s}} = 91.27$$

Then,

$$\begin{aligned}\overline{\text{Nu}}_D &= 2 + 0.6 \text{Re}_D^{1/2} \text{Pr}^{1/3} \\ &= 2 + 0.6(91.27)^{1/2}(0.7108)^{1/3} = 7.11 \\ \bar{h} &= (k/D)(\overline{\text{Nu}}_D) \\ &= \frac{0.02545 \text{ W/m} \cdot \text{K}}{0.15 \times 10^{-2} \text{ m}}(6.98) = 120.73 \text{ W/m}^2 \cdot \text{K}\end{aligned}$$

Note that this \bar{h} is 30% larger than that obtained with eq. (7.52a). But equation (7.52a) is more specifically valid for rigid spheres, whereas eq. (7.52b) is more suited to the falling water droplet.

7.20. Reconsider Problem 7.11 with all parameters unchanged except that the water inlet and outlet temperatures are known and the tube length is unknown. $T_{b,i} = 15^\circ\text{C}$ and $T_{b,o} = 25^\circ\text{C}$. Calculate the required tube length, L , for the heat transfer rate of 5768 W.

The mean bulk temperature is $(15 + 25)/2 = 20^\circ\text{C}$, so the properties from Table B-3 (SI) are unchanged from those in Problem 7.11. Thus Re_D , \bar{h} , ρ , and c_p are:

$$\begin{aligned}\text{Re}_D &= 2.39 \times 10^4 & \rho &= 1000.52 \text{ kg/m}^3 \\ \bar{h} &= 523 \text{ W/m}^2 \cdot \text{K} & c_p &= 4181.8 \text{ J/kg} \cdot \text{K}\end{aligned}$$

and we will assume a trial L/D of 6 (which is assuming $L = 0.9 \text{ m}$), as in Problem 7.11, since L is unknown. Then

$$\bar{h}_e = 1.30\bar{h} = 1.30(523 \text{ W/m} \cdot \text{K}) = 680 \text{ W/m}^2 \cdot \text{K}$$

At this value of \bar{h}_e , the q is known from Problem 7.11,

$$q = 5768 \text{ W}$$

The energy balance and rate equation give

$$q = \bar{h}_e A \Delta T_{lm}$$

where

$$\Delta T_{lm} = \frac{\Delta T_o - \Delta T_i}{\ln(\Delta T_o/\Delta T_i)} = \frac{(25 - 0) - (15 - 0)}{\ln(25/15)} = 19.58^\circ\text{C}$$

Then

$$\begin{aligned}q &= \bar{h}_e(\pi D)(L)(\Delta T_{lm}) \\ L &= \frac{q}{\bar{h}_e(\pi D)(\Delta T_{lm})} = \frac{5768 \text{ W}}{(680 \text{ W/m}^2 \cdot \text{K})(\pi)(0.15 \text{ m})(19.58^\circ\text{C})} = 0.92 \text{ m}\end{aligned}$$

To improve the result, we could use this L value in eq. (7.45) to refine the inlet region h value, but the increased length is within the expected accuracy of the equation. The refined \bar{h}_e would be $\bar{h}_e = 1.27\bar{h} = 1.27(523) = 653 \text{ W/m}^2 \cdot \text{K}$. The length based on this latter value is 0.96 m. Notice that we used the ΔT_{lm} for this constant T_s case, and that with inlet and outlet temperatures known, the area (in this case length) is the result. If area were also stipulated at the outset, the problem would be over-specified.

Notice also that we are using \bar{h} as average value over the tube length. This approach yields a first approximation provided the fluid properties are evaluated at \bar{T}_b . Finally, note that ΔT_{lm} has almost the same value as the arithmetic $(\bar{T}_b - T_s)$.

- 7.21.** Liquid sulfur dioxide in a saturated state flows inside a 25 mm i.d. tube, 5.0 m long with a mass flow rate of 0.15 kg/s. The tube is heated at a constant surface temperature, T_s , of -10°C , and the inlet fluid temperature is $T_{b,i} = -40^\circ\text{C}$. Using the Sieder–Tate equation (7.48a), determine the exit fluid temperature $T_{b,o}$. This will require use of (7.48a) averaged over length; hence properties are evaluated at \bar{T}_b .

Since $T_{b,o}$ is unknown, a fluid mean temperature \bar{T}_b must be estimated for property evaluation. Clearly $-40^\circ\text{C} \leq \bar{T}_b \leq -10^\circ\text{C}$. For a first trial, guess $\bar{T}_{b,1} = -30^\circ\text{C}$ ($T_{b,o} = -20^\circ\text{C}$), then:

Trial 1: From Table B-3 (SI) at $-30^\circ\text{C} = \bar{T}_{b,1}$ and $T_s = -10^\circ\text{C}$:

$$\begin{aligned} \rho_{b,1} &= 1520.64 \text{ kg/m}^3 & \nu_{b,1} &= 0.371 \times 10^{-6} \text{ m}^2/\text{s} \\ k_{b,1} &= 0.230 \text{ W/m} \cdot ^\circ\text{C} & \text{Pr}_{b,1} &= 3.31 \\ \mu_{b,1} &= \nu_{b,1} \cdot \rho_{b,1} = (0.371 \times 10^{-6} \text{ m}^2/\text{s})(1520.64 \text{ kg/m}^3) \\ &= 5.64 \times 10^{-4} \text{ kg/m} \cdot \text{s} \\ c_{p,b,1} &= 1361.6 \text{ J/kg} \cdot \text{K} \\ \mu_s &= \nu_s \cdot \rho_s = (0.288 \times 10^{-6} \text{ m}^2/\text{s})(1463.61 \text{ kg/m}^3) \\ &= 4.22 \times 10^{-4} \text{ kg/m} \cdot \text{s} \end{aligned}$$

The Reynolds number is

$$\begin{aligned} \text{Re}_{D,1} &= \frac{4\dot{m}}{P\nu_b\rho_b} = \frac{4(0.15 \text{ kg/s})}{\pi(0.025 \text{ m})(0.371 \times 10^{-6} \text{ m}^2/\text{s})(1520.64 \text{ kg/m}^3)} \\ &= 1.35 \times 10^4 = 13\,500 \quad (\text{Turbulent}) \end{aligned}$$

Equation (7.48a) is suitable, i.e.,

$$\begin{aligned} \overline{\text{Nu}}_{D,1} &= 0.027(\text{Re}_D)^{0.8}(\text{Pr})^{1/3} \left(\frac{\mu_b}{\mu_s} \right)^{0.14} \\ &= 0.027(13\,500)^{0.8}(3.31)^{1/3}(5.64/4.22)^{0.14} = 84.44 \end{aligned}$$

Checking entry length,

$$\left. \frac{L}{D} \right|_1 = \frac{5.0 \text{ m}}{0.025 \text{ m}} = 200 > 60$$

and no entry length correction is necessary. Thus,

$$\bar{h}_1 = \frac{k_1}{D} (\text{Nu}_{D,1}) = \frac{0.230 \text{ W/m} \cdot ^\circ\text{C}}{0.025 \text{ m}} (84.44) = 777 \text{ W/m}^2 \cdot ^\circ\text{C}$$

By eq. (6.55) the outlet temperature at $x = L$ may be written as

$$T_{b,o} = T_s - (T_s - T_{b,i}) \exp \left[\frac{-PL}{\dot{m}c_p} \bar{h} \right]$$

so

$$\begin{aligned} T_{b,o,1} &= (-10^\circ\text{C}) - [(-10) - (-40)](^\circ\text{C}) \\ &\quad \times \exp \left[\frac{-\pi(0.025 \text{ m})(5 \text{ m})(777 \text{ W/m}^2 \cdot ^\circ\text{C})}{(0.15 \text{ kg/s})(1361.6 \text{ W} \cdot \text{s/kg} \cdot \text{K})} \right] \\ &= (-10 - 6.73)^\circ\text{C} = -16.73^\circ\text{C} \end{aligned}$$

This value of $T_{b,o}$, together with the given $T_{b,i}$, would yield $\bar{T}_h = (-40 - 16.73)/2 = -28.36^\circ\text{C}$. Since we assumed $\bar{T}_{h,1} = -30^\circ\text{C}$, ($T_{h,o,1} = -20^\circ\text{C}$), we may need to iterate. Choosing $T_{b,o,2} = -15^\circ\text{C}$ we have $\bar{T}_{h,2} = (-40 - 15)/2 = -27.5^\circ\text{C}$. The properties are:

Trial 2: From Table B-3 (SI) at $\bar{T}_{h,2} = -27.5^\circ\text{C}$:

$$\begin{aligned}\rho_{b,2} &= 1512 \text{ kg/m}^3 & \nu_{b,2} &= 0.359 \times 10^{-6} \text{ m}^2/\text{s} \\ k_{b,2} &= 0.229 \text{ W/m}\cdot^\circ\text{C} & \text{Pr}_{b,2} &= 3.22 \\ \mu_{b,2} &= (0.359 \times 10^{-6})(1512) \text{ kg/m}\cdot\text{s} \\ c_{p,b,2} &= 1361.8 \text{ J/kg}\cdot\text{K} \\ \mu_s &= (\text{unchanged})\end{aligned}$$

$$\begin{aligned}\text{Re}_{D,2} &= \frac{4\dot{m}}{P\nu_{b,2}\rho_{b,2}} = \frac{4(0.15 \text{ kg/s})}{\pi(0.025 \text{ m})(0.359 \times 10^{-6} \text{ m}^2/\text{s})(1512 \text{ kg/m}^3)} \\ &= 14\,073 \text{ (Turbulent, in range of Sieder-Tate equation)}\end{aligned}$$

Thus,

$$\text{Nu}_{D,2} = 0.027(14\,073)^{0.8}(3.22)^{1/3} \left(\frac{5.43 \times 10^{-4}}{4.22 \times 10^{-4}} \right)^{0.14} = 86.03$$

and

$$h_2 = \frac{k_{b,2}}{D}(\text{Nu}_{D,2}) = \left(\frac{0.229 \text{ W/m}\cdot\text{K}}{0.025 \text{ m}} \right)(86.03) = 788 \text{ W/m}^2\cdot\text{K}$$

Calculating $T_{b,o,2}$

$$\begin{aligned}T_{b,o,2} &= (-10^\circ\text{C}) - [(-10) - (-40)](^\circ\text{C}) \\ &\quad \times \exp \left[\frac{-\pi(0.025 \text{ m})(5 \text{ m})(788 \text{ W/m}^2\cdot\text{K})}{(0.15 \text{ kg/s})(1361.8 \text{ J/kg}\cdot\text{K})} \right] \\ &= -16.59^\circ\text{C}\end{aligned}$$

Since we assumed for Trial 2 a value of $T_{b,o,2} = -15^\circ\text{C}$, further iteration is probably not necessary. Either result, -16.59°C or -16.73°C , is suitable for most purposes.

7.22. Repeat Problem 7.21 using the Dittus-Boelter eq. (7.47) in place of (7.48a).

Assume a trial $T_{b,o}$ of -15°C , giving $\bar{T}_h = -27.5^\circ\text{C}$. Then the Reynolds number is unchanged, $L/D = 200$, and the Pr number is unchanged from Trial 2 of Problem 7.21. Hence the length-average $\overline{\text{Nu}}_D$ based on properties evaluated at \bar{T}_h is

$$\begin{aligned}\overline{\text{Nu}}_D &= 0.023 \text{Re}_D^{0.8} \text{Pr}^{0.4} = 0.023(14\,073)^{0.8}(3.22)^{0.4} \\ &= 76.48\end{aligned}$$

which is about 11% lower than that obtained in Problem 7.21. Then

$$\bar{h} = \left(\frac{k_b}{D} \right) \overline{\text{Nu}}_D = \frac{0.229 \text{ W/m}\cdot\text{K}}{0.025 \text{ m}}(76.5) = 701 \text{ W/m}^2\cdot\text{K}$$

and the value of $T_{b,o}$ is

$$\begin{aligned}T_{b,o} &= T_s - (T_s - T_{b,i}) \exp \left[\frac{-PL}{\dot{m}c_p} \bar{h} \right] \\ &= -10^\circ\text{C} - (-10 + 40)(^\circ\text{C}) \exp \left[\frac{-(0.025 \text{ m})(\pi)(5 \text{ m})(701 \text{ W/m}^2\cdot\text{K})}{0.15 \text{ kg/s}(1361.8 \text{ W}\cdot\text{s/kg}\cdot\text{K})} \right] \\ &= -17.79^\circ\text{C}\end{aligned}$$

This is probably slightly less accurate than the result in Problem 7.21 due to the large temperature difference (more than 6°C for liquids). But either answer is reasonable, since the correlation eqs. (7.47) and (7.48a) are only accurate to within $\pm 20\%$.

Supplementary Problems

- 7.23.** Parallel flat plates are spaced 7.6 cm apart. Estimate the length required for the boundary layers to meet when air at 27 °C flows between them at 30 m/s.
Ans. 2.08 m, assuming the laminar leading edge effect is negligible
- 7.24.** Air at 300 K and 1 atm flows at 30 m/s over a 0.6 m long flat plate, which is maintained at 400 K. What is the heat transfer per unit width from one side of the plate, assuming $Re_c = 500\,000$?
Ans. 3169 W/m
- 7.25.** A 32 km/h wind blows parallel to a 30 m long by 6 m high wall. Determine the heat transfer from the wall, which is held at 21 °C, to the ambient air, which is at -1 °C. *Ans.* 65 984 W
- 7.26.** Ethylene glycol at 0 °C flows at the rate of 23 m/s parallel to a 0.6 m square, thin flat plate at 40 °C, which is suspended from a balance. Assume the fluid flows over both sides of the plate and that the critical Reynolds number is 500 000. (a) What drag should be indicated by the balance? (b) What is the heat transfer rate from the plate to the fluid? *Ans.* (a) 538 N; (b) 63 900 W
- 7.27.** Determine the heat transfer coefficient for the flow of liquid ammonia at a bulk temperature of 20 °C in a long, 30 mm diameter tube which is at 40 °C. The velocity is 6 m/s. Are the effects of viscosity significant? If the fluid were water, would the effects of viscosity be significant?
Ans. $\bar{h} = 18.612 \text{ kW/m}^2 \cdot \text{K}$; +1.48%; +6.22%
- 7.28.** A 3 in o.d. steam pipe without insulation is exposed to a 30 mph wind blowing normal to it. The surface temperature of the pipe is 200 °F and the air is at 40 °F. Find the heat loss per foot of pipe.
Ans. 1291 Btu/h·ft
- 7.29.** Atmospheric air at 70 °F flows normal to a tube bank consisting of 15 transverse and 12 longitudinal rows arranged in-line with $a = 0.38$ in, $b = 0.31$ in. The tubes, which are 0.25 in o.d., are kept at 200 °F. The maximum air velocity is 4 ft/s. What is the average film coefficient of the bundle? See Fig. 7-8.
Ans. 8.467 Btu/h·ft²·°F
- 7.30.** Determine the average heat transfer coefficient in a staggered tube bundle having twelve 20 mm o.d. tubes per row spaced 40 mm apart in both directions. Water at 20 °C flows over the 100 °C tubes at a free-volume velocity of 0.20 m/s. *Ans.* 3.497 kW/m²·K

Natural Convection

The past three chapters dealt with heat transfer in fluids whose motion was caused primarily by changes in fluid pressure produced by external work. In this chapter we shall consider *natural* or *free convection*, in which fluid moves under the influence of buoyant forces arising from changes in density.

In natural convection the velocity is zero at the heated body (no-slip boundary condition), increases rapidly in a thin boundary layer adjacent to the body, and becomes zero again far from the body. In practice, natural convection and forced convection commonly occur simultaneously. The analysis which we make in a given case must then be determined by which is predominant. If both natural and forced convection are approximately of equal importance, both must be accounted for in our analysis.

8.1 VERTICAL FLAT PLATE

One of the most common, and simplest, natural convective problems occurs when a vertical plane surface is subjected to a cooler (or warmer) surrounding fluid. Figure 8-1 shows the boundary layer adjacent to a heated vertical plane surface. For convenience, the hydrodynamic and thermal boundary layers are shown as coincident, which occurs only when the Prandtl number is unity (as was the case with forced convection). When the vertical plate is cooler than the surrounding fluid, the physical problem is inverted, but the mathematical treatment is unchanged.

At the outset the boundary layer is laminar; but at some distance from the leading edge, depending upon fluid properties and the thermal gradient, transition to turbulent flow occurs. As a rule of thumb, transition from laminar to turbulent flow occurs when the product of the Prandtl number and the *Grashof number*, where

$$\text{Gr} \equiv \frac{g\beta(T_s - T_\infty)L^3}{\nu^2} \propto \frac{\text{buoyancy force}}{\text{viscous force}} \quad (8.1)$$

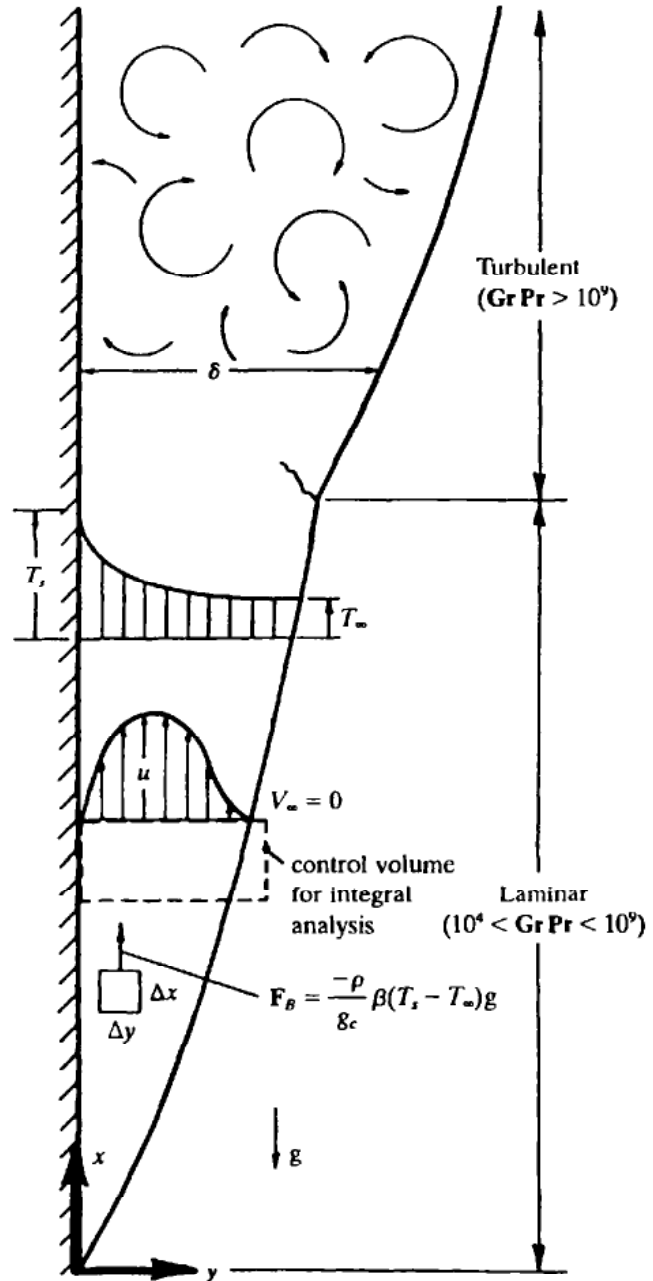


Fig. 8-1

equals approximately 10^9 . To determine Pr and Gr , consider all properties constant at either their film temperature or their *reference temperature* values (see (8.16) below). In (8.1), β is the *coefficient of volume expansion*, defined by

$$\beta \equiv \frac{1}{v} \left(\frac{\partial v}{\partial T} \right)_p \quad (8.2)$$

for an ideal gas having the equation of state $p = \rho RT$, $\beta = 1/T$. The Grashof-Prandtl number product is sometimes called *Rayleigh number*, $\text{Ra} = \text{Gr} \cdot \text{Pr}$.

Resulting as it does from density variations, free convective flow is compressible flow. However, if the temperature difference between the plate and fluid is small, an analysis for $u(x, y)$, $v(x, y)$, and $T(x, y)$ can be made in which the density is treated as constant, except in the body force term, $\rho g/g_c$, where ρ must be considered a function of temperature. (It is the variation of ρ in this term that is responsible for the buoyant force.)

The boundary layer assumptions of Section 6.1 are equally applicable in this quasi-incompressible analysis. The derivation of the x -direction, laminar flow, equation of motion is identical to Problem 6.1 when the body force is included, giving

$$\frac{\rho}{g_c} \left(u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = -\frac{\partial p}{\partial x} - \frac{\rho}{g_c} g + \mu_f \frac{\partial^2 u}{\partial y^2} \quad (8.3)$$

The pressure gradient along the plate results from the change in elevation; hence,

$$\frac{\partial p}{\partial x} = -\frac{\rho_x}{g_c} g \quad (8.4)$$

To relate ρ on the right-hand side of (8.3) to temperature, we introduce the volume coefficient of expansion written across the boundary layer:

$$\beta \approx \frac{1}{v_x} \left(\frac{v - v_x}{T - T_x} \right) = \rho_x \left(\frac{1/\rho - 1/\rho_x}{T - T_x} \right)$$

or

$$\rho_x - \rho \approx \rho \beta (T - T_x) \quad (8.5)$$

The approximation becomes more accurate as the temperature differential approaches zero. Substituting (8.4) and (8.5) into (8.3), we have the free convective x -momentum equation for a vertical flat plate. Noting that the energy equation (6.18) and the continuity equation (6.3) are unchanged from the forced convective, incompressible boundary layer case, the governing equations are:

$$\text{x-momentum:} \quad u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = g \beta (T - T_x) + \nu \frac{\partial^2 u}{\partial y^2} \quad (8.6)$$

$$\text{energy:} \quad u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} \quad (8.7)$$

$$\text{continuity:} \quad \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (8.8)$$

Boundary conditions for an isothermal plate are:

$$\begin{aligned} \text{at } y = 0: \quad & u = 0, \quad v = 0, \quad T = T_s \\ \text{at } y = \infty: \quad & u = 0, \quad T = T_\infty, \quad \frac{\partial u}{\partial y} = 0, \quad \frac{\partial T}{\partial y} = 0 \end{aligned}$$

Note that the momentum and energy equations are coupled in temperature. In forced convection, the hydrodynamic problem could be solved independent of the thermal problem; this is not possible in free convection.

Similarity Solution: Isothermal Plate

The free convective velocity and temperature profiles exhibit a similarity property, analogous to that observed by Blasius for the forced convective problem. Using the similarity parameter

$$\eta \equiv \frac{y}{x} \left[\frac{\text{Gr}_x}{4} \right]^{1/4} \tag{8.9}$$

where Gr_x is given by (8.1) with L replaced by x , and the dimensionless temperature

$$\theta \equiv \frac{T - T_\infty}{T_s - T_\infty} \tag{8.10}$$

S. Ostrach solved the governing equations for a wide range of Prandtl numbers. His results are shown in Figs. 8-2 and 8-3. Problem 8.1 outlines the reduction of three partial differential equations to two ordinary differential equations.

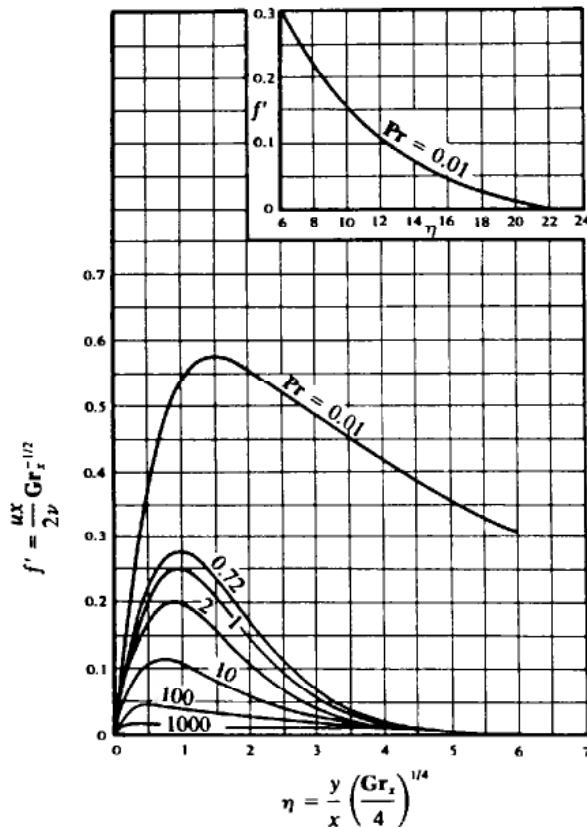


Fig. 8-2. Laminar, free velocity temperature profiles. [From S. Ostrach (1953), *NACA Report 1111*.]

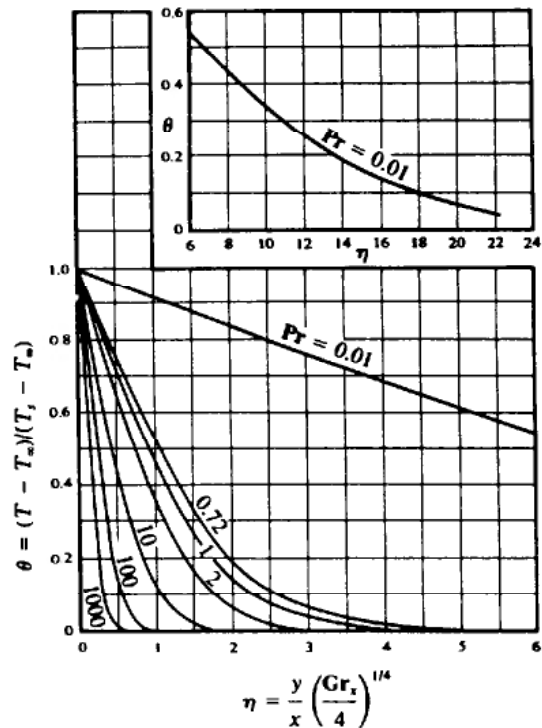


Fig. 8-3. Laminar, free convective temperature profiles. [From S. Ostrach (1953), *NACA Report 1111*.]

Knowing the temperature distribution permits determination of the local heat flux. At the wall, heat transfer takes place by conduction only, since the fluid velocity is zero; therefore,

$$\frac{q}{A} = -k \left. \frac{\partial T}{\partial y} \right|_{y=0} = -\frac{k}{x} (T_s - T_\infty) \left(\frac{\text{Gr}_x}{4} \right)^{1/4} \left. \frac{d\theta}{d\eta} \right|_{\eta=0} \quad (8.11)$$

This energy must be convected away; hence,

$$\frac{q}{A} = h(T_s - T_\infty) \quad (8.12)$$

Combining (8.11) and (8.12), the local Nusselt number is

$$\text{Nu}_x \equiv \frac{hx}{k} = - \left(\frac{\text{Gr}_x}{4} \right)^{1/4} \left. \frac{d\theta}{d\eta} \right|_{\eta=0} \quad (8.13)$$

It is obvious from Fig. 8-3 that the slope of the temperature profile at the wall depends upon the Prandtl number of the fluid. With the slope at the wall, $-(d\theta/d\eta)|_{\eta=0}$, written as a function of Prandtl number, $-F_1(\text{Pr})$, (8.13) becomes

$$\text{Nu}_x = F_1(\text{Pr}) \left(\frac{\text{Gr}_x}{4} \right)^{1/4} \quad (8.14)$$

Some values of F_1 are given in Table 8-1.

Table 8-1. Similarity solution values of $F_1(\text{Pr}) = \text{Nu}_x (\text{Gr}_x/4)^{-1/4}$ for laminar flow along an isothermal, vertical wall.

Pr	0.01	0.72	0.733	1.0	2.0	10.0	100.0	1000.0
$F_1(\text{Pr})$	0.0812	0.5046	0.5080	0.5671	0.7165	1.1694	2.191	3.966

By the usual method of averaging,

$$\bar{h} = \frac{1}{L} \int_0^L h(x) dx$$

resulting in

$$\bar{\text{Nu}} \equiv \frac{\bar{h}L}{k} = \frac{4}{3} F_1(\text{Pr}) \left(\frac{\text{Gr}_L}{4} \right)^{1/4} \quad (8.15)$$

This result is valid for an isothermal vertical plate in the laminar flow regime $10^4 < \text{GrPr} < 10^9$, below which the boundary layer approximations are invalid and above which the flow becomes turbulent, and for constant fluid properties except for density. Properties are evaluated at the *reference temperature*

$$T_{\text{ref}} = T_s + (0.38)(T_\infty - T_s) \quad (8.16)$$

Similarity Solution: Constant Heat Flux

For a uniform heat flux along the plate, (8.6), (8.7), and (8.8) are valid, but the boundary condition which must be used is $q/A = \text{constant}$. With this condition we obtain

$$\bar{\text{Nu}} \equiv \frac{\bar{h}L}{k} = F_2(\text{Pr}) \left(\frac{\text{Gr}_L}{4} \right)^{1/4} \quad (8.17)$$

where $F_2(\text{Pr}) \equiv \text{Nu}_x \text{Gr}_x^{-1/4}$

where $F_2(\text{Pr})$ is the negative of the θ slope at $\eta = 0$ for constant q/A . Some values of F_2 are given in Table 8-2.

Table 8-2. Similarity solution values of $F_2(\text{Pr}) = \text{Nu}(\text{Gr}_L/4)^{1/4}$ for laminar flow along a uniform surface heat flux, vertical wall.

Pr	0.1	1.0	10.0	100.0
$F_2(\text{Pr})$	0.335	0.811	1.656	3.083

Integral Solution: Isothermal Plate

By equating the sum of the external forces in the x -direction to the net x -momentum flux out of a control volume which extends through the boundary layer (see Fig. 8-1), we get the integral momentum equation

$$\frac{d}{dx} \int_0^\delta u^2 dy = \int_0^\delta g\beta(T - T_\infty) dy - \nu \left. \frac{\partial u}{\partial y} \right|_{y=0} \tag{8.18}$$

in which the thermal and hydrodynamic boundary layers have been assumed of equal thickness, as shown in Fig. 8-1. The integral energy equation is obtained as in Problem 6.14:

$$\alpha \left. \frac{\partial T}{\partial y} \right|_{y=0} = \frac{d}{dx} \left[\int_0^\delta (T_\infty - T) u dy \right] \tag{8.19}$$

These equations, which are coupled because of the gravitational body force, may be solved simultaneously when the velocity and temperature profiles are known or can be closely approximated. Logical assumptions for the profiles are:

$$\theta \equiv \frac{T - T_\infty}{T_s - T_\infty} = \left(1 - \frac{y}{\delta} \right)^2 \tag{8.20}$$

and

$$\frac{u}{V} = \frac{y}{\delta} \left(1 - \frac{y}{\delta} \right)^2 \tag{8.21}$$

In (8.21) the fictitious velocity V , chosen to nondimensionalize the expression, is an unknown function of x , as is δ . These parameters may be intuitively expressed as exponential functions:

$$V = C_1 x^a \quad \text{and} \quad \delta = C_2 x^b$$

Substituting (8.20) and (8.21) into (8.18) and (8.19) and integrating, we get

$$\begin{aligned} \frac{1}{105} \frac{d}{dx} (V^2 \delta) &= \frac{1}{3} g\beta(T_s - T_\infty) \delta - \nu \frac{V}{\delta} \\ 2\alpha \frac{T_s - T_\infty}{\delta} &= \frac{1}{30} (T_s - T_\infty) \frac{d}{dx} (V\delta) \end{aligned}$$

which can be further simplified by substituting the expressions for V and δ , and equating exponents to get $a = 1/2$ and $b = 1/4$. Upon simplification, the results are

$$\frac{\delta}{x} = (3.93) \left(\frac{0.952 + \text{Pr}}{\text{Gr}_x \text{Pr}^2} \right)^{1/4} \tag{8.22}$$

and

$$V = (5.17) \frac{\nu}{x} \left(\frac{\text{Gr}_x}{0.952 + \text{Pr}} \right)^{1/2} \quad (8.23)$$

At the wall the heat balance is

$$\frac{q}{A} = -k \left. \frac{\partial T}{\partial y} \right|_{y=0} = h(T_s - T_\infty)$$

from which $h = 2k/\delta$, upon using the temperature profile, (8.20). This, together with (8.22), gives the local Nusselt number as

$$\blacksquare \quad \text{Nu}_x \equiv \frac{hx}{k} = \frac{2x}{\delta} = (0.508) \left[\frac{\text{Gr}_x \text{Pr}^2}{0.952 + \text{Pr}} \right]^{1/4} \quad (8.24)$$

Whenever $\text{Nu}_x \propto \text{Gr}_x^{1/4}$, as in (8.14) and (8.24), the average heat transfer coefficient is given by

$$\overline{\text{Nu}} \equiv \frac{\bar{h}L}{k} = \frac{4}{3} \text{Nu}_L \quad (8.25)$$

In (8.24) and (8.25), as in the exact solutions (8.14) and (8.15), fluid properties are evaluated at the reference temperature (8.16).

When $\text{Gr}_x \text{Pr} > 10^9$, the flow becomes turbulent. Assuming the one-seventh-power law for the velocity and temperature profiles, E. R. G. Eckert and T. W. Jackson obtained a *turbulent free-convective equation*

$$\text{Nu}_x \equiv \frac{hx}{k} = (0.0295) \left[\frac{\text{Gr}_x \text{Pr}^{7/6}}{1 + (0.494) \text{Pr}^{2/3}} \right]^{2/5} \quad (8.26)$$

where the fluid properties are evaluated at the mean film temperature, $T_f = (T_s + T_\infty)/2$. Obtained by an integral analysis, this result can be approximated by a simplified equation and integrated to give an average Nusselt number

$$\overline{\text{Nu}} \equiv \frac{\bar{h}L}{k} = (0.0210)(\text{Gr}_L \text{Pr})^{2/5} \quad (8.27)$$

8.2 EMPIRICAL CORRELATIONS: ISOTHERMAL SURFACES

In the preceding section we have seen that the Nusselt number for free convection is a function of the Grashof and Prandtl numbers. Engineering data, for both the laminar and turbulent regimes, correlate well for many simple geometric configurations in a single equation,

$$\blacksquare \quad \frac{\bar{h}L}{k} = \overline{\text{Nu}} = C(\text{Gr}_L \text{Pr})^n \quad (8.28)$$

where L is a characteristic length appropriate for the configuration. As a rule of thumb, the exponent is usually 1/4 for laminar and 1/3 for turbulent flow. All fluid properties are evaluated at the mean film temperature, $T_f = (T_s + T_\infty)/2$.

Table 8-3 gives the constants in (8.28) for common geometric configurations. The characteristic lengths L_v and L_h in the table refer to vertical and horizontal dimensions, respectively. "Large" cylinders are those with radii which are large compared to the boundary layer thickness δ . The values cited for horizontal plates are for square configurations; however, they are sufficiently accurate for engineering calculations on rectangular plates when the length-to-width ratios are small. For horizontal circular disks of diameter D , the constants pertaining to horizontal plates may be used, together with $L = (0.9)D$.

Table 8-3. Corrections for several free convection situations. [Summary of works from several investigators.]

Configuration	$Gr_L Pr$	Characteristic Length, L	C	a
<i>Vertical Plates and Large Cylinders</i>				
Laminar	10^{-1} to 10^4	L_v	See Fig. 8-4	
Laminar	10^4 to 10^9	L_v	0.59	1/4
Turbulent	10^9 to 10^{12}	L_v	0.13	1/3
<i>Small Vertical Cylinders (Wires)</i>				
		D	Sec Fig. 8-5	
<i>Horizontal Plates</i>				
Laminar (heated surface up or cooled surface down)	10^5 to 2×10^7	$L = (L_1 + L_2)/2$	0.54	1/4
Turbulent (heated surface up or cooled surface down)	2×10^7 to 3×10^{10}	$L = (L_1 + L_2)/2$	0.14	1/3
Laminar (heated surface down or cooled surface up)	3×10^5 to 3×10^{10}	$L = (L_1 + L_2)/2$	0.27	1/4
<i>Inclined Plates (small θ)</i> Multiply Grashof number by $\cos \theta$, where θ is the angle of inclination from the vertical, and use vertical plate constants				
<i>Long Horizontal Cylinders ($0.005 \text{ cm} < D < 30.0 \text{ cm}$)</i>				
Laminar	$< 10^4$	D	See Fig. 8-6	
Laminar	10^4 to 10^9	D	0.53	1/4
Turbulent	10^9 to 10^{12}	D	0.13	1/3
<i>Fine Horizontal Wires ($D < 0.005 \text{ cm}$)</i>				
Laminar		D	0.4	0
<i>Miscellaneous Solid Shapes (spheres, short cylinders, blocks)</i>				
Laminar	10^{-4} to 10^4	$\frac{1}{L} = \frac{1}{L_v} + \frac{1}{L_h}$	See Fig. 8-7	
Laminar	10^4 to 10^9	$\frac{1}{L} = \frac{1}{L_v} + \frac{1}{L_h}$	0.60	1/4

8.3 FREE CONVECTION IN ENCLOSED SPACES

Free convection is influenced by other surfaces or objects being near the surface which generates the convective currents. Two cases, horizontal and vertical fluid layers, commonly occur. In both we define an average heat transfer coefficient \bar{h} by

$$q = \bar{h}A(T_1 - T_2) \quad (8.29)$$

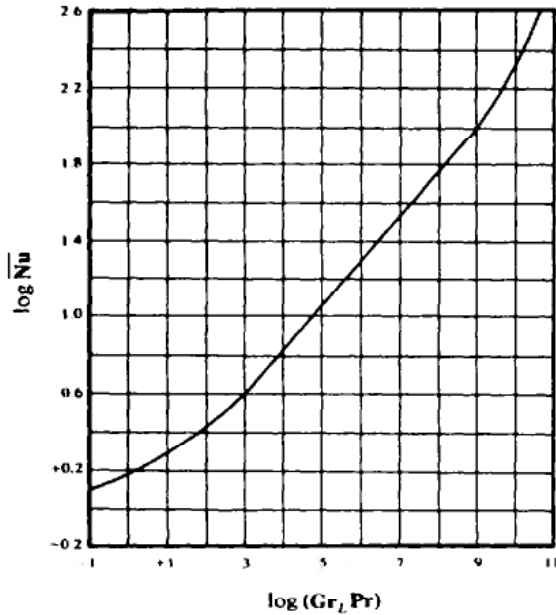


Fig. 8-4. Correlation for heated vertical plates.
[Adapted from W. H. McAdams (1954), *Heat Transmission*, 3rd edn. McGraw-Hill Book Company, New York, p. 173. Used by permission.]

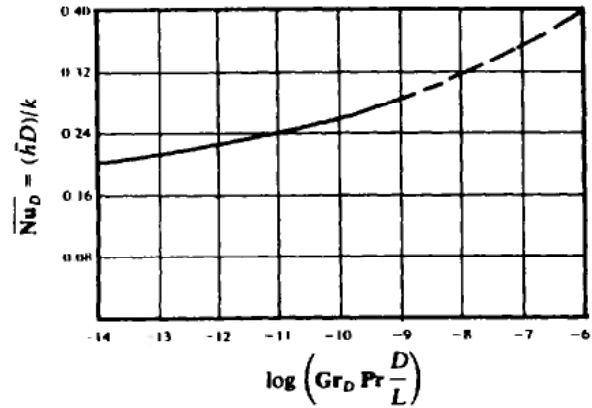


Fig. 8-5. Correlation for small vertical cylinders.
[Adapted from J. R. Kyte, A. J. Madden and E. L. Pirat, *Chem. Eng. Progr.*, **49**: 657 (1953), by permission of the American Institute of Chemical Engineers.]

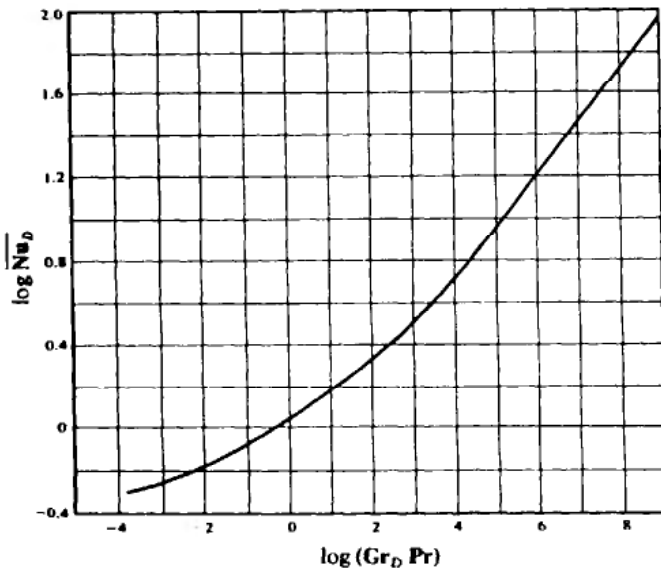


Fig. 8-6. Correlation for horizontal cylinders.
[Adapted from W. H. McAdams, (1954), *Heat Transmission*, 3rd edn. McGraw-Hill Book Company, New York, NY, p. 176. Used by permission.]

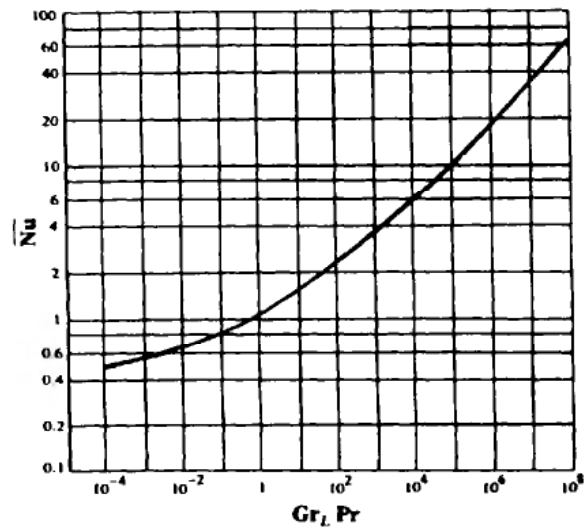


Fig. 8-7. Correlation for miscellaneous solid shapes and low objects. [From tabular data of W. J. King and W. H. McAdams reported by M. Jakob in *Heat Transfer*, Vol. I, John Wiley & Sons, Inc., p. 528.]

where T_1 and T_2 are the temperatures of the opposing surfaces, each of which has area A . Fluid properties are evaluated at the arithmetic mean of the two surface temperatures, $(T_1 + T_2)/2$. And the characteristic length in the Grashof number is the distance between the surfaces, b ; i.e., if $T_1 > T_2$,

$$\text{Gr}_b \equiv \frac{g\beta(T_1 - T_2)b^3}{\nu^2} \quad (8.30)$$

Horizontal Air Layers—Isothermal Walls

For horizontal air layers there are two cases: (1) if the upper plate is at the higher temperature, no convection occurs (since the lighter fluid is above the more dense fluid); (2) if the lower plate is warmer, an unstable condition exists, and convective motion occurs.

Upper plate warmer. As there is no fluid motion, the heat transfer is by conduction, and the heat transfer coefficient in (8.29) can be evaluated by

$$q = \bar{h}A(T_1 - T_2) = kA\left(\frac{T_1 - T_2}{b}\right)$$

or

$$\overline{\text{Nu}}_b \equiv \frac{\bar{h}b}{k} = 1.0 \quad (8.31)$$

Lower plate warmer. The fluid motion depends upon the Grashof number Gr_b . At Grashof numbers less than about 2000, the convective velocities are very low; heat transfer is primarily by conduction, and (8.31) applies. As the Grashof number increases, the conduction and convection modes coexist, until convection predominates at $\text{Gr}_b > 10^4$, and the following correlations apply:

$$\overline{\text{Nu}}_b = (0.195)\text{Gr}_b^{1/4} \quad 10^4 < \text{Gr}_b < 4 \times 10^5 \quad (8.32)$$

or

$$\overline{\text{Nu}}_b = (0.068)\text{Gr}_b^{1/3} \quad \text{Gr}_b > 4 \times 10^5 \quad (8.33)$$

The lower range, (8.32), corresponds to a well-ordered process in which the fluid circulates in small hexagonal cells, called *Benard cells*, rising in the center of each cell and descending at the boundaries (Fig. 8-8).

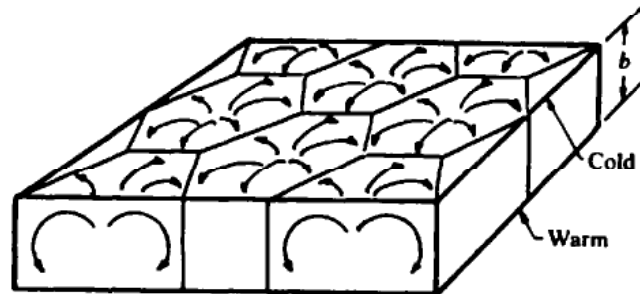


Fig. 8-8. Sketch of Benard cells.

Horizontal Liquid Layers—Isothermal Walls

S. Globe and D. Dropkin recommended the following correlation for mercury, water and silicone oils, over the wide range $0.02 < \text{Pr} < 8750$:

$$\overline{\text{Nu}}_b = (0.069)\text{Gr}_b^{1/3}\text{Pr}^{0.407} \quad 3 \times 10^5 < \text{Gr}_b\text{Pr} < 7 \times 10^9 \quad (8.34)$$

Fluid properties are evaluated at the average of the two surface temperatures.

Vertical Enclosed Spaces

The effects of geometry are more complicated in vertical spaces than for horizontal layers. Both plate height L and spacing b are important, in addition to the Rayleigh number $\text{Ra}_b = \text{Gr}_b\text{Pr}$. R. K. MacGregor and A. F. Emery characterize the behavior in regimes, as shown schematically in Fig. 8-9.

Vertical air layers—isothermal walls. The following results have ranges of applicability approximating the regimes shown in Fig. 8-9.

$$\overline{\text{Nu}}_b = 1 \quad \text{Gr}_b < 2000 \quad (8.35)$$

or

$$\overline{\text{Nu}}_b = (0.18) \text{Gr}_b^{1/4} \left(\frac{L}{b}\right)^{-1/9} \quad 2 \times 10^4 < \text{Gr}_b < 2 \times 10^5 \quad (8.36)$$

or

$$\overline{\text{Nu}}_b = (0.065) \text{Gr}_b^{1/3} \left(\frac{L}{b}\right)^{-1/9} \quad 2 \times 10^5 < \text{Gr}_b < 1.1 \times 10^7 \quad (8.37)$$

Fluid properties are evaluated at $(T_1 + T_2)/2$. These equations are valid for $L/b > 3$; for smaller values, the correlation for a single vertical plate should be applied to each surface.

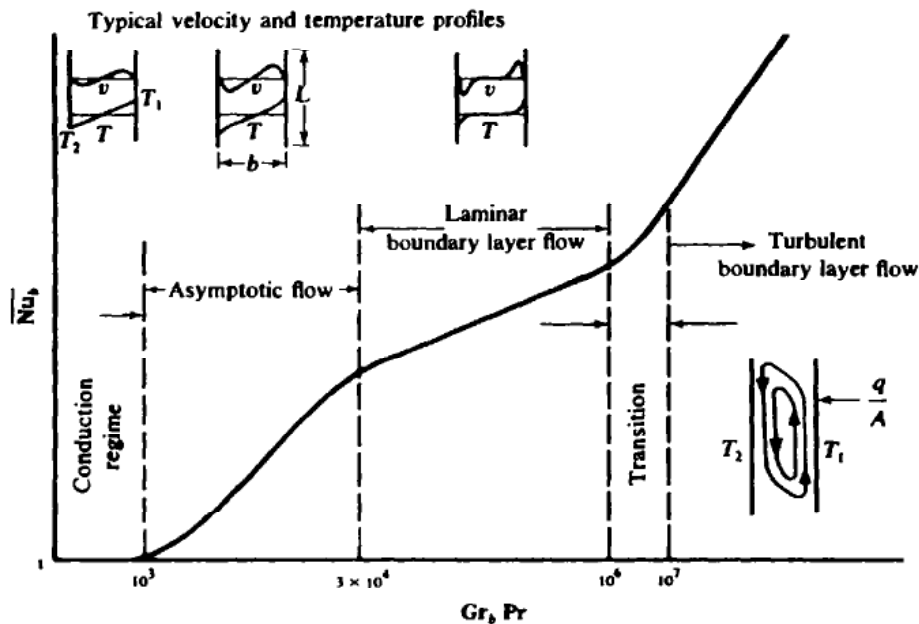


Fig. 8-9. Schematic diagram and flow regimes of the vertical convection layer. [From R. K. MacGregor and A. F. Emery, The American Society of Mechanical Engineers, *Trans. ASME, J. Heat Transfer*, 91: 361 (1969). Reprinted by permission.]

Vertical liquid layers—constant heat flux. The heat transfer coefficients for a number of liquids in vertical enclosures with constant heat flux are given by the following relations.

$$\overline{\text{Nu}}_b = (0.42)(\text{Gr}_b \text{Pr})^{1/4} \text{Pr}^{0.012} \left(\frac{L}{b}\right)^{-0.30} \quad (8.38)$$

for

$$10^4 < \text{Gr}_b \text{Pr} < 10^7 \quad 1 < \text{Pr} < 2 \times 10^4 \quad 10 < L/b < 40$$

and

$$\overline{\text{Nu}}_b = (0.046)(\text{Gr}_b \text{Pr})^{1/3} \quad (8.39)$$

for

$$10^6 < \text{Gr}_b \text{Pr} < 10^9 \quad 1 < \text{Pr} < 20 \quad 1 < L/b < 40$$

Other Geometrical Configurations

For air enclosed between *two concentric spheres* E. H. Bishop, L. R. Mack, and J. A. Scanlan give the convective parameter in terms of the *effective thermal conductivity*, k_e ,

$$\frac{k_e}{k} = 0.106 \text{Gr}_b^{0.276} \quad (8.40)$$

for

$$2 \times 10^4 < \text{Gr}_b < 3.6 \times 10^6 \quad 0.25 < b/r_i < 1.50$$

where b is the difference between the sphere radii, $b = r_o - r_i$. The heat transfer is then given by the steady-state conduction equation for a spherical shell,

$$q = \frac{4\pi k_e r_i r_o}{r_o - r_i} (T_1 - T_2) \quad (8.41)$$

L. B. Evans and N. E. Stefany showed that transient free-convective heating or cooling in *closed vertical or horizontal cylindrical enclosures* is correlated by

$$\overline{\text{Nu}}_D \equiv \frac{\bar{h}D}{k} = (0.55)(\text{Gr}_L \text{Pr})^{1/4} \quad 0.75 < L/D < 2.0 \quad (8.42)$$

where the Grashof number is formed with the cylinder length, and the fluid properties are evaluated at $T_f = (T_s + T_\infty)/2$.

Free-convective coefficients inside *spherical cavities* of diameter D are given by F. Kreith:

$$\overline{\text{Nu}}_D = (0.59)(\text{Gr}_D \text{Pr})^{1/4} \quad 10^4 < \text{Gr}_D \text{Pr} < 10^9 \quad (8.43)$$

$$\overline{\text{Nu}}_D = (0.13)(\text{Gr}_D \text{Pr})^{1/3} \quad 10^9 < \text{Gr}_D \text{Pr} < 10^{12} \quad (8.44)$$

In these equations the Grashof number is based on the cavity diameter, and fluid properties are evaluated at the mean film temperature.

8.4 MIXED FREE AND FORCED CONVECTION

Throughout Chapters 6 and 7, on forced convection, the effects of buoyancy were neglected, a valid approach in moderate- to high-velocity fluids. Free convection may be significant, however, when low-velocity fluids flow over heated (or cooled) surfaces. A measure of the influence of free convection is provided by the ratio

$$\frac{\text{Gr}}{\text{Re}^2} \propto \frac{\text{buoyancy force}}{\text{inertia force}} \quad (8.45)$$

whose significance may be verified by combining (5.16) and (8.1). For $\text{Gr}/\text{Re}^2 > 1.0$ free convection is *important*. The regimes of convection are:

1. Free convection: $\text{Gr} \gg \text{Re}^2$ (Sections 8.1, 8.2, and 8.3)
2. Forced convection: $\text{Gr} \ll \text{Re}^2$ (Chapters 6 and 7)
3. Mixed free and forced convection: $\text{Gr} \approx \text{Re}^2$ (this section)

Combining these with the two hydrodynamic domains—laminar and turbulent—yields $3 \times 2 = 6$ subregimes. These are mapped in Fig. 8-10 for flow in vertical tubes and in Fig. 8-11 for flow in horizontal tubes. These figures may be used to ascertain whether superimposed free convection is of significance for

$$10^{-2} < \text{Pr} \frac{D}{L} < 1.0$$

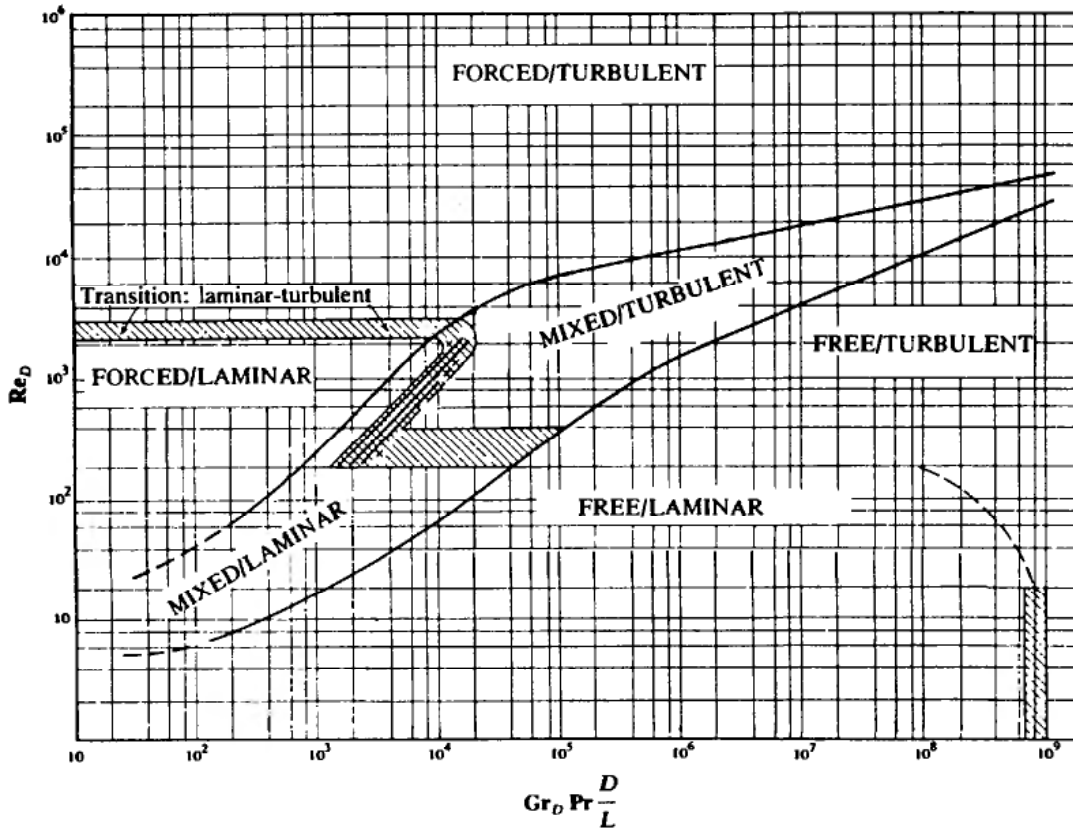


Fig. 8-10. Regimes of flow in vertical tubes. [Adapted from B. Metais and E. R. G. Eckert, *Trans. ASME, Ser. C, J. Heat Transfer*, 86: 295 (1964). Used by permission of the American Society of Mechanical Engineers.]

The Grashof number is formed with the tube diameter as the characteristic length and with the difference between the tube wall and the bulk fluid temperatures.

In the correlation equations given in Fig. 8-11, Gz is the *Graetz number*, defined as

$$Gz \equiv Re_D Pr \frac{D}{L} \quad (8.46)$$

8.5 NEWER CORRELATIONS

There continue to be newer correlation equations in the area of natural convection. These may be found in more extensive heat transfer texts, but we will introduce only a few of the more frequently encountered geometries/empirical equations. Specifically, we will treat only those for the vertical plane wall and the horizontal cylinder with isothermal surfaces.

Long Horizontal Circular Cylinder—Isothermal Surface

A widely used equation is the Churchill and Chu correlation, which covers a wide range of Rayleigh numbers. This is

$$\overline{Nu}_D = \left\{ 0.60 + \frac{0.387 Ra_D^{1/6}}{[1 + (0.559/Pr)^{9/16}]^{8/27}} \right\}^2 \quad (8.47)$$

which is valid $10^{-5} < Ra_D < 10^{12}$ and properties are evaluated at T_f . For gases $\beta = 1/T_f$.

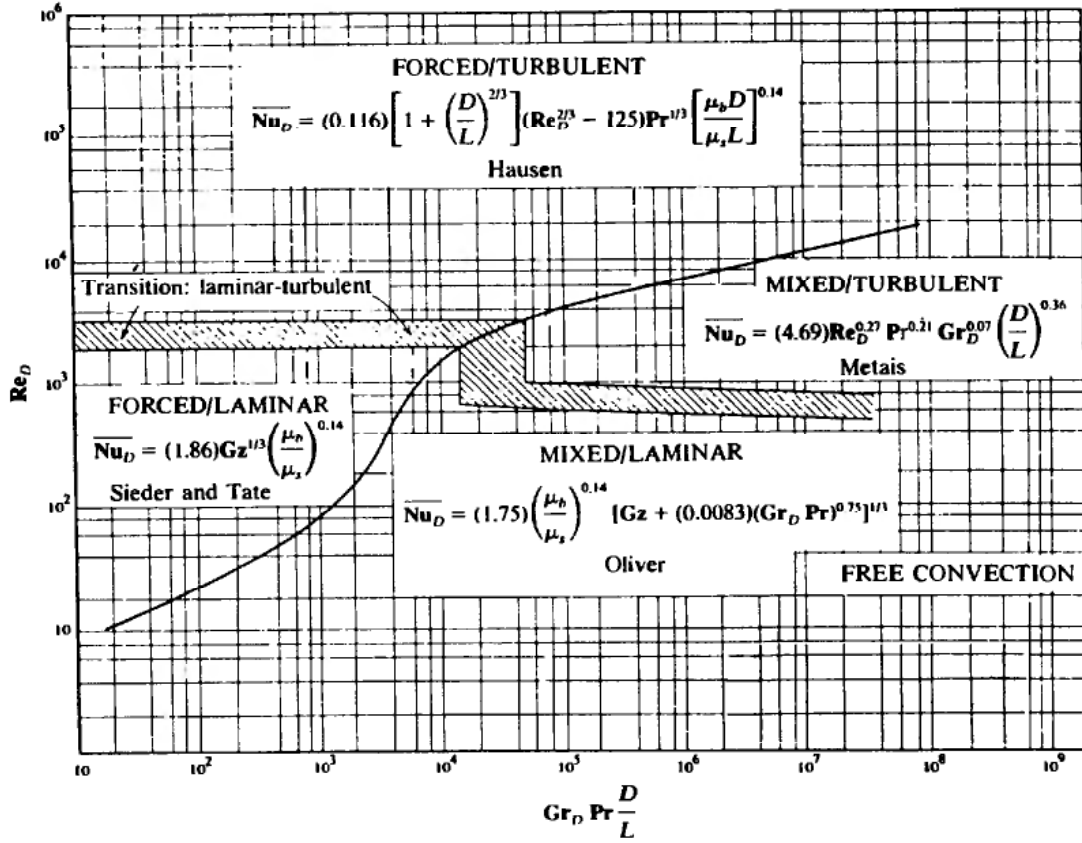


Fig. 8-11. Regimes of flow in horizontal tubes. [Adapted from B. Metais and E. R. G. Eckert, *Trans. ASME, Ser. C, J. Heat Transfer*, 86: 295 (1964). Used by permission of the American Society of Mechanical Engineers.]

Vertical Plate—Isothermal Surface

For constant T_s , Churchill and Chu recommend the following correlation which is valid over the entire range of Ra_L with properties evaluated at T_f

$$\overline{Nu}_L = \left\{ 0.825 + \frac{0.387 Ra_L^{1/6}}{[1 + (0.492/Pr)^{9/16}]^{4/9}} \right\}^2 \tag{8.48}$$

Slightly improved accuracy results for laminar flow with constant T_s by using

$$\overline{Nu}_L = 0.68 + \frac{0.670 Ra_L^{1/4}}{[1 + (0.492/Pr)^{9/16}]^{4/9}} \tag{8.49}$$

where $Ra_L \leq 10^9$ and properties are evaluated at T_f .

Vertical Plate—Constant Heat Flux

The foregoing two equations for the isothermal plane wall can be used with good accuracy for the constant heat flux problem provided that \overline{Nu}_L and Ra_L are based on the temperature difference at the plate height midpoint. Thus, properties and ΔT are based on $\Delta T_{L/2} = T_s(L/2) - T_\infty$. Then $\bar{h} \equiv q_s''/\Delta T_{L/2}$, and a trial-and-error solution is necessary.

Solved Problems

8.1. Using Pohlhausen's similarity parameter,

$$\eta = \frac{y}{x} \left(\frac{\mathbf{Gr}_x}{4} \right)^{1/4}$$

and a stream function $\psi(x, y)$ that involves an unknown function $f(\eta)$,

$$\psi(x, y) = f(\eta) \left[4\nu \left(\frac{\mathbf{Gr}_x}{4} \right)^{1/4} \right]$$

outline the reduction of the three partial differential equations (8.6), (8.7), and (8.8) to two ordinary differential equations. Cite the boundary conditions.

From the definition of a stream function ψ ,

$$u = \frac{\partial \psi}{\partial y} \quad \text{and} \quad v = -\frac{\partial \psi}{\partial x}$$

so that (8.8) is satisfied. Expressing the velocity components in terms of x and η , we get

$$\begin{aligned} u &= \frac{\partial \psi}{\partial y} = \frac{\partial \psi}{\partial \eta} \frac{\partial \eta}{\partial y} = f'(\eta) \left[4\nu \left(\frac{\mathbf{Gr}_x}{4} \right)^{1/4} \right] \frac{1}{x} \left(\frac{\mathbf{Gr}_x}{4} \right)^{1/4} = \frac{2\nu}{x} \mathbf{Gr}_x^{1/2} f' \\ -v &= \frac{\partial \psi}{\partial x} = f'(\eta) \frac{\partial \eta}{\partial x} \left[4\nu \left(\frac{\mathbf{Gr}_x}{4} \right)^{1/4} \right] + f(\eta) \frac{d}{dx} \left[4\nu \left(\frac{\mathbf{Gr}_x}{4} \right)^{1/4} \right] \\ &= -\frac{\nu}{x} \left(\frac{\mathbf{Gr}_x}{4} \right)^{1/4} (\eta f' - 3f) \end{aligned}$$

Defining a dimensionless temperature,

$$\theta = \frac{T - T_\infty}{T_s - T_\infty}$$

and taking the respective derivatives and substituting into (8.6) and (8.7), we get

$$\begin{aligned} f''' + 3ff'' - 2(f')^2 + \theta &= 0 \\ \theta'' + 3\mathbf{Pr}f\theta' &= 0 \end{aligned}$$

where the primes indicate differentiation with respect to η . Although θ can be eliminated between these two equations, it is simpler to consider them as simultaneous equations coupled through the function f . Each solution must be for a particular Prandtl number, since \mathbf{Pr} appears as a parameter. The boundary conditions are:

$$\begin{aligned} \text{at } \eta = 0: & \quad f = 0, \quad f' = 0, \quad \theta = 1 \\ \text{as } \eta \rightarrow \infty: & \quad f \rightarrow 0, \quad \theta \rightarrow 0 \end{aligned}$$

Figures 8-2 and 8-3 give the solution for a wide range of Prandtl numbers.

8.2. Water is heated by a 15 cm by 15 cm vertical flat plate which is maintained at 52 °C. Using the similarity solution of Section 8.1, find the heat transfer rate when the water is at 20 °C.

At the reference temperature, $T_{ref} = T_s + (0.38)(T_\infty - T_s) = 40$ °C, the pertinent parameters from Table B-3 (SI) are:

$$\begin{aligned} \rho &= 994.59 \text{ kg/m}^3 & k &= 0.628 \text{ W/m}\cdot\text{K} \\ \nu &= 0.658 \times 10^{-6} \text{ m}^2/\text{s} & \mathbf{Pr} &= 4.34 \end{aligned}$$

From Fig. 8-3, the temperature gradient at the wall is, for $\text{Pr} \approx 4$,

$$\left. \frac{d\theta}{d\eta} \right|_{\eta=0} \approx -0.9 = -F_1(\text{Pr})$$

and (8.15) gives the average heat transfer coefficient as

$$\bar{h} = \frac{4}{3} (0.9) \frac{k}{L} \left(\frac{\text{Gr}_L}{4} \right)^{1/4}$$

In order to get the Grashof number, the coefficient of volume expansion β may be obtained from (8.5), where ρ_∞ is taken as the density at a temperature only slightly removed from the reference or film temperature. Choosing this as 38 °C,

$$\rho_\infty = \rho_{38} = 995.18 \text{ kg/m}^3$$

by interpolation in Table B-3 (SI) therefore,

$$\beta_{40} \approx \rho_{38} \left[\frac{(1/\rho_{40}) - (1/\rho_{38})}{40 - 38} \right] = 995.18 \left[\frac{(1/994.59) - (1/995.18)}{2} \right] = 2.97 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$$

Then

$$\begin{aligned} \text{Gr}_L &= \frac{g\beta(T_s - T_\infty)L^3}{\nu^2} \\ &= \frac{(9.8 \text{ m/s}^2)(2.97 \times 10^{-4} \text{ } ^\circ\text{C}^{-1})(52 - 20) \text{ } ^\circ\text{C}(0.15 \text{ m})^3}{(0.708 \times 10^{-5})^2 \text{ m}^4/\text{s}^2} = 7.24 \times 10^8 \end{aligned}$$

and

$$\bar{h} = \frac{4}{3} (0.9) \left[\frac{0.628 \text{ W/m}\cdot\text{K}}{0.15 \text{ m}} \right] \left[\frac{7.24 \times 10^8}{4} \right]^{1/4} = 583 \text{ W/m}^2\cdot\text{K}$$

The heat transfer is then

$$q = \bar{h}A(T_s - T_\infty) = (583 \text{ W/m}^2\cdot\text{K})(0.15 \text{ m})^2[(52 - 20) \text{ } ^\circ\text{C}] = 419.8 \text{ W}$$

8.3. Solve Problem 8.2 using the empirical equation (8.28).

At the mean film temperature, $T_f = (T_s + T_\infty)/2 = 36 \text{ } ^\circ\text{C}$, the pertinent parameters are:

$$\begin{aligned} k &= 0.6218 \text{ W/m}\cdot\text{K} & \text{Pr} &= 4.876 & \text{Gr}_L &= 6.019 \times 10^8 & \text{Ra} = \text{Gr}_L \text{Pr} &= 2.935 \times 10^9 \\ \rho &= 995.77 \text{ kg/m}^3 & \nu &= 0.7275 \times 10^{-6} \text{ m}^2/\text{s} & \beta_{36} &= 3.01 \times 10^{-4} \text{ K}^{-1} \end{aligned}$$

The flow is turbulent; Table 8-3 and (8.28) give

$$\begin{aligned} \frac{\bar{h}L}{k} &= (0.13)(\text{Gr}_L \text{Pr})^{1/3} \\ \bar{h} &= \frac{0.6218 \text{ W/m}^2\cdot\text{K}}{0.15 \text{ m}} (0.13)(2.935 \times 10^9)^{1/3} = 771.6 \text{ W/m}^2\cdot\text{K} \end{aligned}$$

This gives a larger value for the heat transfer than that obtained in Problem 8.2, i.e.,

$$q_{\text{emp}} = \frac{771.6}{583} (419.8 \text{ W}) = 556 \text{ W}$$

It is worth noting here that this value is perhaps more reliable than that of Problem 8.2, since the similarity solution required an estimation of the slope in Fig. 8-3.

8.4. Assume that the heating element of Problem 8.2 is a 5.0 cm by 45.0 cm rectangle rather than being square. With the five cm dimension vertical, estimate the heat transfer rate.

This changes the Grashof number, *viz.*

$$\mathbf{Gr}_L = \left(\frac{5 \text{ cm}}{15 \text{ cm}} \right)^3 (6.018 \times 10^8) = 2.229 \times 10^7$$

and

$$\mathbf{Gr}_L \mathbf{Pr} = (2.229 \times 10^7)(4.876) = 1.087 \times 10^8$$

The laminar constants of Table 8-3 give

$$\frac{\bar{h}L}{k} = (0.59)(\mathbf{Gr}_L \mathbf{Pr})^{1/4}$$

where

$$\bar{h} = \frac{0.6218 \text{ W/m} \cdot \text{K}}{0.05 \text{ m}} (0.59)(1.087 \times 10^8)^{1/4} = 749 \text{ W/m}^2 \cdot \text{K}$$

This gives the heat transfer rate:

$$q = \bar{h}A(T_s - T_\infty) = (749 \text{ W/m}^2 \cdot \text{K})(0.0225 \text{ m}^2)(52 - 20)(^\circ\text{C}) = 539 \text{ W}$$

Comparing this result with the square-plate empirical result of Problem 8.3, we conclude that the square plate is better.

- 8.5.** Estimate the heat loss from a vertical wall exposed to nitrogen at one atmosphere and 4 °C. The wall is 1.8 m high and 2.45 m wide. It is maintained at 50 °C.

From Table B-4 (SI), for nitrogen at a mean film temperature of $T_f = (T_s + T_\infty)/2 = 27^\circ\text{C} = 300 \text{ K}$,

$$\begin{aligned} \rho &= 1.1421 \text{ kg/m}^3 & k &= 0.02620 \text{ W/m} \cdot \text{K} \\ \nu &= 15.63 \times 10^{-6} \text{ m}^2/\text{s} & \mathbf{Pr} &= 0.713 \end{aligned}$$

For the gas, $\beta = 1/T = 1/300 = 3.33 \times 10^{-3} \text{ }^\circ\text{K}^{-1}$, giving a Grashof number of

$$\begin{aligned} \mathbf{Gr}_L &= \frac{g\beta(T_s - T_\infty)L^3}{\nu^2} \\ &= \frac{(9.8 \text{ m/s}^2)(3.33 \times 10^{-3} \text{ }^\circ\text{K}^{-1})(50 - 4) \text{ K}(1.8 \text{ m})^3}{(15.63 \times 10^{-6})^2 \text{ m}^4/\text{s}^2} = 3.58 \times 10^{10} \end{aligned}$$

and

$$\mathbf{Gr}_L \mathbf{Pr} = (3.58 \times 10^{10})(0.713) = 2.55 \times 10^{10}$$

The flow is turbulent; (8.28) with the appropriate constants from Table 8-3 gives

$$\frac{\bar{h}L}{k} = (0.13)(\mathbf{Gr}_L \mathbf{Pr})^{1/3}$$

where

$$\bar{h} = \frac{0.0262 \text{ W/m} \cdot \text{K}}{1.8 \text{ m}} (0.13)(2.55 \times 10^{10})^{1/3} = 5.570 \text{ W/m}^2 \cdot \text{K}$$

and the heat loss is given by

$$q = \bar{h}A(T_s - T_\infty) = \left(5.570 \frac{\text{W}}{\text{m}^2 \cdot \text{K}} \right) (1.8 \text{ m})(2.45 \text{ m})(50 - 4)^\circ\text{C} = 1130 \text{ W}$$

- 8.6.** What is the maximum vertical velocity in the boundary layer of Problem 8.5 at $x = 0.90$ m (from the bottom of the wall)?

Using (8.22) and (8.23) and the parameters from Problem 8.5, we get

$$\begin{aligned} \text{Gr}_x &= \left(\frac{0.9}{1.8}\right)^3 \text{Gr}_L = \frac{3.58 \times 10^{10}}{8} = 4.48 \times 10^9 \\ \delta &= (3.93)x \left[\frac{0.952 + \text{Pr}}{\text{Gr}_x \text{Pr}^2} \right]^{1/4} = (3.93)(0.9 \text{ m}) \left[\frac{0.952 + 0.713}{(4.48 \times 10^9)(0.713)^2} \right]^{1/4} = 1.84 \times 10^{-2} \text{ m} \\ V &= (5.17) \frac{\nu}{x} \left[\frac{\text{Gr}_x}{0.952 + \text{Pr}} \right]^{1/2} = (5.17) \left(\frac{15.63 \times 10^{-6} \text{ m}^2/\text{s}}{0.9 \text{ m}} \right) \left(\frac{4.48 \times 10^9}{0.952 + 0.713} \right)^{1/2} = 4.66 \text{ m/s} \end{aligned}$$

Hence, from (8.21),

$$\begin{aligned} \frac{u}{V} &= \frac{y}{\delta} \left(1 - \frac{y}{\delta} \right)^2 \\ u &= \frac{4.66}{0.0184} y \left(1 - \frac{y}{0.0184} \right)^2 = (253.3)y(1 - 54.35y)^2 \end{aligned} \quad (I)$$

Setting du/dy equal to zero to maximize, we get

$$\begin{aligned} (8858)y^2 - (217.36)y + 1 &= 0 \\ y_{\max} &= \frac{217.36 \pm \sqrt{47\,245 - 35\,432}}{17\,716} = 0.0184 \text{ m or } 0.0061 \text{ m} \end{aligned}$$

The root $y = 0.0184$ corresponds to $u = 0$, the boundary layer edge. Thus, $y_{\max} = 0.0061$ m, and, from (I),

$$u_{\max} = 253.3(0.0061)[1 - 54.35(0.0061)]^2 = 0.690 \text{ m/s}$$

- 8.7.** In Problem 8.5, what is the mass flow rate of nitrogen past the station $x = 0.90$ m?

Assuming the density is constant, the mass flow rate is given by ($W =$ width):

$$\begin{aligned} \dot{m} &= \rho W \int_0^{\delta} u \, dy \\ &= (253.3)\rho W \int_0^{\delta} (y - 108.7y^2 + 2954y^3) \, dy \\ &= (253.3)\rho W \left[\frac{y^2}{2} - 36.23y^3 + 738.5y^4 \right]_0^{\delta=0.0184} \\ &= (253.3) \left(1.1421 \frac{\text{kg}}{\text{m}^3} \right) (2.45 \text{ m}) \left[\frac{(0.0184)^2}{2} - (36.23)(0.0184)^3 + (738.5)(0.0184)^4 \right] \frac{\text{m}^2}{\text{s}} \\ &= 0.0200 \text{ kg/s} \end{aligned}$$

- 8.8.** Estimate the heat transfer from a 40 W incandescent bulb at 127°C to 27°C quiescent air. Approximate the bulb as a 50 mm diameter sphere. What percentage of the power is lost by free convection?

From Table B-4 (SI) the required parameters, evaluated at $T_f = (T_s + T_\infty)/2 = 77^\circ\text{C}$, are:

$$\begin{aligned} \nu &= 2.076 \times 10^{-5} \text{ m}^2/\text{s} & \text{Pr} &= 0.697 \\ k &= 0.03003 \text{ W/m}\cdot\text{K} & \beta &= 1/T = 1/350 = 2.857 \times 10^{-3} \text{ K}^{-1} \end{aligned}$$

Evaluating the Grashof number, where the characteristic length L is the diameter of the sphere, gives

$$\begin{aligned}\mathbf{Gr}_L &= \frac{g\beta(T_s - T_\infty)D^3}{\nu^2} \\ &= \frac{(9.80 \text{ m/s}^2)(2.857 \times 10^{-3} \text{ K}^{-1})(100 \text{ K})(0.050 \text{ m})^3}{(2.076 \times 10^{-5})^2 \text{ m}^4/\text{s}^2} = 8.1 \times 10^5\end{aligned}$$

Equation (8.28) governs when the appropriate constants are chosen from Table 8-3; hence,

$$\begin{aligned}\frac{\bar{h}D}{k} &= (0.60)(\mathbf{Gr}_L \mathbf{Pr})^{1/4} \\ \bar{h} &= \frac{0.03003 \text{ W/m}\cdot\text{K}}{0.050 \text{ m}} (0.60)[(8.1 \times 10^5)(0.697)]^{1/4} = 9.87 \text{ W/m}^2\cdot\text{K}\end{aligned}$$

The heat transfer is

$$q = \bar{h}A(T_s - T_\infty) = \left(9.87 \frac{\text{W}}{\text{m}^2\cdot\text{K}}\right) \pi(0.050 \text{ m})^2(100 \text{ K}) = 7.75 \text{ W}$$

The percentage lost by free convection is, therefore,

$$\frac{7.75}{40}(100\%) = 19.37\%$$

This result is of the same order of magnitude as that obtained for the same configuration in forced convection (Problem 7.15). In such cases, both free and forced convection should be considered, as in Section 8.4.

- 8.9.** What heat load is generated in a restaurant by a 1.0 m by 0.8 m grill which is maintained at 134 °C? The room temperature is 20 °C.

The appropriate parameters from Table B-4 (SI), evaluated at the mean film temperature,

$$T_f = \frac{T_s + T_\infty}{2} = 77 \text{ }^\circ\text{C}$$

are:

$$\begin{aligned}\nu &= 2.076 \times 10^{-5} \text{ m}^2/\text{s} \\ k &= 0.03003 \text{ W/m}\cdot\text{K} \\ \mathbf{Pr} &= 0.697\end{aligned}$$

For air, $\beta = 1/T = 1/350 = 2.857 \times 10^{-3} \text{ K}^{-1}$, and the Grashof number is

$$\mathbf{Gr}_L = \frac{g\beta(T_s - T_\infty)L^3}{\nu^2}$$

where $L = 0.9 \text{ m}$, the average of the lengths of the two edges.

$$\mathbf{Gr}_L = \frac{(9.80 \text{ m/s}^2)(2.857 \times 10^{-3} \text{ K}^{-1})(114 \text{ K})(0.9 \text{ m})^3}{(2.076 \times 10^{-5})^2 \text{ m}^4/\text{s}^2} = 5.40 \times 10^9$$

Therefore, using (8.28), with the constants from Table 8-3 for a heated plate facing up, we get

$$\frac{\bar{h}L}{k} = (0.14)(\mathbf{Gr}_L \mathbf{Pr})^{1/3}$$

and

$$\bar{h} = \frac{0.03003 \text{ W/m}\cdot\text{K}}{0.9 \text{ m}} (0.14)[(5.38 \times 10^9)(0.697)]^{1/3} = 7.27 \text{ W/m}^2\cdot\text{K}$$

This gives a heat transfer of

$$q = \bar{h}A(T_s - T_\infty) = \left(7.27 \frac{\text{W}}{\text{m}^2 \cdot \text{K}}\right) [(1.0 \times 0.8) \text{ m}^2] (114 \text{ K}) = 663 \text{ W}$$

- 8.10.** What electrical power is required to maintain a 0.076 mm diameter, 0.6 m long vertical wire at 400 K in an atmosphere of quiescent air at 300 K? The wire's resistance is 0.0118 ohms per meter.

At a mean film temperature $T_f = (T_s + T_\infty)/2 = 350 \text{ K}$, fluid properties from Table B-4 (SI) are:

$$\begin{aligned} \nu &= 20.76 \times 10^{-6} \text{ m}^2/\text{s} & \text{Pr} &= 0.697 \\ k &= 0.03003 \text{ W/m} \cdot \text{K} & \beta &= 1/T = 1/350 = 0.00286 \text{ K}^{-1} \end{aligned}$$

The characteristic length for the wire is its diameter, giving

$$\begin{aligned} \text{Gr}_D &= \frac{g\beta(T_s - T_\infty)D^3}{\nu^2} \\ &= \frac{(9.8 \text{ m/s}^2)(0.00286 \text{ K}^{-1})(400 - 300 \text{ K})[0.076/10^3 \text{ m}]^3}{(20.76 \times 10^{-6})^2 \text{ m}^4/\text{s}^2} = 2.855 \times 10^{-3} \end{aligned}$$

The parameter required for using Fig. 8-5 is

$$\text{Gr}_D \text{Pr} \frac{D}{L} = (2.855 \times 10^{-3})(0.697) \left(\frac{0.076 \times 10^{-3}}{0.6}\right) = 2.52 \times 10^{-7}$$

and

$$\log \left(\text{Gr}_D \text{Pr} \frac{D}{L} \right) = -6.60$$

From Fig. 8-5,

$$\overline{\text{Nu}}_D = \frac{\bar{h}D}{k} \approx 0.37$$

where

$$\bar{h} \approx (0.37) \left(\frac{0.03003 \text{ W/m} \cdot \text{K}}{0.076 \times 10^{-3} \text{ m}} \right) = 146 \text{ W/m}^2 \cdot \text{K}$$

The ohmic power loss is given by $I^2 R = q = \bar{h}A(T_s - T_\infty)$. Thus

$$\begin{aligned} I^2 R &= (146 \text{ W/m}^2 \cdot \text{K}) [\pi(0.076 \times 10^{-3} \text{ m})(0.6 \text{ m})] (400 - 300) \text{ K} \\ &= 2.09 \text{ W} \end{aligned}$$

- 8.11.** Atmospheric air is between two parallel, vertical plates separated by 2.5 cm. The plates, which are 1.8 m high and 1.2 m wide, are at temperatures of 50 °C and 4 °C, respectively. Estimate the heat transfer across the air space.

Evaluating the fluid properties at the average temperature of the two plates, 300 K, we have, using Table B-4 (SI)

$$\nu = 15.68 \times 10^{-6} \text{ m}^2/\text{s} \quad k = 0.02624 \text{ W/m} \cdot \text{K}$$

and

$$\beta = 1/T = 1/300 = 3.33 \times 10^{-3} \text{ K}^{-1}$$

The Grashof number is based upon the thickness between the plates:

$$\begin{aligned} \text{Gr}_b &= \frac{g\beta(T_1 - T_2)b^3}{\nu^2} \\ &= \frac{(9.8 \text{ m/s}^2)(3.33 \times 10^{-3} \text{ K}^{-1})[(50 - 4)^\circ\text{C}](0.025 \text{ m})^3}{(15.68 \times 10^{-6} \text{ m}^2/\text{s})^2} = 9.54 \times 10^4 \end{aligned}$$

and (8.36) gives the heat transfer coefficient, i.e.,

$$\overline{\text{Nu}}_b \equiv \frac{\bar{h}b}{k} = (0.18) \text{Gr}_b^{1/4} \left(\frac{L}{b}\right)^{-1/9}$$

where

$$\bar{h} = \frac{0.02624 \text{ W/m}\cdot\text{K}}{0.025 \text{ m}} (0.18)(9.54 \times 10^4)^{1/4} \left[\frac{1.8 \text{ m}}{0.025 \text{ m}}\right]^{-1/9} = 2.06 \text{ W/m}^2\cdot\text{K}$$

The heat transfer is given by (8.29):

$$q = \bar{h}A(T_1 - T_2) = (2.06 \text{ W/m}^2\cdot\text{K})(2.16 \text{ m}^2)[(50 - 4)^\circ\text{C}] = 204 \text{ W}$$

- 8.12.** Air at 344 700 N/m² is contained between two concentric spheres having radii of 10 cm and 7.5 cm. Estimate the heat transfer when the inner sphere is at 322 K and the outer sphere is at 278 K.

The required parameters may be determined using the data from Table B-4 (SI) when the properties are evaluated at the average temperature, 300 K.

$$\mu_m = 1.846 \times 10^{-5} \text{ kg/m}\cdot\text{s} \quad k = 0.02624 \text{ W/m}\cdot\text{K} \quad \rho_1 = 1.1774 \text{ kg/m}^3$$

Since the air is above atmospheric pressure, the density is given by

$$\frac{\rho}{\rho_1} = \frac{p}{p_1}; \quad e = \frac{344700 \text{ N/m}^2}{101325 \text{ N/m}^2} (1.1774 \text{ kg/m}^3) = 4.005 \text{ kg/m}^3$$

which gives a kinematic viscosity of

$$\nu = \frac{\mu_m}{\rho} = \frac{1.846 \times 10^{-5} \text{ kg/m}\cdot\text{s}}{4.005 \text{ kg/m}^3} = 4.610 \times 10^{-6} \text{ m}^2/\text{s}$$

The coefficient of volume expansion is the reciprocal of absolute temperature, i.e.,

$$\beta = 1/T = 1/300 \text{ K} = 3.33 \times 10^{-3} \text{ K}^{-1}$$

For this configuration the Grashof number is based upon the gap spacing, $b = r_o - r_i$:

$$\begin{aligned} \text{Gr}_b &= \frac{g\beta(T_1 - T_2)b^3}{\nu^2} \\ &= \frac{(9.8 \text{ m/s}^2)(3.33 \times 10^{-3} \text{ K}^{-1})[(322 - 278) \text{ K}](0.025 \text{ m})^3}{(4.610 \times 10^{-6})^2 \text{ m}^4/\text{s}^2} = 1.056 \times 10^6 \end{aligned}$$

The effective thermal conductivity, k_e , is determined from (8.40) ($b/r_i = 0.33$).

$$\begin{aligned} k_e &= k(0.106) \text{Gr}_b^{0.276} \\ &= (0.02624 \text{ W/m}\cdot\text{K})(0.106)(10.56 \times 10^5)^{0.276} = 0.1279 \text{ W/m}\cdot\text{K} \end{aligned}$$

The heat transfer is then given by (8.41):

$$\begin{aligned} q &= \frac{4\pi k_e r_i r_o}{r_o - r_i} (T_1 - T_2) \\ &= \frac{4\pi(0.1279 \text{ W/m}\cdot\text{K})(0.075 \text{ m})(0.1 \text{ m})}{(0.1 - 0.075) \text{ m}} (322 - 278) \text{ K} = 21.21 \text{ W} \end{aligned}$$

- 8.13.** Atmospheric air passes through a 20 mm diameter horizontal tube at an average velocity of 30 mm/s. The tube is maintained at 127 °C, and the bulk temperature of the air is 27 °C. Estimate the heat transfer if the tube is 1 m long.

For the bulk temperature, we get the fluid properties from Table B-4 (Engl.).

$$\begin{aligned} \nu &= (16.88 \times 10^{-5})(0.0929) = 1.568 \times 10^{-5} \text{ m}^2/\text{s} & \text{Pr} &= 0.708 \\ k &= (0.01516)(1.729) = 0.0262 \text{ W/m}\cdot\text{K} & \mu &= (1.241 \times 10^{-5})(1.488) \\ & & &= 1.847 \times 10^{-5} \text{ kg/m}\cdot\text{s} \end{aligned}$$

and

$$\beta = 1/T = 1/300 = 3.33 \times 10^{-3} \text{ K}^{-1}$$

At the wall the viscosity is

$$\mu_s = (1.536 \times 10^{-5})(1.488) = 2.286 \times 10^{-5} \text{ kg/m}\cdot\text{s}$$

In order to determine the regime of interest, we need the Reynolds and Grashof numbers.

$$\begin{aligned} \text{Re}_D &= \frac{VD}{\nu} = \frac{(0.030 \text{ m/s})(0.020 \text{ m})}{1.568 \times 10^{-5} \text{ m}^2/\text{s}} = 38.28 \\ \text{Gr}_D &= \frac{g\beta(T_s - T_b)D^3}{\nu^2} \\ &= \frac{(9.80 \text{ m/s}^2)(3.33 \times 10^{-3} \text{ K}^{-1})[(127 - 27) \text{ K}](0.020 \text{ m})^3}{(1.568 \times 10^{-5} \text{ m}^2/\text{s})^2} = 1.06 \times 10^5 \end{aligned}$$

and

$$\text{Gr}_D \text{Pr} \frac{D}{L} = (1.06 \times 10^5)(0.708) \left(\frac{0.020}{1} \right) = 1504$$

Using these parameters, we see from Fig. 8-11 that the flow is laminar, mixed convection; Oliver's equation will be used to evaluate the Nusselt number. The Graetz number is, from (8.46),

$$\text{Gz} = \text{Re}_D \text{Pr} \frac{D}{L} = (38.28)(0.708) \left(\frac{0.020}{1} \right) = 0.542$$

Thus,

$$\overline{\text{Nu}}_D = \frac{\bar{h}D}{k} = (1.75) \left[\frac{1.847 \times 10^{-5}}{2.286 \times 10^{-5}} \right]^{0.14} \{0.542 + (0.0083)[(1.06 \times 10^5)(0.708)]^{0.75}\}^{1/3} = 5.72$$

and

$$\bar{h} = \frac{k}{D} (5.72) = \frac{0.0262 \text{ W/m}\cdot\text{K}}{0.020 \text{ m}} (5.72) = 7.49 \text{ W/m}^2\cdot\text{K}$$

The heat transfer for a length of 1 m is given by

$$q = \bar{h}A(T_s - T_b) = \left(7.49 \frac{\text{W}}{\text{m}^2\cdot\text{K}} \right) [\pi(0.020 \text{ m})(1 \text{ m})][(127 - 27) \text{ K}] = 47.1 \text{ W}$$

As a matter of interest, we might compare the result for \bar{h} with that obtained from the equation given in Fig. 8-11 for the forced convection, laminar regime.

$$\begin{aligned} \overline{\text{Nu}}_D &= \frac{\bar{h}D}{k} = (1.86) \text{Gz}^{1/3} \left(\frac{\mu_b}{\mu_s} \right)^{0.14} \\ \bar{h} &= \frac{0.0262 \text{ W/m}\cdot\text{K}}{0.020 \text{ m}} (1.86)(0.542)^{1/3} \left(\frac{1.847 \times 10^{-5}}{2.286 \times 10^{-5}} \right)^{0.14} = 1.93 \text{ W/m}^2\cdot\text{K} \end{aligned}$$

Therefore, if the calculation were made on the basis of forced convection, laminar flow alone, the result would be highly erroneous.

- 8.14.** A large fireplace in a ski lodge has a glass firescreen which covers a vertical opening in the fireplace. The opening is 1.2 m high and 2.50 m wide. Its surface temperature is 230 °C and the ambient air temperature is 24 °C. Determine the convective rate of heat transfer from the fireplace to the room.

The film temperature is $(24 + 230)^\circ\text{C}/2 = 400\text{ K}$. The air properties are, at $T_f = 400\text{ K}$,

$$k = 0.03365\text{ W/m}\cdot\text{K} \quad \beta = 1/T = 1/400\text{ K} = 2.50 \times 10^{-3}\text{ K}^{-1}$$

$$\nu = 25.90 \times 10^{-6}\text{ m}^2/\text{s} \quad \text{Pr} = 0.689$$

To apply Newton's law of cooling, $q = \bar{h}A_s(T_s - T_\infty)$, we will determine \bar{h} by use of eq. (8.48) or (8.49), depending upon whether the flow is laminar or turbulent.

The Grashof number is

$$\text{Gr}_L = \frac{g\beta(T_s - T_\infty)(L)^3}{\nu^2}$$

$$= \frac{(9.8\text{ m/s}^2)(2.50 \times 10^{-3}\text{ K}^{-1})(230 - 24)^\circ\text{C}(1.2\text{ m})^3}{(25.9 \times 10^{-6}\text{ m}^2/\text{s})^2}$$

$$= 1.30 \times 10^{10}$$

The Rayleigh number is

$$\text{Ra}_L = \text{Gr}_L \text{Pr} = (1.30 \times 10^{10})(0.689) = 8.97 \times 10^9$$

This indicates that the flow is partly turbulent with transition laminar to turbulent occurring on the glass plate. (The reader should note that the flow becomes turbulent at approximately 0.47 m from the bottom.) Thus, the most appropriate of the recent correlations is eq. (8.48). Proceeding,

$$\overline{\text{Nu}}_L = \left\{ 0.825 + \frac{0.387(8.97 \times 10^9)^{1/6}}{[1 + (0.492/0.689)^{9/16}]^{8/27}} \right\}^2 = 242.7$$

$$\bar{h} = \frac{\overline{\text{Nu}}_L \cdot k}{L} = \frac{(243)(0.03365\text{ W/m}\cdot\text{K})}{1.2\text{ m}} = 6.81\text{ W/m}^2\cdot\text{K}$$

and

$$q = (6.81\text{ W/m}^2\cdot\text{K})(1.2 \times 2.5)\text{ m}^2(230 - 24)^\circ\text{C} = 4208\text{ W}$$

- 8.15.** Repeat Problem 8.14 using eq. (8.28) and Table 8-3. By Table 8-3 the correlation eq. (8.28) requires $C = 0.13$ and $a = 1/3$ for turbulent flow along a vertical surface. Hence,

$$\overline{\text{Nu}}_L = 0.13(\text{Gr}_L \text{Pr})^{1/3}$$

From Problem 8.14, $\text{Gr}_L = 1.30 \times 10^{10}$ and $\text{Pr} = 0.689$. Hence,

$$\overline{\text{Nu}}_L = 0.13(1.30 \times 10^{10} \times 0.689)^{1/3} = 270$$

Then

$$\bar{h} = \frac{\overline{\text{Nu}}_L \cdot k}{L} = 270 \frac{(0.03365\text{ W/m}\cdot\text{K})}{1.2\text{ m}}$$

$$= 7.57\text{ W/m}^2\cdot\text{K}$$

so,

$$q = \bar{h}A_s(T_s - T_\infty)$$

$$= (7.57\text{ W/m}^2\cdot\text{K})(1.2 \times 2.5)\text{ m}^2(230 - 24)^\circ\text{C}$$

$$= 4678\text{ W}$$

This is 11% higher than the result obtained with eq. (8.48). The difference is within the accuracy of these correlation equations. The result in Problem 8.14 is very probably more accurate and should be so considered.

- 8.16.** A long, horizontal, pressurized hot water pipe of 15 cm diameter passes through a room where the air temperature is 24 °C. The pipe surface temperature is 130 °C and the emissivity of the surface is 0.95. Neglecting radiation loss from the pipe, what is the rate of the heat transfer to the room air per meter of pipe length.

The air properties at $T_f = (T_s + T_\infty)/2 = 350$ K are, from Table B-4 (SI),

$$k = 0.03003 \text{ W/m}\cdot\text{K} \quad \text{Pr} = 0.697$$

$$\nu = 20.76 \times 10^{-6} \text{ m}^2/\text{s} \quad \beta = 1/T = 1/350 \text{ K} = 0.00286 \text{ K}^{-1}$$

The Grashof number is

$$\text{Gr}_D = \frac{g\beta(T_s - T_\infty)D^3}{\nu^2}$$

$$= \frac{(9.8 \text{ m/s}^2)(0.00286 \text{ K}^{-1})(130 - 24)^\circ\text{C}(0.15 \text{ m})^3}{(20.76 \times 10^{-6} \text{ m}^2/\text{s})^2}$$

$$= 2.33 \times 10^7$$

and the Ra_D number is

$$\text{Ra}_D = \text{Gr}_D \text{Pr} = 2.33 \times 10^7 \times 0.697 = 1.62 \times 10^7$$

This problem has laminar flow over the entire cylinder. Then the Churchill–Chu equation (8.47) applies and

$$\overline{\text{Nu}}_D = \left\{ 0.60 + \frac{0.387\text{Ra}_D^{1/6}}{[1 + (0.559/\text{Pr})^{9/16}]^{1/4}} \right\}^2$$

$$= \left\{ 0.60 + \frac{0.387(1.62 \times 10^7)^{1/6}}{[1 + (0.559/0.697)^{9/16}]^{1/4}} \right\}^2 = 32.53$$

Thus,

$$\bar{h} = \frac{k}{D} \overline{\text{Nu}}_D = \frac{0.03003 \text{ W/m}\cdot\text{K}}{0.15 \text{ m}} (32.53)$$

$$= 6.51 \text{ W/m}^2\cdot\text{K}$$

The heat loss per meter of length, q' , is

$$q' = \bar{h}A_s'(T_s - T_\infty)$$

$$= (6.51 \text{ W/m}^2\cdot\text{K})(\pi \times 0.15 \text{ m})(130 - 24)^\circ\text{C}$$

$$= 325 \text{ W/m}$$

Supplementary Problems

- 8.17.** For an ideal gas having the equation of state $p = \rho RT$, show that the coefficient of volume expansion is $1/T$.
- 8.18.** Using the empirical equation (8.28) for turbulent flow on a vertical flat plate, show that the heat transfer coefficient is independent of plate height L .

- 8.19.** For film properties evaluated at 127°C , estimate the temperature difference ($T_s - T_\infty$) required to lose 4 W by natural convection from a 120 mm diameter sphere to surrounding air. *Ans.* 17.75°C
- 8.20.** The front panel of a dishwasher is at 95°F during the drying cycle. What is the rate of heat gain by the room, which is maintained at 65°F ? The panel is 2.5 ft square. *Ans.* 108.9 Btu/h using (8.28)
- 8.21.** An uninsulated 10.75 in o.d. steam line passes through a 9 ft high room in which the air is at 120°F . What is the heat loss per foot of pipe if its surface is at 760°F when (a) horizontal, (b) vertical?
Ans. (a) 2193 Btu/h·ft; (b) 2394 Btu/h·ft using (8.28)

Boiling and Condensation

This chapter deals with the two most common *phase change processes*: vaporization and its inverse, condensation. As in simple convection, a heat transfer coefficient h is used to relate the heat flux to the temperature differential between the heating surface and the saturated liquid.

$$q = hA(T_s - T_{\text{sat}}) \quad (9.1)$$

However, since phase change processes involve changes in density, viscosity, specific heat, and thermal conductivity of the fluid, while the fluid's latent heat is either liberated (condensation) or absorbed (vaporization), the heat transfer coefficient for boiling and condensation is much more complicated than that for single-phase convective processes. Because of this, most engineering calculations involving boiling and condensation are made from empirical correlations.

9.1 BOILING PHENOMENA

Consider a pool of fluid being heated from below, e.g., by a submerged wire. For low rates of heat addition, vapor will be formed at the free surface. As the heat flux increases, bubbles form at the heater surface and change in size while rising through the fluid, in addition to the free-surface vaporization. This bubble formation, with its attendant agitation, is called *boiling*, or *ebullition*.

The behavior of the fluid during boiling is highly dependent upon the *excess temperature*, $\Delta T = T_s - T_{\text{sat}}$, measured from the boiling point of the fluid. Figure 9-1 indicates six different regimes for typical *pool boiling*; the heat flux curve is commonly called the *boiling curve*.

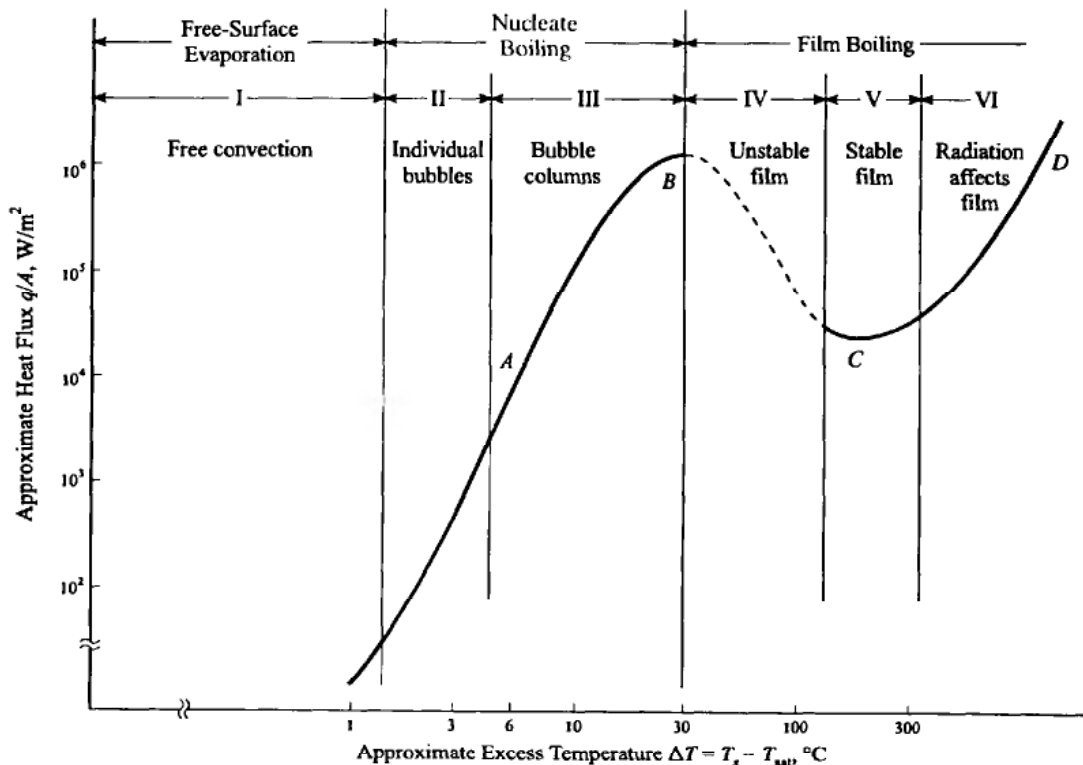


Fig. 9-1. Horizontal Chromel C 0.10 cm diameter heating wire in water at 1 atm.

Regime I. Heat is transferred by free convection, described in detail in Chapter 8.

Regime II. Bubbles begin to appear at the heating surface and rise to the free surface individually.

Regime III. The boiling action becomes so vigorous that individual bubbles combine with others very rapidly to form a vapor bubble column reaching to the free surface.

Regime IV. Bubbles form so rapidly that they blanket the heating surface, preventing fresh fluid from moving in to take their place. The increased resistance of this film reduces the heat flux, and the heat transfer decreases with increasing temperature differential. Because the film intermittently collapses and reappears, this regime is very unstable.

Regime V. The film on the heater surface becomes stable. As ΔT reaches about 1000 °F, radiant heat transfer comes into play—in fact, becomes predominant—and the heat flux again rises with increasing ΔT .

Regime VI. Radiation from the heater surface becomes significant.

The peak heat flux, point *B*, is called the *burnout point*. It is the condition at which the increased heat flux produced by a rise in ΔT is offset by the increased resistance of the vapor blanket around the heater. The two effects balance, producing what is sometimes called the *boiling crisis*, *burnout*, or *departure from nucleate boiling*. For many common fluids, the temperature at *D* is above the melting point of most heater materials, and failure of the heater occurs before reaching it. If the heater does not melt, the boiling curve continues to rise beyond point *D*.

As boiling is predominantly a local phenomenon, the heat transfer coefficient *h* is normally given without the overbar, as in (9.1). Most applications, however, require an average heat flux. Since burnout of heating elements is a common problem in boiling, and since the largest heat flux is a local quantity for a given regime, the local value is the one that should be used in design, being the conservative value.

9.2 POOL BOILING

Free Convection (Regime I)

Using the general equation (8.28), the heat transfer in this regime is given by

$$\frac{q}{A} = C \frac{k}{L} (\text{Gr}_L \text{Pr})^a (T_s - T_b) \quad (9.2)$$

where T_b is the bulk temperature, and where the constants *a* and *C* are taken from Table 8-3. Since $\text{Gr}_L \equiv g\beta(T_s - T_b)L^3/\nu^2$ and since the exponent *a* is usually 1/4 for laminar flow and 1/3 for turbulent flow, the heat transfer in this regime varies with ΔT to the 5/4 power for laminar flow, 5/3 for turbulent.

Nucleate Boiling (Regimes II and III)

The most commonly accepted general correlation for heat transfer in the nucleate boiling regimes is that due to W. M. Rohsenow [*Trans. ASME*, 74: 969 (1952)].

$$\frac{q}{A} = \mu_l h_{fg} \sqrt{\frac{g(\rho_l - \rho_v)}{g_c \sigma}} \left[\frac{c_l(T_s - T_{sat})}{h_{fg} \text{Pr}_l^{1.7} C_{sf}} \right]^3 \quad (9.3)$$

- where c_l = specific heat of saturated liquid, J/kg·K or Btu/lb_m·°F
 C_{sf} = surface-fluid constant
 g = local gravitational acceleration, m/s² or ft/s²
 g_c = constant of proportionality, 1.0 kg·m/N·s² or 32.17 lb_m·ft/lb_f·s²
 h_{fg} = enthalpy of vaporization, J/kg or Btu/lb_m
 Pr_l^n = Prandtl number of saturated liquid ($n = 1.0$ for water, 1.7 for most other fluids)
 q/A = heat flux per unit area, W/m² or Btu/h·ft²
 $T_s - T_{sat}$ = excess temperature, K or °F
 μ_l = liquid viscosity, kg/m·s or lb_m/ft·h
 σ = surface tension, N/m or lb_f/ft
 ρ_l = density of saturated liquid, kg/m³ or lb_m/ft³
 ρ_v = density of saturated vapor, kg/m³ or lb_m/ft³

Note: In the above, and throughout this chapter, μ denotes the mass-based viscosity coefficient. Subscripts l and v refer to the liquid and vapor states, respectively.

The surface-fluid constant which is a function of the surface roughness (number of nucleating sites) and the angle of contact between the bubble and the heating surface, ranges from 0.0025 to 0.015 (from the literature). Values of surface tension σ of some common fluids are given in Fig. 9-2. Many values of C_{sf} are reported in the boiling heat transfer literature. For water,

$$\sigma = (0.00528)(1 - 0.0013T) \tag{9.4}$$

where T is in °F and σ is in lb_f/ft. It should be noted that *the heat flux in the nucleate boiling regimes is proportional to the cube of ΔT .*

Peak heat flux. At the point of maximum heat transfer (point B of Fig. 9-1), the recommended correlation is

$$\frac{q}{A} \Big|_{\max} = (0.149) \rho_v h_{fg} \left[\frac{\sigma(\rho_l - \rho_v) g g_c}{\rho_v^2} \right]^{1/4} \left[\frac{\rho_l}{\rho_l + \rho_v} \right]^{1/2} \approx 1.0 \tag{9.5}$$

Observe that the peak heat flux is independent of the heating element, and the last term in this equation is usually unity.

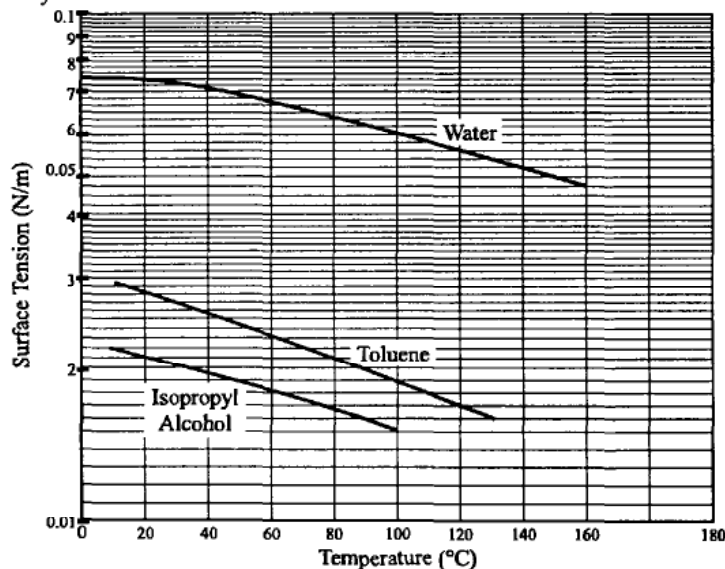


Fig. 9-2

Film Boiling (Regimes IV, V, and VI)

Horizontal tube. From a study of conduction through the film on a heated tube and radiation from the tube, L. A. Bromley [*Chem. Eng. Prog.* 46: 221 (1950)] proposed that the boiling heat transfer coefficient in these regimes be given by

$$h = h_c \left(\frac{h_c}{h} \right)^{1/3} + h_r \quad (9.6)$$

$$h_c = (0.62) \left[\frac{k_{vf}^3 \rho_{vf} (\rho_l - \rho_{vf}) g (h_{fg} + 0.4 c_{pvf} \Delta T)}{D \mu_{vf} \Delta T} \right]^{1/4} \quad (9.7)$$

$$h_r = \frac{\sigma \epsilon (T_s^4 - T_{sat}^4)}{T_s - T_{sat}} \quad (9.8)$$

In (9.8) σ is the Stefan-Boltzmann constant and ϵ is the emissivity of the surface. In (9.7), D is the outside diameter of the tube, and, as indicated by the additional subscript f , vapor properties are taken at the mean film temperature, $T_f = (T_s + T_{sat})/2$.

Equation (9.6) is difficult to use since h is in it implicitly. The following explicit equations are much simpler when the inherent approximation errors and ranges are acceptable, which is the case in most problems of engineering interest.

$$\begin{aligned} \pm 0.3\%: \quad h &= h_c + h_r \left[\frac{3}{4} + \frac{1}{4} \frac{h_r}{h_c} \left(\frac{1}{2.62 + (h_r/h_c)} \right) \right] \quad \left(0 < \frac{h_r}{h_c} < 10 \right) \\ \pm 5\%: \quad h &= h_c + \frac{3}{4} h_r \quad \left(\frac{h_r}{h_c} < 1 \right) \end{aligned} \quad (9.9)$$

Vertical tube. For vertical tubes, Y. Y. Hsu and J. W. Westwater [*Chem. Eng. Progress, Symp. Series*, 56, Storrs Conn.; 15 (1959)] proposed the correlation

$$h = (0.0020) \text{Re}^{0.6} \left[\frac{g \rho_v (\rho_l - \rho_v) k_v^3}{\mu_v^2} \right]^{1/3} \quad (9.10)$$

where

$$\text{Re} \equiv \frac{4\dot{m}}{\pi D \mu_v} \quad (9.11)$$

and \dot{m} is the vapor mass flow rate at the upper end of the tube. For like conditions, the rate of heat transfer is greater for vertical than for horizontal tubes.

Horizontal plane. Verified for boiling in pentane, carbon tetrachloride, benzene, and ethyl alcohol, the following correlation is due to P. Berenson [*Trans. ASME, J. Heat Transfer* 83: 351 (1961)]:

$$\blacksquare \quad h = (0.425) \left[\frac{k_v^3 \rho_v (\rho_l - \rho_v) g (h_{fg} + 0.4 c_{pv} \Delta T)}{\mu_v \Delta T \sqrt{\sigma g_c} g (\rho_l - \rho_v)} \right]^{1/4} \quad (9.12)$$

where σ once again denotes the surface tension. The similarity between this result and (9.7) should be noted.

Minimum heat flux. Using the hydrodynamic instability of the liquid-vapor boundary, N. Zuber and M. Tribus [University of California, Los Angeles, Dept. Engineering Report 85-5 (1958)] found the following equation for the minimum heat flux in film boiling (point C of Fig. 9-1).

$$\blacksquare \quad \frac{q}{A} \Big|_{\min} = (0.09) \rho_{vf} h_{fg} \left[\frac{g (\rho_l - \rho_{vf})}{\rho_l + \rho_{vf}} \right]^{1/2} \left[\frac{g_c \sigma}{g (\rho_l - \rho_{vf})} \right]^{1/4} \quad (9.13)$$

Based upon the Zuber-Tribus analysis, Berenson [op. cit.] found an expression for the excess temperature ΔT at the point of minimum heat flux (point C), viz.

$$\Delta T_C = 0.127 \frac{\rho_v h_{fg}}{k_{vf}} \left[\frac{g(\rho_l - \rho_v)}{\rho_l + \rho_v} \right]^{2/3} \left[\frac{g_c \sigma}{g(\rho_l - \rho_v)} \right]^{1/2} \left[\frac{\mu_f}{g_0(\rho_l - \rho_v)} \right]^{1/3} \quad (9.14)$$

Properties designated by a subscript f in (9.13) and (9.14) are evaluated at the mean film temperature, $T_f = (T_s + T_{sat})/2$; g_0 is the earth's standard gravitation, 32.17 ft/s² or 9.81 m/s².

9.3 FLOW (CONVECTION) BOILING

Flow Boiling Characteristics

Flow boiling may occur when a liquid flows through a passage or over a surface which is maintained at a higher temperature than the saturation temperature of the liquid. The flow is a two-phase mixture of the liquid and its vapor.

Figure 9-3(a) shows a vertical-tube evaporator. A subcooled liquid enters the evaporator, passing over the hotter wall where local nucleate boiling occurs. The flow is bubbly when there is less than about 10% vapor. With an increase in bubble agitation, there is an increase in the heat transfer

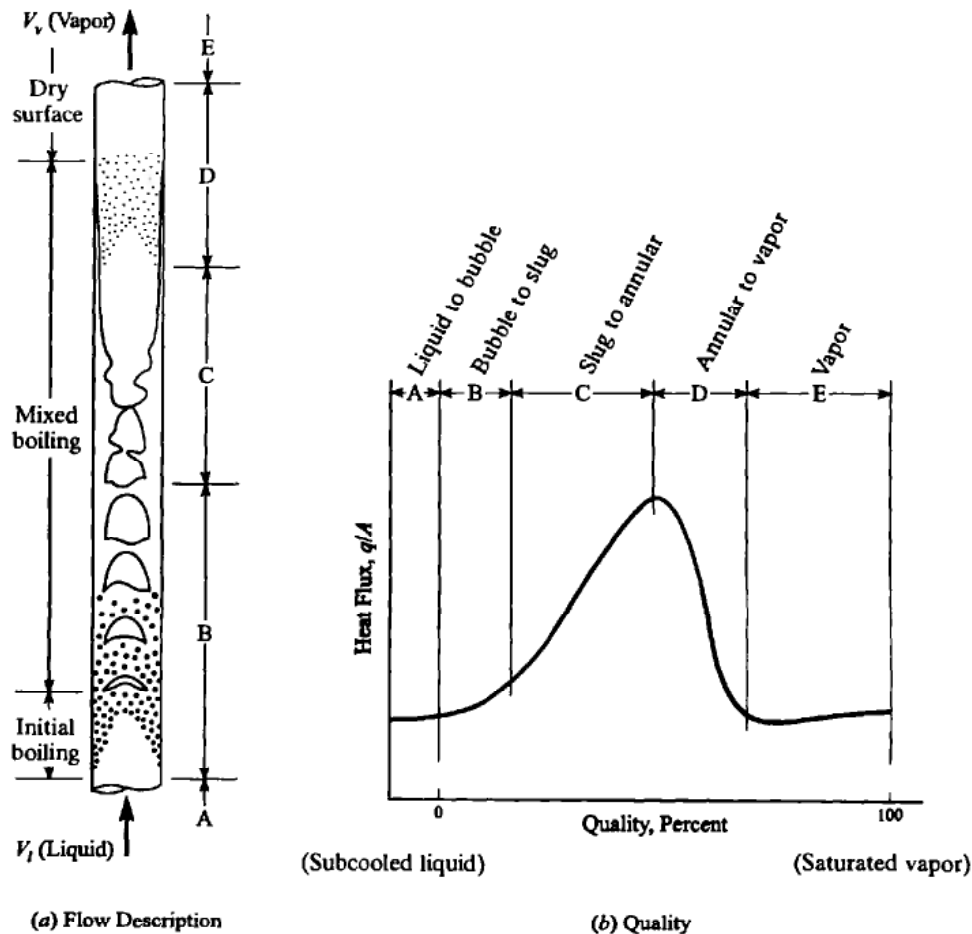


Fig. 9-3. Description of flow and quality inside a vertical tube evaporator.

coefficient. At higher qualities the flow becomes annular, with a thin liquid layer on the wall and a vapor core. The velocity of the vapor is much higher than that of the liquid. Heat is transferred through the film by conduction, and vaporization takes place at the liquid–vapor interface primarily, although some bubbles still form at the wall.

In the transition from annular to vapor (also called *mist* or *fog*) flow, the heat transfer coefficient drops sharply. Burnout sometimes occurs at this transition because a liquid film of high thermal conductivity is replaced by a low-thermal-conductivity vapor at the wall. Vapor flow continues until the quality reaches 100%, after which the heat transfer coefficient may be determined by the appropriate equations for forced convection, Chapters 6 and 7, using vapor properties.

A simplified approach for determination of the heat transfer in flow boiling is to sum the convective effect, either forced or natural convection without boiling, and the boiling effect.

$$\frac{q}{A} = \frac{q}{A} \Big|_{\text{conv}} + \frac{q}{A} \Big|_{\text{bo}} \quad (9.15)$$

Here $(q/A)_{\text{conv}} = \bar{h}(T_s - T_b)$, where T_b is the bulk temperature, and \bar{h} is given by the appropriate relations of Chapters 6 and 7. The heat transfer due to boiling, $(q/A)_{\text{bo}}$, is given by the relations of Section 9.2, where convection is absent.

Nucleate Boiling

Figure 9-4 shows the boiling curve for a submerged heating wire, with the effects of convection superimposed upon it in the nucleate boiling regimes. The fully developed flow boiling curve tends to become asymptotic to a projection of the nonflow boiling curve. The forced convection effects, as

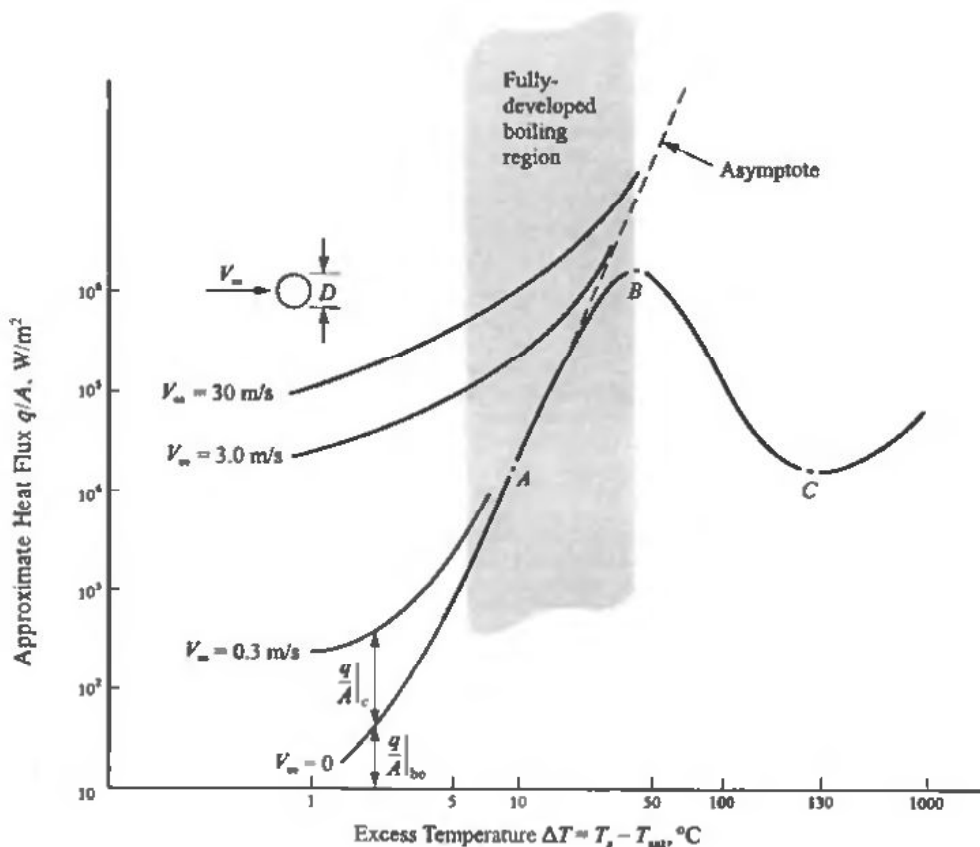


Fig. 9-4. Heat flux as a function of excess temperature for forced convection imposed on nucleate boiling.

shown in the figure, were determined by the use of (7.51b) for normal liquid flow at V_∞, T_∞ across a single cylinder at T_s .

In the fully developed boiling region, little heat is transferred by forced convection. In this region, the heat flux for subcooled water inside tubes is given by (English units only):

$$\frac{q}{A} = (0.074)(\Delta T)^{3.86} \quad (30 < p < 90 \text{ psia}) \quad (9.16)$$

or, for higher pressures,

$$\frac{q}{A} = \frac{p^{4/3}}{495} (\Delta T)^3 \quad (100 < p < 2000 \text{ psia}) \quad (9.17)$$

Peak heat flux. For water flowing in a pipe of diameter D and length L , a simplified correlation for burnout heat flux was developed by W. K. Lowdermilk, C. D. Lanzo, and B. L. Siegel [*NACA Tech. Note 4382* (1958)]. Their result, valid for the full range of quality and for inlet subcooling from 0 to 140 °F, is (English units only):

$$\text{low velocity, high quality: } \frac{q}{A} \Big|_{\max} = \frac{270(\rho V)^{0.85}}{D^{0.2}(L/D)^{0.85}} \quad \left(1 < \frac{\rho V}{(L/D)^2} < 150\right) \quad (9.18)$$

$$\text{high velocity, low quality: } \frac{q}{A} \Big|_{\max} = \frac{1400(\rho V)^{0.50}}{D^{0.2}(L/D)^{0.15}} \quad \left(150 < \frac{\rho V}{(L/D)^2} < 10\,000\right) \quad (9.19)$$

with q/A in Btu/h·ft², ρ in lb_m/ft³, V in fps, L in inches and D in inches. The individual parameters in (9.18) and (9.19) are restricted to the ranges

$$\begin{aligned} 14.7 < p < 100 \text{ psia} & \quad 25 < L/D < 250 \\ 0.1 < V < 98 \text{ fps} & \quad 0.051 < D < 0.188 \text{ in} \end{aligned}$$

Film Boiling

For forced convection of a liquid flowing normally across horizontal tubes, formulas (9.6), (9.7), and (9.8) may be used when $V_\infty < \sqrt{gD}$. If $V_\infty > 2\sqrt{gD}$, (9.7) is replaced by

$$h_c = (2.7) \left[\frac{V_\infty k_{vf} \rho_{vf} (h_{fg} + 0.4c_{pf}\Delta T)}{D \Delta T} \right]^{1/2} \quad (9.20)$$

These laminar flow relations have been verified for benzene, carbon tetrachloride, ethanol, *n*-heptane; tube diameters from 0.387 to 0.637 in; and free-stream velocities from 0 to 14 fps.

9.4 CONDENSATION

Condensation, the inverse of boiling, occurs when a saturated vapor comes in contact with a surface at a lower temperature. The liquid collects on the surface, from which it drains under the influence of gravity or is carried off by the drag of the moving vapor. If the motion of the condensate is laminar, which is generally the case, heat is transferred from the vapor-liquid interface to the surface by conduction. The rate of heat transfer depends upon the thickness of the film, depicted for a vertical surface in Fig. 9-5. The film thickness depends upon the rate of condensation and the rate of removal of the condensate. For an inclined plate the drainage rate is lower, which increases the film thickness and decreases the rate of heat transfer.

Two distinct modes of condensation may occur, or they may occur together. The more common mode, *film condensation*, is characterized by a thin liquid film forming over the entire surface. This occurs on clean wettable surfaces in contact with noncontaminated vapors. *Dropletwise condensation* occurs on nonwetable surfaces, such as Teflon in the presence of water vapor. In this case minute

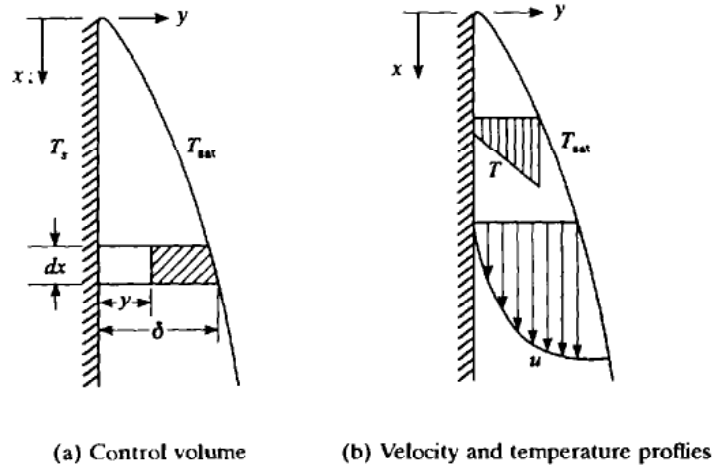


Fig. 9-5

drops of condensate form, growing in size until they are carried away by gravity or vapor motion. In dropwise condensation, a portion of the condenser surface is exposed to the vapor, making heat transfer rates much larger than those in film condensation.

Only film condensation will be treated in this book.

Laminar Film Condensation

Since most condenser surfaces are short and the film velocity is small, condensation is usually laminar film condensation. For this case the Nusselt analysis provides an insight into the mechanism of condensation.

Making a force balance on a unit depth of the shaded element of Fig. 9.5, neglecting inertia terms (low velocity), we get

$$\frac{1}{g_c} \mu_l \frac{du}{dy} dx = \frac{1}{g_c} g(\rho_l - \rho_v)(\delta - y) dx \quad (9.21)$$

The term on the left is the viscous shear force at y , and the term on the right is the difference between the weight and buoyancy forces. The underlying assumptions are: (1) linear temperature gradient in the film; (2) uniform surface temperature T_s ; (3) pure vapor at the saturation temperature T_{sat} ; and (4) negligible shear at the liquid-vapor interface, i.e., low velocity. For the no-slip boundary condition, $u = 0$ at $y = 0$, (9.21) integrates to give

$$u = \frac{g(\rho_l - \rho_v)}{\mu_l} \left(y\delta - \frac{y^2}{2} \right) \quad (9.22)$$

The condensate mass flow rate per unit depth, \dot{m}' , at any elevation x is given by

$$\dot{m}' = \int_0^\delta \rho_l u dy = \frac{\rho_l g(\rho_l - \rho_v) \delta^3}{3\mu_l} \quad (9.23)$$

from which the rate of change of mass flow with respect to condensate thickness is

$$\frac{d\dot{m}'}{d\delta} = \frac{\rho_l g(\rho_l - \rho_v) \delta^2}{\mu_l} \quad (9.24)$$

The excess mass flow rate $d\dot{m}'$ must come from the condensation at the interface, which is given by

$$d\dot{m}' = \frac{dq'}{h_{fg}} \quad (9.25)$$

where h_{fg} is the enthalpy of vaporization (see also Problem 9.16). Moreover, since the liberated heat is conducted through the film,

$$dq' = \frac{k_l(T_{\text{sat}} - T_s)}{\delta} dx \quad (9.26)$$

Combining (9.24), (9.25), and (9.26), we obtain, upon integration, a relation between the film thickness δ and the elevation x :

$$\delta = \left[\frac{4\mu_l k_l x (T_{\text{sat}} - T_s)}{\rho_l g (\rho_l - \rho_v) h_{fg}} \right]^{1/4} \quad (9.27)$$

Since the heat convected into the film is conducted through it to the plate

$$h_x (T_{\text{sat}} - T_s) = \frac{k_l (T_{\text{sat}} - T_s)}{\delta} \quad \text{or} \quad h_x = \frac{k_l}{\delta} \quad (9.28)$$

which, combined with (9.27), gives

$$\text{Nu}_x = \frac{h_x x}{k_l} = \left[\frac{\rho_l g (\rho_l - \rho_v) h_{fg} x^3}{4\mu_l k_l (T_{\text{sat}} - T_s)} \right]^{1/4} \quad (9.29)$$

Examination of this result shows that the thickening of the condensate film is analogous to the growth of a boundary layer over a flat plate in single-phase convection. Contrary to simple convection, however, an increase in temperature differential, being accompanied by an increase in film thickness, *reduces* the surface conductance.

By integrating the local value of conductance over the entire height L of the plate, we get the average heat transfer coefficient

$$\bar{h} = \frac{4}{3} h_L = (0.943) \left[\frac{\rho_l g (\rho_l - \rho_v) h_{fg} k_l^3}{\mu_l L (T_{\text{sat}} - T_s)} \right]^{1/4}$$

More generally for a plate inclined at an angle ϕ with the horizontal, the result is

$$\bar{h} = (0.943) \left[\frac{\rho_l g (\rho_l - \rho_v) h_{fg} k_l^3}{\mu_l L (T_{\text{sat}} - T_s)} \sin \phi \right]^{1/4}$$

Experimental results have shown that this equation is conservative, yielding results approximately 20% lower than measured values. Therefore, the recommended relation for inclined (including vertical) plates is

$$\bar{h} = (1.13) \left[\frac{\rho_l g (\rho_l - \rho_v) h_{fg} k_l^3}{\mu_l L (T_{\text{sat}} - T_s)} \sin \phi \right]^{1/4} \quad (9.30)$$

Vertical tubes. Equation (9.30), with $\sin \phi = 1$, is also valid for the inside and the outside surfaces of vertical tubes if the tubes are large in diameter D compared to the film thickness δ . However, (9.30) is not valid for inclined tubes, since the film flow would not be parallel to the axis of the tube.

Horizontal tubes. A Nusselt-type analysis for external condensation yields

$$\bar{h} = (0.725) \left[\frac{\rho_l g (\rho_l - \rho_v) h_{fg} k_l^3}{\mu_l D (T_{\text{sat}} - T_s)} \right]^{1/4} \quad (9.31)$$

When condensation takes place in a bank of n horizontal tubes arranged in a vertical tier, the condensate from an upper tube flows onto lower tubes affecting the heat transfer rate. In this case, an estimate can be made of the heat transfer, in the absence of empirical relations which account for splashing and other effects, by replacing D in (9.31) by nD .

Turbulent Film Condensation

When a liquid film is vigorous enough, heat is transferred not only by conduction but also by eddy diffusion, a characteristic of turbulence. This may occur on tall vertical surfaces or in banks of horizontal tubes. When such behavior occurs the laminar relations are no longer valid. This change occurs when the film Reynolds number, Re_f , defined by

$$\text{Re}_f \equiv \frac{VD_h\rho_l}{\mu_l} = \frac{4\rho_l AV}{P\mu_l} \quad (9.32)$$

is approximately 1800; here the hydraulic diameter, $D_h \equiv 4A/P$, is the characteristic length. In this relation, A is the area over which the condensate flows and P is the wetted perimeter. For inclined surfaces of width W , $A/P = LW/W = L$; for vertical tubes, $A/P = \pi DL/\pi D = L$; and, for horizontal tubes, $A/P = \pi DL/L = \pi D$. It should be noted at this point that the transition Reynolds number for a horizontal tube is 3600 rather than 1800, since the film flows down two sides of the tube. This is academic, however, since turbulent flow rarely occurs on a horizontal tube, because of its small vertical dimension.

Noting that $\dot{m} = \rho_l AV$ and that $\dot{m}' = \dot{m}/P$, the film Reynolds number may be expressed as

$$\text{Re}_f = \frac{4\dot{m}'}{\mu_l} \quad (9.33)$$

where \dot{m}' is the condensate mass flow per unit width for surfaces or per unit length for tubes. Its maximum value occurs at the lower edge of the surface.

Turbulent film condensation on vertical surfaces. The average heat transfer coefficient, developed by C. G. Kirkbride [*Trans. AIChE*, 30: 170 (1934)], is

$$\bar{h} = (0.0076)\text{Re}_f^{0.4} \left[\frac{\rho_l g(\rho_l - \rho_v)k_l^3}{\mu_l^2} \right]^{1/3} \quad (9.34)$$

which is valid for $\text{Re}_f > 1800$.

Determination of the Film Flow Regime

Since the condensate velocity V is unknown in (9.32), a trial-and-error approach is necessary. Expressing the mass flow rate in terms of the heat transfer, we get

$$\dot{m} = \frac{q}{h_{fg}} = \frac{\bar{h}A(T_{\text{sat}} - T_s)}{h_{fg}}$$

which, substituted into (9.33), gives

$$\text{Re}_f = \frac{4\bar{h}A(T_{\text{sat}} - T_s)}{P\mu_l h_{fg}} \quad (9.35)$$

Since the transition film Reynolds number is known ($\text{Re}_f|_{\text{crit}} \approx 1800$), the process can be simplified by eliminating the heat transfer coefficient for the initial calculation of the film Reynolds number.

From (9.30) and (9.35), flow on vertical or inclined plates and vertical tubes is laminar if

$$(4.52) \left[\frac{\rho_l g(\rho_l - \rho_v)k_l^3(T_{\text{sat}} - T_s)^3}{\mu_l^5 h_{fg}^3} L^3 \sin \phi \right]^{1/4} < 1800 \quad (9.36)$$

From (9.31) and (9.35), flow on a bank of n horizontal tubes is laminar if

$$(9.11) \left[\frac{\rho_l g (\rho_l - \rho_v) k_l^3 (T_{\text{sat}} - T_s)^3}{\mu_l^5 h_{fg}^3} n^3 D^3 \right]^{1/4} < 3600 \quad (9.37)$$

From (9.34) and (9.35), flow on vertical surfaces is turbulent if

$$(0.00296) \left[\frac{\rho_l g (\rho_l - \rho_v) k_l^3 (T_{\text{sat}} - T_s)^3}{\mu_l^5 h_{fg}^3} L^3 \right]^{5/9} > 1800 \quad (9.38)$$

If condition (9.36), (9.37), or (9.38) is satisfied, the left side gives Re_f .

The condensation mechanism is somewhat different if the condensing vapor is superheated rather than saturated. Experimental results have shown that in most cases the effect of superheat may be ignored, and the equations for saturated vapors may be used with negligible error. It should be emphasized, however, that $(T_{\text{sat}} - T_s)$ is still the driving differential, and that the actual superheated vapor temperature does not enter the calculations. *In all the condensation relations, condensate properties are evaluated at the mean film temperature, $T_f = (T_{\text{sat}} + T_s)/2$; vapor properties are evaluated at the saturation temperature; and h_{fg} is that at the saturated vapor temperature.*

Solved Problems

- 9.1.** Using Fig. 9-1, estimate the excess temperature for a 0.10 cm diameter, horizontal, 15 cm long, Chromel C wire submerged in water at atmospheric pressure. The voltage drop in the wire is 14.7 V and the current is 42.8 A.

An energy balance gives

$$q = EI = hA \Delta T$$

Since 1 W = 1 V-A,

$$q = (14.7)(42.8) = 629 \text{ W}$$

The surface area of the wire is

$$A = \pi DL = \pi(0.10 \text{ cm})(15 \text{ cm}) = 4.71 \text{ cm}^2$$

therefore

$$\frac{q}{A} = \frac{629 \text{ W}}{4.71 \text{ cm}^2} \left(\frac{100 \text{ cm}}{\text{m}} \right)^2 = 1.33 \times 10^6 \text{ W/m}^2$$

From Fig. 9-1, $\Delta T \approx 30^\circ\text{C}$.

- 9.2.** A 1.0 mm diameter wire, 180 mm long, is submerged horizontally in water at atmospheric pressure. The wire has a steady state applied voltage drop of 10.1 V and a current of 25.3 A. Determine the heat flux in W/m^2 and the approximate wire temperature in degrees Celsius.

The electrical energy input rate is

$$q = EI = (10.1)(25.3) = 255 \text{ W}$$

The wire surface area is

$$A = \pi DL = \pi(1.0 \times 10^{-3} \text{ m})(180 \times 10^{-3} \text{ m}) = 5.65 \times 10^{-4} \text{ m}^2$$

The boiling energy flux is

$$\frac{q}{A} = \frac{255 \text{ W}}{4.7124 \times 10^{-4} \text{ m}^2} = 5.41 \times 10^5 \text{ W/m}^2$$

To approximate the excess temperature use Fig. 9-1. From Fig. 9-1,

$$\Delta T \approx 12^\circ\text{C}$$

and

$$T_s = 100 + 12 = 112^\circ\text{C}$$

- 9.3.** A 15 cm long, 0.10 cm diameter nickel wire submerged horizontally in water at 792 kPa requires 131.8 A at 2.18 V to maintain the wire at 177°C. What is the heat transfer coefficient?

From steam tables, the saturation temperature at $p = 792 \text{ kPa}$, absolute, is 170.0°C and therefore $\Delta T = 177.0 - 170.0 = 7^\circ\text{C}$. A heat balance on the wire gives

$$q = EI = hA \Delta T$$

whence

$$h = \frac{EI}{A \Delta T} = \frac{[(2.18)(131.8) \text{ W}]}{\pi(0.001 \text{ m})(0.15 \text{ m})(7^\circ\text{C})} = 8.72 \times 10^4 \text{ W/m}^2\text{C}$$

- 9.4.** In a laboratory experiment, a current of 193 A burns out a 12 in long, 0.040 in diameter nickel wire which is submerged horizontally in water at atmospheric pressure. What was the voltage at burnout? The vapor density is 0.0374 lb_m/ft³ and h_{fg} is 970.4 Btu/lb_m.

The peak heat flux is given by (9.5):

$$\left. \frac{q}{A} \right|_{\max} = (0.149) \rho_v h_{fg} \left[\frac{\sigma(\rho_l - \rho_v) g g_c}{\rho_v^2} \right]^{1/4} \left[\frac{\rho_l}{\rho_l + \rho_v} \right]^{1/2}$$

Taking the remaining parameters from Table B-3 (Engl.), and from equation (9.4) we get

$$\begin{aligned} \left. \frac{q}{A} \right|_{\max} &= (0.149) \left(0.0374 \frac{\text{lb}_m}{\text{ft}^3} \right) \left(970.4 \frac{\text{Btu}}{\text{lb}_m} \right) \\ &\quad \times \left[\frac{(0.0038 \text{ lb}_l/\text{ft})(59.97 - 0.0374)(\text{lb}_m/\text{ft}^3)(32.17 \text{ ft/s})(32.17 \text{ lb}_m \cdot \text{ft}/\text{lb}_l \cdot \text{s})}{(0.0374 \text{ lb}_m/\text{ft}^3)^2} \right]^{1/4} \\ &\quad \times \left[\frac{59.97}{59.97 + 0.0374} \right]^{1/2} \\ &= \left(133.84 \frac{\text{Btu}}{\text{s} \cdot \text{ft}^2} \right) \left(3600 \frac{\text{s}}{\text{h}} \right) = 3.93 \times 10^5 \text{ Btu/h} \cdot \text{ft}^2 \end{aligned}$$

The burnout voltage, E_b , must satisfy $E_b I = q_{\max}$. Thus,

$$\begin{aligned} E_b &= \frac{q_{\max}}{I} = \frac{A}{I} \left. \frac{q}{A} \right|_{\max} = \frac{\pi[(0.040/12) \text{ ft}](1 \text{ ft})}{193 \text{ A}} \left(3.93 \times 10^5 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2} \right) \left(\frac{1 \text{ V} \cdot \text{A}}{3.413 \text{ Btu/h}} \right) \\ &= 6.26 \text{ V} \end{aligned}$$

9.5. Estimate the peak heat flux, in W/m^2 , for boiling water at normal atmospheric pressure.

Equation (9.5) may be used with the parameters in SI units. From Table B-3 (Engl.) and with a vapor density of $0.0374 \text{ lb}_m/\text{ft}^3$ and $h_{fg} = 970.4 \text{ Btu}/\text{lb}_m$,

$$\begin{aligned} \frac{q}{A} \Big|_{\max} &= (0.149) \rho_v h_{fg} \left[\frac{\sigma(\rho_l - \rho_v) g g_c}{\rho_v^2} \right]^{1/4} \left[\frac{\rho_l}{\rho_l + \rho_v} \right]^{1/2} \approx 1.0 \\ \rho_l &= (1/0.016715)(16.02) = 958.42 \text{ kg}/\text{m}^3 \\ \rho_v &= (0.0374)(16.02) = 0.60 \text{ kg}/\text{m}^3 \\ h_{fg} &= \left(970.4 \frac{\text{Btu}}{\text{lb}_m} \right) \left(\frac{\text{lb}_m}{0.454 \text{ kg}} \right) \left(1054.8 \frac{\text{J}}{\text{Btu}} \right) \\ &= 2.25 \times 10^6 \text{ J}/\text{kg} = 2.25 \text{ MW} \cdot \text{s}/\text{kg} \\ \sigma &= \left(0.0038 \frac{\text{lb}_f}{\text{ft}} \right) \left(4.448 \frac{\text{N}}{\text{lb}_f} \right) \left(\frac{1}{0.3048 \text{ m}} \right) = 0.0554 \text{ N}/\text{m}, \text{ from eq. (9.4)} \\ g_c &= 1.0 \text{ kg} \cdot \text{m}/\text{N} \cdot \text{s}^2 \\ g &= 9.80 \text{ m}/\text{s}^2 \\ \frac{q}{A} \Big|_{\max} &= (0.149) \left(0.60 \frac{\text{kg}}{\text{m}^3} \right) \left(2.25 \frac{\text{MW} \cdot \text{s}}{\text{kg}} \right) \\ &\quad \times \left[\frac{(0.0554 \text{ N}/\text{m})(958.42 - 0.60) \text{ kg}/\text{m}^3 (9.8 \text{ m}/\text{s}^2)(1.0 \text{ kg} \cdot \text{m}/\text{N} \cdot \text{s}^2)}{(0.60 \text{ kg}/\text{m}^3)^2} \right]^{1/4} \\ &\quad \times \left[\frac{958.42}{958.42 + 0.60} \right]^{1/2} \approx 1.0 \\ &= 1.240 \text{ MW}/\text{m}^2 \end{aligned}$$

9.6. A heated nickel plate at 106°C is submerged horizontally in water at atmospheric pressure. What is the heat transfer per unit area assuming $C_{sf} = 0.006$, $h_{fg} = 2256.9 \text{ kJ}/\text{kg}$, and $\rho_v = 0.598 \text{ kg}/\text{m}^3$?

For an excess temperature

$$\Delta T = T_s - T_{\text{sat}} = 106 - 100 = 6^\circ\text{C}$$

Fig. 9-1 indicates that the boiling is most likely nucleate, with (9.3) being valid. Then

$$\frac{q}{A} = \mu_l h_{fg} \sqrt{\frac{g(\rho_l - \rho_v)}{g_c \sigma}} \left[\frac{c_l(T_s - T_{\text{sat}})}{h_{fg} \text{Pr}_l^{1/3} C_{sf}} \right]^3$$

The required parameters, from Appendix B (SI) except where noted, are:

$$\begin{aligned} \rho_l &= 957.8 \text{ kg}/\text{m}^3 & c_l &= 4.216 \text{ kJ}/\text{kg} \cdot \text{K} \\ \mu_l &= \rho_v = 2.824 \times 10^{-4} \text{ kg}/\text{s} \cdot \text{m} & \text{Pr}_l &= 1.74 \\ \sigma &= 0.057 \text{ N}/\text{m}, \text{ from eq. (9.4)} & C_{sf} &= 0.006, \text{ from the boiling heat transfer literature} \end{aligned}$$

The heat transfer is

$$\begin{aligned} \frac{q}{A} &= (2.824 \times 10^{-4} \text{ kg}/\text{m} \cdot \text{s})(2256.9 \text{ kJ}/\text{kg}) \sqrt{\frac{(9.8 \text{ m}/\text{s}^2)[(957.8 - 0.598)(\text{kg}/\text{m}^3)]}{(\text{kg} \cdot \text{m}/\text{N} \cdot \text{s}^2)(0.057 \text{ N}/\text{m})}} \\ &\quad \times \left[\frac{(4.216 \text{ kJ}/\text{kg} \cdot \text{K})(6^\circ\text{C})}{(2256.9 \text{ kJ}/\text{kg})(1.74)^{1/3}(0.006)} \right]^3 \\ &= 3.19 \times 10^5 \text{ W}/\text{m}^2 \end{aligned}$$

The peak heat flux for water at 1 atm was found in Problem 9.4 to be $3.93 \times 10^5 \text{ Btu/h}\cdot\text{ft}^2$ or

$$\left. \frac{q}{A} \right|_{\max} = 1.24 \times 10^6 \text{ W/m}^2$$

Since $q/A < (q/A)_{\max}$, nucleate boiling does in fact occur, and the heat transfer is as calculated.

- 9.7.** Estimate the excess temperature, $\Delta T = T_s - T_{\text{sat}}$, for a 0.10 cm diameter, horizontal, 0.25 m long polished copper wire submerged in water at standard atmospheric pressure. The wire is electrically heated with $q = EI = 629 \text{ W}$. Nucleate boiling is observed.

An energy balance is

$$q = EI = hA_s \Delta T = 629 \text{ W}$$

The wire surface area is

$$A_s = \pi DL = \pi \left(\frac{0.10 \text{ cm}}{100 \text{ cm/m}} \right) (0.25 \text{ m}) = 7.85 \times 10^{-4} \text{ m}^2$$

and therefore

$$\frac{q}{A_s} = \frac{629 \text{ W}}{7.85 \times 10^{-4} \text{ m}^2} = 8.01 \times 10^5 \text{ W/m}^2$$

With q/A and other parameters for eq. (9.3) known, ΔT may be calculated. Rearranging eq. (9.3),

$$\Delta T = \frac{(h_{fg})(\text{Pr}_l^n)(C_{sf})}{c_l} \left[\frac{q/A}{\mu_l h_{fg}} \sqrt{\frac{g_c \sigma}{g(\rho_l - \rho_v)}} \right]^{0.33}$$

For boiling water $n = 1.0$ and for polished copper–water $C_{sf} = 0.0128$ (from the boiling heat transfer literature). From eq. (9.4) $\sigma \approx 0.00382 \text{ lb}_f/\text{ft} \approx 0.056 \text{ N/m}$. The vapor density is 0.595 kg/m^3 and $h_{fg} = 2257 \text{ kJ/kg}$. The remaining properties are from Appendix B (SI).

Thus,

$$\begin{aligned} c_l &= 4217 \text{ J/kg}\cdot\text{K} & \rho_l &= 1/\nu_l = 958 \text{ kg/m}^3 \\ \text{Pr}_l &= 1.76 & \mu_l &= 279 \times 10^{-6} \text{ N}\cdot\text{s/m}^2 \end{aligned}$$

or

$$\mu_l = \nu_l \cdot \rho = (0.294 \times 10^{-6} \text{ m}^2/\text{s})(958 \text{ kg/m}^3) = 2.82 \times 10^{-4} \text{ kg/m}\cdot\text{s}$$

Substituting

$$\begin{aligned} \Delta T &= \frac{(2257 \text{ kJ/kg})(1.76)(0.0128)}{4217 \text{ J/kg}\cdot\text{K}} \left[\frac{8.01 \times 10^5 \text{ W/m}^2}{(2.82 \times 10^{-4} \text{ kg/m}\cdot\text{s})(2257 \text{ kJ/kg})} \right]^{0.33} \\ &\times \left[\sqrt{\frac{(1 \text{ kg}\cdot\text{m}/\text{N}\cdot\text{s}^2)(0.056 \text{ N/m})}{(9.8 \text{ m/s}^2)(958 - 0.595) \text{ kg/m}^3}} \right]^{0.33} \\ &= 17.4 \text{ }^\circ\text{C} \end{aligned}$$

Using a more accurate value of σ , 0.0589 N/m , yields $\Delta T = 17.5 \text{ }^\circ\text{C}$, which is a negligible difference.

- 9.8.** If the plate of Problem 9.6 were copper, what would be the heat transfer rate?

We note from the Rohsenow equation, (9.3), that all parameters are identical to those in Problem 9.6 except the surface–fluid constant C_{sf} ; therefore, if the boiling remains nucleate,

$$\left. \frac{q}{A} \right|_{\text{copper}} = \left[\frac{C_{sf\text{nickel}}}{C_{sf\text{copper}}} \right]^3 \times \left. \frac{q}{A} \right|_{\text{nickel}}$$

From boiling heat transfer literature, $C_{sf\text{copper}} = 0.0128$; hence

$$\frac{q}{A} \Big|_{\text{copper}} = \left(\frac{0.006}{0.0128} \right)^3 (3.19 \times 10^5 \text{ W/m}^2) = 3.28 \times 10^4 \text{ W/m}^2$$

The boiling is certainly nucleate, since the peak heat flux, which is independent of the heater material, has the same value as in Problem 9.6.

- 9.9.** A brass plate which is submerged horizontally in water at atmospheric pressure is heated at the rate of 0.7 MW/m^2 . At what temperature, in $^{\circ}\text{C}$, must the plate be held? $C_{sf\text{brass}} = 0.006$.

Assume that nucleate boiling occurs. Except for the excess temperature $\Delta T = T_s - T_{\text{sat}}$ and the brass surface–fluid constant C_{sf} , the parameters are identical to those in Problem 9.6. We may, then, use the Rohsenow equation, (9.3), to simplify the computation, viz.

$$\frac{(q/A)_{\text{brass}}}{(q/A)_{\text{nickel}}} = \left[\frac{(\Delta T)_{\text{brass}} C_{sf\text{nickel}}}{(\Delta T)_{\text{nickel}} C_{sf\text{brass}}} \right]^3$$

From Problem 9.6 $C_{sf\text{nickel}} = 0.006$ and

$$(q/A)_{\text{nickel}} = 3.19 \times 10^5 \text{ W/m}^2$$

Also

$$(\Delta T)_{\text{nickel}} = 6^{\circ}\text{C}$$

Using these values in the above relation, we get

$$\frac{0.7 \times 10^6 \text{ W/m}^2}{3.19 \times 10^5 \text{ W/m}^2} = \left[\frac{(\Delta T)_{\text{brass}} (0.006)}{6^{\circ}\text{C} (0.006)} \right]^3$$

Solving,

$$(\Delta T)_{\text{brass}} = (6^{\circ}\text{C}) \left(\frac{0.7 \times 10^6}{3.19 \times 10^5} \right)^{1/3} = 7.80^{\circ}\text{C}$$

and

$$(T_s)_{\text{brass}} = (\Delta T)_{\text{brass}} + T_{\text{sat}} = 7.80 + 100 = 107.80^{\circ}\text{C}$$

Since the excess temperature $\Delta T = 7.80^{\circ}\text{C}$, the assumption of nucleate boiling appears to be reasonable from Fig. 9-1.

- 9.10.** A polished metal plate of unknown material has a measured surface temperature of -24°C while submerged horizontally in saturated liquid ammonia at -50°C . The measured heat flux from the surface is 0.3 MW/m^2 . Determine the correlation constant C_{sf} for the Rohsenow equation.

The properties of saturated liquid ammonia at -50°C adapted from gas tables and Appendix B (SI) are:

$$\begin{aligned} \rho_l &= 701.33 \text{ kg/m}^3 & \text{Pr}_l &= 2.60 \\ \rho_v &= 0.379 \text{ kg/m}^3 & c_{p,l} &= 4463 \text{ J/kg}\cdot\text{K} \\ h_{fg} &= 1420.7 \text{ kJ/kg} \\ \mu_l &= \rho_l \nu_l = (701.33 \text{ kg/m}^3)(4.35 \times 10^{-7} \text{ m}^2/\text{s}) = 3.06 \times 10^{-4} \text{ kg/s}\cdot\text{m} \end{aligned}$$

From the literature we find $\sigma = 0.038 \text{ N/m}$ for the saturated liquid ammonia at -50°C . Solving the Rohsenow equation (for nucleate boiling) for C_{sf} gives

$$C_{sf} = \left(\frac{\mu_l h_{fg}}{q/A_s} \right)^{1/3} \left[\frac{g(\rho_l - \rho_v)}{\sigma} \right]^{1/6} \left(\frac{c_{p,l} \Delta T}{h_{fg} \text{Pr}_l^n} \right)$$

where $n = 1.7$ for fluids other than water. Evaluating the three terms on the right-hand side of this expression

$$\left(\frac{\mu_l h_{fg}}{q/A_s}\right)^{1/3} = \left[\frac{(3.06 \times 10^{-4} \text{ kg/s}\cdot\text{m})(1420.7 \text{ kJ/kg})}{(0.3 \times 10^6 \text{ W/m}^2)}\right]^{1/3} = 0.113$$

$$\left[\frac{g}{\sigma}(\rho_l - \rho_v)\right]^{1/6} = \left[\frac{(9.8 \text{ m/s}^2)(701.33 - 0.379)(\text{kg/m}^3)}{(0.038 \text{ N/m})}\right]^{1/6} = 7.52$$

$$\frac{c_{p,l} \Delta T}{h_{fg} \text{Pr}_l^{1/7}} = \frac{(4463 \text{ J/kg}\cdot\text{K})(26 \text{ K})}{(1420.7 \text{ kJ/kg})(2.6)^{1/7}} = 0.0161$$

and then

$$C_{s,f} = (0.113)(7.52)(0.0161) = 0.0137 \approx 0.014$$

This value of the empirical constant $C_{s,f}$ is within the range of values in the boiling heat transfer literature, $0.0025 < C_{s,f} < 0.015$.

- 9.11.** What is the peak heat flux for nucleate boiling of saturated liquid ammonia at -50°C ? Is this greater than the q/A value specified in Problem 9.10?

For saturated liquid ammonia at -50°C we obtain from Problem 9.10

$$\begin{aligned} \rho_l &= 701.33 \text{ kg/m}^3 & \rho_v &= 0.379 \text{ kg/m}^3 \\ h_{fg} &= 1420.7 \text{ kJ/kg} & \sigma &= 0.038 \text{ N/m} \end{aligned}$$

Then by eq. (9.5) with the last term on the right side being approximately 1,

$$\begin{aligned} \frac{q}{A} \Big|_{\text{max}} &= 0.149 \rho_v h_{fg} \left[\frac{\sigma(\rho_l - \rho_v) g g_c}{\rho_v^2} \right]^{1/4} \\ &= 0.149(0.379 \text{ kg/m}^3)(1420.7 \text{ kJ/kg}) \\ &\quad \times \left[\frac{(0.038 \text{ N/m})(701.33 - 0.379)(\text{kg/m}^3)(9.8 \text{ m/s}^2)(\text{kg}\cdot\text{m/N}\cdot\text{s}^2)}{(0.379 \text{ kg/m}^3)^2} \right]^{1/4} \\ &= 523\,820 \text{ W/m}^2 \end{aligned}$$

Since this peak heat flux is significantly larger than the measured q/A_s in Problem 9.10, and within the nucleate range of Fig. 9-1, we can conclude that nucleate boiling was experienced in that problem.

- 9.12.** A 2 in diameter polished copper bar having emissivity of 0.023 is submerged horizontally in a pool of water at atmospheric pressure and 68°F . The bar is maintained at 300°F . Estimate the heat transfer rate per foot of the bar.

The excess temperature is $\Delta T = T_s - T_{\text{sat}} = 300 - 212 = 88^\circ\text{F}$, which may be in the nucleate boiling regime III as shown in Fig. 9-1; therefore, (9.3) will be tried and compared with the peak heat flux, (9.5).

The required parameters, taken from Table B-3 (Engl.) except where noted, are given below. The enthalpy of evaporation h_{fg} is 970.4 Btu/lb_m and ρ_v is $0.0374 \text{ lb}_m/\text{ft}^3$. Note that the liquid parameters are evaluated at the saturation condition at 212°F , since the temperature of the pool of water has little effect on the heat transfer. *Except for a slight effect due to subcooling, which is usually negligible in engineering calculations, the same heat is transferred whether the pool is at 68°F , 150°F , or 212°F .*

$$\begin{aligned} \rho_l &= 59.97 \text{ lb}_m/\text{ft}^3 \\ \mu_l &= \nu_l \rho_l = (0.316 \times 10^{-5} \text{ ft}^2/\text{s})(59.97 \text{ lb}_m/\text{ft}^3) \\ &= 1.895 \times 10^{-4} \text{ lb}_m/\text{ft}\cdot\text{s} = 0.682 \text{ lb}_m/\text{ft}\cdot\text{h} \\ \sigma &= 0.004 \text{ lb}_f/\text{ft}, \text{ from Fig. 9-2 converted to Engl. units} \\ c_l &= 1.007 \text{ Btu/lb}_m\cdot^\circ\text{F} \\ \text{Pr}_l &= 1.74 \\ C_{s,f} &= 0.013, \text{ from boiling heat transfer literature} \end{aligned}$$

Substituting these values into (9.3), we get

$$\begin{aligned} \frac{q}{A} &= \left(0.682 \frac{\text{lb}_m}{\text{ft} \cdot \text{h}}\right) \left(970.4 \frac{\text{Btu}}{\text{lb}_m}\right) \\ &\quad \times \sqrt{\frac{(32.2 \text{ ft/s}^2)[(59.97 - 0.0374) \text{ lb}_m/\text{ft}^3]}{(32.2 \text{ ft} \cdot \text{lb}_m/\text{lb}_f \cdot \text{s}^2)(0.004 \text{ lb}_f/\text{ft})} \left[\frac{(1.007 \text{ Btu}/\text{lb}_m \cdot \text{°F})(88 \text{ °F})}{(970.4 \text{ Btu}/\text{lb}_m)(1.74)^{1.0}(0.013)} \right]^3} \\ &= 5.33 \times 10^6 \text{ Btu/h} \cdot \text{ft}^2 \end{aligned}$$

which is out of the range of validity of eq. (9.3).

The maximum heat flux is as found in Problem 9.4:

$$\left. \frac{q}{A} \right|_{\max} = 3.983 \times 10^5 \text{ Btu/h} \cdot \text{ft}^2$$

Since $(q/A)_{\max}$ is less than that given by the Rohsenow equation, film boiling exists, and (9.6), (9.7), and (9.8) will be used to evaluate. Four additional vapor properties are required, evaluated at the mean film temperature,

$$T_f = \frac{T_s + T_{\text{sat}}}{2} = \frac{300 + 212}{2} = 256 \text{ °F}$$

hence, from Table B-4 (Engl.):

$$\begin{aligned} k_{vf} &= 0.0150 \text{ Btu/h} \cdot \text{ft} \cdot \text{°F} \\ c_{pvf} &= 0.482 \text{ Btu}/\text{lb}_m \cdot \text{°F} \\ \rho_{vf} &= 0.0348 \text{ lb}_m/\text{ft}^3 \\ \mu_{vf} &= 8.98 \times 10^{-6} \text{ lb}_m/\text{ft} \cdot \text{s} = 0.0323 \text{ lb}_m/\text{ft} \cdot \text{h} \end{aligned}$$

and

$$\epsilon = 0.023, \text{ from problem statement}$$

Using these values, the appropriate heat transfer coefficients are:

$$\begin{aligned} h_c &= (0.62) \left[\frac{k_{vf}^3 \rho_{vf} (\rho_l - \rho_{vf}) g (h_{fg} + 0.4 c_{pvf} \Delta T)}{D \mu_{vf} \Delta T} \right]^{1/4} \\ &= (0.62) \left[\frac{(0.0150 \text{ Btu/h} \cdot \text{ft} \cdot \text{°F})^3 (0.0348 \text{ lb}_m/\text{ft}^3) (59.97 - 0.0348) (\text{lb}_m/\text{ft}^3) (32.2 \text{ ft/s}^2) (3600 \text{ s/h})^2}{[(2/12) \text{ ft}] (0.0323 \text{ lb}_m/\text{ft} \cdot \text{h}) (88 \text{ °F})} \right]^{1/4} \\ &\quad \times \left[970.4 \frac{\text{Btu}}{\text{lb}_m} + 0.4 \left(0.482 \frac{\text{Btu}}{\text{lb}_m \cdot \text{°F}} \right) \right]^{1/4} \\ &= 30.84 \text{ Btu/h} \cdot \text{ft}^2 \cdot \text{°F} \\ h_r &= \frac{\sigma \epsilon (T_s^4 - T_{\text{sat}}^4)}{T_s - T_{\text{sat}}} \\ &= \frac{(0.1714)(0.023)[(760/100)^4 - (672/100)^4]}{88} = 0.0581 \text{ Btu/h} \cdot \text{ft}^2 \cdot \text{°F} \end{aligned}$$

The radiation heat transfer coefficient is negligible, which could have been guessed from the outset since the surface temperature is relatively low. Therefore, $h = h_c$, and

$$\frac{q}{A} = h \Delta T = (30.84)(88) = 2713.9 \text{ Btu/h} \cdot \text{ft}^2$$

Since

$$A = \pi D L = \pi \left(\frac{2}{12} \text{ ft} \right) L = (0.524) L$$

the heat transfer per length of bar is

$$\frac{q}{L} = (0.524)(2713.9) = 1422 \text{ Btu/h}\cdot\text{ft}$$

By determining the excess temperature for the minimum heat flux, using (9.14), the boiling curve can be sketched for this configuration.

$$\begin{aligned} \Delta T_c &= (0.127) \frac{(0.0348 \text{ lb}_m/\text{ft}^3)(970.4 \text{ Btu}/\text{lb}_m)}{(0.0150 \text{ Btu}/\text{h}\cdot\text{ft}\cdot^\circ\text{F})(\text{h}/3600 \text{ s})} \left[\frac{(32.2 \text{ ft}/\text{s}^2)(59.97 - 0.0374)(\text{lb}_m/\text{ft}^3)}{(59.97 + 0.0374) \text{ lb}_m/\text{ft}^3} \right]^{2/3} \\ &\times \left[\frac{(32.2 \text{ lb}_m\cdot\text{ft}/\text{lb}_f\cdot\text{s}^2)(0.004 \text{ lb}_f/\text{ft})}{(32.2 \text{ ft}/\text{s}^2)(59.97 - 0.0374) \text{ lb}_m/\text{ft}^3} \right]^{1/2} \left[\frac{(\text{h}/3600 \text{ s})(0.555 \text{ lb}_m/\text{ft}\cdot\text{h})}{(32.2 \text{ ft}/\text{s}^2)(59.97 - 0.0374) \text{ lb}_m/\text{ft}^3} \right]^{1/3} \\ &= 366^\circ\text{F} \end{aligned}$$

The boiling curve is shown in Fig. 9-6.

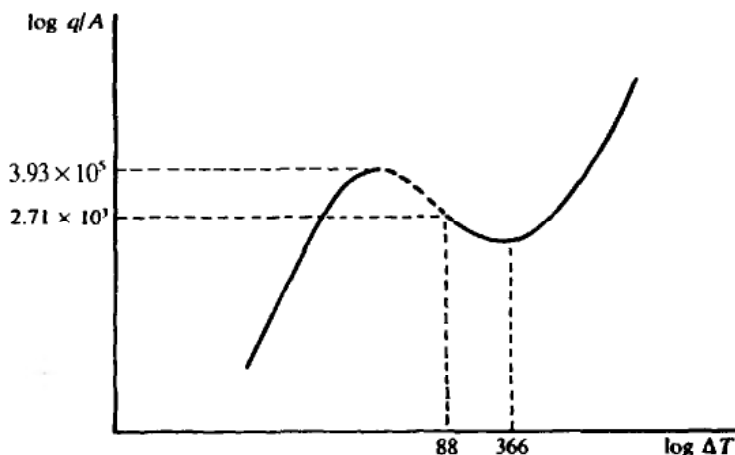


Fig. 9-6. Boiling curve for Problem 9.12.

- 9.13.** A 0.040 in diameter wire, 6 in long, is submerged in water at atmospheric pressure. The wire is maintained at a surface temperature resulting in $\Delta T = 50^\circ\text{F}$ and q/A is $4.1 \times 10^5 \text{ Btu}/\text{h}\cdot\text{ft}^2$. What change in heat transfer would occur if the water were flowing normal to the wire at 10 fps? Assume the water temperature to be 212°F .

The change is that due to convection, $(q/A)_{\text{conv}}$ of (9.16), which can be assessed by the use of (7.51b),

$$\frac{\bar{h}D}{k_f} = C \text{Pr}_f^{1/3} \text{Re}_{Df}^n$$

where the constants C and n depend upon the flow regimes as given in Table 7-6.

Evaluating the fluid (vapor) properties at the film temperature

$$T_f = \frac{T_s + T_s}{2} = T_{\text{sat}} + \frac{\Delta T}{2} = 212 + \frac{50}{2} = 237^\circ\text{F}$$

we get the following values from Table B-4 (Engl.)

$$k_f = 0.0145 \text{ Btu}/\text{h}\cdot\text{ft}\cdot^\circ\text{F} \quad \text{Pr}_f = 1.0528 \quad \nu = 2.431 \times 10^{-4} \text{ ft}^2/\text{s}$$

Therefore

$$\text{Re}_{Df} = \frac{VD}{\nu} = \frac{(10 \text{ ft/s})[(0.040/12) \text{ ft}]}{2.431 \times 10^{-4} \text{ ft}^2/\text{s}} = 137.12$$

The appropriate constants are $C = 0.683$, $n = 0.466$; hence,

$$\bar{h} = \frac{0.0148 \text{ Btu/h} \cdot \text{ft} \cdot ^\circ\text{F}}{(0.040/12) \text{ ft}} (0.683)(1.0528)^{1/3}(137.12)^{0.466} = 30.56 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$$

and

$$\left. \frac{q}{A} \right|_{\text{conv}} = \bar{h}(T_s - T_\infty) = (30.56 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F})[(262 - 212) ^\circ\text{F}] = 1528 \text{ Btu/h} \cdot \text{ft}^2$$

If we add this value to that obtained for boiling, we get

$$\frac{q}{A} = \left. \frac{q}{A} \right|_{\text{conv}} + \left. \frac{q}{A} \right|_{\text{bo}} = 1528 + (4.1 \times 10^5) = 4.12 \times 10^5 \text{ Btu/h} \cdot \text{ft}^2$$

which is approximately the value shown in Fig. 9-4 at $\Delta T \approx 20^\circ\text{C}$.

It should be noted that the “convective” contribution in this case is negligible, which is what the shaded portion of Fig. 9-4 emphasizes.

- 9.14.** Film boiling occurs when water flows normal to a polished 15 mm diameter copper tube at the rate of 3 m/s. Determine the boiling heat transfer coefficient when the tube is maintained at 114°C and the surface emissivity is 0.023.

The tube size and fluid velocity are such that (9.20) applies. It must be used together with (9.6) and (9.8); i.e.,

$$h = h_c \left(\frac{h_c}{h} \right)^{1/3} + h_r$$

$$h_c = (2.7) \left[\frac{V_\infty k_{vf} \rho_{vf} (h_{fg} + 0.4c_{pf}\Delta T)}{D \Delta T} \right]^{1/2}$$

$$h_r = \frac{\sigma \epsilon (T_s^4 - T_{\text{sat}}^4)}{T_s - T_{\text{sat}}}$$

Except where noted, the required fluid properties, evaluated at

$$T_f = \frac{T_s + T_{\text{sat}}}{2} = \frac{114 + 100}{2} = 107^\circ\text{C}$$

are taken from Table B-4 (Engl.) and $h_{fg} = 2.25 \times 10^6 \text{ J/kg}$.

$$k_{vf} = (0.0142)(1.7296) = 0.02456 \text{ W/m} \cdot \text{K}$$

$$\rho_{vf} = (0.0366)(16.02) = 0.5863 \text{ kg/m}^3$$

$$c_{pf} = (0.492)(4184) = 2058.5 \text{ J/kg} \cdot \text{K}$$

$$\sigma = 5.6697 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4$$

$$\epsilon = 0.023, \text{ from problem statement}$$

Then

$$h_c = (2.7) \left[\frac{(3 \text{ m/s})(0.02456 \text{ W/m} \cdot \text{K})(0.5863 \text{ kg/m}^3)\{(2.25 \times 10^6 \text{ W} \cdot \text{s/kg}) + 0.4(2058.5 \text{ W} \cdot \text{s/kg} \cdot \text{K})(14 \text{ K})\}}{(0.015 \text{ m})(14 \text{ K})} \right]^{1/2}$$

$$= 1841.58 \text{ W/m}^2 \cdot \text{K}$$

and

$$h_r = \frac{(5.6697 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4)(0.023)[(387)^4 - (373)^4] \text{ K}^4}{(387 - 373) \text{ K}} = 0.2863 \text{ W/m}^2 \cdot \text{K}$$

Therefore,

$$h = (1841.58) \left(\frac{1841.58}{h} \right)^{1/3} + 0.2863$$

Solving by trial, $h \approx 1841.79 \text{ W/m}^2 \cdot \text{K}$.

- 9.15.** A wide vertical cooling fin, approximating a flat plate 0.3 m high, is exposed to steam at atmospheric pressure. The fin is maintained at 90 °C by cooling water. Determine the heat transfer and also the condensate mass flow rate per unit width.

Assuming that the condensate film is laminar, (9.30) will be used to get the average heat transfer coefficient, with condensate properties evaluated at the mean film temperature,

$$T_f = \frac{T_{\text{sat}} + T_s}{2} = \frac{100 + 90}{2} = 95 \text{ }^\circ\text{C}$$

and the values at T_{sat} of ρ_v and h_{fg} are 0.598 kg/m^3 and $2.27 \times 10^6 \text{ J/kg}$, respectively.

Since $\sin \phi = 1$, the equation is:

$$\bar{h} = (1.13) \left[\frac{\rho_l g (\rho_l - \rho_v) h_{fg} k_l^3}{\mu_l L (T_{\text{sat}} - T_s)} \right]^{1/4}$$

where the remaining terms are from Tables B-3 (Engl.) and B-3 (SI).

$$\begin{aligned} \rho_l &= 961.9 \text{ kg/m}^3 \\ g &= 9.8 \text{ m/s}^2 \\ k_l &= (0.3913)(1.7296) = 0.6767 \text{ W/m} \cdot \text{K} \\ \mu_l &= 3.0 \times 10^{-4} \text{ kg/m} \cdot \text{s} \end{aligned}$$

Thus,

$$\begin{aligned} \bar{h} &= (1.13) \left[\frac{(961.9 \text{ kg/m}^3)(9.8 \text{ m/s}^2)(961.9 - 0.598) \text{ kg/m}^3 (2.27 \times 10^6 \text{ J/kg})(0.6767 \text{ W/m} \cdot \text{K})^3}{(3.0 \times 10^{-4} \text{ kg/m} \cdot \text{s})(0.3 \text{ m})(10 \text{ K})} \right]^{1/4} \\ &= 1.04 \times 10^4 \text{ J/s} \cdot \text{m}^2 \cdot \text{K} = 1.04 \times 10^4 \text{ W/m}^2 \cdot \text{K} \end{aligned}$$

Checking the film Reynolds number with (9.35), we get

$$\text{Re}_f = \frac{4\bar{h}L(T_{\text{sat}} - T_s)}{\mu_l h_{fg}} = \frac{4(1.04 \times 10^4 \text{ W/m}^2 \cdot \text{K})(0.3 \text{ m})(10 \text{ K})}{(3 \times 10^{-4} \text{ kg/m} \cdot \text{s})(2.27 \times 10^6 \text{ W} \cdot \text{s/kg})} = 183 < 1800$$

and the laminar assumption was correct. The heat transfer rate is, therefore,

$$\frac{q}{A} = \bar{h}(T_{\text{sat}} - T_s) = (1.04 \times 10^4 \text{ W/m}^2 \cdot \text{K})(10 \text{ K}) = 0.104 \text{ MW/m}^2$$

and, by (9.33),

$$\dot{m}' = \frac{\mu_l \text{Re}_f}{4} = \frac{(3.0 \times 10^{-4} \text{ kg/s} \cdot \text{m})(183)}{4} = 0.0137 \text{ kg/s} \cdot \text{m}$$

- 9.16.** A horizontal, 2 in. o.d. tube is surrounded by saturated steam at 2.0 psia. The tube is maintained at 90 °F. What is the average condensation heat transfer coefficient if ρ_v and h_{fg} are $0.00575 \text{ lb}_m/\text{ft}^3$ and 1022.1 Btu/lb_m , respectively, at T_{sat} .

The average heat transfer coefficient is given by (9.31), which requires the following property data,

taken from Table B-3 (Engl.). The liquid properties are evaluated at the mean film temperature, $T_f = (T_{sat} + T_s)/2 = (126 + 90)/2 = 108^\circ\text{F}$.

$$\begin{aligned}\rho_l &= 62.03 \text{ lb}_m/\text{ft}^3 \\ k_l &= 0.364 \text{ Btu}/\text{h}\cdot\text{ft}\cdot^\circ\text{F} \\ \mu_l &= 4.26 \times 10^{-4} \text{ lb}_m/\text{ft}\cdot\text{s}\end{aligned}$$

Using these data, we get

$$\begin{aligned}\bar{h} &= (0.725) \left[\frac{\rho_l g (\rho_l - \rho_v) h_{fg} k_l^3}{\mu_l D (T_{sat} - T_s)} \right]^{1/4} \\ &= (0.725) \left[\frac{(62.03 \text{ lb}_m/\text{ft}^3)(32.2 \text{ ft}/\text{s}^2)(62.03 - 0.00575)(\text{lb}_m/\text{ft}^3)(1022.1 \text{ Btu}/\text{lb}_m)(0.364 \text{ Btu}/\text{h}\cdot\text{ft}\cdot^\circ\text{F})^3}{(4.26 \times 10^{-4} \text{ lb}_m/\text{ft}\cdot\text{s})(2/12 \text{ ft})(126 - 90)^\circ\text{F}(3600 \text{ s})} \right]^{1/4} \\ &= 1241.6 \text{ Btu}/\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}\end{aligned}$$

- 9.17.** The relations given in Section 9.4 are somewhat simplified, although sufficiently accurate for most engineering calculations, since they do not account for the change of enthalpy from the saturation temperature, T_{sat} , to the film temperature, T , which varies across the film. This refinement can be taken into account by considering the total enthalpy change, Δh_{fg} , as the vapor condenses and cools to the film temperature. In equation form,

$$\Delta h_{fg} = \frac{1}{\dot{m}'} \int_0^\delta \rho_l u c_p (T_{sat} - T) dy \quad (1)$$

Calculate Δh_{fg} for a linear temperature profile in the condensate film, i.e.,

$$T = T_s + \frac{y}{\delta} (T_{sat} - T_s) \quad (2)$$

Using (9.22), (9.23), and (2) for u , \dot{m}' , and T , respectively, we get

$$\begin{aligned}\Delta h_{fg} &= \frac{3\mu_l}{\rho_l g (\rho_l - \rho_v) \delta^3} \int_0^\delta \frac{\rho_l g (\rho_l - \rho_v)}{\mu_l} \left(y\delta - \frac{y^2}{2} \right) c_p \left[(T_{sat} - T_s) - \frac{y}{\delta} (T_{sat} - T_s) \right] dy \\ &= \frac{3c_p (T_{sat} - T_s)}{\delta^3} \int_0^\delta \left(y\delta - \frac{3}{2}y^2 + \frac{y^3}{2\delta} \right) dy = \frac{3c_p (T_{sat} - T_s)}{\delta^3} \left[\frac{y^2\delta}{2} - \frac{y^3}{2} + \frac{y^4}{8\delta} \right]_0^\delta \\ &= \frac{3}{8} c_p (T_{sat} - T_s)\end{aligned} \quad (3)$$

For more accurate results in Section 9.4, h_{fg} should be replaced by $h_{fg} + \Delta h_{fg} = h'_{fg}$.

- 9.18.** What effect does the refinement developed in Problem 9.17 have on the heat transfer coefficient of Problem 9.16?

At $T_f = 108^\circ\text{F}$ the specific heat of water is $0.998 \text{ Btu}/\text{lb}_m\cdot^\circ\text{F}$; therefore, using (3) of Problem 9.17,

$$h'_{fg} = h_{fg} + \Delta h_{fg} = 1022.1 \frac{\text{Btu}}{\text{lb}_m} + \frac{3}{8} \left(0.998 \frac{\text{Btu}}{\text{lb}_m\cdot^\circ\text{F}} \right) [(126 - 90)^\circ\text{F}] = 1035.6 \text{ Btu}/\text{lb}_m$$

Hence, a more accurate result for Problem 9.16 is

$$\bar{h} = (1241.6) \left(\frac{1035.6}{1022.1} \right)^{1/4} = 1245.7 \text{ Btu}/\text{h}\cdot\text{ft}^2\cdot^\circ\text{F}$$

giving an error of 0.33%, negligible in most engineering calculations.

9.19. A vertical plate 4 ft high is maintained at 60°C in the presence of saturated steam at atmospheric pressure. Estimate the heat transfer per unit width and the condensation rate per unit width. Use $\rho_v = 0.293 \text{ kg/m}^3$ and $h_{fg} = 2308.8 \text{ kJ/kg}$ at T_{sat} .

The remaining parameters which will be required, with condensate properties evaluated at the mean film temperature,

$$T_f = \frac{T_{\text{sat}} + T_s}{2} = \frac{100 + 60}{2} = 80^\circ\text{C}$$

are:

$$\begin{aligned}\rho_l &= 1/0.001029 \text{ m}^3/\text{kg} = 971.8 \text{ kg/m}^3 \\ c_{pl} &= 4.1964 \times 10^3 \text{ J/kg}\cdot\text{K} \\ \mu_l &= \rho_l \cdot \nu_l = (971.8 \text{ kg/m}^3)(0.364 \times 10^{-6} \text{ m}^2/\text{s}) = 353.7 \times 10^{-6} \text{ kg/s}\cdot\text{m} \\ k_l &= 0.668 \text{ W/m}\cdot\text{K} \\ A &= LW = (1.2 \text{ m})(0.3 \text{ m}) = 0.36 \text{ m}^2 \\ P &= W = 0.3 \text{ m}\end{aligned}$$

Testing for laminar flow with (9.36):

$$(4.52) \left[\frac{(971.8 \text{ kg/m}^3)(9.8 \text{ m/s}^2)(971.8 - 0.293)(\text{kg/m}^3)(0.668 \text{ W/m}\cdot\text{K})^3(100 - 60)^3(\text{K})^3}{(353.7 \times 10^{-6} \text{ kg/s}\cdot\text{m})^5(2308.8 \text{ kJ/kg})^3} (1.2 \text{ m})^3 \right]^{1/4} = 1169 < 1800$$

Thus, the flow is laminar and $\text{Re}_f = 1169$. We may now get the condensate rate from (9.33):

$$\dot{m}' = \frac{\text{Re}_f \mu_l}{4} = \frac{1169(353.7 \times 10^{-6} \text{ kg/s}\cdot\text{m})}{4} = 0.1033 \text{ kg/s}\cdot\text{m}$$

or $\dot{m}' = 371.9 \text{ kg/h}\cdot\text{m}$. The heat transfer per unit width is then

$$q' = \dot{m}' h_{fg} = (371.9 \text{ kg/h}\cdot\text{m})(2308.8 \text{ kJ/kg}) = 8.586 \times 10^8 \text{ J/h}\cdot\text{m} = 2.385 \times 10^5 \text{ W/m}$$

9.20. How would doubling the plate height of Problem (9.19) affect the heat transfer rate?

The fluid parameters are identical to those of Problem 9.19. The flow will likely be turbulent, however. Testing with (9.38), we can express our previous solution of Problem 9.19 as

$$\text{Re}_{1,2} = 4.52[A \cdot (1.2)^3]^{1/4} = 1169$$

Where 1.2 refers to plate height. Note that the term bracketed contains A , which is dependent on fluid properties, temperatures, and g . Thus A will be unchanged in Problem 9.20 from that of Problem 9.19.

Solving for A ,

$$\begin{aligned}(A)(1.2)^3 &= \left(\frac{1169}{4.52} \right)^4; & A &= \frac{(1169/4.52)^4}{(1.2)^3} \\ & & A &= 2.589 \times 10^9\end{aligned}$$

Now for the increased height, we write, assuming turbulent condensation,

$$\begin{aligned}\text{Re}_{2,4} &= 0.00296[A \cdot (2.4)^3]^{5/9} = 0.00296[(2.589 \times 10^9)(13.824)]^{5/9} \\ &= 2160 > 1800\end{aligned}$$

Conversely, we can substitute the fluid properties, temperature, g , and plate height into eq. (9.38) to obtain this value of Re .

The film is turbulent, as assumed, and $Re = 2160$. Since $q' \propto Re_f$, the ratio of the heat transfer rates is

$$\frac{q'_{2.4}}{q'_{1.2}} \propto \frac{2160}{1169} = 1.85$$

and the heat transfer rate is approximately doubled by doubling the plate height.

The heat transfer rate increases more rapidly, however, as the plate is heightened further. For example, increasing the plate height by a factor of 4 (to 4.8 m) gives more than a sixfold increase in heat transfer. This illustrates the effect which eddy diffusion has on the heat transfer rate.

Supplementary Problems

- 9.21. For equilibrium of a spherical vapor bubble in a liquid, a balance of forces gives

$$\pi r^2(p_v - p_l) = 2\pi r\sigma$$

where r is the bubble radius, σ is the surface tension, and subscripts v and l represent the vapor and liquid, respectively. Combining this equilibrium condition with the *Clausius-Clapeyron equation*,

$$\frac{dp}{dT} = \frac{h_{fg}}{v_v T_v}$$

which relates the pressure and temperature between a saturated liquid and its saturated vapor, and with the ideal gas law, determine the relationship between the degree of superheat and bubble radius.

$$\text{Ans. } T_v - T_{\text{sat}} = \frac{2R_v T_v^2 \sigma}{h_{fg} p_v r}$$

- 9.22. A tungsten wire submerged horizontally in water at atmospheric pressure is electrically heated, maintaining the surface at 107°C . The wire is 0.001 m diameter and 0.3 m long; $E = 2\text{ V}$ and $I = 20\text{ A}$. Determine the heat transfer coefficient. *Ans.* $h = 6.06 \times 10^3\text{ W/m}^2 \cdot ^\circ\text{C}$
- 9.23. A heated brass plate is submerged vertically in water at atmospheric pressure. The plate is maintained at 108°C . What is the heat transfer rate per unit area? $C_{sf} = 0.006$. *Ans.* $7.56 \times 10^5\text{ W/m}^2$
- 9.24. Estimate the maximum nucleate boiling heat flux for water in a pressure cooker at 200 kPa .
Ans. $1.68 \times 10^6\text{ W/m}^2$
- 9.25. For laminar film condensation, what is the ratio of heat transfer to a horizontal tube of large diameter to that to a vertical tube of the same size for the same temperature difference? *Ans.* $(0.64)(L/D)^{1/4}$
- 9.26. What L/D ratio will produce the same laminar-film-condensation-controlled heat transfer rate to a tube in both the vertical and horizontal orientations? Assume the tube diameter is large compared with the condensate thickness. *Ans.* 5.90
- 9.27. A 1 ft high vertical plate is exposed to saturated steam at atmospheric pressure. If the plate is maintained at 188°F , determine the heat transfer per unit width and the condensation rate per unit width.
Ans. $40\,445\text{ Btu/h} \cdot \text{ft}$; $41.7\text{ lb}_m/\text{h} \cdot \text{ft}$

Heat Exchangers

A *heat exchanger* is any device that effects the transfer of thermal energy from one fluid to another. In the simplest exchangers the hot and cold fluids mix directly; more common are those in which the fluids are separated by a wall. This type, called a *recuperator*, may range from a simple plane wall between two flowing fluids to complex configurations involving multiple passes, fins, or baffles. In this case conductive and convective heat transfer, and sometimes radiation, principles are required to describe the energy exchange process.

Many factors enter into the design of heat exchangers, including thermal analysis, size, weight, structural strength, pressure drop, and cost. Our primary concern in this chapter shall be thermal analysis. Except for structural strength and cost, the remaining factors may be adequately evaluated utilizing the principles of earlier chapters. The ASME Code for Unfired Pressure Vessels sets structural design standards, while cost evaluation is obviously an optimization process dependent upon the other design parameters.

10.1 TYPES OF HEAT EXCHANGER

Common heat exchangers include the *flat-plate*, *shell-and-tube*, and *crossflow* types. A double-pipe exchanger, the simplest form of the shell-and-tube type, is shown in Fig. 10-1. If the fluids both flow in the same direction, as shown, it is referred to as a *parallel-flow* type; if they flow in opposite directions, a *counterflow* type. Figure 10-2 shows a shell-and-tube exchanger with several tubes, two passes and baffles.

In crossflow heat exchangers the fluids flow at right angles to each other, as illustrated in Fig. 10-3. If a fluid can move about freely while passing through the exchanger, the fluid is said to be *mixed*. Figure 10-4 shows a crossflow type with both fluids unmixed. Here the temperature distribution with distance is skewed because the fluid in a given flow path is subjected to a temperature difference unlike that experienced by the fluid in any other path at the same distance from the inlet.

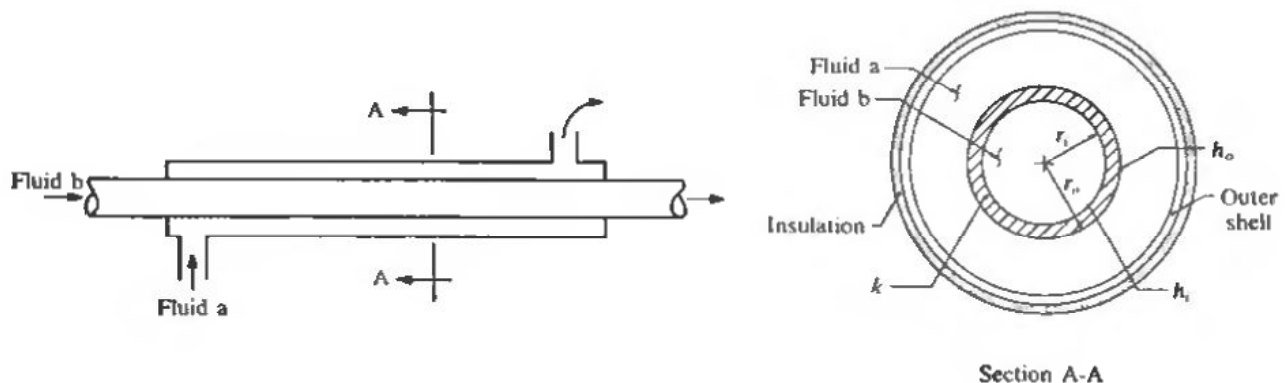


Fig. 10-1


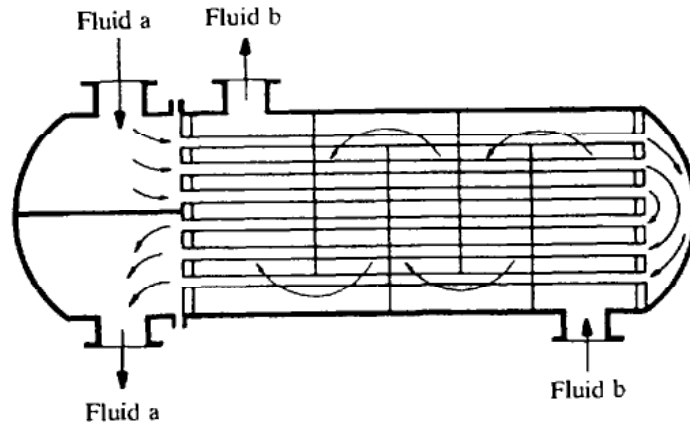


Fig. 10-2. Typical shell-and-tube heat exchanger.

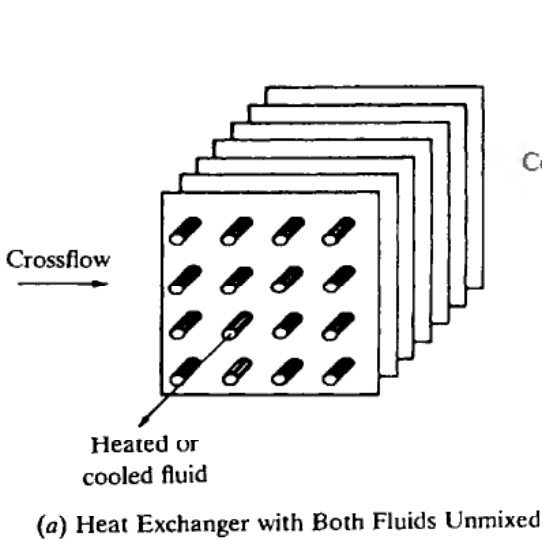

(a) Heat Exchanger with Both Fluids Unmixed

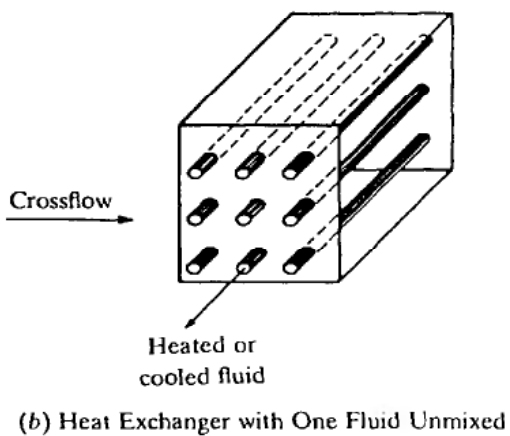


Fig. 10-3

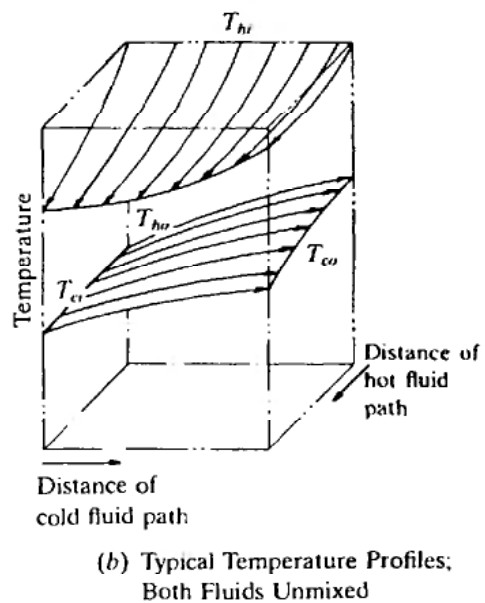
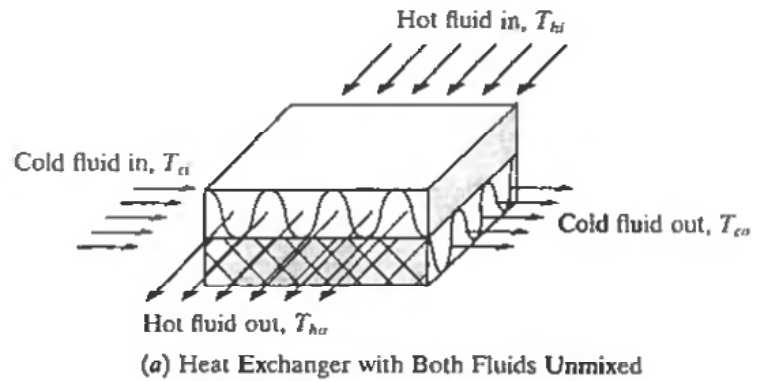


Fig. 10-4

10.2 HEAT TRANSFER CALCULATIONS

The primary objective in the thermal design of heat exchangers is to determine the necessary surface area required to transfer heat at a given rate for given fluid temperatures and flow rates. This is facilitated by employing the overall heat transfer coefficient, U , introduced in Section 2.7, in the fundamental heat transfer relation

$$q = UA\overline{\Delta T} \quad (10.1)$$

where $\overline{\Delta T}$ is an average effective temperature difference for the entire heat exchanger.

Overall Heat Transfer Coefficient

Equation (2.30) shows that the overall heat transfer coefficient U is proportional to the reciprocal of the sum of the thermal resistances. For the common configurations which we shall encounter,

$$\text{plane wall:} \quad U = \frac{1}{1/h_o + L/k + 1/h_i} \quad (10.2)$$

$$\text{cylindrical wall:} \quad U_o = \frac{1}{r_o/r_i h_i + [r_o \ln(r_o/r_i)]/k + 1/h_o} \quad (10.3)$$

$$U_i = \frac{1}{1/h_i + [r_i \ln(r_o/r_i)]/k + r_i/r_o h_o} \quad (10.4)$$

where subscripts i and o represent the inside and outside surfaces of the wall, respectively. It is important to note that the area for convection is not the same for both fluids in the case of a cylindrical wall; therefore, the overall heat transfer coefficient and the surface area must be compatible, i.e., $q = U_o A_o \overline{\Delta T} = U_i A_i \overline{\Delta T}$.

For the preliminary design of heat exchangers it is advantageous to be able to estimate overall heat transfer coefficients. Table 10-1 gives approximate values of U for some commonly encountered fluids. The wide range of values cited results from a diversity of heat exchanger materials (of different thermal conductivities, k) and flow conditions (influencing the film coefficients, h), as well as geometric configuration.

Log-Mean Temperature Difference

Before making heat transfer calculations it is necessary to define the remaining term in (10.1), $\overline{\Delta T}$. Consider, for instance, a parallel-flow flat-plate exchanger, whose temperature profiles are shown in Fig. 10-5. We shall assume that:

1. U is constant throughout the exchanger
2. the system is adiabatic; heat exchange takes place only between the two fluids
3. the temperatures of both fluids are constant over a given cross-section and can be represented by bulk temperatures
4. the specific heats of the fluids are constant

Based upon these assumptions, the heat transfer between the hot and cold fluids for a differential length dx is

$$dq = U(T_h - T_c) dA \quad (10.5)$$

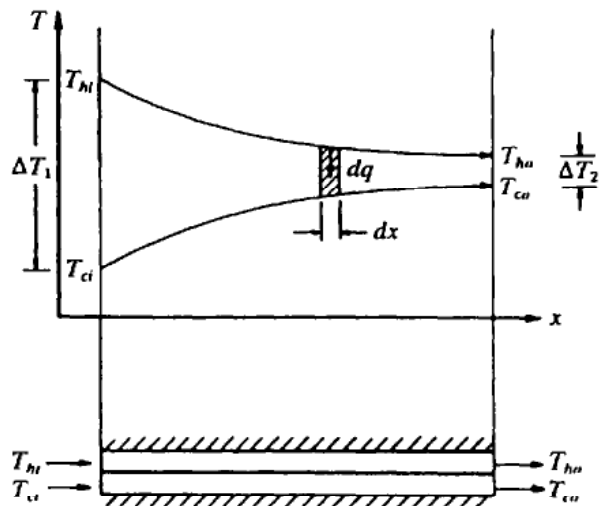


Fig. 10-5

Table 10-1. Approximate values of U .

Fluid	U	
	W/m ² ·K	Btu/h·ft ² ·°F
Brick exterior/wood panel interior wall, uninsulated	2.2–2.8	0.4–0.5
Steam to:		
Fuel oil, heavy	60–170	10–30
Light	170–340	30–60
Gases	28–280	5–50
Water	990–3400	175–600
Water to:		
Alcohol	280–850	50–150
Brine	560–1100	100–200
Compressed air	60–170	10–30
Condensing alcohol	255–680	45–120
Condensing ammonia	850–1400	150–250
Condensing Freon-12	454–850	80–150
Condensing oil	227–567	40–100
Gasoline	340–510	60–90
Lubricating oil	115–340	20–60
Water	850–1700	150–300

since dA is the product of length dx and a constant width. The energy gained by the cold fluid is equal to that given up by the hot fluid, i.e.,

$$dq = \dot{m}_c c_c dT_c = -\dot{m}_h c_h dT_h \quad (10.6)$$

where \dot{m} is the mass flow rate and c is the specific heat. Solving for the temperature differentials from eqs. (10.6) and subtracting, we get

$$d(T_h - T_c) = -\left(\frac{1}{\dot{m}_h c_h} + \frac{1}{\dot{m}_c c_c}\right) dq \quad (10.7)$$

Eliminating dq between (10.5) and (10.7) yields

$$\frac{d(T_h - T_c)}{(T_h - T_c)} = -U \left(\frac{1}{\dot{m}_h c_h} + \frac{1}{\dot{m}_c c_c}\right) dA \quad (10.8)$$

which integrates to give

$$\ln \frac{\Delta T_2}{\Delta T_1} = -UA \left(\frac{1}{\dot{m}_h c_h} + \frac{1}{\dot{m}_c c_c}\right) \quad (10.9)$$

where the ΔT terms are as shown in Fig. 10-5.

From an energy balance on each fluid,

$$\dot{m}_h c_h = \frac{q}{(T_{hi} - T_{ho})} \quad \dot{m}_c c_c = \frac{q}{(T_{co} - T_{ci})}$$

and substitution of these expressions into (10.9) gives

$$\ln \frac{\Delta T_2}{\Delta T_1} = -UA \frac{(T_{ho} - T_{ho}) + (T_{co} - T_{ci})}{q}$$

or, in terms of the differences in end temperatures,

$$\blacksquare \quad q = UA \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)} \quad (10.10)$$

Upon comparing this result with eq. (10.1), we see that

$$\blacksquare \quad \overline{\Delta T} = \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)} \equiv \Delta T_{lm} \quad (10.11)$$

This average effective temperature difference is called the *log-mean temperature difference (LMTD)*. It can easily be shown that the subscripts 1 and 2 may be interchanged without changing the value of ΔT_{lm} ; hence, the designation of ends for use in (10.10) and (10.11) is arbitrary.

Equations (10.10) and (10.11) can also be shown to hold for other single-pass exchangers such as the counterflow flat plate and the parallel flow or counterflow double-pipe configurations. Also, these equations are valid for single-pass parallel flow and counterflow evaporators and condensers where one of the fluids remains at a constant temperature.

Correction Factors for Complex Heat Exchangers

For more complex heat exchangers, such as those involving multiple tubes, several shell passes, or crossflow, determination of the average effective temperature difference is so difficult that the usual practice is to modify (10.1) by a correction factor F , giving

$$\blacksquare \quad q = UAF\Delta T_{lm} \quad (10.12)$$

in which ΔT_{lm} is that for a counterflow double-pipe exchanger with the same fluid inlet and outlet temperatures as in the more complex design. Correction factors for several common configurations are given in Figs. 10-6 through 10-9. In these figures the notation (T, t) to denote the temperatures of the two fluid streams has been introduced, since it is immaterial whether the hot fluid flows through the shell or the tubes.

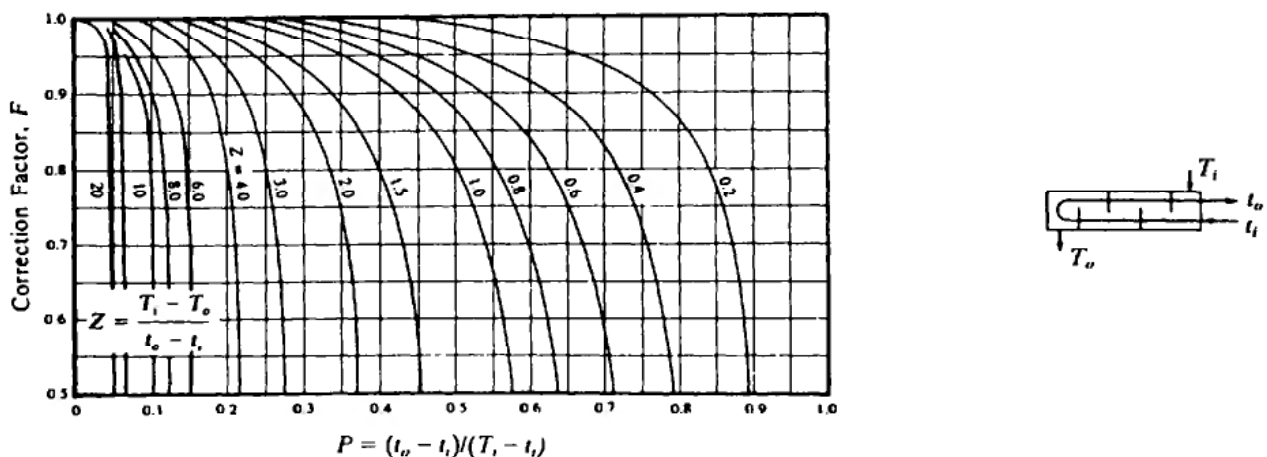


Fig. 10-6. Heat exchanger correction factor plot for one shell pass and an even number of tube passes. [From R. A. Bowman, A. C. Mueller and W. M. Nagle, ©1940, The American Society of Mechanical Engineers, *Trans. ASME*, 62: 283, New York. Used with permission.]

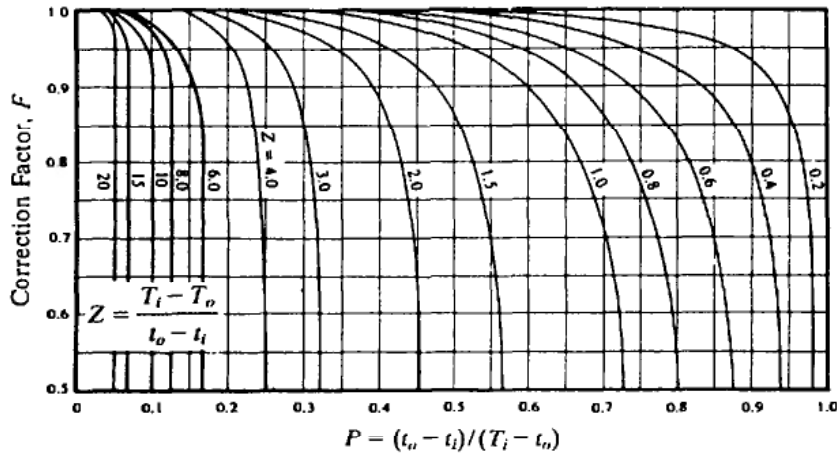


Fig. 10-7. Heat exchanger correction factor plot for two shell passes and twice an even number of tube passes. [From R. A. Bowman, A. C. Mueller and W. M. Nagle, ©1940, The American Society of Mechanical Engineers, *Trans. ASME*, 62: 283, New York. Used with permission.]

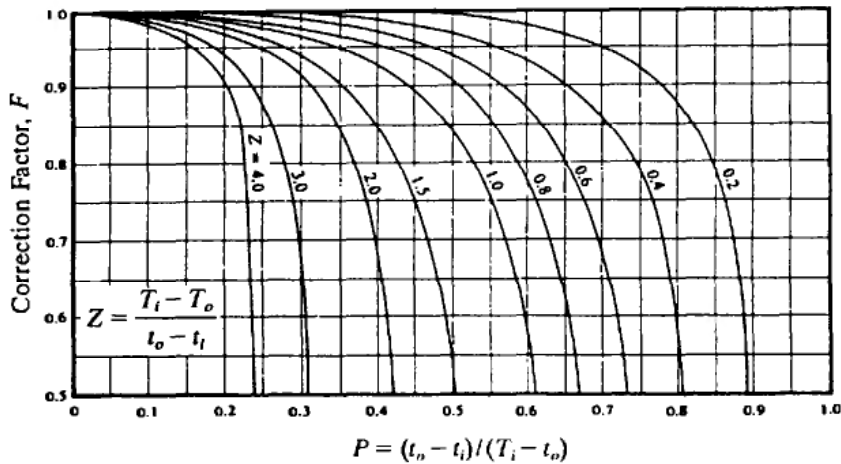


Fig. 10-8. Heat exchanger correction factor plot for single pass, crossflow with one fluid mixed. [From R. A. Bowman, A. C. Mueller, and W. M. Nagle, ©1940, The American Society of Mechanical Engineers, *Trans. ASME*, 62: 283, New York. Used with permission.]

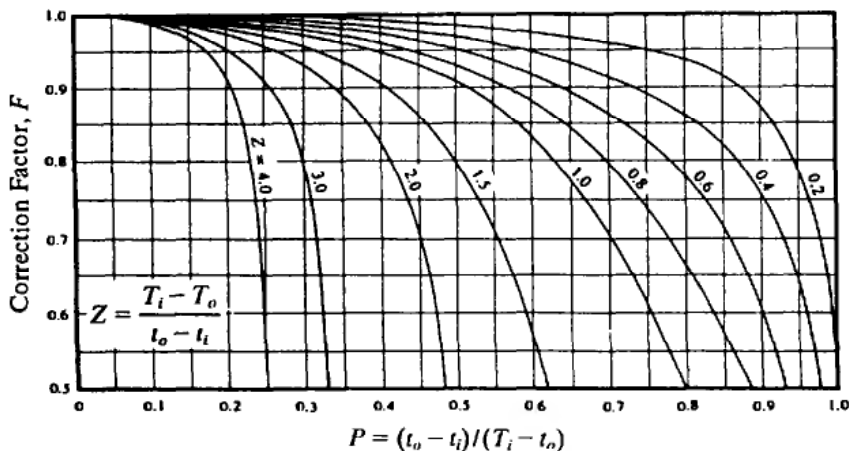


Fig. 10-9. Heat exchanger correction factor plot for single pass, crossflow with both fluids unmixed. [From R. A. Bowman, A. C. Mueller, and W. M. Nagle, ©1940, The American Society of Mechanical Engineers, *Trans. ASME*, 62: 283, New York. Used with permission.]

10.3 HEAT EXCHANGER EFFECTIVENESS (NTU METHOD)

If more than one of the inlet or outlet temperatures of the heat exchanger are unknown, the LMTD method of Section 10.2 is unwieldy, requiring a trial-and-error iterative approach. Another approach introduces a definition of heat exchanger *effectiveness*:

$$\epsilon \equiv \frac{\text{actual heat transfer}}{\text{maximum possible heat transfer}} = \frac{q_{\text{actual}}}{q_{\text{max}}} \quad (10.13)$$

where the maximum possible heat transfer is that which would result if one fluid underwent a temperature change equal to the maximum temperature difference available—the temperature of the entering hot fluid minus the temperature of the entering cold fluid. This method uses the effectiveness ϵ to eliminate the unknown discharge temperature and gives a solution for effectiveness in terms of other known parameters (\dot{m} , c , A , and U).

Letting $C \equiv \dot{m}c$,

$$q_{\text{actual}} = C_h(T_{hi} - T_{ho}) = C_c(T_{co} - T_{ci}) \quad (10.14)$$

which indicates that the energy given up by the hot fluid is gained by the cold fluid. The maximum possible heat transfer occurs when the fluid of smaller C undergoes the maximum temperature difference available, i.e.,

$$q_{\text{max}} = C_{\min}(T_{hi} - T_{ci}) \quad (10.15)$$

This transfer would be attained in a counterflow exchanger of infinite area. Combining (10.13) and (10.15), we get the basic equation for determining the heat transfer in heat exchangers with unknown discharge temperatures:

$$\blacksquare \quad q_{\text{actual}} = \epsilon C_{\min}(T_{hi} - T_{ci}) \quad (10.16)$$

Parallel-Flow Heat Exchanger

Consider the simple parallel-flow heat exchanger of Fig. 10-5 under the same assumptions used in Section 10.2 to determine the log-mean temperature difference.

Combining (10.13), (10.14), and (10.15), we get two expressions for effectiveness, viz.

$$\epsilon = \frac{C_h(T_{hi} - T_{ho})}{C_{\min}(T_{hi} - T_{ci})} = \frac{C_c(T_{co} - T_{ci})}{C_{\min}(T_{hi} - T_{ci})} \quad (10.17)$$

Since either the hot or the cold fluid may have the minimum value of C , there are two possible values of effectiveness:

$$\begin{aligned} C_h < C_c & : \quad \epsilon_h = \frac{T_{hi} - T_{ho}}{T_{hi} - T_{ci}} \\ C_c < C_h & : \quad \epsilon_c = \frac{T_{co} - T_{ci}}{T_{hi} - T_{ci}} \end{aligned} \quad (10.18)$$

where subscripts on ϵ designate the fluid which has the minimum C . Returning to (10.9), it may be written in terms of the C s to give

$$\ln \frac{T_{ho} - T_{co}}{T_{hi} - T_{ci}} = -UA \left(\frac{1}{C_h} + \frac{1}{C_c} \right) \quad (10.19)$$

or

$$\frac{T_{ho} - T_{co}}{T_{hi} - T_{ci}} = \exp \left[-\frac{UA}{C_h} \left(1 + \frac{C_h}{C_c} \right) \right] \quad (10.20)$$

From the energy balance equation (10.14),

$$T_{co} = T_{ci} + \frac{C_h}{C_c} (T_{hi} - T_{ho}) \quad (10.21)$$

Combining (10.20) and (10.21) with the first equation (10.18), which assumes that the hotter fluid has the minimum value of C , we get

$$\epsilon_h = \frac{1 - \exp[-(UA/C_h)(1 + C_h/C_c)]}{1 + C_h/C_c} \quad (10.22)$$

If the colder fluid has the minimum value of C ,

$$\epsilon_c = \frac{1 - \exp[-(UA/C_c)(1 + C_c/C_h)]}{1 + C_c/C_h} \quad (10.23)$$

Equations (10.22) and (10.23) may both be expressed as

$$\blacksquare \quad \epsilon = \frac{1 - \exp[-(UA/C_{\min})(1 + C_{\min}/C_{\max})]}{1 + C_{\min}/C_{\max}} \quad (10.24)$$

giving the effectiveness for a parallel-flow heat exchanger in terms of two dimensionless ratios. One of these, UA/C_{\min} , is called the *number of transfer units*, i.e.,

$$NTU \equiv \dot{U}A/C_{\min} \quad (10.25)$$

The NTU may be considered as a heat exchanger size factor. It should be noted that (10.24) contains only the overall heat transfer coefficient, area, fluid properties, and flow rates.

Other Configurations

Expressions for the effectiveness of other configurations are given in Table 10-2, where $C \equiv C_{\min}/C_{\max}$. Note that for an evaporator or condenser $C = 0$, because one fluid remains at a constant temperature, making its effective specific heat infinite.

10.4 FOULING FACTORS

The performance of heat exchangers as developed in the preceding sections depends upon the heat transfer surfaces being clean and uncorroded. Should surface deposits be present, thermal resistance increases, resulting in decreased performance. This added resistance is usually accounted for by a *fouling factor*, or *fouling resistance*, R_f , which must be included along with other thermal resistances when calculating the overall heat transfer coefficient.

Fouling factors are determined experimentally by testing the heat exchanger in both the clean and dirty condition, being defined by

$$R_f = \frac{1}{U_{\text{dirty}}} - \frac{1}{U_{\text{clean}}} \quad (10.26)$$

Typical values of R_f in $\text{m}^2 \cdot \text{K}/\text{W}$ range from 0.00009 for clean vapors to 0.0002 for hot river water or hot seawater. For more details, contact the Tubular Exchanger Manufacturers Association, Tarrytown, NY, or manufacturers of specific equipment.

Table 10-2. Summary of effectiveness equations.

Exchanger Type	Effectiveness	Figure
		Equation
Parallel-flow: single-pass	$\epsilon = \frac{1 - \exp[-NTU(1 + C)]}{1 + C}$	Fig. 10-10 eq. (10.27)
Counterflow: single-pass	$\epsilon = \frac{1 - \exp[-NTU(1 - C)]}{1 - C \exp[-NTU(1 - C)]}$	Fig. 10-11 eq. (10.28)
Shell-and-tube (one shell pass; 2, 4, 6, etc., tube passes)	$\epsilon_1 = 2 \left[1 + C + \frac{1 + \exp[-NTU(1 + C^2)^{1/2}]}{1 - \exp[-NTU(1 + C^2)^{1/2}]} (1 + C^2)^{1/2} \right]^{-1}$	Fig. 10-12 eq. (10.29)
Shell-and-tube (n shell passes; $2n, 4n, 6n$, etc., tube passes)	$\epsilon_n = \left[\left(\frac{1 - \epsilon_1 C}{1 - \epsilon_1} \right)^n - 1 \right] \left[\left(\frac{1 - \epsilon_1 C}{1 - \epsilon_1} \right)^n - C \right]^{-1}$	Fig. 10-13 for $n = 2$ eq. (10.30)
Crossflow (both streams unmixed)	$\epsilon = 1 - \exp \left\{ \left(\frac{1}{C} \right) (NTU)^{0.22} [\exp[-C(NTU)^{0.78}] - 1] \right\}$	Fig. 10-14 eq. (10.31)
Crossflow (both streams mixed)	$\epsilon = NTU \left[\frac{NTU}{1 - \exp(-NTU)} + \frac{(NTU)(C)}{1 - \exp[-(NTU)(C)]} - 1 \right]^{-1}$	No figure eq. (10.32)
Crossflow (stream C_{min} unmixed)	$\epsilon = \left(\frac{1}{C} \right) \{ 1 - \exp[-C \{ 1 - \exp(-NTU) \}] \}$	Fig. 10-15 (dashed curves) eq. (10.33)
Crossflow (stream C_{max} unmixed)	$\epsilon = 1 - \exp \left\{ - \left(\frac{1}{C} \right) [1 - \exp[-(NTU)(C)]] \right\}$	Fig. 10-15 (solid curves) eq. (10.34)
Parallel-flow: single-pass $C = 1$	$\epsilon = \frac{1 - \exp(-2NTU)}{2}$	No figure eq. (10.35)
Counterflow: single-pass $C = 1$	$\epsilon = \frac{NTU}{NTU + 1}$	No figure eq. (10.36)

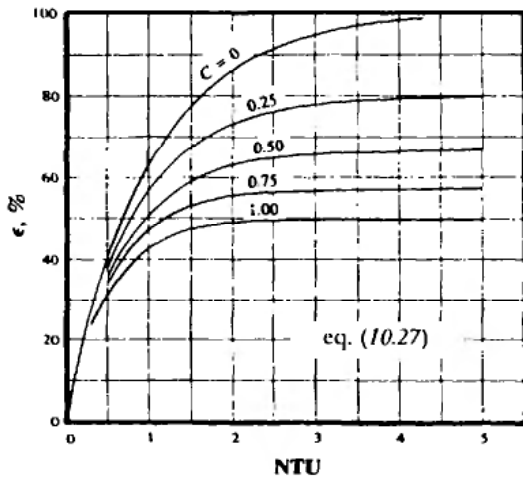


Fig. 10-10. Effectiveness: parallel-flow, single-pass heat exchanger.

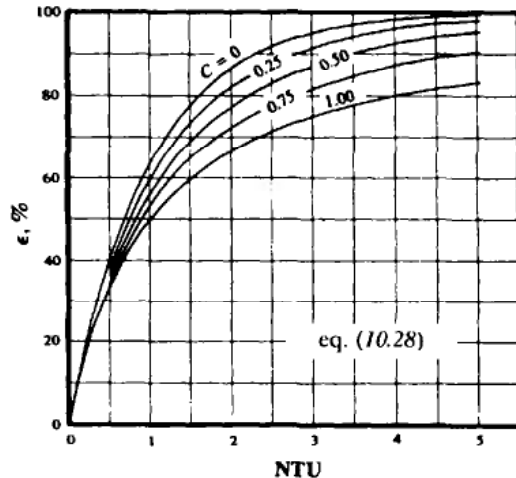


Fig. 10-11. Effectiveness: counter flow, single-pass heat exchanger.

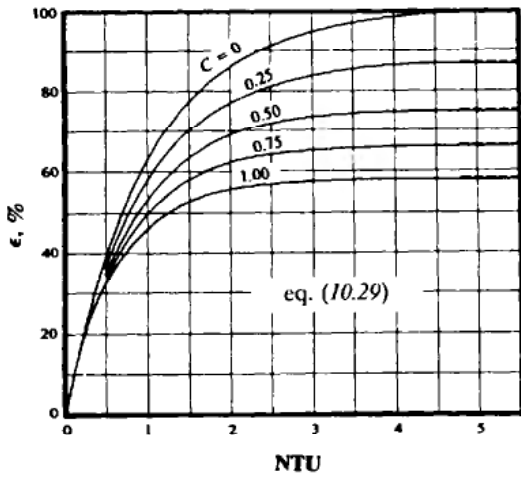


Fig. 10-12. Effectiveness: shell-and-tube heat exchanger (one shell pass; 2, 4, 6, etc. tube passes).

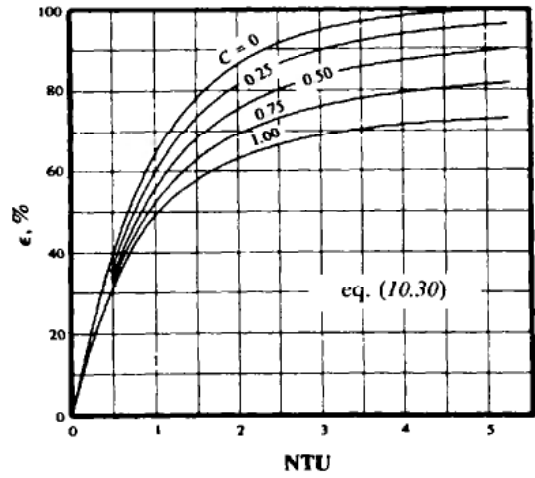


Fig. 10-13. Effectiveness: shell-and-tube heat exchanger (n shell passes and $2n, 4n, 6n,$ etc. tube passes) (for $n = 2$).

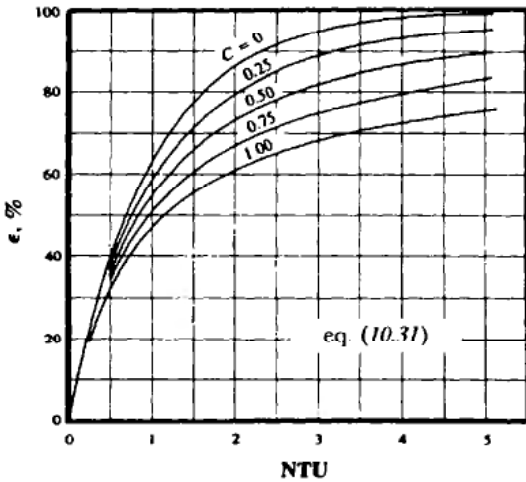


Fig. 10-14. Effectiveness: cross flow heat exchanger (both streams unmixed).

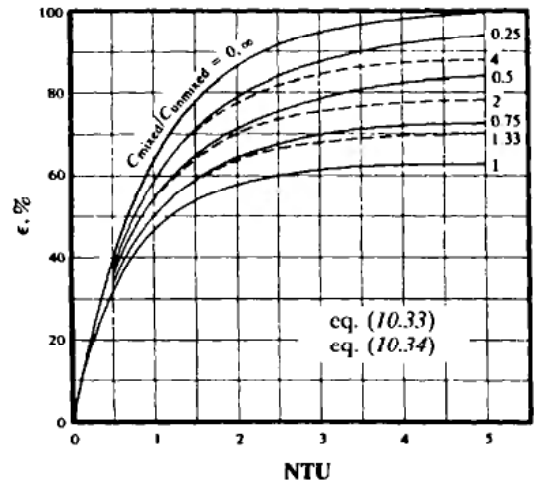


Fig. 10-15. Effectiveness: cross flow heat exchanger (one stream unmixed).

Solved Problems

- 10.1.** In a food processing plant a brine solution is heated from 6°C to 12°C in a double-pipe heat exchanger by water entering at 50°C and leaving at 40°C at the rate of 0.166 kg/s. If the overall heat transfer coefficient is 850 W/m²·°C, what heat exchanger area is required for (a) parallel flow and (b) counterflow?

The heat transfer from the water is given by

$$q = \dot{m}c_p \Delta T$$

where $c_p = 4.180$ kJ/kg·K taken from Table B-3 (SI); therefore,

$$q = (0.166 \text{ kg/s})(4.180)(\text{kJ/kg} \cdot \text{K})[(50 - 40)^\circ\text{C}] = 6.967 \times 10^3 \text{ W}$$

- (a) Figure 10-5 is a qualitative representation of the temperature distribution for the parallel-flow case. The log-mean temperature difference is given by (10.11),

$$\Delta T_{lm} = \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)}$$

for which $\Delta T_1 = 50 - 6 = 44^\circ\text{C}$ and $\Delta T_2 = 40 - 12 = 28^\circ\text{C}$; hence,

$$\Delta T_{lm} = \frac{28 - 44}{\ln(28/44)} = 35.4^\circ\text{C}$$

and

$$A = \frac{q}{U \Delta T_{lm}} = \frac{6.967 \times 10^3 \text{ W}}{(850 \text{ W/m}^2 \cdot ^\circ\text{C})(35.4^\circ\text{C})} = 0.231 \text{ m}^2$$

- (b) The temperature distribution for the counterflow case is shown qualitatively in Fig. 10-16, from which

$$\Delta T_1 = 50 - 12 = 38^\circ\text{C}$$

and

$$\Delta T_2 = 40 - 6 = 34^\circ\text{C}$$

Equation (10.11) yields

$$\Delta T_{lm} = \frac{34 - 38}{\ln(34/38)} = 35.96^\circ\text{C}$$

and

$$\begin{aligned} A &= \frac{q}{U \Delta T_{lm}} \\ &= \frac{6967 \text{ W}}{(850 \text{ W/m}^2 \cdot ^\circ\text{C})(35.96^\circ\text{C})} \\ &= 0.228 \text{ m}^2 \end{aligned}$$

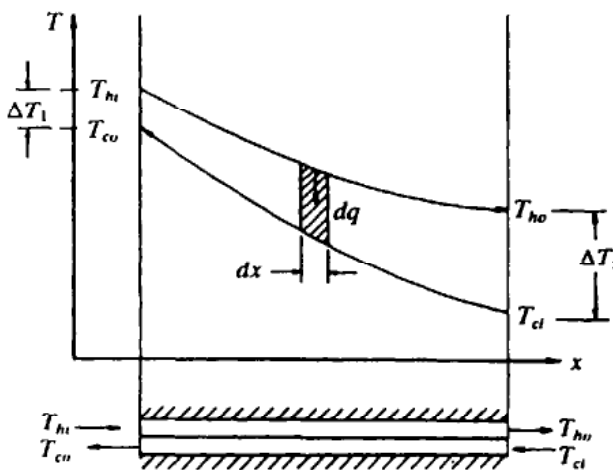


Fig. 10-16

- 10.2.** Hot oil is used to heat water, flowing at the rate of 0.1 kg/s, from 40°C to 80°C in a counterflow double-pipe heat exchanger. For an overall heat transfer coefficient of 300 W/m²·K, find the heat transfer area if the oil enters at 105°C and leaves at 70°C.

The heat gained by the water is given by

$$q = \dot{m}_w c_w (T_{wo} - T_{wi})$$

From Table B-3 (SI) the specific heat of water at $(40 + 80)/2 = 60^\circ\text{C}$ is

$$c_w = (0.9994)(4.184 \times 10^3) = 4184 \text{ J/kg} \cdot \text{K}$$

This gives a heat transfer

$$q = (0.1 \text{ kg/s})(4184 \text{ W} \cdot \text{s/kg} \cdot \text{K})(80 - 40) \text{ K} = 1.67 \times 10^4 \text{ W}$$

Using (10.10), where $\Delta T_2 = 70 - 40 = 30 \text{ K}$ and $\Delta T_1 = 105 - 80 = 25 \text{ K}$, we get

$$A = \frac{q \ln(\Delta T_2/\Delta T_1)}{U \Delta T_2 - \Delta T_1} = \frac{1.67 \times 10^4 \text{ W} \ln(30/25)}{300 \text{ W/m}^2 \cdot \text{K} (30 - 25) \text{ K}} = 2.03 \text{ m}^2$$

- 10.3.** In a double-pipe counterflow heat exchanger, water at the rate of $60 \text{ lb}_m/\text{min}$ is heated from 65°F to 95°F by an oil having a specific heat of $0.36 \text{ Btu/lb}_m \cdot ^\circ\text{F}$. The oil enters the exchanger at 200°F and leaves at 140°F . Determine the heat exchanger area for an overall heat transfer coefficient of $50 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F}$.

The total heat transfer to the water, using $c_p = 1.0 \text{ Btu/lb}_m \cdot ^\circ\text{F}$, is

$$q = \dot{m} c_p \Delta T = \left(60 \frac{\text{lb}_m}{\text{min}}\right) \left(\frac{60 \text{ min}}{\text{h}}\right) \left(1.0 \frac{\text{Btu}}{\text{lb}_m \cdot ^\circ\text{F}}\right) [(95 - 65) ^\circ\text{F}] = 108\,000 \text{ Btu/h}$$

Referring to Fig. 10-16, the log-mean temperature difference is given by

$$\Delta T_{\text{lm}} = \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)}$$

where $\Delta T_2 = 140 - 65 = 75^\circ\text{F}$ and $\Delta T_1 = 200 - 95 = 105^\circ\text{F}$; hence,

$$\Delta T_{\text{lm}} = \frac{75 - 105}{\ln(75/105)} = \frac{-30}{-0.336} = 89.16^\circ\text{F}$$

and the area is

$$A = \frac{q}{U \Delta T_{\text{lm}}} = \frac{108\,000 \text{ Btu/h}}{(50 \text{ Btu/h} \cdot \text{ft}^2 \cdot ^\circ\text{F})(89.16^\circ\text{F})} = 24.23 \text{ ft}^2$$

- 10.4.** Hot oil ($c_p = 2.09 \text{ kJ/kg} \cdot \text{K}$) flows through a counterflow heat exchanger at the rate of 0.63 kg/s . It enters at 193°C and leaves at 65°C . Cold oil ($c_p = 1.67 \text{ kJ/kg} \cdot \text{K}$) exits at 149°C at the rate of 1.0 kg/s . What area is required to handle the load if the overall heat transfer coefficient based on the inside area is $0.7 \text{ kW/m}^2 \cdot \text{K}$?

The unknown inlet temperature of the cold oil may be found from an energy balance on the two fluids, i.e.,

$$\dot{m}_c c_c (T_{co} - T_{ci}) = \dot{m}_h c_h (T_{hi} - T_{ho})$$

$$T_{ci} = T_{co} - \frac{\dot{m}_h c_h}{\dot{m}_c c_c} (T_{hi} - T_{ho})$$

$$= 149^\circ\text{C} - \frac{(0.63 \text{ kg/s})(2.09 \text{ kJ/kg} \cdot \text{K})}{(1.0 \text{ kg/s})(1.67 \text{ kJ/kg} \cdot \text{K})} [(193 - 65) ^\circ\text{C}] = 48.08^\circ\text{C}$$

Knowing the inlet and exit temperatures for both fluids, we may now use (10.10) in conjunction with an energy balance on one fluid to determine the area. From an energy balance on the hot fluid, the heat transfer is given by

$$q = \dot{m}_h c_h (T_{hi} - T_{ho}) \\ = (0.63 \text{ kg/s})(2.09 \text{ kJ/kg} \cdot \text{K})[(193 - 65) \text{ K}] = 168.54 \text{ kJ/s} = 168.54 \text{ kW}$$

Referring to Fig. 10-16 and using (10.10), we have

$$A = \frac{q}{U} \frac{\ln(\Delta T_2/\Delta T_1)}{\Delta T_2 - \Delta T_1}$$

where

$$\begin{aligned}\Delta T_2 &= T_{h_o} - T_{c_i} = 65 - 48.08 = 16.92 \text{ K} \\ \Delta T_1 &= T_{h_i} - T_{c_o} = 193 - 149 = 44 \text{ K}\end{aligned}$$

Thus,

$$A = \frac{168.54 \text{ kW}}{0.700 \text{ kW/m}^2 \cdot \text{K}} \frac{\ln(16.92/44)}{(16.92 - 44) \text{ K}} = 8.5 \text{ m}^2$$

- 10.5.** A brine solution is heated from 6 °C to 30 °C in a one-shell-pass (hot water)—two-tube-pass (brine) heat exchanger. The hot water enters at 55 °C and exits at 40 °C. The water flow rate is 0.25 kg/s, and the overall heat transfer coefficient is $U = 900 \text{ W/m}^2 \cdot \text{K}$. What heat exchanger area is required?

The heat transfer rate is

$$q = (\dot{m}c_p \Delta T)_{\text{water}}$$

where the c_p for water at $T_{\text{avg}} = 47.5 \text{ °C}$ is $4.181 \times 10^3 \text{ J/kg} \cdot \text{K}$ from Table B-3 (SI). Thus,

$$q = \left(\frac{0.25 \text{ kg}}{\text{s}} \right) \left(\frac{4.181 \times 10^3 \text{ J}}{\text{kg} \cdot \text{°C}} \right) (55 - 40) \text{ °C} = 15\,678 \text{ W}$$

The ΔT_1 and ΔT_2 for the double-pipe, counterflow heat exchanger are

$$\Delta T_1 = 55 - 30 = 25 \text{ °C}; \quad \Delta T_2 = 40 - 6 = 34 \text{ °C}$$

and

$$\Delta T_{\text{lm}} = \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)} = \frac{34 - 25}{\ln(34/25)} = 29.27 \text{ °C}$$

Now

$$q = UAF\Delta T_{\text{lm}}; \quad A = \frac{q}{UF\Delta T_{\text{lm}}}$$

We will determine F by use of Fig. 10-6. For this, temperatures T_i , T_o are for the shell side (water) and t_i , t_o are for the two tube passes (brine).

$$\begin{aligned}P &= \frac{t_o - t_i}{T_i - t_i} = \frac{30 - 6}{55 - 6} = 0.490 \\ Z &= \frac{T_i - T_o}{t_o - t_i} = \frac{55 - 40}{30 - 6} = 0.625\end{aligned}$$

From Fig. 10-6, $F \approx 0.92$ and thus

$$A = \frac{15\,678 \text{ W}}{(900 \text{ W/m}^2 \cdot \text{K})(0.92)(29.27 \text{ °C})} = 0.647 \text{ m}^2$$

- 10.6.** Repeat Problem 10.5 for two shell passes and four tube passes.

The dimensionless parameters for this case are the same as those of Problem 10.5, but Fig. 10-7 must be used to obtain F , which approaches unity. Therefore, $A \approx 0.601 \text{ m}^2$.

- 10.7.** What area would be required for the conditions of Problem 10.2 if a shell-and-tube heat exchanger were substituted for the double-pipe heat exchanger? The water makes one shell pass, and the oil makes two tube passes.

Assuming that the overall heat transfer coefficient remains at $300 \text{ W/m}^2 \cdot \text{K}$, we must get a correction factor F from Fig. 10-6 to use in (10.12), viz.

$$q = UAF\Delta T_{lm}$$

The temperatures for use in the figure are:

$$T_i = 40^\circ\text{C} \quad T_o = 80^\circ\text{C} \quad t_i = 105^\circ\text{C} \quad t_o = 70^\circ\text{C}$$

The dimensionless ratios are

$$P = \frac{t_o - t_i}{T_i - t_i} = \frac{70 - 105}{40 - 105} = 0.54 \quad Z = \frac{T_i - T_o}{t_o - t_i} = \frac{40 - 80}{70 - 105} = 1.14$$

which gives a correction factor $F \approx 0.62$; therefore,

$$A = \frac{q}{UF\Delta T_{lm}} = \frac{q \ln(\Delta T_2/\Delta T_1)}{UF(\Delta T_2 - \Delta T_1)} \approx \frac{2.03 \text{ m}^2}{0.62} = 3.27 \text{ m}^2$$

- 10.8.** A crossflow heat exchanger with both fluids unmixed is used to heat water ($c_p = 4.181 \text{ kJ/kg} \cdot \text{K}$) from 40°C to 80°C , flowing at the rate of 1.0 kg/s . What is the overall heat transfer coefficient if hot engine oil ($c_p = 1.9 \text{ kJ/kg} \cdot \text{K}$), flowing at the rate of 2.6 kg/s , enters at 100°C ? The heat transfer area is 20 m^2 .

The heat transfer is given by

$$q = \dot{m}_w c_w (T_{wo} - T_{wi}) = \dot{m}_e c_e (T_{ei} - T_{eo}) = UAF \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)}$$

The second equality will be used to get the exit oil temperature so that the log-mean temperature differences and the correction factor can be determined.

$$\begin{aligned} T_{eo} &= T_{ei} - \frac{\dot{m}_w c_w}{\dot{m}_e c_e} (T_{wo} - T_{wi}) \\ &= 100^\circ\text{C} - \frac{(1.0 \text{ kg/s})(4.181 \text{ kJ/kg} \cdot \text{K})}{(2.6 \text{ kg/s})(1.9 \text{ kJ/kg} \cdot \text{K})} [(80 - 40)^\circ\text{C}] = 66.15^\circ\text{C} \end{aligned}$$

This gives:

$$\Delta T_2 = T_{eo} - T_{wi} = 66.15 - 40 = 26.15^\circ\text{C} \quad \Delta T_1 = T_{ei} - T_{wo} = 100 - 80 = 20^\circ\text{C}$$

In the nomenclature of Fig. 10-9,

$$T_i = 100^\circ\text{C} \quad T_o = 66.15^\circ\text{C} \quad t_i = 40^\circ\text{C} \quad t_o = 80^\circ\text{C}$$

Evaluating the dimensionless parameters, we get

$$P = \frac{t_o - t_i}{T_i - t_i} = \frac{80 - 40}{100 - 40} = 0.67 \quad Z = \frac{T_i - T_o}{t_o - t_i} = \frac{100 - 66.15}{80 - 40} = 0.846$$

and the correction factor is $F \approx 0.81$.

From the above heat transfer equations,

$$\begin{aligned} U &= \frac{\dot{m}_w c_w (T_{wo} - T_{wi}) \ln(\Delta T_2/\Delta T_1)}{AF(\Delta T_2 - \Delta T_1)} \\ &\approx \frac{(1.0 \text{ kg/s})(4.181 \text{ kJ/kg} \cdot \text{K})[(80 - 40) \text{ K}] \ln(26.15/20)}{(20 \text{ m}^2)(0.81)[(26.15 - 20) \text{ K}]} = 0.45 \text{ kW/m}^2 \cdot \text{K} \end{aligned}$$

- 10.9.** Estimate the surface area required in a crossflow heat exchanger with both fluids unmixed to cool 50 000 lb_m/h of air from 120 °F to 100 °F with inlet water at 60 °F flowing at the rate of 115 000 lb_m/h. Assume that the average value of the overall heat transfer coefficient is 30 Btu/h · ft² · °F.

The total heat transfer from the air is

$$q = (\dot{m}c_p \Delta T)_a = \left(50\,000 \frac{\text{lb}_m}{\text{h}} \right) \left(0.24 \frac{\text{Btu}}{\text{lb}_m \cdot ^\circ\text{F}} \right) [(120 - 100) ^\circ\text{F}] = 240\,000 \text{ Btu/h}$$

From an energy balance we can get the exit water temperature, i.e.,

$$\begin{aligned} \dot{m}_a c_{pa} \Delta T_a &= \dot{m}_w c_{pw} \Delta T_w = 240\,000 \text{ Btu/h} \\ \Delta T_w &= \frac{240\,000 \text{ Btu/h}}{(115\,000 \text{ lb}_m/\text{h})(1.0 \text{ Btu}/\text{lb}_m \cdot ^\circ\text{F})} = 2.09 ^\circ\text{F} \end{aligned}$$

and

$$T_{wo} = T_{wi} + \Delta T_w = 60 + 2.09 = 62.09 ^\circ\text{F}$$

The surface area is given by (10.12) as

$$A = \frac{q}{UF\Delta T_{lm}}$$

where F is taken from Fig. 10-9 and ΔT_{lm} is the log-mean temperature difference for a counterflow double-pipe heat exchanger having the same fluid inlet and outlet temperatures. Referring to Fig. 10-16, $\Delta T_1 = 120 - 62.09 = 57.91 ^\circ\text{F}$ and $\Delta T_2 = 100 - 60 = 40 ^\circ\text{F}$. Equation (10.11) gives the log-mean temperature difference as

$$\Delta T_{lm} = \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)} = \frac{40 - 57.91}{\ln(40/57.91)} = 48.40 ^\circ\text{F}$$

Letting the lowercase temperature nomenclature of Fig. 10-9 represent the air, the required dimensionless parameters are:

$$P = \frac{t_o - t_i}{T_i - t_i} = \frac{100 - 120}{60 - 120} = 0.33 \quad Z = \frac{T_i - T_o}{T_o - t_i} = \frac{60 - 62.09}{100 - 120} = 0.10$$

The correction factor, from Fig. 10-9, is approximately unity; therefore,

$$A \approx \frac{240\,000 \text{ Btu/h}}{(30 \text{ Btu}/\text{h} \cdot \text{ft}^2 \cdot ^\circ\text{F})(1.0)(48.40 ^\circ\text{F})} = 165.29 \text{ ft}^2$$

- 10.10.** What error would have been introduced in Problem 10.9 if the arithmetic mean temperature difference, defined by $\overline{\Delta T}_{am} \equiv (\Delta T_2 + \Delta T_1)/2$, had been used rather than the log-mean temperature difference, ΔT_{lm} ?

The arithmetic mean temperature difference is

$$\overline{\Delta T}_{am} = \frac{40 + 57.91}{2} = 48.96 ^\circ\text{F}$$

This gives an area of

$$A_{am} = \left(\frac{48.40}{48.96} \right) (165.29) = 163.42 \text{ ft}^2$$

which underspecifies the area by

$$\text{error} = \frac{165.29 - 163.42}{165.29} \times 100\% = 1.13\%$$

10.11. For what value of $\Delta T_2/\Delta T_1$ is the arithmetic mean temperature difference,

$$\overline{\Delta T}_{am} \equiv (\Delta T_2 + \Delta T_1)/2$$

5% larger than the log-mean temperature difference, ΔT_{lm} ?

We have

$$\frac{\overline{\Delta T}_{am}}{\Delta T_{lm}} = \frac{\frac{1}{2}(\Delta T_2 + \Delta T_1)}{(\Delta T_2 - \Delta T_1)/\ln(\Delta T_2/\Delta T_1)} = \frac{1}{2} \frac{(\Delta T_2/\Delta T_1) + 1}{(\Delta T_2/\Delta T_1) - 1} \ln(\Delta T_2/\Delta T_1)$$

For $\overline{\Delta T}_{am}/\Delta T_{lm} = 1.05$,

$$\frac{(\Delta T_2/\Delta T_1) + 1}{(\Delta T_2/\Delta T_1) - 1} \ln(\Delta T_2/\Delta T_1) = 2.10$$

Solving by trial, $\Delta T_2/\Delta T_1 = 2.2$.

It can be shown analytically that $\overline{\Delta T}_{am}/\Delta T_{lm}$ is a strictly increasing function of $\Delta T_2/\Delta T_1$ for $\Delta T_2/\Delta T_1 \geq 1$. Consequently, the simple arithmetic mean temperature difference gives results to within 5%, when the end temperature differences vary by no more than a factor of 2.2.

10.12. When new, a heat exchanger transfers 10% more heat than it does after being in service for six months. Assuming that it operates between the same temperature differentials and that there is insufficient scale buildup to change the effective surface area, determine the effective fouling factor in terms of its clean (new) overall heat transfer coefficient.

The heat exchange ratio may be written as

$$\frac{q_{\text{clean}}}{q_{\text{dirty}}} = \frac{U_{\text{clean}} A \overline{\Delta T}}{U_{\text{dirty}} A \overline{\Delta T}} = 1.10 \quad \text{or} \quad U_{\text{dirty}} = \frac{U_{\text{clean}}}{1.10}$$

Substituting this into (10.26), we get

$$R_f = \frac{1}{U_{\text{dirty}}} - \frac{1}{U_{\text{clean}}} = \frac{1.10}{U_{\text{clean}}} - \frac{1}{U_{\text{clean}}} = \frac{0.10}{U_{\text{clean}}}$$

10.13. A double-pipe, parallel-flow heat exchanger uses oil ($c_p = 1.88 \text{ kJ/kg}\cdot^\circ\text{C}$) at an initial temperature of 205°C to heat water, flowing at 225 kg/h , from 16°C to 44°C . The oil flow rate is 270 kg/h . (a) What heat exchanger area is required for an overall heat transfer coefficient of $340 \text{ W/m}^2\cdot^\circ\text{C}$? (b) Determine the number of transfer units (NTU). (c) Calculate the effectiveness of the heat exchanger.

(a) At an average water temperature of 30°C , the specific heat is $c_{pw} = 4.18 \text{ kJ/kg}\cdot^\circ\text{C}$; therefore, an energy balance gives

$$\begin{aligned} (\dot{m}c_p \Delta T)_{\text{oil}} &= (\dot{m}c_p \Delta T)_{\text{water}} \\ (270 \text{ kg/h})(1.88 \text{ kJ/kg}\cdot^\circ\text{C})(205^\circ\text{C} - T_o) &= (225 \text{ kg/h})(4.18 \text{ kJ/kg}\cdot^\circ\text{C})(44 - 16)^\circ\text{C} \\ T_o \Big|_o &= 205 - \frac{225(4.18)(28)}{(270)(1.88)} = 205 - 51.9 = 153^\circ\text{C} \end{aligned}$$

This gives end temperature differences: $\Delta T_1 = 205 - 16 = 189^\circ\text{C}$ and $\Delta T_2 = 153 - 44 = 109^\circ\text{C}$, and the log-mean temperature difference is

$$\Delta T_{lm} = \frac{\Delta T_2 - \Delta T_1}{\ln(\Delta T_2/\Delta T_1)} = \frac{109 - 189}{\ln(109/189)} = 145.4^\circ\text{C}$$

The total heat transfer is $q = (\dot{m}c_p \Delta T)_{\text{water}} = (225 \text{ kg/h})(4.18 \text{ kJ/kg}\cdot^\circ\text{C})(44 - 16^\circ\text{C}) = 7315 \text{ W}$ and the area is given by

$$A = \frac{q}{U \Delta T_{lm}} = \frac{7315 \text{ W}}{(340 \text{ W/m}^2\cdot^\circ\text{C})(145.4^\circ\text{C})} = 0.148 \text{ m}^2$$

- (b) The number of transfer units is given by $NTU = UA/C_{min}$. To determine C_{min} we must compare the products of the mass-flow rate and specific heat for the water and oil.

$$(\dot{m}c_p)_{water} = \left(225 \frac{\text{kg}}{\text{h}}\right) \left(4.18 \frac{\text{kJ}}{\text{kg} \cdot ^\circ\text{C}}\right) = 9.405 \times 10^5 \text{ J/h} \cdot ^\circ\text{C}$$

$$(\dot{m}c_p)_{oil} = \left(270 \frac{\text{kg}}{\text{h}}\right) \left(1.88 \frac{\text{kJ}}{\text{kg} \cdot ^\circ\text{C}}\right) = 5.076 \times 10^5 \text{ J/h} \cdot ^\circ\text{C}$$

Therefore, $C_{min} = 5.076 \times 10^5 \text{ J/h} \cdot ^\circ\text{C} = 141 \text{ W/}^\circ\text{C}$ and $C_{max} = 9.405 \text{ J/h} \cdot ^\circ\text{C} = 261 \text{ W/}^\circ\text{C}$. Hence,

$$NTU = \frac{UA}{C_{min}} = \frac{(340 \text{ W/m}^2 \cdot ^\circ\text{C})(0.148 \text{ m}^2)}{141 \text{ W/}^\circ\text{C}} = 0.36$$

- (c) The effectiveness is given by (10.24).

$$\epsilon = \frac{1 - \exp[-NTU(1 + C_{min}/C_{max})]}{1 + C_{min}/C_{max}} = \frac{1 - \exp[-(0.36)[1 + (141/261)]]}{1 + 141/261} = 28\%$$

which agrees very well with that shown graphically in Fig. 10-10.

- 10.14.** Water enters a counterflow, double-pipe heat exchanger at 38°C , flowing at the rate of 0.75 kg/s . It is heated by oil ($c_p = 1.884 \text{ kJ/kg} \cdot \text{K}$) flowing at the rate of 1.5 kg/s from an inlet temperature of 116°C . For an area of 13.0 m^2 and an overall heat transfer coefficient of $340 \text{ W/m}^2 \cdot \text{K}$, determine the total heat transfer rate.

Since the inlet temperatures are known and the $(\dot{m}c_p)$ products can be calculated, (10.16) may be used to determine the heat transfer after finding the heat exchanger effectiveness, ϵ . Since the specific heat of water is approximately $4.18 \text{ kJ/kg} \cdot \text{K}$ (at approximately 40°C),

$$(\dot{m}c_p)_{water} = \left(0.75 \frac{\text{kg}}{\text{s}}\right) \left(4.18 \frac{\text{kJ}}{\text{kg} \cdot \text{K}}\right) = 3.14 \text{ kJ/s} \cdot \text{K}$$

$$(\dot{m}c_p)_{oil} = \left(1.5 \frac{\text{kg}}{\text{s}}\right) \left(1.88 \frac{\text{kJ}}{\text{kg} \cdot \text{K}}\right) = 2.82 \text{ kJ/s} \cdot \text{K}$$

Therefore

$$\frac{C_{min}}{C_{max}} = \frac{2.82}{3.14} = 0.90$$

and

$$NTU = \frac{UA}{C_{min}} = \frac{(340 \text{ W/m}^2 \cdot \text{K})(13.0 \text{ m}^2)}{(2.82 \text{ kJ/s} \cdot \text{K})} = 1.57$$

Using these parameters with Fig. 10-11, we get $\epsilon \approx 0.62$; hence,

$$q = \epsilon C_{min}(T_{h,i} - T_{c,i}) \approx (0.62)(2.82 \text{ kJ/s} \cdot \text{K})(116 - 38)^\circ\text{C} = 136 \text{ 400 W}$$

- 10.15.** Water enters a crossflow heat exchanger (both fluids unmixed) at 16°C and flows at the rate of 7.5 kg/s to cool 10.0 kg/s of air from 120°C . For an overall heat transfer coefficient of $225 \text{ W/m}^2 \cdot \text{K}$ and an exchanger surface area of 240 m^2 , what is the exit air temperature?

Taking the specific heats of the air and water to be constant at 1.014 and $4.182 \text{ kJ/kg} \cdot \text{K}$, respectively, we get

$$(\dot{m}c_p)_{air} = \left(10.0 \frac{\text{kg}}{\text{s}}\right) \left(1.014 \frac{\text{kJ}}{\text{kg} \cdot \text{K}}\right) = 10.14 \text{ kW/}^\circ\text{C}$$

$$(\dot{m}c_p)_{water} = \left(7.5 \frac{\text{kg}}{\text{s}}\right) \left(4.182 \frac{\text{kJ}}{\text{kg} \cdot \text{K}}\right) = 31.37 \text{ kW/}^\circ\text{C}$$

which gives

$$\frac{C_{\min}}{C_{\max}} = \frac{C_{\text{air}}}{C_{\text{water}}} = \frac{10.14}{31.37} = 0.32$$

Also,

$$\text{NTU} = \frac{AU}{C_{\min}} = \frac{(240 \text{ m}^2)(225 \text{ W/m}^2 \cdot \text{K})}{10.14 \text{ kW/}^\circ\text{C}} = 5.32$$

and from Fig. 10-14, $\epsilon \approx 0.94$.

The heat transfer is given by

$$\begin{aligned} q &= \epsilon C_{\min}(T_{hi} - T_{ci}) \\ &\approx (0.94)(10.14 \text{ kW/K})(120 - 16)^\circ\text{C} = 9.91 \times 10^5 \text{ W} \end{aligned}$$

An energy balance on the air then gives the exit temperature:

$$\begin{aligned} q &= \dot{m}c_p(T_i - T_o) \\ T_o &= -\frac{q}{\dot{m}c_p} + T_i \\ &= -\frac{9.91 \times 10^5 \text{ W}}{(10.0 \text{ kg/s})(1.014 \text{ kJ/kg} \cdot ^\circ\text{C})} + 120^\circ\text{C} = 22.27^\circ\text{C} \end{aligned}$$

10.16. Solve Problem 10.15 for a one-shell-pass, 10-tube-pass heat exchanger.

The same dimensionless parameters hold, but the heat exchanger effectiveness is lower. From Fig. 10-12, $\epsilon \approx 0.84$; therefore,

$$\begin{aligned} q &= \epsilon C_{\min}(T_{hi} - T_{ci}) = [\dot{m}c_p(T_i - T_o)]_{\text{air}} \\ (0.84)(10.14 \text{ kW/}^\circ\text{C})(120 - 16)^\circ\text{C} &= (10.14 \text{ kW/}^\circ\text{C})(120^\circ\text{C} - T_o) \\ T_o &= -0.84(120 - 16)^\circ\text{C} + 120^\circ\text{C} = 32.6^\circ\text{C} \end{aligned}$$

10.17. Hot water at 80°C enters the tubes of a two-shell-pass, eight-tube-pass heat exchanger at the rate of 0.375 kg/s heating helium from 20°C . The overall heat transfer coefficient is $155 \text{ W/m}^2 \cdot ^\circ\text{C}$ and the exchanger area is 10.0 m^2 . If the water exits at 44°C , determine the exit temperature of the helium and its mass flow rate.

Since the flow rate of the helium is unknown, there is no way to determine a priori the minimum heat capacity rate. Assuming that the minimum fluid is the water, with $c_p = 4.185 \text{ kJ/kg} \cdot \text{K}$ at 55°C ,

$$C_w = \dot{m}c_p = \left(0.375 \frac{\text{kg}}{\text{s}}\right) \left(4185 \frac{\text{J}}{\text{kg} \cdot \text{K}}\right) = 1570 \text{ W/K}$$

Based upon this assumption, the number of transfer units is

$$\text{NTU} = \frac{UA}{C_{\min}} = \frac{(155 \text{ W/m}^2 \cdot ^\circ\text{C})(10.0 \text{ m}^2)}{(1570 \text{ W/K})} = 0.99 \approx 1.0$$

The top equation (10.18) holds, giving

$$\epsilon_h = \frac{T_{hi} - T_{ho}}{T_{hi} - T_{ci}} = \frac{80 - 44}{80 - 20} = 0.60$$

From Fig. 10-13 these parameters give $C = C_{\min}/C_{\max} \approx 0.25$, which validates the initial assumption of the water as the minimum fluid. Hence,

$$C_{\text{He}} \approx \frac{C_w}{0.25} = \left(\frac{1570 \text{ W/K}}{0.25}\right) = (6280 \text{ W/K}) = (\dot{m}c_p)_{\text{He}}$$

In the temperature range being considered, the specific heat of helium is 5.2 kJ/kg·°C; therefore,

$$\dot{m}_{\text{He}} = \frac{C_{\text{He}}}{c_{p\text{He}}} = \frac{6280 \text{ W/K}}{5200 \text{ J/kg}\cdot\text{K}} = 1.21 \text{ kg/s}$$

An energy balance gives the helium exit temperature, i.e.,

$$\begin{aligned} [\dot{m}c_p(T_i - T_o)]_w &= [\dot{m}c_p(T_o - T_i)]_{\text{He}} \\ T_w \Big|_{\text{He}} &= T_{i,\text{He}} + \frac{(\dot{m}c_p)_w}{(\dot{m}c_p)_{\text{He}}} (T_i - T_o)_w \\ T_w \Big|_{\text{He}} &= 20^\circ\text{C} + \frac{1570 \text{ W/K}}{6280 \text{ W/K}} (80 - 44)^\circ\text{C} = 29^\circ\text{C} \end{aligned}$$

10.18. Hot oil is used in a crossflow heat exchanger to heat a dye solution in a carpet manufacturing plant. The mixed-flow dye solution ($c_p = 1.12 \text{ Btu/lb}_m\cdot^\circ\text{F}$) enters at 60 °F and exits at 130 °F at a flow rate of 3000 lb_m/h. The unmixed-flow oil ($c_p = 0.46 \text{ Btu/lb}_m\cdot^\circ\text{F}$) enters at 400 °F, and the flow system produces an overall heat transfer coefficient of 50 Btu/h·ft²·°F. For an exchanger surface area of 80 ft², what mass flow rate of oil is required, and what is its exit temperature?

The given conditions do not permit the direct determination of the minimum fluid. If the minimum fluid is the dye solution, we can solve for ϵ and NTU and use Fig. 10-15 to get $C_{\text{mixed}}/C_{\text{unmixed}}$, which would permit the oil flow rate to be determined. If the minimum fluid is the oil, a solution requires trial-and-error.

Assuming that the minimum fluid is the dye solution, the second equation (10.18) gives

$$\epsilon_{\text{dye}} = \epsilon_t = \frac{T_{w} - T_{c}}{T_h - T_{c}} = \frac{130 - 60}{400 - 60} = 0.21$$

Under the same assumption,

$$C_{\text{mixed}} = C_{\text{dye}} = (\dot{m}c_p)_{\text{dye}} = \left(3000 \frac{\text{lb}_m}{\text{h}}\right) \left(1.12 \frac{\text{Btu}}{\text{lb}_m\cdot^\circ\text{F}}\right) = 3360 \text{ Btu/h}\cdot^\circ\text{F}$$

and

$$\text{NTU} = \frac{UA}{C_{\text{mixed}}} = \frac{(50 \text{ Btu/h}\cdot\text{ft}^2\cdot^\circ\text{F})(80 \text{ ft}^2)}{3360 \text{ Btu/h}\cdot^\circ\text{F}} = 1.19$$

With these parameters, it is apparent from Fig. 10-15 that the ratio $C_{\text{mixed}}/C_{\text{unmixed}}$ does not exist; therefore, *the minimum fluid is the oil.*

We must now assume a value of C_{unmixed} (which amounts to assuming \dot{m}_{oil}), determine the pertinent parameters and compare calculated results with Fig. 10-15 until a solution is found. A first trial in this procedure is outlined below; subsequent assumptions and results are presented in Table 10-4. Assume

$$C_{\text{unmixed}} = C_{\text{oil}} = C_{\text{min}} = 1000 \text{ Btu/h}\cdot^\circ\text{F}$$

Then

$$\frac{C_{\text{mixed}}}{C_{\text{unmixed}}} = \frac{3360}{1000} = 3.36 \quad \text{NTU} = \frac{UA}{C_{\text{min}}} = \frac{50(80)}{1000} = 4.00$$

From Fig. 10-15, $\epsilon \approx 0.84$; an energy balance gives

$$\begin{aligned} \Delta T_h = \Delta T_{\text{oil}} &= \frac{(\dot{m}c_p \Delta T)_{\text{dye}}}{(\dot{m}c_p)_{\text{oil}}} = \frac{C_{\text{mixed}}(\Delta T)_{\text{dye}}}{C_{\text{unmixed}}} = (3.36)(130 - 60) = 235.2^\circ\text{F} \\ \epsilon_h = \epsilon_{\text{oil}} &= \frac{(\Delta T)_{\text{oil}}}{T_h - T_c} = \frac{235.2}{400 - 60} = 0.69 \end{aligned}$$

and the assumed C_{unmixed} is incorrect.

Table 10-4

Trial No.	$C_{unmixed}$ (assumed)	$\frac{C_{mixed}}{C_{unmixed}}$	NTU	ΔT_h	ϵ	
					Calculated	From Fig. 10-15
1	1000 Btu/h·°F	3.36	4.00	235.2 °F	0.69	0.84
2	2000	1.68	2.00	117.6	0.35	0.67
3	1500	2.24	2.67	156.8	0.46	0.77
4	880	3.82	4.55	267.3	0.79	0.87
5	750	4.48	5.33	313.6	0.92	0.92

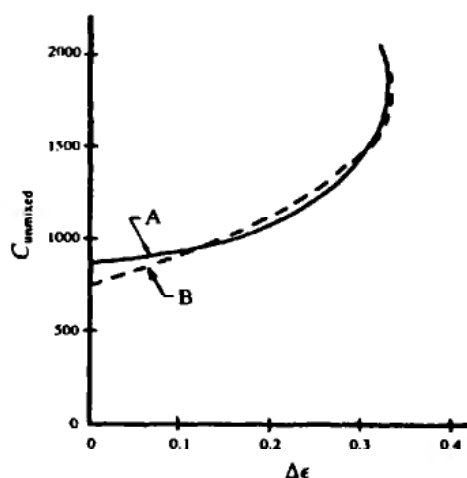


Fig. 10-17

Figure 10-17 illustrates how such a trial-and-error solution may be refined from a simple plot of the data from the trial solutions. Curve A is an extrapolation of the data from the first three trials, giving $C_{unmixed} \approx 880$, where $\Delta\epsilon$ is the difference between the value from Fig. 10-15 and the calculated value. Curve B is a refinement using the values determined in trial number 4. No further refinement was necessary.

The required parameters may now be determined.

$$\dot{m}_{oil} = \frac{C_{oil}}{c_{p\,oil}} = \frac{750 \text{ Btu/h} \cdot \text{°F}}{0.46 \text{ Btu/lb}_m \cdot \text{°F}} = 1630 \text{ lb}_m/\text{h}$$

$$(\Delta T)_{oil} = 313.6 = T_{hi} - T_{ho} = 400 - T_{ho}$$

$$T_{ho} = 400 - 313.6 = 86.4 \text{ °F}$$

Supplementary Problems

- 10.19.** In a double-pipe, counterflow heat exchanger, water at the rate of 0.45 kg/s is heated from 19 °C to 35 °C by an oil having a specific heat of 1.5 kJ/kg·°C. The oil enters the exchanger at 94 °C and exits at 60 °C. Determine the heat exchanger area for an overall heat transfer coefficient $U = 285 \text{ W/m}^2 \cdot \text{°C}$, and c_p for the water is 4.181 kJ/kg·°C at $T_{avg} = 27 \text{ °C}$. *Ans.* 2.138 m²

- 10.20.** In a one-shell-pass, one-tube-pass (double-pipe) heat exchanger one fluid enters at 60°C and leaves at 250°C . The other fluid enters at 450°C and leaves at 300°C . What is the log-mean temperature difference for (a) parallel flow and (b) counterflow? *Ans.* (a) 165.5°C ; (b) 219.4°C
- 10.21.** Hot gases enter a parallel-flow heat exchanger at 425°C and leave at 260°C , heating 25 kg/s of water from 32°C to 82°C . For a surface area of 370 m^2 , what is the overall heat transfer coefficient?
Ans. $52.14\text{ W/m}^2\cdot^\circ\text{C}$
- 10.22.** What is the exit water temperature, in $^\circ\text{C}$, for the heat exchanger of Problem 10.14? *Ans.* 81.4°C
- 10.23.** A counterflow heat exchanger has an overall heat-transfer coefficient of $225\text{ W/m}^2\cdot^\circ\text{C}$ and a surface area of 33.0 m^2 . The hot fluid ($c_p = 3.56\text{ kJ/kg}\cdot^\circ\text{C}$) enters at 94°C and flows at the rate of 2.52 kg/s . The cold fluid ($c_p = 1.67\text{ kJ/kg}\cdot^\circ\text{C}$) enters at 16°C and flows at the rate of 2.27 kg/s . What is the rate of heat transfer? *Ans.* $2.87 \times 10^5\text{ W}$
- 10.24.** How much heat would a crossflow heat exchanger having one fluid (air) mixed and one fluid unmixed transfer under the conditions given in Problem 10.15? *Ans.* $9.70 \times 10^5\text{ W}$
- 10.25.** For the same parameters as in Problem 10.3, what area is required when using a shell-and-tube heat exchanger with the water making one shell pass and the oil making two tube passes?
Ans. 24.98 ft^2

Radiation

11.1 INTRODUCTION

Radiation is a term applied to many processes which involve energy transfer by electromagnetic wave phenomena. The radiative mode of heat transfer differs in two important respects from the conductive and convective modes: (1) no medium is required and (2) the energy transfer is proportional to the fourth or fifth power of the temperatures of the bodies involved.

The Electromagnetic Spectrum

A major part of the electromagnetic spectrum is illustrated in Fig. 11-1. *Thermal radiation* is defined as the portion of the spectrum between the wavelengths 1×10^{-7} m and 1×10^{-4} m. Of interest also is the very narrow *visible spectrum*, which runs from 3.9×10^{-7} m to 7.8×10^{-7} m.

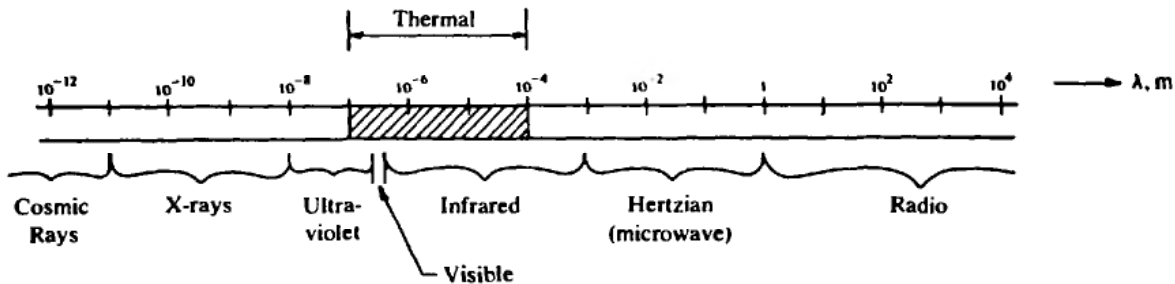


Fig. 11-1

A convenient wavelength unit is the *micrometer*: $1 \mu\text{m} = 10^{-6}$ m. In these units, thermal radiation has the range 0.1 to $100 \mu\text{m}$, and the visible portion of the spectrum is from 0.39 to $0.78 \mu\text{m}$. Another common unit of wavelength is the *angstrom*: $1 \text{ \AA} = 10^{-10}$ m.

The propagation velocity for all types of electromagnetic radiation in a vacuum is

$$c = \lambda\nu = 3 \times 10^8 \text{ m/s} \quad (11.1)$$

where λ is the wavelength and ν is the frequency of the radiation.

11.2 PROPERTIES AND DEFINITIONS

The word *spectral* is used to denote dependence upon wavelength for any radiation quantity. The value of the quantity at a given wavelength is called a *monochromatic* value.

Absorptivity, Reflectivity, and Transmissivity

Whenever radiant energy is incident upon any surface, part may be absorbed, part may be reflected, and part may be transmitted through the receiving body. Defining

$\alpha \equiv$ fraction of incident radiation absorbed \equiv absorptivity

$\rho \equiv$ fraction of incident radiation reflected \equiv reflectivity

$\tau \equiv$ fraction of incident radiation transmitted \equiv transmissivity

it is clear that

$$\alpha + \rho + \tau = 1 \quad (11.2)$$

Most solids, other than those which are visibly transparent or translucent, do not transmit radiation, and (11.2) reduces to

$$\alpha + \rho = 1 \quad (11.3)$$

Frequently, (11.3) is applied to liquids, although the transmissivity of a liquid is strongly dependent upon thickness.

Gases generally reflect very little radiant thermal energy, and (11.2) simplifies to

$$\alpha + \tau = 1 \quad (11.4)$$

Emissive Power and Radiosity

The *total emissive power*, denoted by E , is the total (over all wavelengths and all directions) emitted radiant thermal energy leaving a surface per unit time and unit area of the emitting surface. Note in particular that this is the energy leaving due to original emission only; it does not include any energy reflected from the surface (and originating elsewhere). Other names are "total hemispherical emissive power," "radiant flux density," or simply "emissive power." The total emissive power of a surface is dependent upon (1) the material or substance, (2) the surface condition (including roughness), and (3) the temperature.

Radiosity, J , denotes the total radiant thermal energy leaving a surface per unit time and unit area of the surface. Thus the radiosity is the sum of the emitted and the reflected radiant energy fluxes from a surface. Like total emissive power, total radiosity represents an integration over the spectral and directional distribution.

Specular and Diffuse Surfaces

Reflection of radiant thermal energy from a surface can be described with the help of two ideal models. The perfect *specular reflector* is shown in Fig. 11-2(a); in this case the angle of incidence, ϕ_i , is equal to the angle made by the reflected ray, ϕ_r . A *diffuse reflector* is shown in Fig. 11-2(b); in this case the magnitude of the reflected energy in a specific direction ϕ_r is proportional to the cosine of ϕ_r , ϕ_r being measured from the normal N .

If the roughness dimension (height) for a real surface is considerably smaller than the wavelength of incident irradiation, the surface behaves as a specular one; if the roughness dimension is large with respect to wavelength, the surface reflects diffusely.

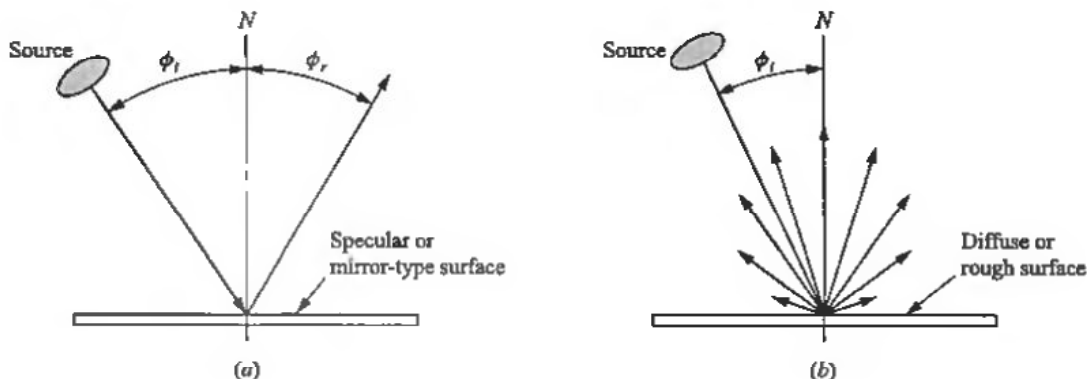


Fig. 11-2

Intensity of Radiation

We shall define the *radiation intensity*, I , as the radiant energy per unit time per unit solid angle per unit area of the emitter projected normal to the line of view of the receiver from the radiating element. For the geometry depicted in Fig. 11-3, the energy radiated from element dA_1 and intercepted by element dA_2 is

$$dq_{1-2} = I(\cos \phi dA_1) d\omega \tag{11.5}$$

Here

$$d\omega \equiv \frac{dA_2}{r^2} = \sin \phi d\theta d\phi \tag{11.6}$$

is the solid angle subtended by dA_2 , and $\cos \phi dA_1$ is the area of the emitting surface projected normal to the line of view to the receiving surface. Substituting (11.6) into (11.5) and integrating over the hemispherical surface results in

$$\frac{q_{1-2}}{dA_1} = \int_0^{2\pi} \int_0^{\pi/2} I \cos \phi \sin \phi d\phi d\theta \tag{11.7}$$

which is the general relationship between the total emissive power of a body (in this case, the element dA_1) and the intensity of radiation.

If the emitting surface is diffuse, $I = \text{constant}$, and (11.7) integrates to

$$\frac{q_{1-2}}{dA_1} = E = \pi I \tag{11.8}$$

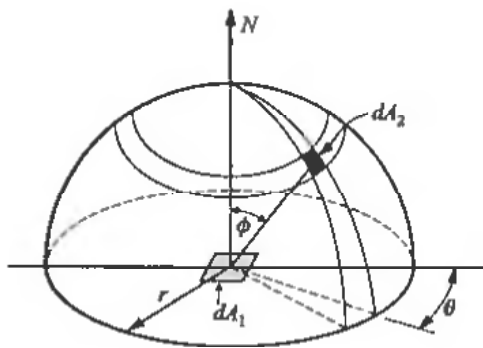


Fig. 11-3

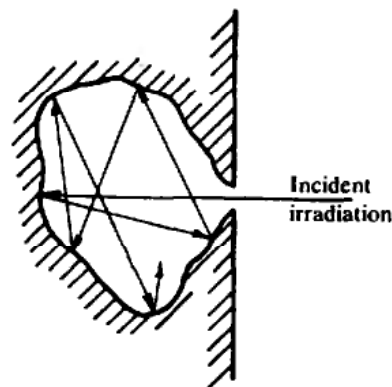



Fig. 11-4

11.3 BLACKBODY RADIATION

The ideal surface in the study of radiative heat transfer is the *blackbody*, which is defined by $\alpha_b = 1$. Thus the blackbody absorbs all incident thermal radiation, regardless of spectral or directional characteristics. As shown in Problem 11.4, such a body can be approximated by a small hole leading into a cavity (German, *Hohlraum*). See Fig. 11-4.

Blackbody Emissive Power

The total (hemispherical) emissive power of a blackbody is given by the *Stefan-Boltzmann equation*:

$$E_b = \sigma T^4 \tag{11.9}$$

where σ , the Stefan-Boltzmann constant, is $0.1714 \times 10^{-8} \text{ Btu/h} \cdot \text{ft}^2 \cdot \text{R}^4$ or $5.6697 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4$.

Blackbody Spectral Distribution

In general, a surface emits different amounts of energy at different wavelengths. The total emissive power can be expressed as

$$E = \int_0^{\infty} E_{\lambda} d\lambda \quad (11.10)$$

where E_{λ} is the monochromatic emissive power at wavelength λ . For a blackbody,

$$E_b = \int_0^{\infty} E_{b\lambda} d\lambda = \sigma T^4 \quad (11.11)$$

The first accurate expression for $E_{b\lambda}$ was determined by Max Planck; it is

$$E_{b\lambda} = \frac{C_1 \lambda^{-5}}{\exp(C_2/\lambda T) - 1} \quad (11.12)$$

in which

$$C_1 = 3.742 \times 10^8 \frac{\text{W} \cdot \mu\text{m}^4}{\text{m}^2} = 1.187 \times 10^8 \frac{\text{Btu} \cdot \mu\text{m}^4}{\text{h} \cdot \text{ft}^2}$$

$$C_2 = 1.4387 \times 10^4 \mu\text{m} \cdot \text{K} = 2.5896 \times 10^4 \mu\text{m} \cdot ^\circ\text{R}$$

Plots of $E_{b\lambda}$ versus λ for several different temperatures are given in Fig. 11-5. The shift in location of the maximum value of the monochromatic emissive power to shorter wavelengths with increasing temperature is evident. This wavelength shift is described by *Wien's displacement law*,

$$\lambda_{\max} T = 2897.6 \mu\text{m} \cdot \text{K} = 5215.6 \mu\text{m} \cdot ^\circ\text{R} \quad (11.13)$$

which plots as the dashed curve through the peak values of emissive power in Fig. 11-5.

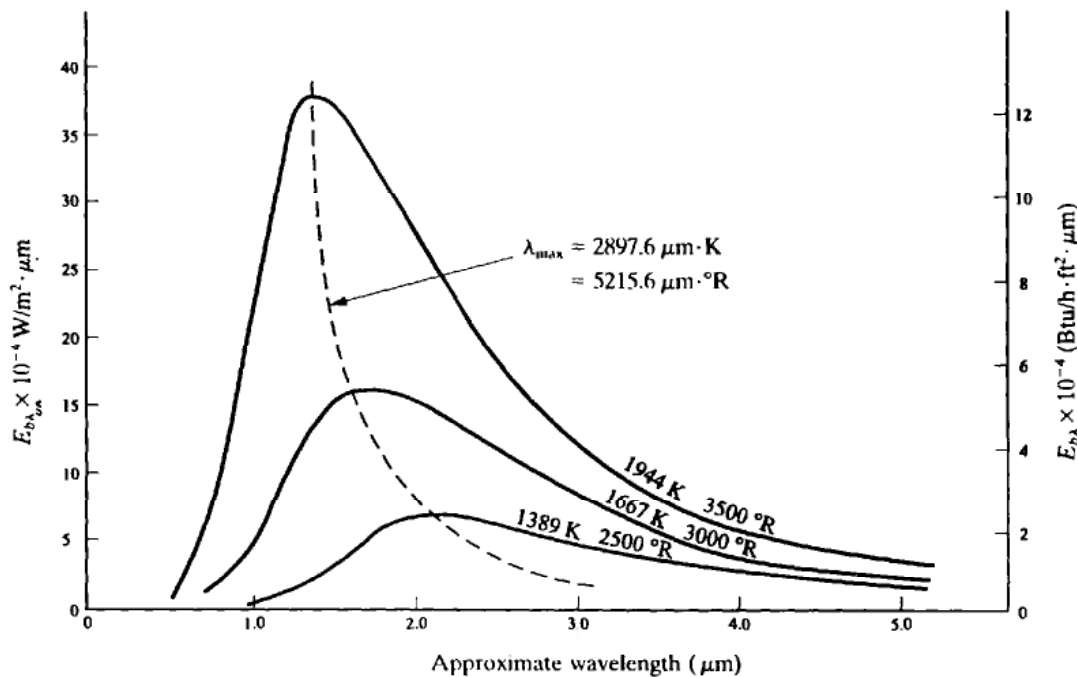


Fig. 11-5. Blackbody spectral emissive power.

It is frequently necessary to determine the amount of energy radiated by a blackbody over a specified portion of the thermal radiation waveband. The energy emitted within the range 0 to λ at a specified temperature T can be expressed as

$$E_{b(0-\lambda T)} \equiv \int_0^{\lambda T} \frac{1}{T} E_{b\lambda} d(\lambda T) \tag{11.14}$$

The fraction of the total energy within this range is then

$$\frac{E_{b(0-\lambda T)}}{E_b} = \frac{E_{b(0-\lambda T)}}{\sigma T^4} = \int_0^{\lambda T} \frac{E_{b\lambda}}{\sigma T^5} d(\lambda T) \tag{11.15}$$

Values of the integrand and of the integral in (11.15) are presented in Table 11-1.

Blackbody Intensity

Emission from a blackbody is independent of direction, so that (11.8) gives

$$E_b = \sigma T^4 = \pi I_b \tag{11.16}$$

11.4 REAL SURFACES AND THE GRAY BODY

A real surface has a total emissive power E less than that of a blackbody. The ratio of the total emissive power of a body to that of a blackbody at the same temperature is the *total emissivity* (or *total hemispherical emissivity*), ϵ :

$$\epsilon \equiv \frac{E}{E_b} \tag{11.17}$$

Some total emissivity; general trends are shown in Fig. 11-6.

The *monochromatic (hemispherical) emissivity*, ϵ_λ , will be useful in dealing with real surfaces which exhibit spectrally selective emittance values. This is

$$\epsilon_\lambda \equiv \frac{E_\lambda}{E_{b\lambda}} \tag{11.18}$$

where E_λ is the emissive power of the real surface at wavelength λ , and $E_{b\lambda}$ is that of a blackbody, both being at the same temperature.

Kirchhoff's Law

Consider a black enclosure as shown in Fig. 11-7. Suppose that this contains a small body, say body 1, which is also a blackbody. Under equilibrium conditions, energy is absorbed by the small body 1 at

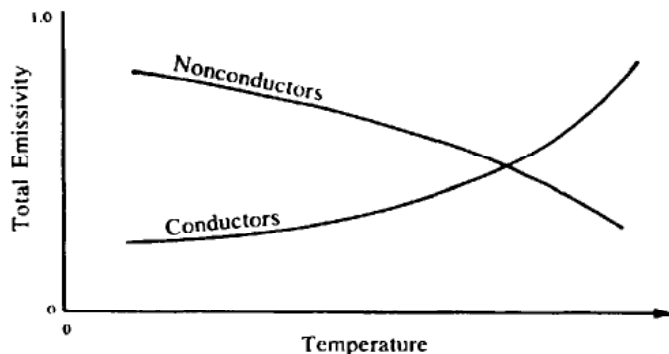


Fig. 11-6

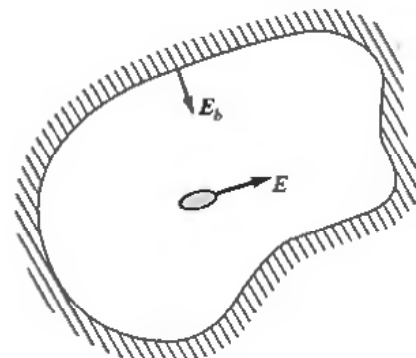


Fig. 11-7

Table 11-1. Blackbody radiation functions. [From R. V. Dunkle, ©1954, The American Society of Mechanical Engineers, *Trans. ASME*, 76: 549-552, New York. Used by permission.]

λT ($\mu\text{m}\cdot^\circ\text{R}$)	$\frac{E_{b\lambda} \times 10^5}{\sigma T^5}$ ($\mu\text{m}\cdot^\circ\text{R}$) ⁻¹	$\frac{E_{b(0-\lambda T)}}{\sigma T^4}$	λT ($\mu\text{m}\cdot^\circ\text{R}$)	$\frac{E_{b\lambda} \times 10^5}{\sigma T^5}$ ($\mu\text{m}\cdot^\circ\text{R}$) ⁻¹	$\frac{E_{b(0-\lambda T)}}{\sigma T^4}$
1 000.0	0.000 0394	0.0000	10 400.0	5.146	0.7181
1 200.0	0.001 184	0.0000	10 600.0	4.925	0.7252
1 400.0	0.011 94	0.0000	10 800.0	4.714	0.7378
1 600.0	0.061 8	0.0001	11 000.0	4.512	0.7474
1 800.0	0.207 0	0.0003	11 200.0	4.320	0.7559
2 000.0	0.515 1	0.0009	11 400.0	4.137	0.7643
2 200.0	1.038 4	0.0025	11 600.0	3.962	0.7724
2 400.0	1.791	0.0063	11 800.0	3.795	0.7802
2 600.0	2.753	0.0098	12 000.0	3.637	0.7876
2 800.0	3.872	0.0164	12 200.0	3.485	0.7947
3 000.0	5.081	0.0254	12 400.0	3.341	0.8015
3 200.0	6.312	0.0368	12 600.0	3.203	0.8081
3 400.0	7.506	0.0506	12 800.0	3.071	0.8144
3 600.0	8.613	0.0667	13 000.0	2.947	0.8204
3 800.0	9.601	0.0850	13 200.0	2.827	0.8262
4 000.0	10.450	0.1061	13 400.0	2.714	0.8317
4 200.0	11.151	0.1267	13 600.0	2.605	0.8370
4 400.0	11.704	0.1496	13 800.0	2.502	0.8421
4 600.0	12.114	0.1734	14 000.0	2.416	0.8470
4 800.0	12.392	0.1979	14 200.0	2.309	0.8517
5 000.0	12.556	0.2229	14 400.0	2.219	0.8563
5 200.0	12.607	0.2481	14 600.0	2.134	0.8606
5 400.0	12.571	0.2733	14 800.0	2.052	0.8648
5 600.0	12.458	0.2983	15 000.0	1.972	0.8688
5 800.0	12.282	0.3230	16 000.0	1.633	0.8868
6 000.0	12.053	0.3474	17 000.0	1.360	0.9017
6 200.0	11.783	0.3712	18 000.0	1.140	0.9142
6 400.0	11.480	0.3945	19 000.0	0.962	0.9247
6 600.0	11.152	0.4171	20 000.0	0.817	0.9335
6 800.0	10.508	0.4391	21 000.0	0.702	0.9411
7 000.0	10.451	0.4604	22 000.0	0.599	0.9475
7 200.0	10.089	0.4809	23 000.0	0.516	0.9531
7 400.0	9.723	0.5007	24 000.0	0.448	0.9589
7 600.0	9.357	0.5199	25 000.0	0.390	0.9621
7 800.0	8.997	0.5381	26 000.0	0.341	0.9657
8 000.0	8.642	0.5558	27 000.0	0.300	0.9689
8 200.0	8.293	0.5727	28 000.0	0.265	0.9718
8 400.0	7.954	0.5890	29 000.0	0.234	0.9742
8 600.0	7.624	0.6045	30 000.0	0.208	0.9765
8 800.0	7.304	0.6195	40 000.0	0.0741	0.9891
9 000.0	6.995	0.6337	50 000.0	0.0326	0.9941
9 200.0	6.697	0.6474	60 000.0	0.0165	0.9963
9 400.0	6.411	0.6606	70 000.0	0.00919	0.9981
9 600.0	6.136	0.6731	80 000.0	0.0055	0.9987
9 800.0	5.872	0.6951	90 000.0	0.0035	0.9990
10 000.0	5.619	0.6966	100 000.0	0.0023	0.9992
10 200.0	5.378	0.7076	∞	0	1.0000

the same rate as it is emitted, $A_1 E_b$. Now suppose that the small body is replaced by another body having the same size, shape, geometric position, and orientation. Denote this as body 2. Clearly the energy impinging upon this second body is the same as before, $A_1 E_b = A_2 E_b$. An energy balance on the second body under steady state conditions is

$$\alpha_2 A_2 E_b = A_2 E$$

and consequently, for any arbitrary body,

$$\alpha = \frac{E}{E_b} = \epsilon \tag{11.19}$$

since E/E_b is by definition the total hemispherical emissivity. Equation (11.19) is known as *Kirchhoff's law*.

Note that (11.19) was obtained under conditions of thermal equilibrium in an isothermal black enclosure. It is applicable to a surface receiving blackbody irradiation from surroundings at the same temperature as itself; serious errors may result from extending this result to other situations.

For monochromatic values, however, it can be shown that Kirchhoff's law is

$$\alpha_\lambda(T) = \epsilon_\lambda(T) \tag{11.20}$$

that is, for specified wavelength, the monochromatic absorptivity and the monochromatic emissivity of a surface at a given surface temperature are equal, regardless of the temperature of the source of the incoming irradiation.

Real Surface Emission and the Gray Body Approximation

As seen in Fig. 11-8, the monochromatic emissive power of a real surface is not a constant fraction of that of a black surface. A very useful idealization is that of a *gray body*, defined by

$$(\epsilon_\lambda)_{\text{gray}} = \text{constant}$$

The computational advantages of this are apparent from a consideration of the expression for the total emissive power of a body:

$$E = \int_0^\infty E_\lambda d\lambda = \int_0^\infty \epsilon_\lambda E_{b\lambda} d\lambda \tag{11.21}$$

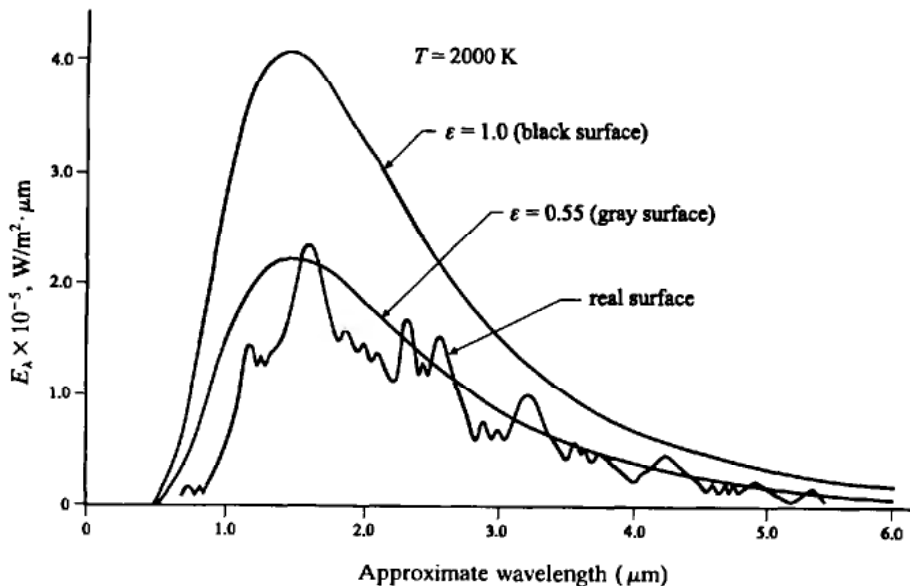


Fig. 11-8. Illustration of black, gray and red surfaces.

which for constant ϵ_λ simplifies to

$$E = \epsilon \int_0^\infty E_{b\lambda} d\lambda = \epsilon \sigma T^4 \quad (11.22)$$

Directional Dependence of Properties

In addition to the previously discussed variables which influence surface properties, the emissivity of a smooth surface depends strongly upon the polar angle ϕ between the direction of the incoming radiation and a normal to the surface. In general, nonconductors emit more strongly in the direction normal to the surface (or at small polar angles), whereas conductors emit more strongly at large polar angles.

11.5 RADIANT EXCHANGE: BLACK SURFACES

In this section, and in those that follow, we will limit our discussion to *diffuse surface behavior*, and further, we will consider only *total hemispherical properties* unless otherwise specifically stated. The following subscript notation will be used in the remainder of this chapter:

- q_i = net rate of energy given up by surface i
- $q_{i \rightarrow j}$ = rate of energy leaving surface i and striking surface j
- $q'_{i \rightarrow j}$ = rate of energy emitted by surface i and absorbed by surface j
- $q_{i \leftarrow j}$ = net rate of energy exchange between surface i and surface j

The "net rate of energy given up" is that above the rate of absorption of energy.

Consider the simplest physical configuration, that of two infinite, black, parallel planes maintained at different (but constant) temperatures, T_1 and T_2 , as shown in Fig. 11-9. The net exchange of energy between surfaces 1 and 2 is

$$q_{1-2} = q'_{1-2} - q'_{2-1} = \alpha_2 E_{b1} A_1 - \alpha_1 E_{b2} A_2 = E_{b1} A_1 - E_{b2} A_2$$

since $\alpha_1 = \alpha_2 = 1$. Then, per unit area,

$$q_{1-2}/A = E_{b1} - E_{b2} = \sigma(T_1^4 - T_2^4) \quad (11.23)$$

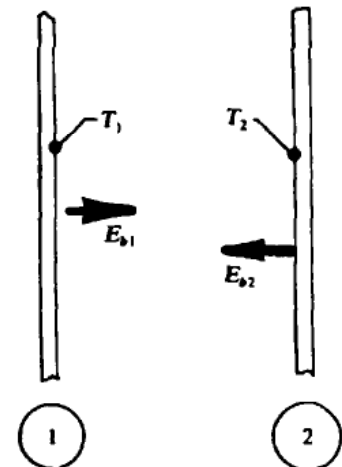


Fig. 11-9

Configuration Factors

Engineering problems of practical interest invariably involve one or more surfaces of finite size, and the radiant exchange is strongly dependent upon the geometry. Hence, we must determine the configuration effect upon the radiant heat transfer rate. This is accounted for by introduction of the *configuration factor*, which is defined as the fraction of radiant energy leaving one surface which strikes a second surface directly, both surfaces assumed to be emitting energy diffusely. The term "directly" means that none of the energy is transferred by reflection or reradiation from other surfaces. Other names in the literature for this factor include the "radiation shape factor," the "shape factor," the "view factor," and the "angle factor."

Infinitesimal areas. To develop a general expression for the configuration factor, consider the surface elements shown in Fig. 11-10. The energy leaving dA_1 and incident upon dA_2 is, by (11.5),

$$dq_{1 \rightarrow 2} = I_1 \cos \phi_1 dA_1 d\omega_{1-2} \quad (11.24)$$

where $d\omega_{1,2}$ is the solid angle subtended by dA_2 at dA_1 , i.e.,

$$d\omega_{1,2} = \frac{\cos \phi_2 dA_2}{r^2} \tag{11.25}$$

The total energy radiated from dA_1 is (compare (11.8))

$$dq_1 = I_1 \pi dA_1 \tag{11.26}$$

The configuration factor, $F_{dA_1 \rightarrow dA_2}$, is by definition the ratio of $dq_{1 \rightarrow 2}$ to dq_1 :

$$F_{dA_1 \rightarrow dA_2} = \frac{\cos \phi_1 \cos \phi_2 dA_2}{\pi r^2} \tag{11.27}$$

Note that the configuration factor involves geometrical quantities only.

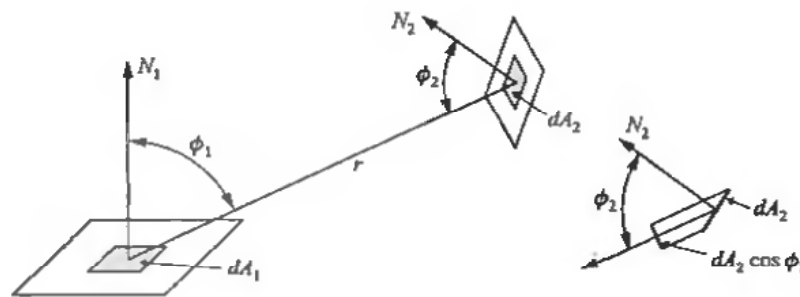


Fig. 11-10

Infinitesimal-to-finite area. Consider the case of a very small emitter and a finite-sized receiving surface. Forming the ratio of $q_{1 \rightarrow 2}$ from (11.24) to dq_1 from (11.26),

$$F_{dA_1 \rightarrow A_2} = \frac{\int_{A_2} I_1 \cos \phi_1 dA_1 \cos \phi_2 dA_2 / r^2}{\pi I_1 dA_1} = \int_{A_2} \frac{\cos \phi_1 \cos \phi_2 dA_2}{\pi r^2} \tag{11.28}$$

since both I_1 and dA_1 are independent of the integration. It should be noted that this equation is simply the integral over A_2 of (11.27), the configuration factor for infinitesimal-to-infinitesimal areas. The integral is evaluated for one configuration of interest in Fig. 11-11.

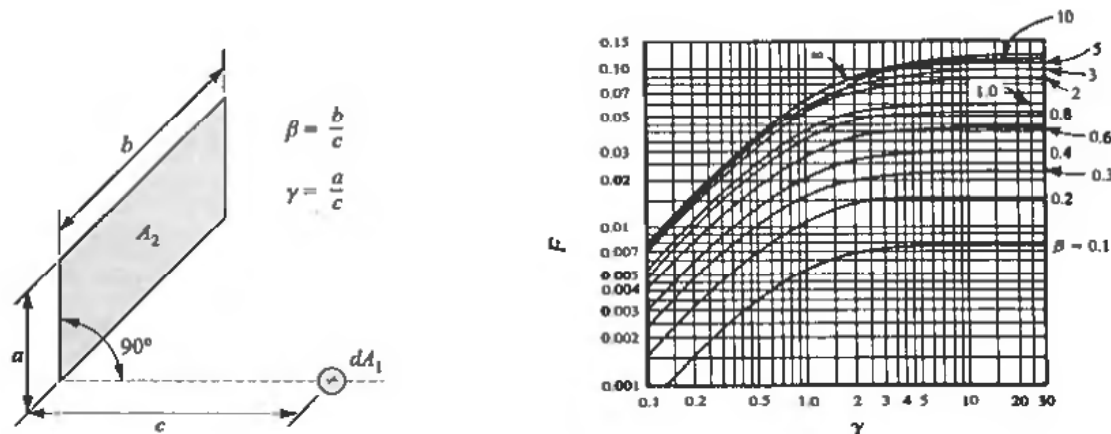


Fig. 11-11. Configuration factor – spherical point source to a plane rectangle. [Adapted from D. C. Hamilton and W. R. Morgan, *NACA Tech. Note TN-2836*, 1952.]

Finite-to-finite area. From the definition of configuration factor,

$$F_{A_1 \rightarrow A_2} = \frac{\int_{A_2} \int_{A_1} I_1 \cos \phi_1 dA_1 \cos \phi_2 dA_2 / r^2}{\int_{A_1} \pi I_1 dA_1}$$

which for constant I_1 (valid for diffuse surfaces) becomes

$$F_{A_1 \rightarrow A_2} = \frac{1}{\pi A_1} \int_{A_2} \int_{A_1} \frac{\cos \phi_1 \cos \phi_2}{r^2} dA_1 dA_2 \quad (11.29)$$

Some graphical evaluations of (11.29) are presented in Figs. 11-12 through 11-15, in which $F_{A_1 \rightarrow A_2}$ is abbreviated to $F_{1,2}$. In the last of these configurations, area A_1 "sees itself," and consequently $F_{1,1}$ is of practical importance.

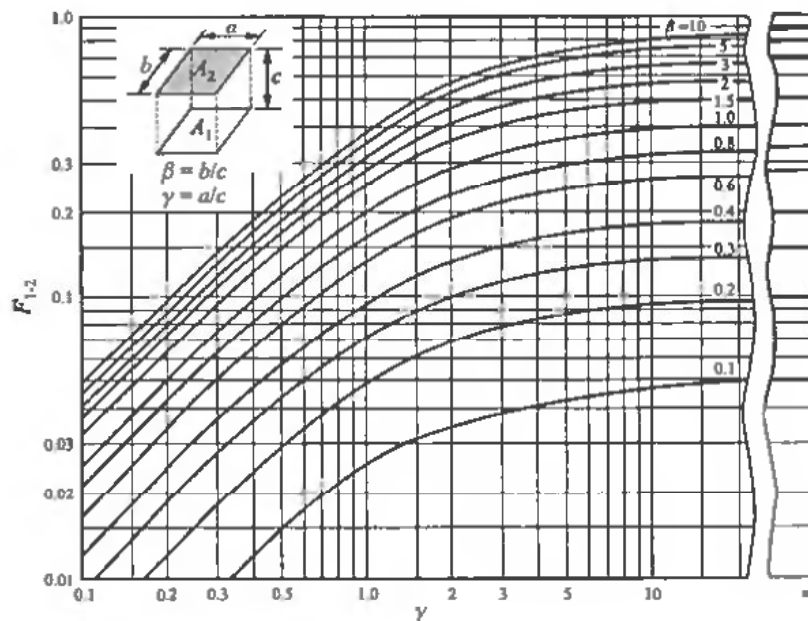


Fig. 11-12. Configuration factor – two identical, parallel, directly opposed flat plates. [Adapted from D. C. Hamilton and W. R. Morgan, *NACA Tech. Note TN-2836*, 1952.]

Configuration Factor Properties

There are four useful properties that should be understood prior to attempting to calculate radiant heat transfer rates between finite areas.

1. Subdivision of receiving surface. By examination of (11.27) and (11.28), we see that

$$F_{dA_1 \rightarrow A_2} = \int_{A_2} \frac{\cos \phi_1 \cos \phi_2 dA_2}{\pi r^2} = \int_{A_2} F_{dA_1 \rightarrow dA_2} \quad (11.30)$$

which reveals that the fractions of energy radiated from dA_1 to each of the subareas dA_2 are simply summed to obtain the total fraction radiated to A_2 .

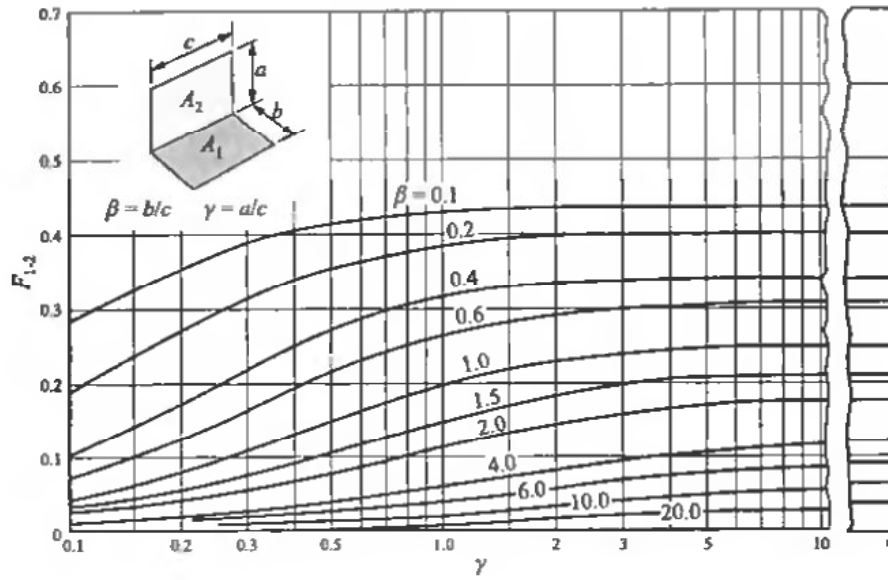


Fig. 11-13. Configuration factor – two perpendicular flat plates with a common edge. [Adapted from D. C. Hamilton and W. R. Morgan, *NACA Tech. Note TN-2836*, 1952.]

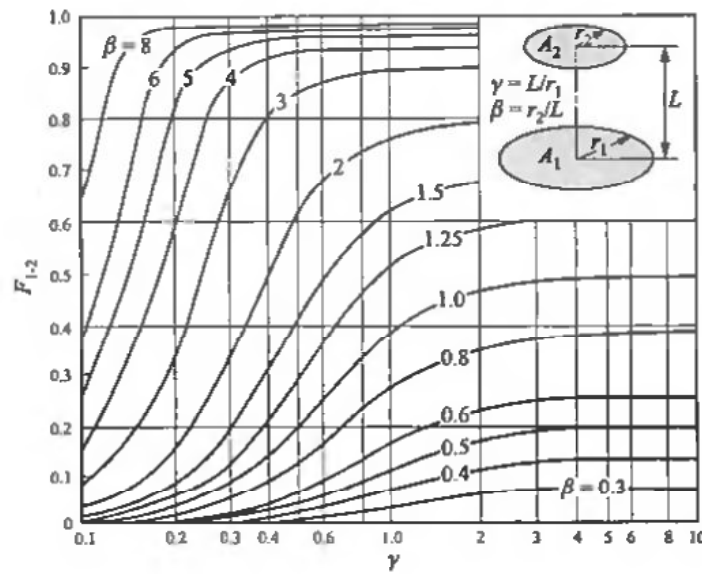


Fig. 11-14. Configuration factor – parallel concentric disks. [Adapted from D. C. Hamilton and W. R. Morgan, *NACA Tech. Note TN-2836*, 1952.]

2. Subdivision of emitting surface. The expression for the configuration factor from a finite-sized area to a finite-sized area is, by (11.29),

$$F_{A_1 \rightarrow A_2} = \frac{1}{A_1} \int_{A_1} \int_{A_2} \frac{\cos \phi_1 \cos \phi_2 dA_2}{\pi r^2} dA_1 = \frac{1}{A_1} \int_{A_1} F_{dA_1 \rightarrow A_2} dA_1 \quad (11.31)$$

i.e., the average value of $F_{dA_1 \rightarrow A_2}$ over the area A_1 . This can be approximated as

$$F_{A_1 \rightarrow A_2} \approx \frac{1}{A_1} \sum_i \Delta A_i F_{\Delta A_i \rightarrow A_2} \quad (11.32)$$

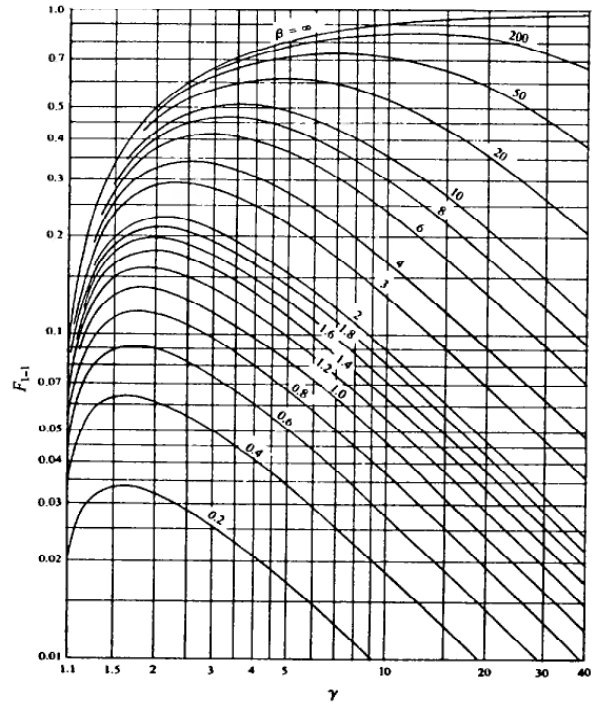
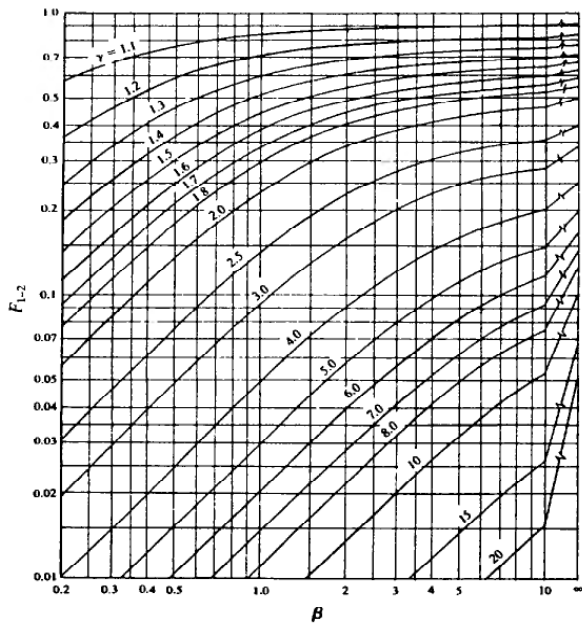
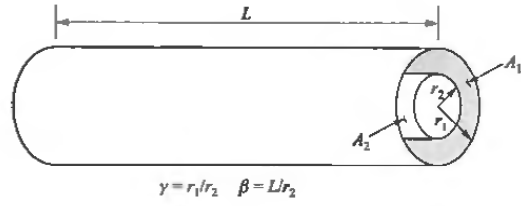


Fig. 11-15. Configuration factor – two concentric cylinders of finite length. [Adapted from D. C. Hamilton and W. R. Morgan, *NACA Tech. Note TN-2836*, 1952.]

where the ΔA_i are the subdivisions of A_1 . As an example, consider the system shown in Fig. 11-16, where A_1 (irradiating surface) is divided into subareas A_1' and A_1'' . In this case, (11.32) gives

$$F_{(A_1+A_1'') \rightarrow A_2} \approx \frac{1}{A_1' + A_1''} (A_1' F_{A_1' \rightarrow A_2} + A_1'' F_{A_1'' \rightarrow A_2}) \quad (11.33)$$

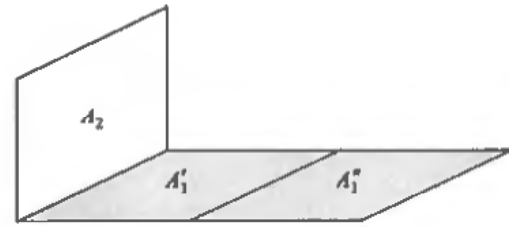


Fig. 11-16

3. Enclosure property. The third important property is that the summation of configuration factors for any surface has the value unity. For an emitter A_i completely enclosed by n receiving surfaces A_j (which possibly include A_i itself),

$$\sum_{j=1}^n F_{A_i \rightarrow A_j} = 1 \quad (11.34)$$

4. Reciprocity theorem. Multiplying both sides of (11.29) by A_1 yields

$$A_1 F_{A_1 \rightarrow A_2} = \int_{A_2} \int_{A_1} \frac{\cos \phi_1 \cos \phi_2}{\pi r^2} dA_1 dA_2$$

Clearly, we can write the similar expression

$$A_2 F_{A_2 \rightarrow A_1} = \int_{A_1} \int_{A_2} \frac{\cos \phi_2 \cos \phi_1}{\pi r^2} dA_2 dA_1$$

since the assignment of subscripts 1 and 2 is arbitrary. The integrand of both expressions is the same, and it is a continuous function; hence the order of integration is immaterial, and

■
$$A_1 F_{A_1 \rightarrow A_2} = A_2 F_{A_2 \rightarrow A_1} \quad (11.35)$$

which is known as the *reciprocity theorem*.

Black Enclosures

For an enclosure system consisting of n black surfaces, the net rate of energy exchange between any two of the surfaces is

$$q_{i-j} = q'_{i-j} - q'_{j-i} = A_i E_{b_i} F_{i-j} - A_j E_{b_j} F_{j-i}$$

where we have simplified the notation $F_{A_i \rightarrow A_j}$ to F_{i-j} , and have used the fact that all the radiation that strikes a blackbody is absorbed by it. Application of the reciprocity theorem gives

$$q_{i-j} = A_i F_{i-j} (E_{b_i} - E_{b_j}) = -q_{j-i} \quad (11.36)$$

The net heat transfer rate from any one of the surfaces is

$$q_i = \sum_{j=1}^n q'_{i-j} - \sum_{j=1}^n q'_{j-i} = \sum_{j=1}^n q_{i-j} \quad (11.37)$$

Substituting q_{i-j} from (11.36) and using (11.34), we obtain

$$q_i = A_i \left[E_{b_i} - \sum_{j=1}^n F_{i-j} E_{b_j} \right] \quad (11.38)$$

where the summation includes the term for $j = i$. The system of equations (11.37) ($i = 1, 2, \dots, n$), with q_{i-j} given by (11.36), suggests an electrical network analogy. For $n = 3$ the analog is illustrated in Fig. 11-17, where the nodal points are maintained at potentials equal to their respective blackbody emissive powers. The resistances between nodes are spatial resistances, $R_{i-j} = 1/A_i F_{i-j}$.

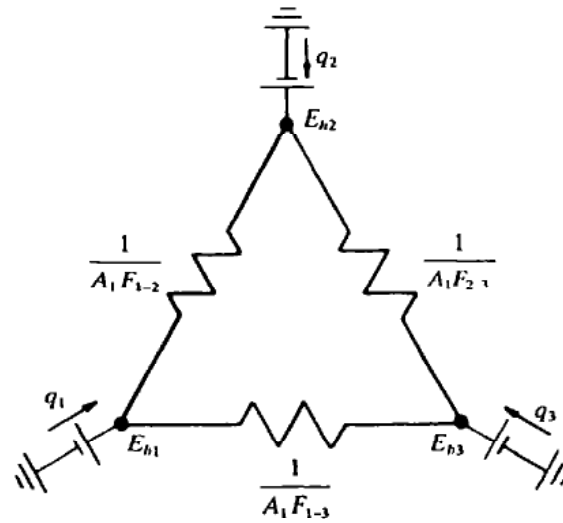


Fig. 11-17. Three blackbody enclosure analog.

Reradiating Surfaces

Often encountered in engineering practice are *adiabatic walls* which can have no net gain or loss of thermal energy ($q_i = 0$). Such a surface must reflect and/or reemit all radiant energy incident upon it, and it reaches an equilibrium temperature dependent upon its absorptivity and emissivity and the temperatures of the surrounding surfaces.

If an enclosure system includes reradiating surfaces, the quantities q'_{i-j} cannot be evaluated as before, because of reflection. However, the type of reasoning that led to (11.37) gives in this case

$$q_a = \sum_s q_{a \rightarrow s} - \sum_s q_{s \rightarrow a} = \sum_s A_a F_{a-s} (J_s - J_a) \quad (11.39)$$

where the indices a and s run over all surfaces. The J 's are the surface radiosities (Section 11.2); for a black surface, $J = E_b$. Thus, if an enclosure consists of n black (active) surfaces (1, 2, ..., n) and m reradiating surfaces ($r1, r2, \dots, rm$), we can rewrite (11.39) as

$$q_i = \sum_{j=1}^n A_i F_{i-j} (E_{b_i} - E_{b_j}) + \sum_{k=1}^m A_i F_{i-rk} (E_{b_i} - J_{rk}) \quad (11.40)$$

for each active surface, $i = 1, 2, \dots, n$; and

$$0 = \sum_{j=1}^n A_{rk} F_{rk-j} (J_{rk} - E_{b_j}) + \sum_{l=1}^m A_{rk} F_{rk-rl} (J_{rk} - J_{rl}) \quad (11.41)$$

for each of the reradiating surfaces, $k = 1, 2, \dots, m$. Equations (11.40) and (11.41) constitute a set of $m + n$ equations in the n unknown q_i 's and m unknown J_{rk} 's.

Modified Configuration Factors

In order to determine the net heat exchange rate between two of the active surfaces, A_i and A_j , in the enclosure described by (11.40) and (11.41), we define the *modified configuration factor* \bar{F}_{i-j} to be the fraction of the radiation from A_i that reaches A_j , directly or via reflection or reradiation. Thus,

$$\bar{F}_{i-j} = \frac{q'_{i-j}}{A_i E_{b_i}} \quad \text{or} \quad q'_{i-j} = A_i E_{b_i} \bar{F}_{i-j} \quad (11.42)$$

Consider now a "reduced problem" in which $E_{b_i} = 1$ and all other active surfaces have $E_b = 0$; denote by $q_{i,j}$ the net rate of heat transfer from A_i in this reduced problem. Since all the radiation

striking A_j must ultimately have been emitted by A_i , and since A_j itself emits nothing,

$$q'_{i-j} = -q_{j,i} \quad (11.43)$$

But, on physical grounds, it is clear that the *fraction* of the output of A_i that reaches A_j has the same value in the reduced and original problems. Therefore,

$$\bar{F}_{i-j} = \frac{q'_{i-j}}{A_i \cdot 1} = \frac{-q_{j,i}}{A_i} \quad (11.44)$$

The modified configuration factor also obeys the reciprocity theorem:

■
$$A_i \bar{F}_{i-j} = A_j \bar{F}_{j-i} \quad (11.45)$$

From (11.42) and (11.45),

$$q_{i-j} = q'_{i-j} - q'_{j-i} = A_i \bar{F}_{i-j} (E_{bi} - E_{bj}) = -q_{j-i} \quad (11.46)$$

This being identical in form to (11.36), the electrical network analogy also applies when reradiating surfaces are present, provided the spatial resistances are chosen as $1/A_i \bar{F}_{i-j}$.

While solving the system (11.40) and (11.41) for the appropriate $q_{j,i}$ will always permit determination of the modified configuration factors, expressions for \bar{F}_{i-j} for some often-encountered configurations are available.

One reradiating zone. Denoting the single reradiating zone as A_r , the modified configuration factor is

$$\bar{F}_{i-j} = F_{i-j} + \frac{F_{i-r} F_{r-j}}{1 - F_{r-r}} \quad (11.47)$$

One reradiating zone, only two active surfaces. In this case, (11.47) gives for the two active surfaces:

$$\bar{F}_{1-2} = F_{1-2} + \frac{1}{(A_1/A_2)(1/F_{2-r}) + (1/F_{1-r})} \quad (11.48)$$

One reradiating zone, two planar or convex active surfaces. Whenever $F_{1-1} = F_{2-2} = 0$,

$$\bar{F}_{1-2} = \frac{(A_2/A_1) - (F_{1-2})^2}{(A_2/A_1) + (1 - 2F_{1-2})} \quad (11.49)$$

Note that the geometry of the reradiating surface is immaterial in the last case, since there is no F_{i-r} in the expression.

11.6 RADIANT EXCHANGE: GRAY SURFACES

To begin a study of radiant heat transfer between gray bodies, consider the system composed of two infinite parallel gray planes depicted in Fig. 11-18. The upper plane is at uniform temperature T_1 , the lower plane is at uniform temperature T_2 , and both planes are assumed to have uniform radiation characteristics, α and ρ . For simplicity, the diffuse radiant energy per unit area leaving plane 1 is shown as a single ray. The radiant energy transfer rate per unit area from plane 1 to plane 2 is

$$\frac{q'_{1-2}}{A} = \alpha_2 E_1 + \alpha_2 \rho_1 \rho_2 E_1 + \alpha_2 \rho_1^2 \rho_2^2 E_1 + \cdots + \alpha_2 \rho_1^n \rho_2^n E_1 + \cdots = \frac{\alpha_2 E_1}{1 - \rho_1 \rho_2}$$

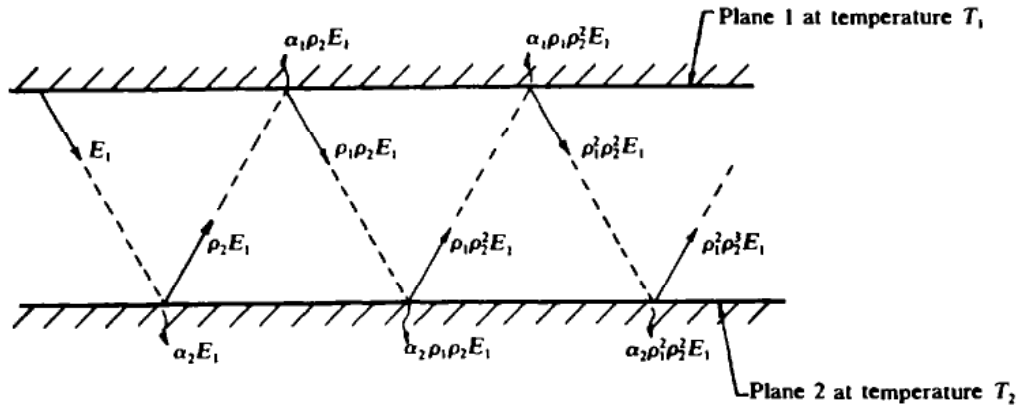


Fig. 11-18. System of two infinite, parallel gray planes.

Likewise, the rate of energy transfer from plane 2 to plane 1 is

$$\frac{q'_{2-1}}{A} = \frac{\alpha_1 E_2}{1 - \rho_2 \rho_1}$$

Therefore the net rate of energy exchange from plane 1 to plane 2 per unit area is

$$\frac{q_{1-2}}{A} = \frac{q'_{1-2}}{A} - \frac{q'_{2-1}}{A} = \frac{\alpha_2 E_1 - \alpha_1 E_2}{1 - \rho_1 \rho_2} \quad (11.50)$$

Since we are considering gray surfaces, E may be expressed as $\epsilon \sigma T^4$. Also, assuming solid surfaces with zero transmissivity, $\rho = 1 - \alpha = 1 - \epsilon$ [this follows from $\epsilon_\lambda = \text{constant} = \epsilon$ and (11.20)]. Then (11.50) can be simplified to

$$\frac{q_{1-2}}{A} = \frac{\sigma(T_1^4 - T_2^4)}{(1/\epsilon_1) + (1/\epsilon_2) - 1} \quad (11.51)$$

A different approach to the same problem affords insight into the electrical analogy. With reference to Fig. 11-18, an energy balance on either surface in terms of the radiosity and the irradiation G (the total radiant thermal energy incident on the surface per unit time and unit area of the surface) is

$$\frac{q}{A} = J - G \quad (11.52)$$

But

$$J = \epsilon E_b + \rho G \quad (11.53)$$

Eliminating G between (11.52) and (11.53),

$$q = \frac{E_b - J}{(1 - \epsilon)/\epsilon A} \quad (11.54)$$

Equation (11.54) provides the basis for the gray body electrical analog. The numerator, $E_b - J$, can be regarded as a potential difference, while the denominator, $(1 - \epsilon)/\epsilon A$, can be considered as a surface resistance. Thus, the unknown potential J can be replaced by the known potential $E_b = \sigma T^4$ by means of the surface resistance. Also, the previously discussed spatial resistance to radiative heat transfer between two surfaces i and j , $1/A_i F_{i-j}$, can be used together with the surface resistances to form a complete electrical analog such as that for the two-gray-body system shown as Fig. 11-19.

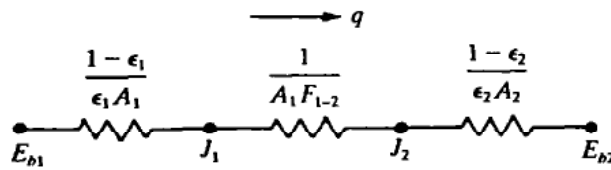


Fig. 11-19. Two gray body analog.

The net radiant heat transfer rate between two gray surfaces is, by the electrical analogy,

$$\blacksquare \quad q_{1-2} = \frac{E_{b1} - E_{b2}}{\Sigma R} = \frac{E_{b1} - E_{b2}}{[(1 - \epsilon_1)/\epsilon_1 A_1] + (1/A_1 F_{1-2}) + [(1 - \epsilon_2)/\epsilon_2 A_2]} \quad (11.55)$$

For the case of two infinite gray planes with $A_1 = A_2$ and $F_{1-2} = 1$,

$$\Sigma R = \frac{1}{A} \left(\frac{1}{\epsilon_1} + \frac{1}{\epsilon_2} - 1 \right) \quad \text{and} \quad \frac{q_{1-2}}{A} = \frac{\sigma(T_1^4 - T_2^4)}{(1/\epsilon_1) + (1/\epsilon_2) - 1}$$

in agreement with (11.51).

Consider next a more complicated geometry, resulting in the analog network of Fig. 11-20. In this case, a specific rate of heat transfer, say q_{1-2} , is given by

$$q_{1-2} = \frac{J_1 - J_2}{1/A_1 F_{1-2}} \quad (11.56)$$

but J_1 and J_2 are unknown. They can be found only by a complete solution of the general equations

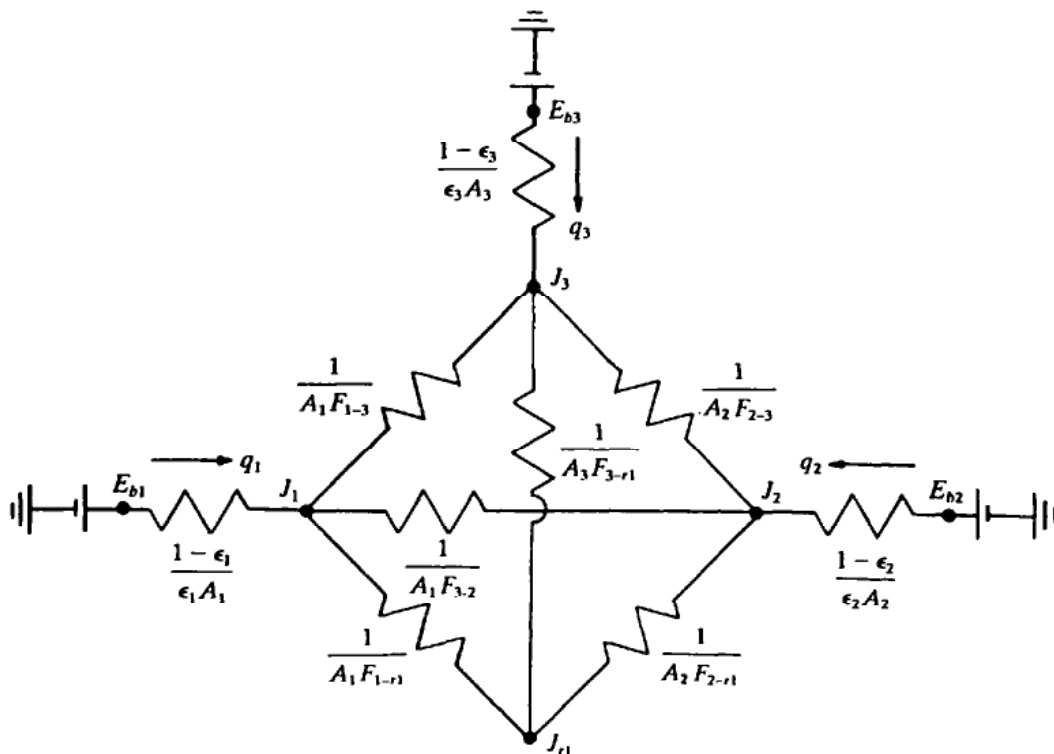


Fig. 11-20. Electrical analog network for an enclosure consisting of three active gray surfaces and one reradiating surface.

(11.39), which hold for gray as well as black enclosures. Again using the index i for active surfaces, k for reradiating surfaces, and s for all surfaces, we have from (11.54) and from the adiabatic condition,

$$q_i = \frac{E_{bi} - J_i}{(1 - \epsilon_i)/\epsilon_i A_i} \quad i = 1, 2, \dots, n$$

$$q_{rk} = 0 \quad k = 1, 2, \dots, m$$

Substituting these expressions in the left side of (11.39) gives $m + n$ linear equations in the $m + n$ unknown J 's:

$$\sum_s A_i F_{i-s} (J_i - J_s) + A_i \frac{\epsilon_i}{1 - \epsilon_i} (J_i - E_{bi}) = 0 \quad (11.57)$$

for $i = 1, 2, \dots, n$; and

$$\sum_s A_{rk} F_{rk-s} (J_{rk} - J_s) = 0 \quad (11.58)$$

for $k = 1, 2, \dots, m$.

Gray Body Configuration Factors

A convenient way to determine the rate of radiant heat transfer between two gray surfaces i and j is by use of the *gray body configuration factor* $\mathcal{F}_{i,j}$. Analogous to (11.44),

$$\mathcal{F}_{i,j} \equiv \frac{-q_{j,i}}{A_i} = \frac{A_j}{A_i} \frac{\epsilon_j}{1 - \epsilon_j} J_{j,i} \quad (11.59)$$

the last equality holding for $j \neq i$. The $J_{j,i}$ are obtained by solving the set of equations (11.57) and (11.58) when $E_{bi} = 1$ and all other E_b 's are zero. Analogous to (11.46),

$$q_{i,j} = A_i \mathcal{F}_{i,j} E_{bi} - A_j \mathcal{F}_{j,i} E_{bj} = A_i \mathcal{F}_{i,j} (E_{bi} - E_{bj}) = -q_{j,i} \quad (11.60)$$

where the reciprocity property has been used. Some special cases are given below.

Two-gray-surface enclosure. For a complete enclosure consisting of two gray surfaces, A_1 and A_2 ,

$$\frac{1}{\mathcal{F}_{1,2}} = \frac{1}{F_{1,2}} + \frac{A_1}{A_2} \left(\frac{1}{\epsilon_2} - 1 \right) + \left(\frac{1}{\epsilon_1} - 1 \right) \quad (11.61)$$

One gray surface enclosing a second. For a gray surface A_1 which does not "see" itself and which is completely enclosed by a second gray surface A_2 , $F_{1,2} = 1$, and (11.61) becomes

$$\frac{1}{\mathcal{F}_{1,2}} = \frac{1}{\epsilon_1} + \frac{A_1}{A_2} \left(\frac{1}{\epsilon_2} - 1 \right) \quad (11.62)$$

Two planar or convex gray surfaces with no other radiation present. For two surfaces which do not "see" themselves ($F_{1,1} = F_{2,2} = 0$) but do not form a complete enclosure and are located in an otherwise radiation-free environment, an enclosure may be considered to exist by defining a third surface having $J = 0$. Then

$$\mathcal{F}_{1,2} = \frac{F_{1,2}}{(1/\epsilon_1 \epsilon_2) - [(1/\epsilon_1) - 1][(1/\epsilon_2) - 1](A_1/A_2)(F_{1,2})^2} \quad (11.63)$$

One reradiating zone enclosing two active gray surfaces. In this case,

$$\frac{1}{\mathcal{F}_{1,2}} = \frac{1}{\bar{F}_{1,2}} + \frac{A_1}{A_2} \left(\frac{1}{\epsilon_2} - 1 \right) + \left(\frac{1}{\epsilon_1} - 1 \right) \quad (11.64)$$

where the modified blackbody configuration factor $\bar{F}_{1,2}$ is given by (11.48) or (11.49), as appropriate.

11.7 RADIATION SHIELDING

An important application is the use of shielding to reduce the rate of heat transfer by radiant exchange. A specific example is the use of aluminum-foil-backed insulation in building walls, with the foil serving as the shield. Consider the infinite gray walls of Fig. 11-21(a), for which (11.51) gives

$$q_{1,3} = -q_{3,1} = \frac{A\sigma(T_1^4 - T_3^4)}{(1/\epsilon_1) + (1/\epsilon_3) - 1} \quad (11.65)$$

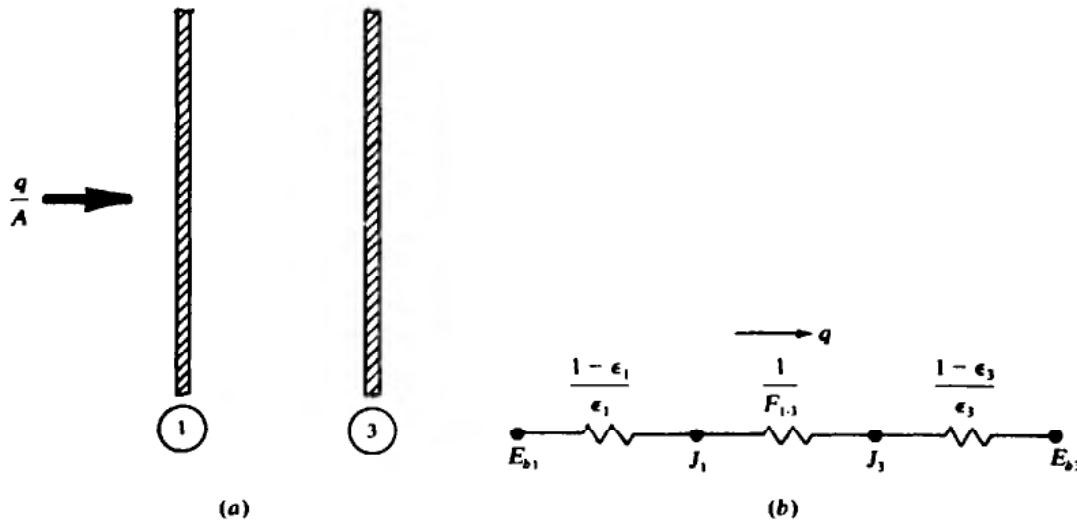


Fig. 11-21. System consisting of two infinite, parallel gray walls.

If a thin radiation shield, body 2, is placed between the two walls (Fig. 11-22(a)), the heat transfer rate per unit area for steady state is

$$\frac{q_{1,2}}{A} = \frac{q_{2,3}}{A} = \frac{q}{A}$$

or

$$\frac{q}{A} = \frac{\sigma(T_1^4 - T_2^4)}{(1/\epsilon_1) + (1/\epsilon_2) - 1} = \frac{\sigma(T_2^4 - T_3^4)}{(1/\epsilon_2) + (1/\epsilon_3) - 1} \quad (11.66)$$

For the case where $\epsilon_1 = \epsilon_3$, we obtain from (11.66)

$$T_2^4 = \frac{1}{2}(T_1^4 + T_3^4)$$

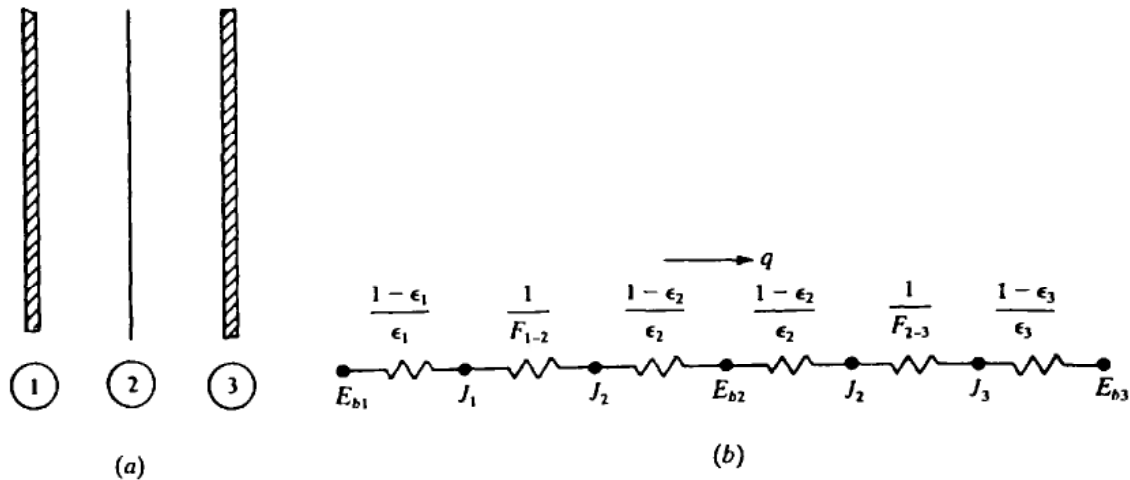


Fig. 11-22. System consisting of two infinite, parallel gray walls plus a radiation shield.

so that, if also $\epsilon_1 = \epsilon_2$, the resulting heat transfer rate is

$$\frac{q}{A} = \frac{1}{2} \left[\frac{\sigma(T_1^4 - T_3^4)}{(2/\epsilon) - 1} \right] = \frac{1}{2} \frac{(q_{1-3})_0}{A} \quad (11.67)$$

where the subscript 0 denotes no radiation shield. Similarly, for n radiation shields each having the same emissivity as the two active walls,

$$\frac{(q_{1-3})_n}{A} = \frac{1}{n+1} \frac{(q_{1-3})_0}{A} \quad (11.68)$$

A second shielding problem of importance is that of protecting a thermocouple used to measure the temperature of a flowing hot gas from loss by radiation to a cooler duct wall (Fig. 11-23(a)). Considering the shield and the duct to be very long, the steady state heat loss from the thermocouple can be approximated by

$$\begin{aligned} q_{1-3} = q_{1-2} &= \frac{A_1 \sigma (T_1^4 - T_2^4)}{(1/\epsilon_1) + (A_1/A_2)[(1/\epsilon_2) - 1]} \\ &= q_{2-3} = \frac{A_2 \sigma (T_2^4 - T_3^4)}{(1/\epsilon_2) + (A_2/A_1)[(1/\epsilon_3) - 1]} \end{aligned} \quad (11.69)$$

and clearly the heat loss rate is dependent upon the size and the emissivity of the shielding material.

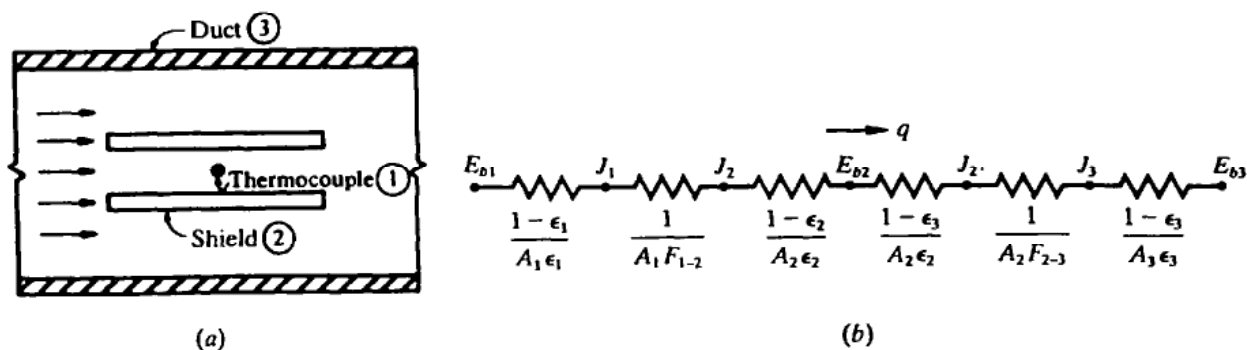


Fig. 11-23. Schematic and analog for thermocouple shielding inside a duct.

(The shield's inner surface "sees" itself; however, there is no net heat transfer with itself, and so, for clarity, the path joining node J_2 to itself has been omitted from Fig. 11-23(b).)

11.8 RADIATION INVOLVING GASES AND VAPORS

In general, gases with nonpolar symmetrical molecules do not emit or absorb thermal energy within the temperature ranges encountered in engineering applications. Typical of this class are O_2 , N_2 , H_2 , and mixtures of these, including dry air. On the other hand, gases with nonsymmetrical molecules, such as CO_2 , H_2O , SO_2 , and many of the hydrocarbons, exhibit absorption and emission over certain wavelength ranges or bands. The absorptivity of such a gas is dependent upon molecular structure, wavelength and gas layer thickness. A typical case is shown in Fig. 11-24, in which (a) refers to a 50 mm layer of CO_2 at 1 atm and (b) refers to a 30 mm layer.

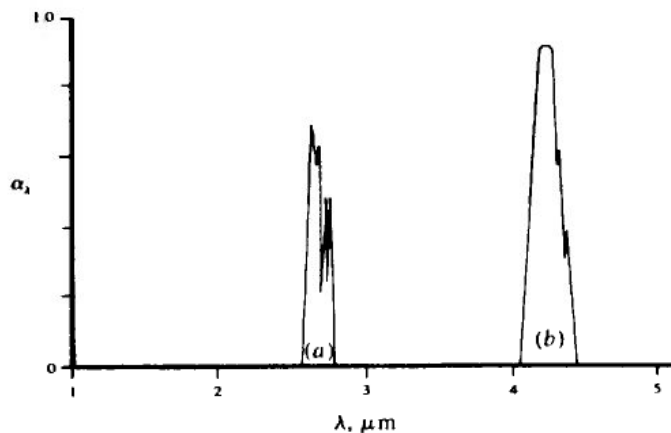


Fig. 11-24

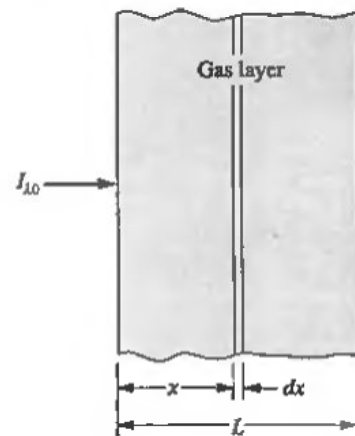


Fig. 11-25

As an aid to understanding the absorption phenomenon, consider a beam of monochromatic radiation having intensity $I_{\lambda 0}$ as it enters a layer of gas shown in Fig. 11-25. The decrease in intensity is dependent upon wavelength and thickness, and is given by

$$dI_{\lambda x} = -\kappa_{\lambda} I_{\lambda x} dx \tag{11.70}$$

where $I_{\lambda x}$ is the monochromatic intensity at depth x and κ_{λ} is the *monochromatic absorption coefficient*, which depends upon the state of the gas (i.e., temperature and pressure) as well as upon the wavelength. To a first approximation, κ_{λ} increases linearly with pressure at constant temperature; and in a gas mixture involving both absorbing and nonabsorbing gases, κ_{λ} should be proportional to the partial pressure of the absorbing species.

Separating variables and integrating (11.70) for constant κ_{λ} yields

$$I_{\lambda x} = I_{\lambda 0} e^{-\kappa_{\lambda} x} \tag{11.71}$$

By the definition of the monochromatic transmissivity, $\tau_{\lambda} = I_{\lambda x} / I_{\lambda 0}$, so that

$$\tau_{\lambda} = e^{-\kappa_{\lambda} x} \tag{11.72}$$

and the absorptivity is

$$\alpha_{\lambda} = 1 - \tau_{\lambda} = 1 - e^{-\kappa_{\lambda} x} \tag{11.73}$$

which is also the monochromatic emissivity, ϵ_{λ} , if Kirchoff's law is valid.

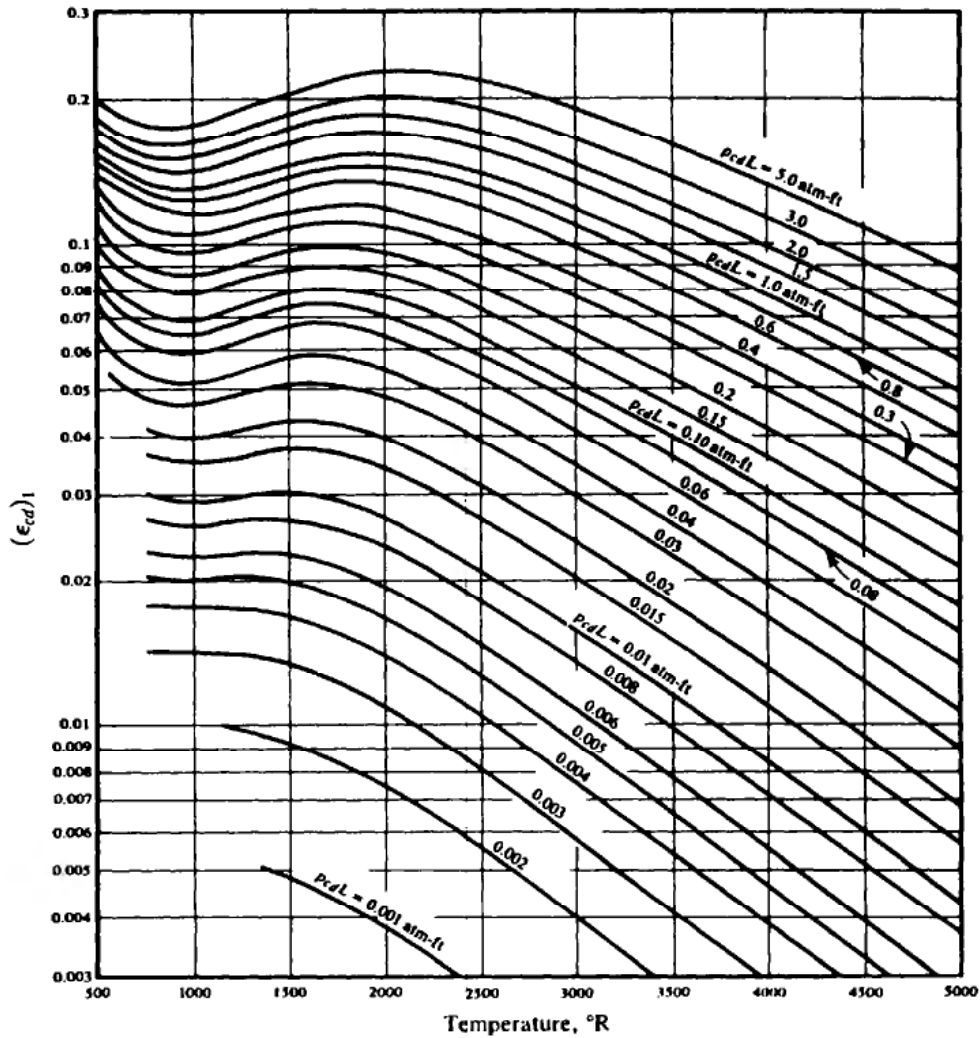


Fig. 11-26. Emissivity of carbon dioxide at 1 atm total pressure. [Adapted from H. C. Hottel, Chapter 4 in *Heat Transmission*, 3rd edn (ed. W. C. McAdams), © 1959, McGraw-Hill Book Company, New York, NY. Reproduced with permission of the McGraw-Hill Companies.]

A typical engineering computation requires that all radiant heat exchange between a mass of gas and each element of a surrounding solid boundary (container, etc.) be accounted for. The geometry of most configurations results in a rather complicated integration to yield the absorptivity (or emissivity) of a gas mass with respect to a boundary element.

In the special case of a hemispherical mass of gas, the emissivity for radiant exchange from the gas to the center of the hemispherical base can readily be analytically determined. Using this approach, H. C. Hottel and R. B. Egbert determined the effective emissivity of a hemispherical gas system of radius L at a partial pressure p_i radiating to a black surface element located at the center of the hemispherical base. Their results for carbon dioxide and water vapor are given in Figs. 11-26 through 11-29. These results are also applicable to other shapes of practical interest by use of the equivalent beam lengths given in Table 11-2.

To determine the effective emissivity of a mass of carbon dioxide gas, Fig. 11-26 may be used to obtain the emissivity of a hypothetical gas system at one atmosphere total pressure, having radius L , partial CO_2 pressure p_{cd} , and a given uniform system temperature. For other system geometry, the equivalent beam length for use in the parameter $p_{cd}L$ is obtained from Table 11-2. If the total gas

Table 11-2. Some selected equivalent beam lengths.

Configuration	Equivalent Beam Length, L
Volume between infinite planes – irradiation onto planes	$1.8 \times$ distance between planes
Sphere – irradiation into surface	$2/3 \times$ diameter
Infinitely long cylinder – irradiation onto convex surface	$0.95 \times$ diameter
Cube	$2/3 \times$ side
Arbitrary Surface	$\approx 3.6 \times$ (volume/surface area)

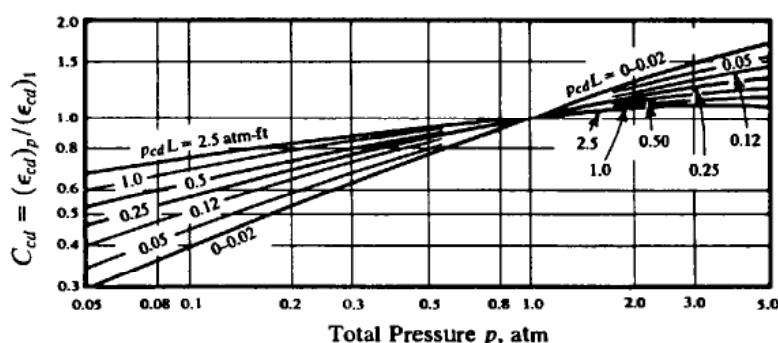


Fig. 11-27. Effect of total pressure on carbon dioxide emissivity. [Adapted from H. C. Hottel (1954), *Heat Transmission*, 3rd edn (ed. W. C. McAdams), McGraw-Hill Book Company, New York, NY, Chapter 4. Used by permission.]

system pressure is different from 1 atmosphere, Fig. 11-27 is used to account for the broadening of the absorption bands with increasing pressure.

Turning to the case of water vapor, Fig. 11-28 gives the emissivity of a hypothetical system having a water-vapor partial pressure of zero (to be corrected later) as a function of the product of the actual partial pressure and the equivalent beam length, $p_w L$, and the uniform gas system temperature. Again, the equivalent beam length is taken from Table 11-2, and the emissivity obtained from Fig. 11-28 is modified by use of Fig. 11-29, which accounts for the fact that the total system pressure may be other than 1 atm and the partial pressure of the H_2O vapor may be other than zero.

For a mixture of gases containing only water vapor, carbon dioxide, and nonactive species having symmetrical molecules, the mixture emissivity may be approximated by simple addition of the individual values for the water vapor and the carbon dioxide.

Solved Problems

- 11.1.** The incident solar radiant flux at the earth's mean orbital radius from the sun is $G \approx 1402.6 \text{ W/m}^2$. Using this fact, determine the solar flux in the vicinity of (a) the planet Mercury, which has a mean orbital radius of $5.7936 \times 10^{10} \text{ m}$; (b) the planet Pluto, which has a mean orbital radius of $5.9079 \times 10^{12} \text{ m}$.

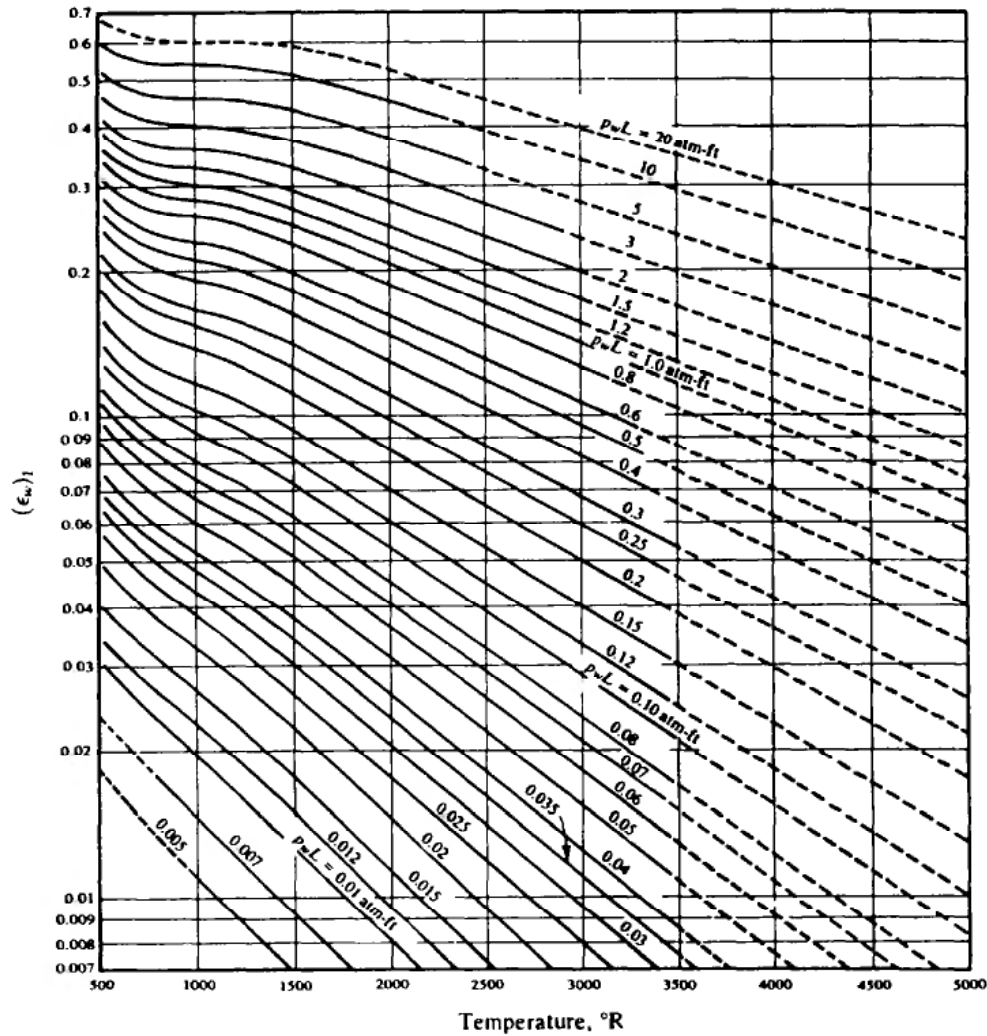


Fig. 11-28. Emissivity of hypothetical water vapor system at 1 atm total pressure. [Adapted from H. C. Hottel, Chapter 4 in *Heat Transmission*, 3rd edn (ed. W. C. McAdams), ©1959, McGraw-Hill Book Company, New York, NY. Reproduced with permission of the McGraw-Hill Companies.]

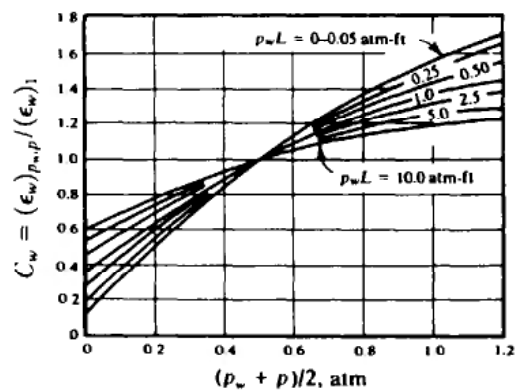


Fig. 11-29. Effect of partial and total pressures on emissivity of water vapor. [Adapted from H. C. Hottel, Chapter 4 in *Heat Transmission*, 3rd edn (ed. W. C. McAdams), ©1959, McGraw-Hill Book Company, New York, NY. Reproduced with permission of the McGraw-Hill Companies.]

Considering the sun as a point source, the incident energy upon a sphere having radius 1.4967×10^{11} m equal to the earth's orbit is the total \dot{Q} from the sun, i.e.,

$$\dot{Q}_{\text{sun}} \approx (1402.6 \text{ W/m}^2)(4\pi)(1.4967 \times 10^{11} \text{ m})^2 = 3.9483 \times 10^{26} \text{ W}$$

(a) At Mercury, the incident radiation is

$$G_m = \frac{\dot{Q}_{\text{sun}}}{4\pi(\text{Mercury orbital radius})^2} \approx \frac{3.9483 \times 10^{26} \text{ W}}{(4\pi)(5.7936 \times 10^{10} \text{ m})^2} = 9.3605 \times 10^3 \text{ W/m}^2$$

(b) Similarly, at Pluto,

$$G_p \approx \frac{3.9483 \times 10^{26} \text{ W}}{(4\pi)(5.9079 \times 10^{12} \text{ m})^2} = 0.9002 \text{ W/m}^2$$

11.2. The total incident radiant energy upon a body which partially reflects, absorbs, and transmits radiant energy is 2200 W/m^2 . Of this amount, 450 W/m^2 is reflected and 900 W/m^2 is absorbed by the body. Find the transmissivity τ .

$$\tau = 1 - \rho - \alpha = 1 - \frac{450}{2200} - \frac{900}{2200} = 0.386$$

11.3. Determine the total emissive power of a blackbody at (a) 1000°C and (b) 1000°F .

$$(a) \quad E_b = \sigma T^4 = (5.6697 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4)(1273.15 \text{ K})^4 \\ = (5.6697)(12.7315)^4 = 148\,967.67 \text{ W/m}^2 \quad \text{or} \quad 148.97 \text{ kW/m}^2$$

$$(b) \quad E_b = \sigma T^4 = \left(0.1714 \times 10^{-8} \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2 \cdot \text{R}^4}\right)(1460^\circ\text{R})^4 \\ = (0.1714)(14.60)^4 = 7787.93 \text{ Btu/h} \cdot \text{ft}^2$$

Note that in either unit system it is convenient to divide the absolute temperature by 100, which results in

$$E_b = (0.1714) \left(\frac{T}{100}\right)^4 \frac{\text{Btu}}{\text{h} \cdot \text{ft}^2} = (5.6697) \left(\frac{T}{100}\right)^4 \text{ W/m}^2$$

11.4. Show that a hohlraum approximates a blackbody.

With reference to Fig. 11-4, if the entering irradiation is G_0 , the irradiation after the first internal reflection is ρG_0 ; after the second, $\rho^2 G_0$; ...; after the n th, $\rho^n G_0$ (which approaches 0 as $n \rightarrow \infty$). Since the few rays that emerge from the hole will have suffered many reflections, the emergent flux is essentially zero, i.e., $\alpha_{\text{hole}} = 1$.

11.5. For a blackbody maintained at 115°C , determine (a) the total emissive power, (b) the wavelength at which the maximum monochromatic emissive power occurs, and (c) the maximum monochromatic emissive power.

$$(a) \quad E_b = \sigma T^4 = \left(5.670 \times 10^{-8} \frac{\text{W}}{\text{m}^2 \cdot \text{K}^4}\right)[(115 + 273.15)^4 \cdot \text{K}^4] = 1287 \text{ W/m}^2$$

(The number 5.67×10^{-8} is often used for σ for simplicity in engineering applications—as are 273 and 460 for absolute temperature conversions.)

$$(b) \quad \lambda_{\text{max}} T = 2897.6 \mu\text{m} \cdot \text{K} \quad (\text{or}) \quad 5215.6 \mu\text{m} \cdot ^\circ\text{R}$$

$$\lambda_{\text{max}} = \frac{2897.6 \mu\text{m} \cdot \text{K}}{388.15 \text{ K}} = 7.465 \mu\text{m}$$

(c) By Planck's law, (11.12),

$$E_{b\lambda} = \frac{3.742 \times 10^8}{(7.465)^5 [\exp(14387/2897) - 1]} = 113.3 \text{ W/m}^2 \cdot \mu\text{m}$$

11.6. Derive Wien's law, (11.13), from Planck's formula, (11.12).

Differentiating (11.12) at constant T ,

$$\frac{\partial E_{b\lambda}}{\partial \lambda} = \frac{(e^{C_2/\lambda T} - 1)(-5C_1 \lambda^{-6}) - (C_1 \lambda^{-5})(e^{C_2/\lambda T})(-C_2 \cdot \lambda^2 T)}{(e^{C_2/\lambda T} - 1)^2}$$

For a maximum, the numerator on the right must vanish. This gives, after cancellation of common factors,

$$x - \frac{C_2}{5(1 - e^{-C_2/x})} = 0 \quad (1)$$

where $x = \lambda_{\max} T$. For $\lambda \approx 1 \mu\text{m}$, $T \approx 10^3 \text{ K}$, we have

$$\frac{C_2}{\lambda T} \approx 10$$

Thus, as a first approximation, we neglect $e^{-C_2/x}$ in comparison to 1, and (1) gives

$$x = \frac{C_2}{5} = 2877 \mu\text{m} \cdot \text{K}$$

which is quite close. If this value is used as the first approximation, x_0 , in *Newton's iterative method*, a single iteration gives

$$x_1 = \frac{1 - 6e^{-5}}{1 - 7e^{-5} + e^{-10}} \left(\frac{C_2}{5} \right) = \frac{0.9595}{0.9528} (2877) = 2897 \mu\text{m} \cdot \text{K}$$

11.7. Reflectivity measurements, which are relatively easy to make, are often used to obtain other surface radiation properties. A set of reflectivity measurements for a certain solid surface at 1000°R is roughly graphed in Fig. 11-30. Estimate the total emissive power at this temperature.

By (11.21) and Kirchhoff's law,

$$E = \int_0^{\infty} \epsilon_{\lambda} E_{b\lambda} d\lambda = \int_0^{\infty} \alpha_{\lambda} E_{b\lambda} d\lambda$$

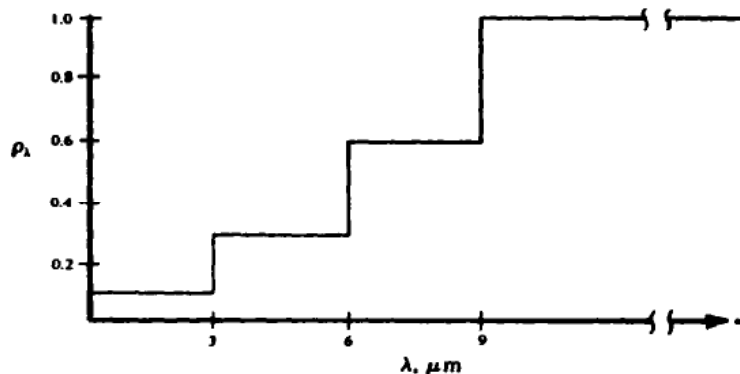


Fig. 11-30

But for a solid surface, $\alpha_\lambda = 1 - \rho_\lambda$, so

$$E = \int_0^\infty (1 - \rho_\lambda) E_{b\lambda} d\lambda = (1 - \rho_\lambda)_{0-3} \int_0^3 E_{b\lambda} d\lambda + (1 - \rho_\lambda)_{3-6} \int_3^6 E_{b\lambda} d\lambda \\ + (1 - \rho_\lambda)_{6-9} \int_6^9 E_{b\lambda} d\lambda + (1 - \rho_\lambda)_{9-\infty} \int_9^\infty E_{b\lambda} d\lambda$$

From Fig. 11-30,

$$(1 - \rho_\lambda)_{0-3} = 1.0 - 0.1 = 0.9 \quad (1 - \rho_\lambda)_{6-9} = 1.0 - 0.6 = 0.4 \\ (1 - \rho_\lambda)_{3-6} = 1.0 - 0.3 = 0.7 \quad (1 - \rho_\lambda)_{9-\infty} = 1.0 - 1.0 = 0$$

Using Table 11-1,

$$\int_0^3 E_{b\lambda} d\lambda = \int_0^{3000} \frac{1}{1000} E_{b\lambda} d(\lambda T) \\ = E_{b(0-3000)} = (0.0254) \sigma (1000)^4 = 43.54 \text{ Btu/h} \cdot \text{ft}^2 \\ \int_3^6 E_{b\lambda} d\lambda = E_{b(0-6000)} - E_{b(0-3000)} \\ = (0.3477 - 0.0254) \sigma (1000)^4 = 552.42 \text{ Btu/h} \cdot \text{ft}^2 \\ \int_6^9 E_{b\lambda} d\lambda = E_{b(0-9000)} - E_{b(0-6000)} \\ = (0.6340 - 0.3477) \sigma (1000)^4 = 490.72 \text{ Btu/h} \cdot \text{ft}^2$$

Substituting into the expression for E ,

$$E = (0.9)(43.54) + (0.7)(552.42) + (0.4)(490.72) = 622.17 \text{ Btu/h} \cdot \text{ft}^2$$

- 11.8.** Using the definitions of total emissive power and total absorptivity, show that ϵ and α are not necessarily equal for irradiation of a surface at temperature T from a source at a different temperature, T^* .

The total emissivity is, by (11.17), (11.10), (11.11), and (11.18),

$$\epsilon = \frac{E}{E_b} = \frac{\int_0^\infty \epsilon_\lambda(T) E_{b\lambda}(T) d\lambda}{\sigma T^4} = \epsilon(T)$$

The total absorptivity is, by definition,

$$\alpha = \frac{\text{energy absorbed}}{\text{energy incident}} = \frac{\int_0^\infty \alpha_\lambda(T) G_\lambda(T^*) d\lambda}{G(T^*)} = \alpha(T, T^*)$$

Since α depends on T^* , while ϵ does not, the two will generally be unequal.

- 11.9.** Approximate the radiant energy leaving a 30 mm diameter sphere at 1200 K and impinging upon a 1 m by 1.5 m wall 1 meter away from the sphere (Fig. 11-31). Assume all surfaces to be blackbodies.

The sphere is small enough to be treated as an infinitesimal disk,

$$dA_1 = \pi R^2$$

From Fig. 11-11 with

$$\beta = 0.75 \quad \text{and} \quad \gamma = 0.5$$

the configuration factor to one-fourth the wall is approximately 0.021. Thus, for the entire wall A_2 ,

$$F_{dA_1 \rightarrow A_2} = 4(0.021) = 0.084$$

and

$$\begin{aligned} q_{dA_1 \rightarrow A_2} &= F_{dA_1 \rightarrow A_2} (\sigma T_1^4) (dA_1) \\ &= (0.084)(5.6697 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4) \\ &\quad \times (1200 \text{ K})^4 \pi (15 \times 10^{-3} \text{ m})^2 \\ &= 6.98 \text{ W} \end{aligned}$$

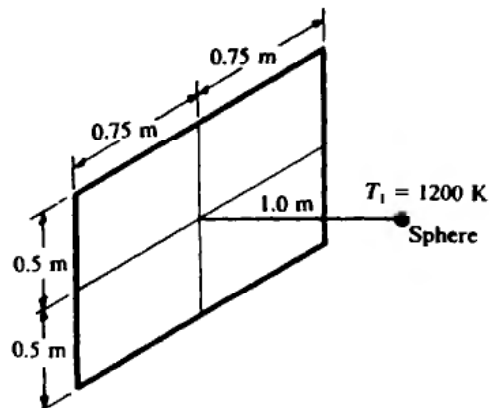


Fig. 11-31

- 11.10.** Two blackbody rectangles, 1.8 m by 3.6 m, are parallel and directly opposed, as shown in Fig. 11-12; they are 3.6 m apart. If surface 1 is at $T_1 = 95^\circ\text{C}$ and surface 2 is at $T_2 = 315^\circ\text{C}$, determine (a) the net rate of heat transfer $q_{1,2}$; (b) the net energy loss rate from the 95°C surface (side facing surface 2 only) if the surroundings other than surface 2 behave as a blackbody at (i) 0.0 K, (ii) 295 K.

(a) Using Fig. 11-12 with $\beta = 12/12$ and $\gamma = 6/12$, $F_{1,2} \approx 0.12$. Thus, the net rate of heat transfer is, by (11.36),

$$\begin{aligned} q_{1,2} &= A_1 F_{1,2} \sigma (T_1^4 - T_2^4) \\ &= (1.8 \text{ m} \times 3.6 \text{ m})(0.12)(5.670 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4) \times [(368 \text{ K})^4 - (588 \text{ K})^4] = -4461 \text{ W} \end{aligned}$$

(b) (i) Surface 1 is irradiated only by surface 2; hence the net energy loss rate from surface 1 is

$$\begin{aligned} q_1 &= A_1 E_{b1} - A_2 F_{2,1} E_{b2} = A_1 (E_{b1} - F_{1,2} E_{b2}) \\ &= (1.8 \text{ m} \times 3.6 \text{ m})(5.670 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4) [(368 \text{ K})^4 - 0.12(588 \text{ K})^4] = 1468 \text{ W} \end{aligned}$$

(ii) The summation of configuration factors from any surface to its total surroundings is 1, hence

$$F_{1\text{-space}} = 1 - F_{1,1} - F_{1,2} = 1 - 0 - 0.12 = 0.88$$

Thus, the net energy loss rate from surface 1 is

$$\begin{aligned} q_1 &= A_1 E_{b1} - A_2 F_{2,1} E_{b2} - A_{\text{space}} F_{\text{space-1}} E_{b\text{space}} \\ &= A_1 (E_{b1} - F_{1,2} E_{b2} - F_{1\text{-space}} E_{b\text{space}}) \\ &= 6.48 \text{ m}^2 (5.670 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4) [(368 \text{ K})^4 - 0.12(588 \text{ K})^4 - 0.88(295 \text{ K})^4] = -981 \text{ W} \end{aligned}$$

- 11.11.** A large black enclosure consists of a box as shown in Fig. 11-32. Surface 1 (bottom) is at 262°C , surface 2 (top) is at 177°C , and all vertical surfaces (including the back wall, 3) are at 205°C . Find (a) the net heat transfer rate $q_{1,2}$, and (b) the net heat-transfer rate $q_{1,3}$.

(a) From Fig. 11-12 with $\beta = 1.0$ and $\gamma = (2.5/3) = 0.833$; $F_{1,2} \approx 0.17$.

$$\begin{aligned} q_{1,2} &= A_1 F_{1,2} (E_{b1} - E_{b2}) \\ &\approx (3 \times 2.5)(\text{m}^2)(0.17)(5.670 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4) \\ &\quad \times [(535 \text{ K})^4 - (450 \text{ K})^4] \approx 2958 \text{ W} \end{aligned}$$

(b) From Fig. 11-13 with $\beta = 0.83$ and $\gamma = 1.0$; $F_{1,3} \approx 0.21$.

$$\begin{aligned} q_{1,3} &\approx 7.5(0.21)(5.670 \times 10^{-8}) [(535)^4 - (477)^4] \\ &\approx 2693 \text{ W} \end{aligned}$$

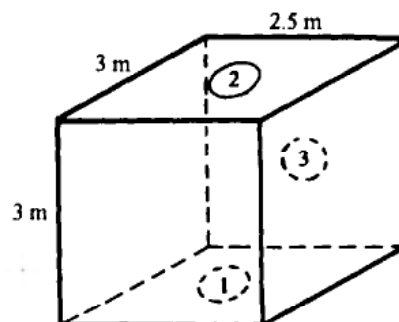


Fig. 11-32

11.12. For the configuration illustrated in Fig. 11-15, with the flat annular area between the two cylinders at one end designated as A_3 , obtain expressions for $F_{1,3}$, $F_{3,1}$, $F_{3,2}$, and $F_{3,3}$ in terms of $F_{1,1}$, $F_{1,2}$ and the three areas A_1 , A_2 , and A_3 . $F_{3,3}$ is the configuration factor between the two annular areas at opposite ends. A_1 is the inner surface of the outer cylinder and A_2 is the outer surface of the inner cylinder.

By (11.34),

$$2F_{1,3} + F_{1,2} + F_{1,1} = 1 \quad \text{or} \quad F_{1,3} = \frac{1}{2}(1 - F_{1,2} - F_{1,1})$$

and by reciprocity

$$F_{3,1} = \frac{A_1}{2A_3}(1 - F_{1,2} - F_{1,1})$$

Also, since $F_{2,2} = 0$,

$$2F_{2,3} + F_{2,1} = 1 \quad \text{or} \quad F_{2,3} = \frac{1}{2}(1 - F_{2,1})$$

and reciprocity gives

$$F_{2,3} = \frac{1}{2}\left(1 - \frac{A_1}{A_2}F_{1,2}\right) \quad \text{and} \quad F_{3,2} = \frac{A_2}{2A_3}\left(1 - \frac{A_1}{A_2}F_{1,2}\right)$$

Again by (11.34),

$$F_{3,3} + F_{3,1} + F_{3,2} = 1$$

or

$$\begin{aligned} F_{3,3} &= 1 - F_{3,1} - F_{3,2} \\ &= 1 - \frac{A_1}{2A_3}(1 - F_{1,2} - F_{1,1}) - \frac{A_2}{2A_3}\left(1 - \frac{A_1}{A_2}F_{1,2}\right) \\ &= 1 - \frac{A_1 + A_2}{2A_3} + \frac{A_1}{2A_3}(2F_{1,2} + F_{1,1}) \end{aligned}$$

11.13. For two concentric cylinders as shown in Fig. 11-15, having $r_1 = 20$ cm, $r_2 = 10$ cm, and $L = 20$ cm, determine $F_{1,1}$, $F_{1,2}$, and $F_{3,3}$, where the end annular plane area is A_3 . Use the results of Problem 11.12.

From Fig. 11-15, with $\gamma = 2.0$ and $\beta = 2.0$, $F_{1,1} = 0.23$; $F_{1,2} = 0.34$. The areas are:

$$\begin{aligned} A_1 &= 2\pi(20)(20) = 2513 \text{ cm}^2 & A_2 &= 2\pi(10)(20) = 1257 \text{ cm}^2 \\ A_3 &= \pi[(20 \text{ cm})^2 - (10 \text{ cm})^2] = 942 \text{ cm}^2 \end{aligned}$$

From Problem 11.12,

$$F_{3,3} = 1 - \frac{2513 \text{ cm}^2 + 1257 \text{ cm}^2}{2(942 \text{ cm}^2)} + \frac{2513 \text{ cm}^2}{2(942 \text{ cm}^2)} [2(0.34) + 0.23] = 0.213$$

(See Problem 11.29 also.)

11.14. Determine the configuration factor $F_{1,2}$ for Fig. 11-33.

By reciprocity, $F_{1,2} = (A_2/A_1)F_{2,1}$. By subdivision of the receiving surface,

$$F_{2,(1,3)} = F_{2,1} + F_{2,3} \quad \text{or} \quad F_{2,1} = F_{2,(1,3)} - F_{2,3}$$

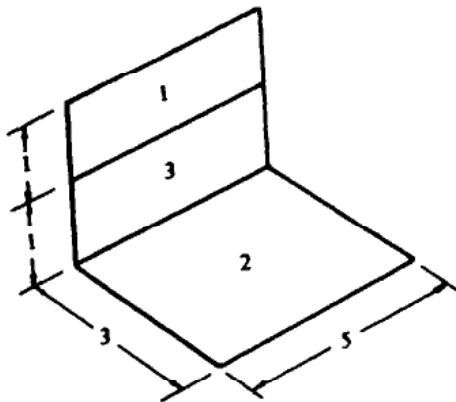


Fig. 11-33

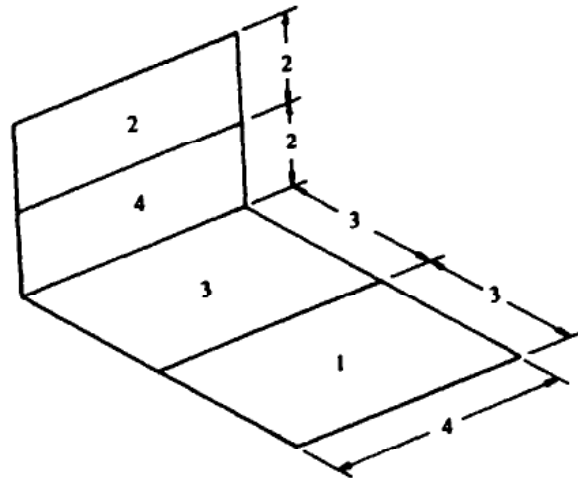


Fig. 11-34

Both $F_{2,3}$ and $F_{2-(1,3)}$ are obtainable from Fig. 11-13.

$$F_{2,3}: \quad \beta = \frac{3}{5} = 0.6, \quad \gamma = \frac{1}{5} = 0.2, \quad F_{2,3} \approx 0.125$$

$$F_{2-(1,3)}: \quad \beta = \frac{3}{5} = 0.6, \quad \gamma = \frac{2}{5} = 0.4, \quad F_{2-(1,3)} \approx 0.190$$

Hence,

$$F_{2,1} \approx 0.190 - 0.125 = 0.065 \quad \text{and} \quad F_{1,2} \approx \left(\frac{15}{5}\right)(0.065) = 0.195$$

11.15. Determine the configuration factor $F_{1,2}$ for Fig. 11-34.

Using the graphical data of Fig. 11-13,

$$F_{(1,3)-(2,4)}: \quad \beta = \frac{6}{4} = 1.5, \quad \gamma = \frac{4}{4} = 1.0, \quad F_{(1,3)-(2,4)} \approx 0.150$$

$$F_{(1,3),4}: \quad \beta = \frac{6}{4} = 1.5, \quad \gamma = \frac{2}{4} = 0.5, \quad F_{(1,3),4} \approx 0.108$$

By subdivision of the receiving surface,

$$F_{(1,3),2} = F_{(1,3)-(2,4)} - F_{(1,3),4} \approx 0.150 - 0.108 = 0.042$$

Again from Fig. 11-13,

$$F_{3-(2,4)}: \quad \beta = \frac{3}{4} = 0.75, \quad \gamma = \frac{4}{4} = 1.0, \quad F_{3-(2,4)} \approx 0.250$$

$$F_{3,4}: \quad \beta = \frac{3}{4} = 0.75, \quad \gamma = \frac{2}{4} = 0.5, \quad F_{3,4} \approx 0.175$$

and, by subdivision of the receiving surface,

$$F_{3,2} = F_{3-(2,4)} - F_{3,4} \approx 0.250 - 0.175 = 0.075$$

Now by subdivision of the emitting surface, (11.33),

$$F_{(1,3)-2} = \frac{1}{A_1 + A_3} (A_1 F_{1-2} + A_3 F_{3-2})$$

$$0.042 \approx \left(\frac{1}{12 + 12} \right) [12F_{1-2} + 12(0.075)]$$

$$F_{1-2} \approx 0.009$$

11.16. Suppose that in Fig. 11-14 the two concentric parallel disks are 3 m apart, with disk 1 (1 m radius) being at 200 °C and disk 2 (1.5 m radius) being at 400 °C. Calculate q_i and q_{i-j} as appropriate for: (a) the two disks being blackbodies, with no other surfaces present (no other radiation present); (b) both disks being blackbodies, with a single reradiating surface in the form of a right frustum of a cone enclosing them; (c) both disks being blackbodies, with a single black surface (right frustum of a cone) at 0 °C enclosing them.

In each case the enclosing surface shall be denoted as surface 3 (this may be chosen as a black surface at 0 K in (a)). To find the configuration factors we shall use, instead of the graphed results for F_{1-2} , the exact equation

$$F_{1-2} = \frac{1}{2} [x - \sqrt{x^2 - 4(\beta\gamma)^2}]$$

where $x = 1 + (1 + \beta^2)\gamma^2$, and β and γ are as defined in Fig. 11-14. Here, $\beta = 1.5/3 = 0.5$ and $\gamma = 3/1 = 3$; hence,

$$x = 1 + (1 + 0.25)9 = 12.25$$

and

$$F_{1-2} = \frac{1}{2} [(12.25 - \sqrt{(12.25)^2 - 4(1.5)^2})] = 0.1865$$

Then

$$F_{1-3} = 1 - 0.1865 = 0.8135$$

and, by reciprocity ($A_1 = \pi$, $A_2 = 2.25\pi$),

$$F_{2-1} = \frac{\pi}{2.25\pi} (0.1865) = 0.0829 \quad \text{and} \quad F_{2-3} = 1 - 0.0829 = 0.9171$$

Also, the area of the enclosing frustum is given by

$$A_3 = \pi S(r_1 + r_2) \quad \text{where} \quad S = \sqrt{(r_2 - r_1)^2 + (L)^2}$$

so

$$A_3 = \pi \sqrt{(1.5 - 1)^2 + (3)^2} (1.5 + 1) = 23.887 \text{ m}^2$$

Thus

$$A_1 F_{1-3} = A_3 F_{3-1}; \quad F_{3-1} = \frac{\pi(0.8135)}{23.887} = 0.1070$$

$$A_2 F_{2-3} = A_3 F_{3-2}; \quad F_{3-2} = \frac{\pi(2.25)(0.9171)}{23.887} = 0.2714$$

$$F_{3-3} = 1 - F_{3-1} - F_{3-2} = 1 - 0.1070 - 0.2714 = 0.6216$$

(a) By (11.36),

$$q_{1-2} = A_1 F_{1-2} \sigma (T_1^4 - T_2^4) = \pi (1 \cdot \text{m})^2 (0.1865) (5.670 \times 10^{-8} \text{ W/m}^2 \cdot \text{K}^4) [(473)^4 - (673)^4] (\text{K}^4)$$

$$= -5152 \text{ W} = -q_{2-1}$$

By (11.38) with $F_{1-1} = F_{2-2} = 0$,

$$\begin{aligned} q_1 &= A_1 \sigma [T_1^4 - F_{1-2} T_2^4] \\ &= \pi(5.670 \times 10^{-8}) [(473)^4 - (0.1865)(673)^4] = 2101 \text{ W} \\ q_2 &= A_2 \sigma [T_2^4 - F_{2-1} T_1^4] \\ &= (2.25\pi)(5.670 \times 10^{-8}) [(673)^4 - (0.0829)(473)^4] = 80\,556 \text{ W} \end{aligned}$$

(b) By (11.49),

$$\bar{F}_{1-2} = \frac{(A_2/A_1) - (F_{1-2})^2}{(A_2/A_1) + (1 - 2F_{1-2})} = \frac{2.25 - (0.1865)^2}{2.25 + [1 - 2(0.1865)]} = 0.770$$

Using (11.46),

$$\begin{aligned} q_{1-2} &= A_1 \bar{F}_{1-2} (E_{b1} - E_{b2}) \\ &= \pi(0.770)(5.670 \times 10^{-8}) [(473)^4 - (673)^4] = -21\,272 \text{ W} = -q_{2-1} \end{aligned}$$

It is physically evident that $q_1 = -q_2 = q_{1-2}$; this may be verified by solving (11.40) and (11.41) for q_1 , q_2 and J_3 .

(c) By (11.36)

$$\begin{aligned} q_{1-3} &= A_1 F_{1-3} (E_{b1} - E_{b3}) \\ &= \pi(0.8135)(5.670 \times 10^{-8}) [(473)^4 - (273)^4] = 6448 \text{ W} = -q_{3-1} \end{aligned}$$

From part (a),

$$q_{1-2} = -5152 \text{ W} = -q_{2-1}$$

Also, by (11.36),

$$\begin{aligned} q_{2-3} &= A_2 F_{2-3} (E_{b2} - E_{b3}) \\ &= (2.25\pi)(0.9171)(5.670 \times 10^{-8}) [(673)^4 - (273)^4] = 73\,362 \text{ W} = -q_{3-2} \end{aligned}$$

The q_i 's are given by (11.38). Thus, since $F_{1-1} = F_{2-2} = 0$,

$$\begin{aligned} q_1 &= A_1 [E_{b1} - F_{1-2} E_{b2} - F_{1-3} E_{b3}] \\ &= \pi(5.670 \times 10^{-8}) [(473)^4 - (0.1865)(673)^4 - (0.8135)(273)^4] = 1296 \text{ W} \\ q_2 &= A_2 [E_{b2} - F_{2-1} E_{b1} - F_{2-3} E_{b3}] \\ &= (2.25\pi)(5.670 \times 10^{-8}) [(673)^4 - (0.0829)(473)^4 - (0.9171)(273)^4] = 80\,556 \text{ W} \\ q_3 &= A_3 [E_{b3} - F_{3-1} E_{b1} - F_{3-2} E_{b2} - F_{3-3} E_{b3}] \\ &= (23.887)(5.670 \times 10^{-8}) [(273)^4 - (0.1070)(473)^4 - (0.2714)(673)^4 - (0.6216)(273)^4] \\ &= -79\,815 \text{ W} \end{aligned}$$

11.17. Two parallel infinite black planes are maintained at 200 °C and 300 °C. (a) Determine the net rate of heat transfer per unit area (SI units). (b) Repeat for the case where both temperatures are lowered by 100 °C and determine the ratio of the reduced heat transfer to the original value.

(a) Denoting as plane 1 the hotter plane,

$$\frac{q_{1-2}}{A} = \sigma(T_1^4 - T_2^4) = (5.6697 \times 10^{-8}) [(573.15)^4 - (473.15)^4] = 3276.78 \text{ W/m}^2$$

(b) $\frac{q_{1-2}}{A} = (5.6697 \times 10^{-8}) [(473.15)^4 - (373.15)^4] = 1742.31 \text{ W/m}^2$

$$\frac{(q_{1-2}/A)_{200-100}}{(q_{1-2}/A)_{300-200}} = \frac{1742.31}{3276.78} = 0.5317$$

A reduction in temperature of 100 °C reduces the net heat transfer rate approximately 47%!

11.18. Two blackbody rectangles, 0.6 m by 1.2 m, are parallel and directly opposed. The bottom rectangle is at $T_1 = 500$ K and the top rectangle is at $T_2 = 900$ K. The two rectangles are 1.2 m apart. Determine (a) the rate of radiant heat transfer between the two surfaces, (b) the rate at which the bottom rectangle is losing energy if the surroundings (other than the top rectangle) are considered a blackbody at 0.0 K, (c) the rate at which the bottom rectangle is losing energy if the surroundings (other than the top rectangle) are considered to be a blackbody at 300 K.

(a) Using Fig. 11-12 with $\beta = 1.2/1.2 = 1.0$ and $\gamma = 0.6/1.2 = 0.5$, $F_{1-2} = F_{2-1} = 0.12$; therefore,

$$\begin{aligned} q_{1-2} &= A_1 F_{1-2} \sigma (T_1^4 - T_2^4) \\ &= (0.72)(0.12)(5.6697 \times 10^{-8}) [(500)^4 - (900)^4] = -2908 \text{ W} \end{aligned}$$

(b) By (11.38), with $F_{1-1} = 0$ and $E_{b\text{space}} = 0$,

$$q_1 = A_1 [E_{b1} - F_{1-2} E_{b2}] = (0.72)(5.6697 \times 10^{-8}) [(500)^4 - (0.12)(900)^4] = -662.6 \text{ W}$$

i.e., a net gain for surface 1.

(c) $F_{1-\text{space}} = 1 - F_{1-1} - F_{1-2} = 1 - 0 - 0.12 = 0.88$

Again by (11.38),

$$\begin{aligned} q_1 &= A_1 [E_{b1} - F_{1-2} E_{b2} - F_{1-\text{space}} E_{b\text{space}}] \\ &= (0.72)(5.6697 \times 10^{-8}) [(500)^4 - (0.12)(900)^4 - (0.88)(300)^4] = -953.6 \text{ W} \end{aligned}$$

i.e., an even larger gain for surface 1 than in part (b).

11.19. Repeat Problem 11.16(a) for both disks being gray with $\epsilon_1 = \epsilon_2 = 0.7$ and no other radiation present.

By (11.60),

$$q_{1-2} = A_1 \mathcal{F}_{1-2} \sigma (T_1^4 - T_2^4) = -q_{2-1}$$

where \mathcal{F}_{1-2} is given by (11.63) with $F_{1-2} = 0.1865$, $A_1 = \pi$, and $A_2 = 2.25\pi$ (from Problem 11.16). So

$$\mathcal{F}_{1-2} = \frac{0.1865}{\frac{1}{(0.7)^2} - \left(\frac{1}{0.7} - 1\right) \left(\frac{1}{0.7} - 1\right) \left(\frac{\pi}{2.25\pi}\right) (0.1865)^2} = 0.092$$

$$q_{1-2} = \pi(0.092)(5.67 \times 10^{-8}) [(473)^4 - (673)^4] = -2542 \text{ W} = -q_{2-1}$$

The net heat transfer from either surface is given by (11.38) or by physical reasoning:

$$\begin{aligned} q_1 &= (\text{energy emitted by } A_1) - q_{2-1} \\ &= A_1 \epsilon_1 \sigma T_1^4 - q_{2-1} = \pi(0.7)(5.67 \times 10^{-8})(473)^4 - 2542 = 3699 \text{ W} \end{aligned}$$

Also,

$$\begin{aligned} q_2 &= A_2 \epsilon_2 \sigma T_2^4 - q_{1-2} \\ &= (2.25\pi)(0.7)(5.67 \times 10^{-8})(673)^4 - (-2542) = 60\,096 \text{ W} \end{aligned}$$

11.20. Repeat Problem 11.16(b) for both disks being gray, $\epsilon_1 = \epsilon_2 = 0.7$, and the disks surrounded by a reradiating surface which is a right frustum of a cone.

By (11.64), and using areas from Problem 11.16 and \mathcal{F}_{1-2} from Problem 11.16(b),

$$\frac{1}{\mathcal{F}_{1-2}} = \frac{1}{0.770} + \left(\frac{\pi}{2.25\pi}\right) \left(\frac{1}{0.7} - 1\right) + \left(\frac{1}{0.7} - 1\right) = 1.9177 \quad \mathcal{F}_{1-2} = 0.52143$$

By (11.60),

$$q_{1-2} = \pi(0.52143)(5.67 \times 10^{-8}) [(473)^4 - (673)^4] = -14\,405 \text{ W} = -q_{2-1}$$

As in Problem 11.16(b), $q_{1-2} = q_1 = -q_2$.

11.21. Consider Fig. 11-14 with $r_1 = 1.0$ ft, $r_2 = 1.5$ ft, and $L = 3$ ft. Both disks are gray with $\epsilon_1 = \epsilon_2 = 0.7$, $T_1 = 660^\circ\text{R}$, $T_2 = 860^\circ\text{R}$ and the surrounding right frustum of a cone is an active gray body with $\epsilon_3 = 0.4$ and $T_3 = 760^\circ\text{R}$.

From Problem 11.16 (since F_{i-j} is independent of units on geometrical terms),

$$\begin{aligned} F_{1-2} &= 0.1865 & F_{1-3} &= 0.8135 \\ F_{2-1} &= 0.0829 & F_{2-3} &= 0.9171 \\ F_{3-1} &= 0.1070 & F_{3-2} &= 0.2714 & F_{3-3} &= 0.6216 \end{aligned}$$

Also,

$$\begin{aligned} E_{b1} &= (0.1714 \times 10^{-8})(660)^4 = 325.23 \text{ Btu/h} \cdot \text{ft}^2 \\ E_{b2} &= (0.1714 \times 10^{-8})(860)^4 = 937.57 \text{ Btu/h} \cdot \text{ft}^2 \\ E_{b3} &= (0.1714 \times 10^{-8})(760)^4 = 571.83 \text{ Btu/h} \cdot \text{ft}^2 \end{aligned}$$

and

$$\frac{\epsilon_1}{1 - \epsilon_1} = \frac{\epsilon_2}{1 - \epsilon_2} = 2.3333 \quad \frac{\epsilon_3}{1 - \epsilon_3} = 0.6667$$

Equations (11.57) (there are no reradiating surfaces present) are, after canceling the areas:

$$F_{1-2}(J_1 - J_2) + F_{1-3}(J_1 - J_3) + \frac{\epsilon_1}{1 - \epsilon_1}(J_1 - E_{b1}) = 0$$

$$F_{2-1}(J_2 - J_1) + F_{2-3}(J_2 - J_3) + \frac{\epsilon_2}{1 - \epsilon_2}(J_2 - E_{b2}) = 0$$

$$F_{3-1}(J_3 - J_1) + F_{3-2}(J_3 - J_2) + \frac{\epsilon_3}{1 - \epsilon_3}(J_3 - E_{b3}) = 0$$

Inserting known numerical values and collecting terms,

$$\begin{aligned} 3.3333 J_1 - 0.1865 J_2 - 0.8135 J_3 &= 758.859 \\ -0.0829 J_1 + 3.3333 J_2 - 0.9171 J_3 &= 2187.632 \\ -0.1070 J_1 - 0.2714 J_2 + 1.0451 J_3 &= 381.239 \end{aligned}$$

Gaussian elimination (hand or computer solution) yields

$$J_1 = 427.5 \quad J_2 = 839.3 \quad J_3 = 626.5$$

Then, from (11.54) and $A_3 = 23.887 \text{ ft}^2$,

$$q_1 = \frac{325.23 - 427.5}{(1 - 0.7)/(0.7)\pi} = -749.7 \text{ Btu/h}$$

$$q_2 = \frac{937.57 - 839.3}{(1 - 0.7)/(0.7)(2.25\pi)} = 1620.8 \text{ Btu/h}$$

$$q_3 = \frac{571.83 - 626.5}{(1 - 0.4)/(0.4)(23.887)} = -870.6 \text{ Btu/h}$$

To determine the $q_{i,j}$'s, we solve equations (11.57) for the appropriate J_{ij} 's and then calculate the $\mathcal{F}_{i,j}$'s.

$i = 1$: $E_{b1} = 1$, $E_{b2} = 0$, $E_{b3} = 0$. Using the previously stated values of F 's, ϵ 's, etc., we have

$$\begin{aligned} 3.3333 J_{1,1} - 0.1865 J_{2,1} - 0.8135 J_{3,1} &= 2.3333 \\ -0.0829 J_{1,1} + 3.3333 J_{2,1} - 0.9171 J_{3,1} &= 0 \\ -0.1070 J_{1,1} - 0.2714 J_{2,1} + 1.0451 J_{3,1} &= 0 \end{aligned}$$

Solving by Gaussian elimination,

$$J_{1,1} = 0.7230 \quad J_{2,1} = 0.04129 \quad J_{3,1} = 0.08474$$

and by (11.59),

$$\mathcal{F}_{1-2} = \frac{A_2}{A_1} \left(\frac{\epsilon_2}{1 - \epsilon_2} \right) J_{2,1} = \frac{2.25\pi}{\pi} (2.3333)(0.04129) = 0.2168$$

$$\mathcal{F}_{1-3} = \frac{A_3}{A_1} \left(\frac{\epsilon_3}{1 - \epsilon_3} \right) J_{3,1} = \frac{23.887}{\pi} (0.6667)(0.08474) = 0.4296$$

Repeating the procedure for $i = 2$, with $E_{b1} = 0$, $E_{b2} = 1$ and $E_{b3} = 0$,

$$3.3333 J_{1,2} - 0.1865 J_{2,2} - 0.8135 J_{3,2} = 0$$

$$-0.0829 J_{1,2} + 3.3333 J_{2,2} - 0.9171 J_{3,2} = 2.3333$$

$$-0.1070 J_{1,2} - 0.2714 J_{2,2} + 1.0451 J_{3,2} = 0$$

Solving by Gaussian elimination,

$$J_{1,2} = 0.09291 \quad J_{2,2} = 0.7592 \quad J_{3,2} = 0.2067$$

Then

$$\mathcal{F}_{2-1} = \frac{A_1}{A_2} \left(\frac{\epsilon_1}{1 - \epsilon_1} \right) J_{1,2} = \frac{\pi}{2.25\pi} (2.3333)(0.09291) = 0.09635$$

$$\mathcal{F}_{2-3} = \frac{A_3}{A_2} \left(\frac{\epsilon_3}{1 - \epsilon_3} \right) J_{3,2} = \frac{23.887}{2.25\pi} (0.6667)(0.2067) = 0.4657$$

A check on the solution is:

$$A_1 \mathcal{F}_{1-2} = A_2 \mathcal{F}_{2-1}$$

$$\pi(0.2168) \stackrel{?}{=} (2.25\pi)(0.09635)$$

$$0.6811 = 0.6811$$

By reciprocity,

$$\mathcal{F}_{3-1} = \frac{A_1}{A_3} \mathcal{F}_{1-3} = \frac{\pi}{23.887} (0.4296) = 0.05650$$

$$\mathcal{F}_{3-2} = \frac{A_2}{A_3} \mathcal{F}_{2-3} = \frac{2.25\pi}{23.887} (0.4657) = 0.1378$$

Next, using (11.60),

$$q_{1-2} = A_1 \mathcal{F}_{1-2} \sigma (T_1^4 - T_2^4)$$

$$= \pi(0.2168)(0.1714 \times 10^{-8}) [(660)^4 - (860)^4] = -417.07 \text{ Btu/h} = -q_{2-1}$$

$$q_{1-3} = A_1 \mathcal{F}_{1-3} \sigma (T_1^4 - T_3^4)$$

$$= \pi(0.4296)(0.1714 \times 10^{-8}) [(660)^4 - (760)^4] = -332.82 \text{ Btu/h} = -q_{3-1}$$

$$q_{2-3} = A_2 \mathcal{F}_{2-3} \sigma (T_2^4 - T_3^4)$$

$$= (2.25\pi)(0.4657)(0.1714 \times 10^{-8}) [(860)^4 - (760)^4] = 1203.97 \text{ Btu/h} = -q_{3-2}$$

11.22. A gray body having a surface area of 0.37 m^2 has $\epsilon_1 = 0.35$ and $T_1 = 407^\circ\text{C}$. This is completely enclosed by a gray surface having an area of 3.33 m^2 , $\epsilon_2 = 0.75$, and $T_2 = 37^\circ\text{C}$. Find the net rate of heat transfer q_{1-2} between the two surfaces if $F_{1-1} = 0$.

By (11.62),

$$\frac{1}{\mathcal{F}_{1-2}} = \frac{1}{\epsilon_1} + \frac{A_1}{A_2} \left(\frac{1}{\epsilon_2} - 1 \right) = \frac{1}{0.35} + \frac{0.37}{3.33} \left(\frac{1}{0.75} - 1 \right) = 2.89$$

$$\mathcal{F}_{1-2} = 0.3455$$

Thus

$$\begin{aligned} q_{1,2} &= A_1 \mathcal{F}_{1,2} \sigma (T_1^4 - T_2^4) \\ &= 0.37 \text{ m}^2 (0.3455) (5.67 \times 10^{-8}) [(680)^4 - (310)^4] = 1483 \text{ W} \end{aligned}$$

11.23. Two parallel metal walls of a kitchen oven have temperatures $T_1 = 232^\circ\text{C}$ and $T_3 = 27^\circ\text{C}$, and emissivities $\epsilon_1 = \epsilon_3 = 0.30$, where subscripts 1 and 3 denote the inner and outer walls, respectively. The space between the walls is filled with a rock-wool-type insulation. Assuming this insulation material to be transparent to thermal radiation, calculate the radiant heat transfer rate per unit area between the two walls (a) with no radiation shield and (b) for one radiation shield of aluminum foil having $\epsilon_2 = 0.09$.

(a) By (11.51),

$$\frac{q_{1,3}}{A} = \frac{\sigma(T_1^4 - T_3^4)}{(1/\epsilon_1) + (1/\epsilon_3) - 1} = \frac{(5.67 \times 10^{-8})[(505)^4 - (300)^4]}{(1/0.3) + (1/0.3) - 1} = 570 \text{ W/m}^2$$

$$(b) \quad \frac{q}{A} = \frac{\sigma(T_1^4 - T_2^4)}{(1/\epsilon_1) + (1/\epsilon_2) - 1} = \frac{\sigma(T_2^4 - T_3^4)}{(1/\epsilon_2) + (1/\epsilon_3) - 1}$$

but since $\epsilon_1 = \epsilon_3$, the two denominators are equal; hence

$$\begin{aligned} T_1^4 - T_2^4 &= T_2^4 - T_3^4 \\ T_2^4 &= \frac{1}{2}(T_1^4 + T_3^4) = \frac{1}{2}[(505)^4 + (300)^4], \end{aligned}$$

and

$$T_2 = 437.7 \text{ K}$$

Then

$$\frac{q}{A} = \frac{q_{1,2}}{A} = \frac{(5.67 \times 10^{-8})[(505)^4 - (437.7)^4]}{(1/0.3) + (1/0.09) - 1} = 119.5 \text{ W/m}^2$$

Checking:

$$\frac{q}{A} = \frac{q_{2,3}}{A} = \frac{(5.67 \times 10^{-8})[(437.7)^4 - (300)^4]}{(1/0.09) + (1/0.3) - 1} = 120.6 \text{ W/m}^2$$

11.24. Determine the effective emissivity (for radiation from the gas to the surface) of CO_2 gas at 2500°R in a very long cylinder which is 2 ft in diameter. The partial pressure of the CO_2 is 0.2 atm and the gas system total pressure is 0.3 atm.

From Table 11-2, $L = 1 \times D = 2$ ft. From Fig. 11-26 at $p_{\text{CO}_2} L = 0.2 \times 2 = 0.4$ atm·ft and $T = 2500^\circ\text{R}$, $(\epsilon_{\text{CO}_2}) \approx 0.102$. From Fig. 11-27 at $p = 0.3$ atm and $p_{\text{CO}_2} L = 0.4$ atm·ft, $C_{\text{CO}_2} \approx 0.78$. Thus

$$(\epsilon_{\text{CO}_2})_p \approx (0.78)(0.102) = 0.08$$

11.25. A combustion exhaust gas at 2500°R has a CO_2 partial pressure of 0.08 atm, a water vapor partial pressure of 0.16 atm, and a total gas system pressure of 2.0 atm. Estimate the effective gas mixture emissivity in a long cylindrical flue 3 ft in diameter. The other major gas constituents are O_2 and N_2 .

The O_2 and N_2 constituents do not absorb or emit radiant energy in the temperature range of this problem. We may approximate the gas system emissivity by linear addition of the individual emissivities

of the CO_2 and the water vapor; thus,

$$\begin{aligned}\text{CO}_2: \quad L &= 1 \times D = 3 \text{ ft} \\ p_{\text{CO}_2} L &= 0.08 \times 3 = 0.24 \text{ atm}\cdot\text{ft} \\ \text{From Fig. 11-26, } (\epsilon_{\text{CO}_2})_1 &\approx 0.085 \\ \text{From Fig. 11-27, } C_{\text{CO}_2} &\approx 1.2 \\ \text{and } (\epsilon_{\text{CO}_2})_p &\approx (0.085)(1.2) = 0.102\end{aligned}$$

$$\begin{aligned}\text{H}_2\text{O}: \quad L &= 1 \times D = 3 \text{ ft} \\ p_{\text{H}_2\text{O}} L &= 0.16 \times 3 = 0.48 \text{ atm}\cdot\text{ft} \\ \text{From Fig. 11-28, } (\epsilon_{\text{H}_2\text{O}})_1 &\approx 0.115 \\ \text{From Fig. 11-29 at } (p_w + p)/2 = 2.16/2 = 1.08 \text{ atm, } C_w &\approx 1.5 \\ \text{and } (\epsilon_{\text{H}_2\text{O}})_{p_w, p} &\approx (0.115)(1.5) = 0.173\end{aligned}$$

It follows that $\epsilon_{\text{total}} \approx 0.102 + 0.173 = 0.275$.

Supplementary Problems

11.26. Determine the monochromatic emissive power at $2.30 \mu\text{m}$ of a blackbody at a temperature of 2500°F .

Ans. $40\,645 \text{ Btu/h}\cdot\text{ft}^2\cdot\mu\text{m}$

11.27. Determine λ_{max} and the maximum value of the monochromatic emissive power of a blackbody at (a) 3500°R , (b) 3000°R , (c) 2500°R , (d) 2000°R , (e) 1944 K , and (f) 1667 K .

Ans. (a) $1.4902 \mu\text{m}$, $1.134\,99 \times 10^5 \text{ Btu/h}\cdot\text{ft}^2\cdot\mu\text{m}$; (d) $2.6078 \mu\text{m}$, $6.9152 \times 10^3 \text{ Btu/h}\cdot\text{ft}^2\cdot\mu\text{m}$;

(b) $1.7385 \mu\text{m}$, $5.2512 \times 10^4 \text{ Btu/h}\cdot\text{ft}^2\cdot\mu\text{m}$; (e) $1.4902 \mu\text{m}$, $3.580 \times 10^5 \text{ W/m}^2\cdot\mu\text{m}$;

(c) $2.0862 \mu\text{m}$, $2.1103 \times 10^4 \text{ Btu/h}\cdot\text{ft}^2\cdot\mu\text{m}$; (f) $1.7385 \mu\text{m}$, $1.656 \times 10^5 \text{ W/m}^2\cdot\mu\text{m}$

11.28. Obtain (11.35) by thermodynamic reasoning. (*Hint:* $q_{1,2}$ must vanish when $T_1 = T_2$.)

11.29. For the situation of Problem 11.13, determine $F_{3,1}$ and $F_{3,2}$ where area 3 is the annular area at one end of the set of concentric cylinders. Use these to confirm the answer to Problem 11.13.

Ans. $F_{3,1} = 0.580$, $F_{3,2} = 0.220$, and $F_{3,1} + F_{3,2} + F_{3,3} = 1.01$

11.30. Two blackbody rectangles, each 6 ft by 12 ft, are parallel, directly opposed, and 12 ft apart. One rectangle is held at $T_1 = 200^\circ\text{F}$; the other is at $T_2 = 600^\circ\text{F}$. Find: (a) the rate of radiant heat transfer $q_{1,2}$, (b) the rate at which the 200°F rectangle is losing energy if the surroundings are at 0°R , and (c) the rate at which the 200°F rectangle is losing energy if the surroundings are considered as a single blackbody at 70°F .

Ans. For $F_{1,2} \approx 0.115$: (a) $-15\,224 \text{ Btu/h}$; (b) 5499.4 Btu/h ; (c) -3118.3 Btu/h

Appendixes

Appendix A

Table A-1. Conversion factors for single terms.

To convert from	to	multiply by
<i>Energy</i>		
Btu (thermochemical)	joule (J)	1054.350 264 48
calorie (thermochemical)	joule (J)	4.184
foot lb _f	joule (J)	1.355 817 9
foot poundal	joule (J)	0.042 140 110
kilowatt hour	joule (J)	3.60×10^6
watt hour	joule (J)	3600
<i>Force</i>		
dyne	newton (N)	1.00×10^{-5}
kilogram force (kg _f)	newton (N)	9.806 65
ounce force (avoirdupois)	newton (N)	0.278 013 85
pound force, lb _f (avoirdupois)	newton (N)	4.448 221 615 26
poundal	newton (N)	0.138 254 954 3
<i>Length</i>		
angstrom	meter (m)	1.00×10^{-10}
foot	meter (m)	0.3048
inch	meter (m)	0.0254
micron	meter (m)	1.00×10^{-6}
mil	meter (m)	2.54×10^{-5}
mile (U.S. statute)	meter (m)	1609.344
yard	meter (m)	0.9144
<i>Mass</i>		
gram	kilogram (kg)	1.00×10^{-3}
kg _f second ² meter	kilogram (kg)	9.806 65
lb _m (avoirdupois)	kilogram (kg)	0.453 592 37
ounce mass (avoirdupois)	kilogram (kg)	0.028 349 523
ton (long)	kilogram (kg)	1016.0469
ton (metric)	kilogram (kg)	1000
ton (short, 2000 pound)	kilogram (kg)	907.184 74
<i>Temperature</i>		
Celsius	Kelvin	$K = C + 273.15$
Fahrenheit	Celsius	$C = \frac{5}{9}(F - 32)$
Fahrenheit	Kelvin	$K = \frac{5}{9}(F + 459.67)$
Kelvin	Celsius	$C = K - 273.15$
Rankine	Kelvin	$K = \frac{5}{9}R$

Source: Table A-1 and A-2. [From E. A. Mechtly, NASA SP-7012, 1973.]

Table A-2. Conversion factors for compound terms.*

To convert from	to	multiply by
<i>Acceleration</i>		
foot/second ²	meter/second ² (m/s ²)	0.3048
inch/second ²	meter/second ² (m/s ²)	0.0254
<i>Density</i>		
gram/centimeter ³	kilogram/meter ³ (kg/m ³)	1000
lb _m /foot ³	kilogram/meter ³ (kg/m ³)	16.018 463
slug/foot ³	kilogram/meter ³ (kg/m ³)	515.379
<i>Energy/Area-Time</i>		
*Btu/foot ² ·hour °F	watt/meter ² °C (W/m ² ·°C)	3.152 480 8
*calorie/cm ² ·minute	watt/meter ² (W/m ²)	697.333 33
watt/centimeter ²	watt/meter ² (W/m ²)	10 000
<i>Power</i>		
Btu/second	watt (W)	1054.350 264 4
calorie/second	watt (W)	4.184
foot lb _f /second	watt (W)	1.355 817 9
horsepower (550 ft lb _f /second)	watt (W)	745.699 87
horsepower (electric)	watt (W)	746.000 00
horsepower (metric)	watt (W)	735.499
<i>Pressure</i>		
atmosphere	newton/meter ² (N/m ²)	1.013 25 × 10 ⁵
bar	newton/meter ² (N/m ²)	1.00 × 10 ⁵
millimeter of mercury (0 °C)	newton/meter ² (N/m ²)	133.322
centimeter of water (4 °C)	newton/meter ² (N/m ²)	98.0638
dyne/centimeter ²	newton/meter ² (N/m ²)	0.100
kg _f /centimeter ²	newton/meter ² (N/m ²)	98 066.5
lb _f /inch ² (psi)	newton/meter ² (N/m ²)	6894.7572
pascal	newton/meter ² (N/m ²)	1.00
torr (0 °C)	newton/meter ² (N/m ²)	133.322
<i>Speed</i>		
foot/second	meter/second (m/s)	0.3048
kilometer/hour	meter/second (m/s)	0.277 777 78
knot (international)	meter/second (m/s)	0.514 444 44
mile/hour (U.S. statute)	meter/second (m/s)	0.447 04
<i>Thermal Conductivity</i>		
Btu inch/foot ² · second·°F	joule/meter·second·K (J/m·s·K)	518.873 15
Btu/foot·hour·°F	joule/meter·second·K (J/m·s·K)	1.729 577 1

Table A-2. (continued)

To convert from	to	multiply by
<i>Viscosity</i>		
centipoise	newton second/meter ² (N·s/m ²)	1.00 × 10 ⁻³
centistoke	meter ² /second (m ² /s)	1.00 × 10 ⁻⁶
foot ² /second	meter ² /second (m ² /s)	0.092 903 04
lb _m /foot·second	newton second/meter ² (N·s/m ²)	1.488 163 9
lb _f second/foot ²	newton second/meter ² (N·s/m ²)	47.880 258
poise	newton second/meter ² (N·s/m ²)	0.10
poundal second/ft ²	newton second/meter ² (N·s/m ²)	1.488 163 9
slug/foot·second	newton second/meter ² (N·s/m ²)	47.880 258
stoke	meter ² /second (m ² /s)	1.00 × 10 ⁻⁴
<i>Volume</i>		
fluid ounce (U.S.)	meter ³ (m ³)	2.957 352 95 × 10 ⁻⁵
foot ³	meter ³ (m ³)	0.028 316 846 5
gallon (British)	meter ³ (m ³)	4.546 087 × 10 ⁻³
gallon (U.S. dry)	meter ³ (m ³)	4.404 883 77 × 10 ⁻³
gallon (U.S. liquid)	meter ³ (m ³)	3.785 411 78 × 10 ⁻³
liter (H ₂ O at 4 °C)	meter ³ (m ³)	1.000 028 × 10 ⁻³
liter (SI)	meter ³ (m ³)	1.00 × 10 ⁻³
pint (U.S. liquid)	meter ³ (m ³)	4.731 764 73 × 10 ⁻⁴
quart (U.S. liquid)	meter ³ (m ³)	9.463 529 5 × 10 ⁻⁴
yard ³	meter ³ (m ³)	0.764 554 857

*All Btu and calorie terms in Table A-2 are thermochemical values.

Appendix B

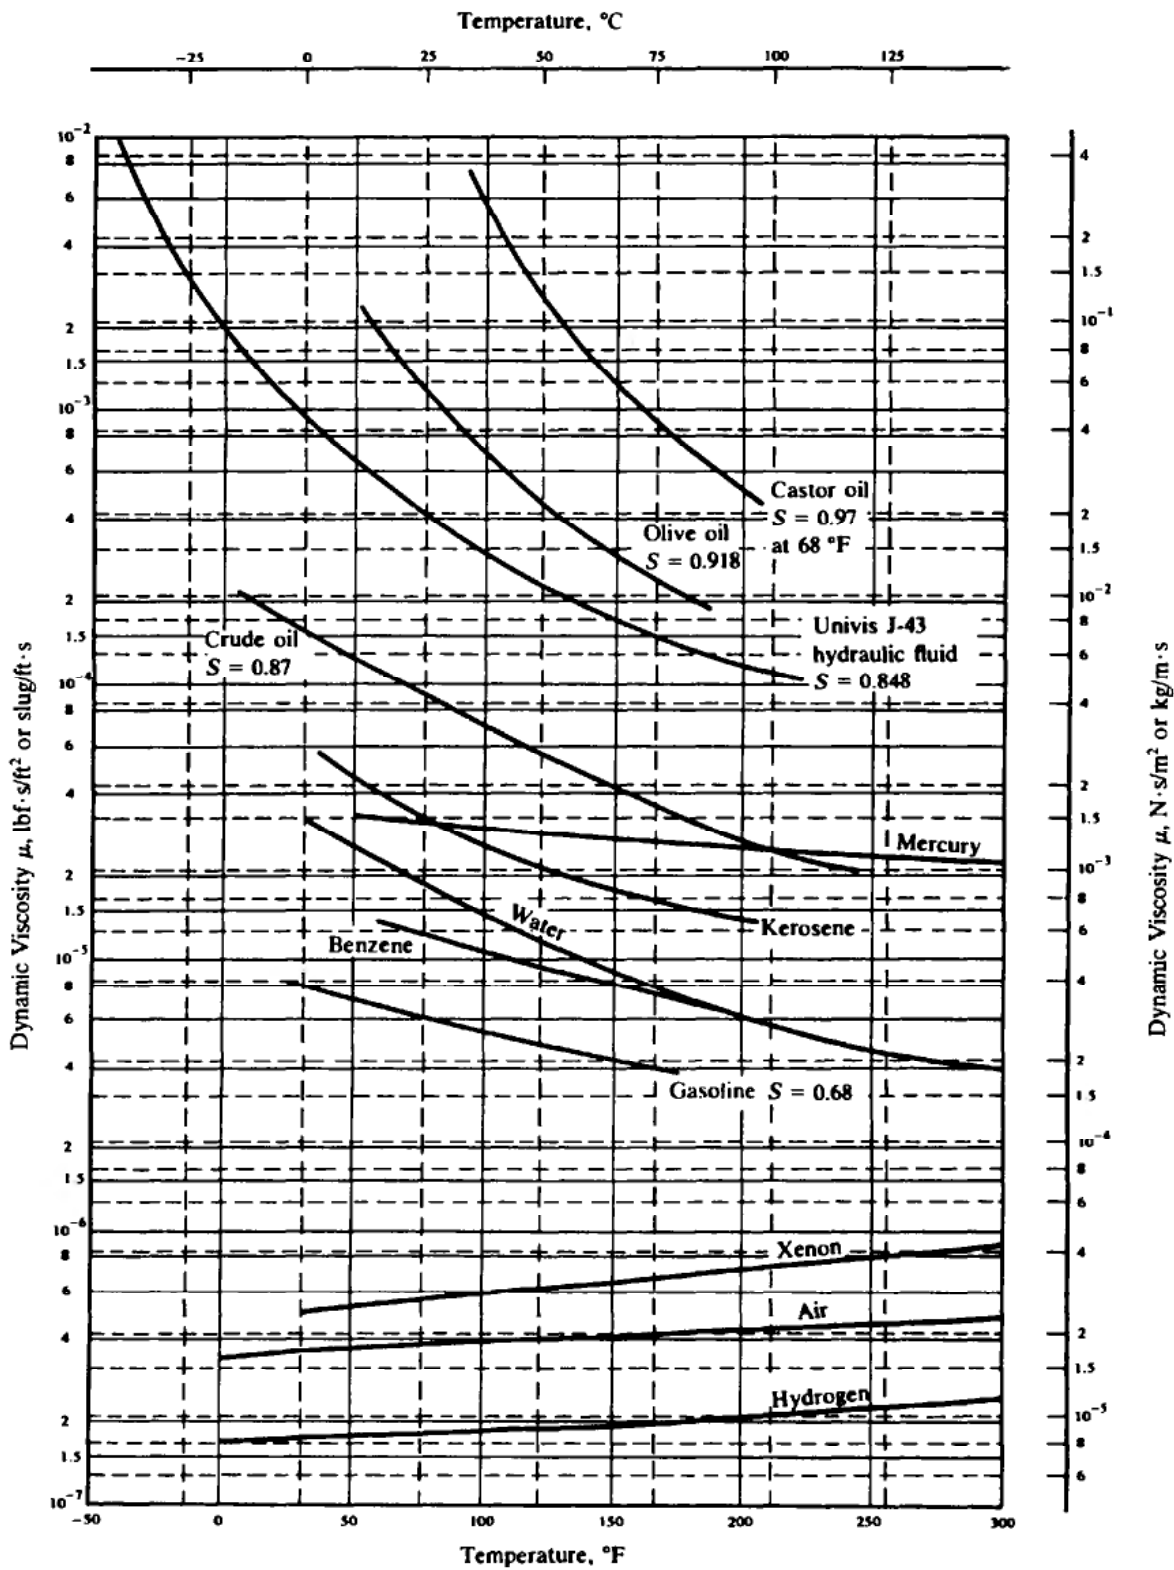


Fig. B-1. Dynamic (absolute) viscosity of liquids.
Specific gravity (S) values apply at 70°F or 21.4°C.

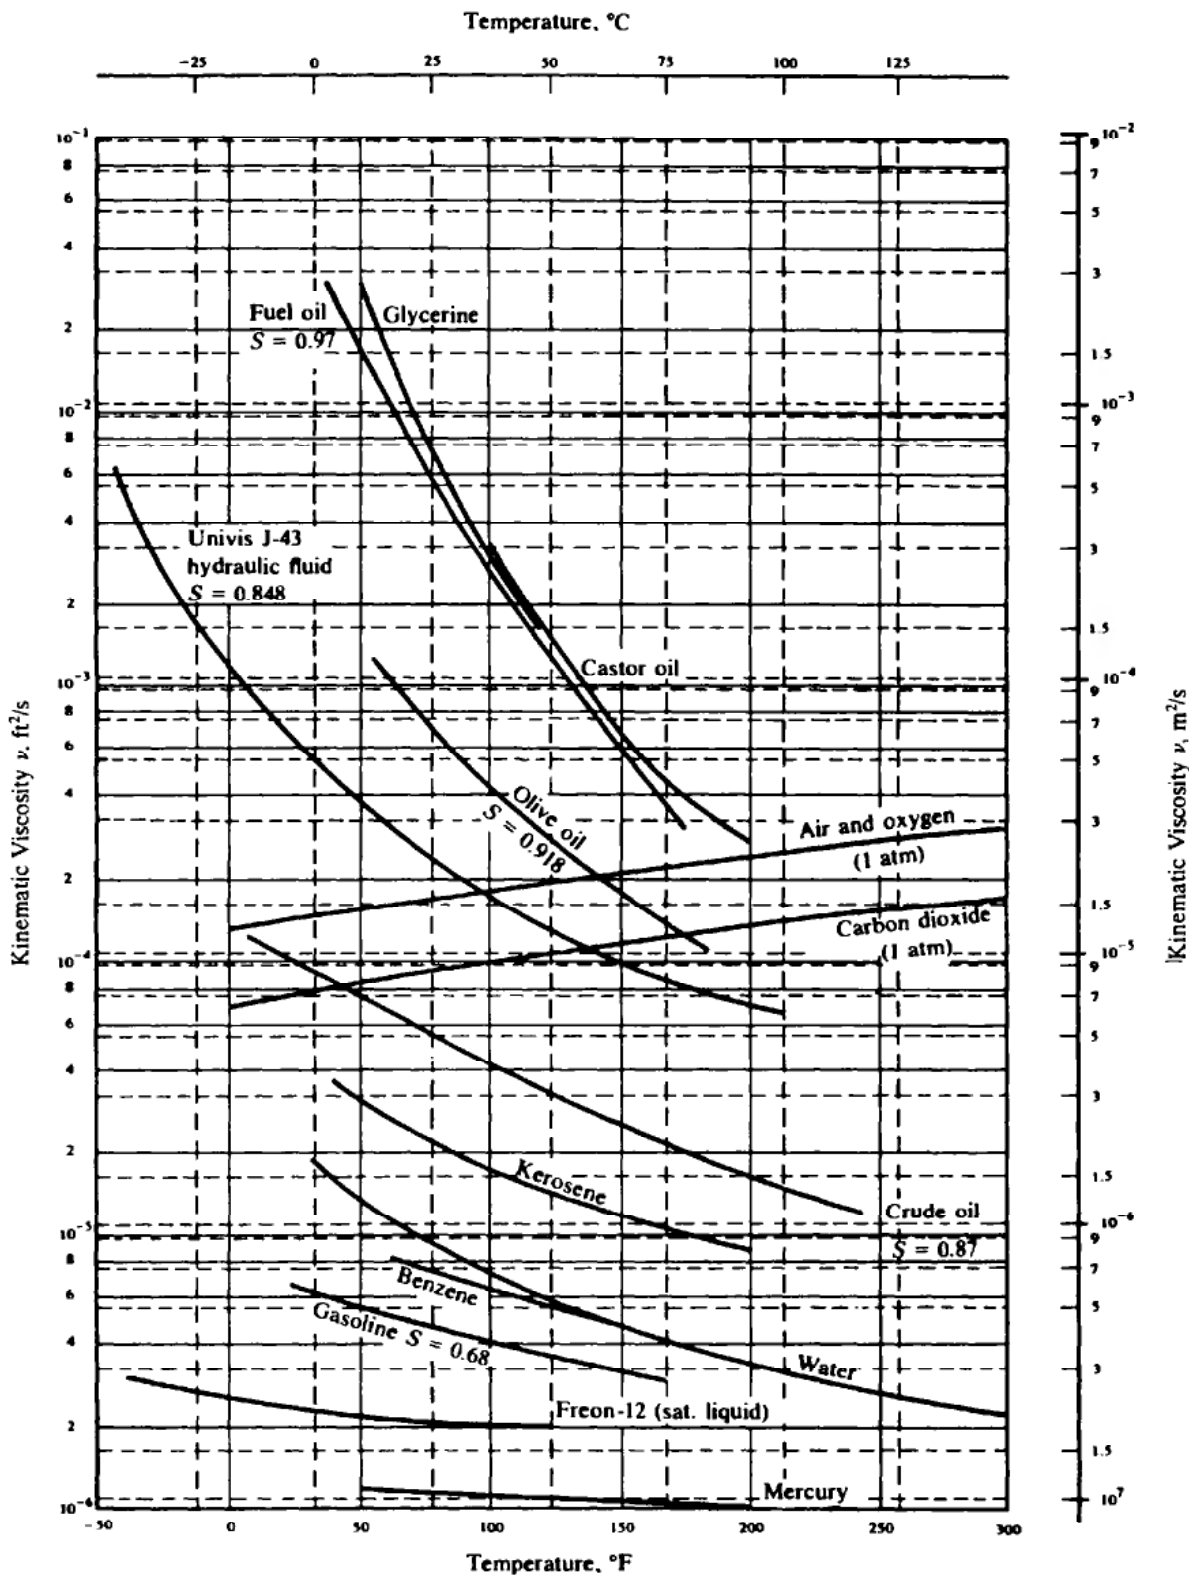


Fig. B-2. Kinematic viscosity of liquids.
 Specific gravity (S) values apply at 70°F or 21.4°C.

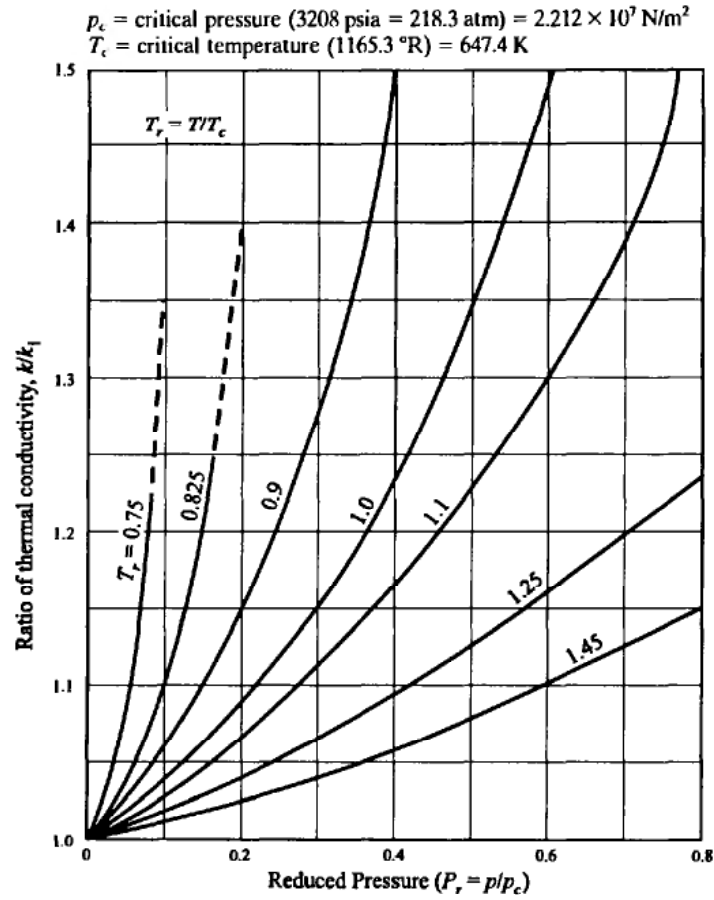


Fig. B-3. Ratio of steam thermal conductivity k to the value k_1 , at one atmosphere and the same pressure.

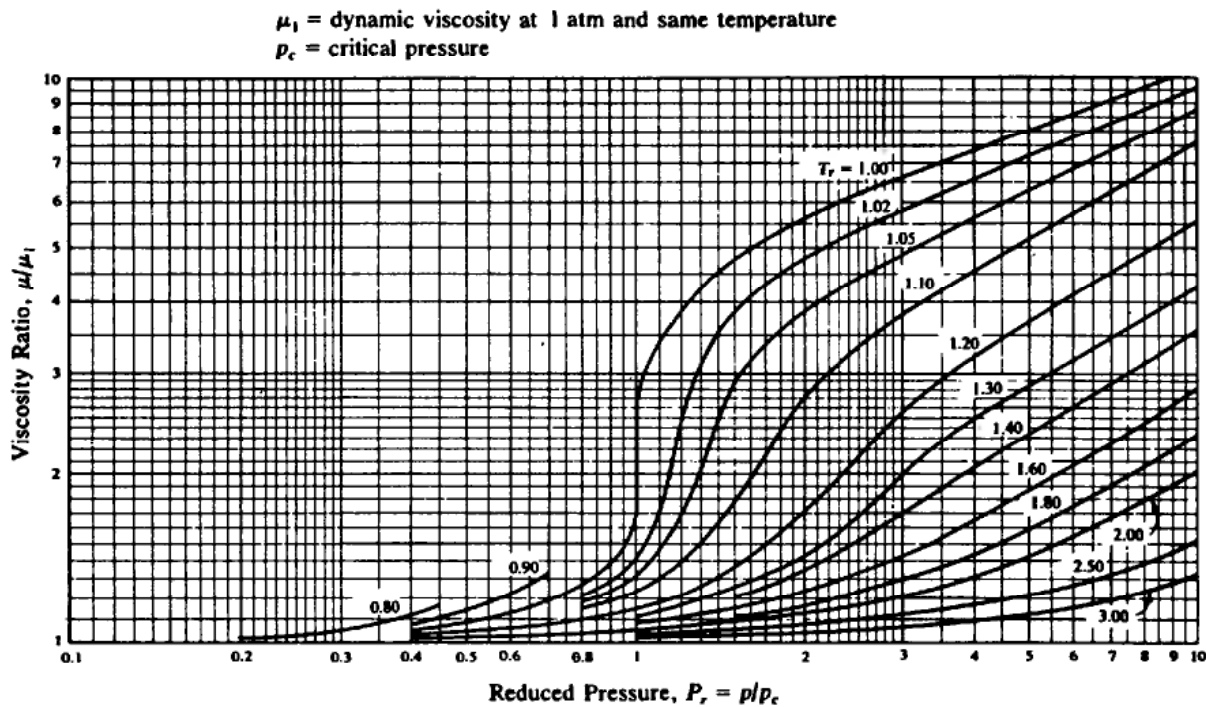


Fig. B-4. Generalized correlation chart of the dynamic viscosity of gases at high pressures. [From E. W. Comings, B. J. Mayland, and R. S. Egly, *The Viscosity of Gases at High Pressures*, University of Illinois Engineering Experiment Station Bulletin No. 354 (1944). Used with permission of the University of Illinois, Urbana, Illinois.]

Table B-1 (SI). (continued)

Metal	Properties at 20 °C				Thermal Conductivity k (W/m·K)									
	ρ (kg/m ³)	c_p (J/kg·K)	k (W/m·K)	α (m ² /s)	-100 °C -148 °F	0 °C 32 °F	100 °C 212 °F	200 °C 392 °F	300 °C 572 °F	400 °C 752 °F	600 °C 1112 °F	800 °C 1472 °F	1000 °C 1832 °F	1200 °C 2192 °F
Copper:														
Pure	8 954	0.3831 × 10 ³	386	11.234 × 10 ⁻⁵	407	386	379	374	369	363	353			
Aluminum bronze 95 Cu, 5 Al	8 666	0.410	83	2.330										
Bronze 75 Cu, 25 Sn	8 666	0.343	26	0.859										
Red Brass 85 Cu, 9 Sn, 6 Zn	8 714	0.385	61	1.804		59	71							
Brass 70 Cu, 30 Zn	8 522	0.385	111	3.412	88		128	144	147	147				
German silver 62 Cu, 15 Ni, 22 Zn	8 618	0.394	24.9	0.733	19.2		31	40	45	48				
Constantan 60 Cu, 40 Ni	8 922	0.410	22.7	0.612	21		22.2	26						
Magnesium:														
Pure	1 746	1.013	171	9.708	178	171	168	163	157					
Mg-Al (electrolytic) 6-8% Al, 1-2% Zn	1 810	1.00	66	3.605		52	62	74	83					
Mg-Mn 2% Mn	1 778	1.00	114	6.382	93	111	125	130						
Mg-Mn 2% Mn	1 778	1.00	114	6.382	93	111	125	130						
Molybdenum	10 220	0.251	123	4.790	138	125	118	114	111	109	106	102	99	92
Nickel:														
Pure (99.9%)	8 906	0.4459	90	2.266	104	93	83	73	64	59				
Impure (99.2%)	8 906	0.444	69	1.747		69	64	59	55	52	55	62	67	69
Ni-Cr 90 Ni, 10 Cr	8 666	0.444	17	0.444		17.1	18.9	20.9	22.8	24.6				
80 Ni, 20 Cr	8 314	0.444	12.6	0.343		12.3	13.8	15.6	17.1	18.9	22.5			
Silver:														
Purest	10 524	0.2340	419	17.004	419	417	415	412						
Pure (99.9%)	10 524	0.2340	407	16.563	419	410	415	374	362	360				
Tungsten	19 350	0.1344	163	6.271		166	151	142	133	126	112	76		
Zinc, pure	7 144	0.3843	112.2	4.106	114	112	109	106	100	93				
Tin, pure	7 304	0.2265	64	3.884	74	65.9	59	57						

*Adapted to SI units from E. R. G. Eckert and R. M. Drake, *Analysis of Heat and Mass Transfer*, ©1972, McGraw-Hill Book Company, New York, NY. Adapted by permission of the current copyright holder, E. R. G. Eckert.

Table B-2 (SI). Property values of nonmetals.*

Substance	Temperature (°C)	k (W/m·°C)	ρ (kg/m ³)	c (kJ/kg·°C)	$\alpha \times 10^7$ (m ² /s)
Structural and heat-resistant materials					
Aluminum oxide, sapphire	30	46	3970	0.76	150
Aluminum oxide, polycrystalline	30	36	3970	0.76	120
Asphalt	20–55	0.74–0.76			
Brick:					
Building brick, common	20	0.69	1600	0.84	5.2
Face		1.32	2000		
Carborundum brick	600	18.5			
	1400	11.1			
Chrome brick	200	2.32	3000	0.84	9.2
	550	2.47			9.8
	900	1.99			7.9
Diatomaceous earth, molded and fired	200	0.24			
	870	0.31			
Fireclay brick	500	1.04	2000	0.96	5.4
Burnt 2426 °F	800	1.07			
	1100	1.09			
Burnt 2642 °F	500	1.28	2300	0.96	5.8
	800	1.37			
	1100	1.40			
Missouri	200	1.00	2600	0.96	4.0
	600	1.47			
	1400	1.77			
Magnesite	200	3.81		1.13	
	650	2.77			
	1200	1.90			
Cement, portland		0.29	1500		
Mortar	23	1.16			
Coal, anthracite	30	0.26	1300	1.25	1.6
Concrete, cinder	23	0.76			
Stone, 1-2-4 mix	20	1.37	1900–2300	0.88	8.2–6.8
Glass, window	20	0.78 (avg)	2700	0.84	3.4
Corosilicate	30–75	1.09	2200		
Graphite, pyrolytic parallel to layers	30	1900	2200	0.71	12 200
perpendicular to layers	30	5.6	2200	0.71	36
Particle board, low density	30	0.079	590	1.3	1.0
high density	30	0.17	1000	1.3	1.3

Table B-2 (SI). (continued)

Substance	Temperature (°C)	k (W/m·°C)	ρ (kg/m ³)	c (kJ/kg·°C)	$\alpha \times 10^7$ (m ² /s)
Structural and heat-resistant materials					
Plaster, gypsum	20	0.48	1440	0.84	4.0
Metal lath	20	0.47			
Wood lath	20	0.28			
Polyethylene	30	0.33	960	2.1	1.64
Polypropylene	30	0.16	1150	1.9	0.73
Polyvinylchloride	30	0.09	1700	1.1	0.48
Rubber, hard	30	0.15	1200	2.0	0.62
Silicon carbide	30	490	3150	0.68	2290
Stone:					
Granite		1.73–3.98	2640	0.82	8–18
Limestone	100–300	1.26–1.33	2500	0.90	5.6–5.9
Marble		2.07–2.94	2500–2700	0.80	10–13.6
Sandstone	40	1.83	2160–2300	0.71	11.2–11.9
Teflon	30	0.35	2200	1.05	1.5
Titanium dioxide	30	8.4	4150	0.7	29
Wood (across the grain):					
Balsa, 8.8 lb/ft ²	30	0.055	140		
Cypress	30	0.097	460		
Fir	23	0.11	420	2.72	0.96
Maple or oak	30	0.166	540	2.4	1.28
Yellow pine	23	0.147	640	2.8	0.82
White pine	30	0.112	430		
Acoustic tile	30	0.06	290	1.3	1.6
Asbestos:					
Loosely packed	–45	0.149			
	0	0.154	470–570	0.816	3.3–4
	100	0.161			
Asbestos-cement boards	20	0.74			
Sheets	51	0.166			
Felt, 40 laminations/in	38	0.057			
	150	0.069			
	260	0.083			
20 laminations/in	38	0.078			
	150	0.095			
	260	0.112			
Corrugated, 4 plies/in	38	0.087			
	93	0.100			
	150	0.119			
Asbestos cement	–	2.08			

Table B-2 (SI). (continued)

Substance	Temperature (°C)	k (W/m·°C)	ρ (kg/m ³)	c (kJ/kg·°C)	$\alpha \times 10^7$ (m ² /s)
Insulating material					
Balsa wood, 2.2 lb/ft ³	32	0.04	35		
Cardboard, corrugated	—	0.064			
Celotex	32	0.048			
Corkboard, 10 lb/ft ³	30	0.043	160		
Cork, regranulated	32	0.045	45–120	1.88	2–5.3
Ground	32	0.043	150		
Diamond, Type IIa, insulator	30	2300	3500	0.509	12 900
Diatomaceous earth (Sil-o-cel)	0	0.061	320		
Felt, hair	30	0.036	130–200		
Wool	30	0.052	330		
Fiber, insulating board	20	0.048	240		
Glass wool, 1.5 lb/ft ³	23	0.038	24	0.7	22.6
Glass fiber, duct liner	30	0.038	32	0.84	14.1
Glass fiber, loose blown	30	0.043	16	0.84	32
Ice	0	2.22	910	1.93	12.6
Insulex, dry	32	0.064			
		0.144			
Kapok	30	0.035			
Magnesia, 85%	38	0.067	270		
	93	0.071			
	150	0.074			
	204	0.080			
Rock wool, 10 lb/ft ³	32	0.040	160		
Loosely packed	150	0.067	64		
	260	0.087			
Sawdust	23	0.059			
Silica aerogel	32	0.024	140		
Styrofoam	32	0.033			
Wood shavings	23	0.059			

*From J. P. Holman, *Heat Transfer*, ©1997, McGraw-Hill Book Company, New York, NY. Reprinted by permission of the McGraw-Hill Companies.

Table B-3 (SI). Property values of liquids in a saturated state*

t (°C)	ρ (kg/m ³)	c_p (J/kg·K)	ν (m ² /s)	k (W/m·K)	α (m ² /s)	Pr	β (K ⁻¹)
Water, H ₂ O							
0	1 002.28	4.2178 × 10 ³	1.788 × 10 ⁻⁶	0.552	1.308 × 10 ⁻⁷	13.6	0.18 × 10 ⁻³
20	1 000.52	4.1818	1.006	0.597	1.430	7.02	
40	994.59	4.1784	0.658	0.628	1.512	4.34	
60	985.46	4.1843	0.478	0.651	1.554	3.02	
80	974.08	4.1964	0.364	0.668	1.636	2.22	
100	960.63	4.2161	0.294	0.680	1.680	1.74	
120	945.25	4.250	0.247	0.685	1.708	1.446	
140	928.27	4.283	0.214	0.684	1.724	1.241	
160	909.69	4.342	0.190	0.680	1.729	1.099	
180	889.03	4.417	0.173	0.675	1.724	1.004	
200	866.76	4.505	0.160	0.665	1.706	0.937	
220	842.41	4.610	0.150	0.652	1.680	0.891	
240	815.66	4.756	0.143	0.635	1.639	0.871	
260	785.87	4.949	0.137	0.611	1.577	0.874	
280.6	752.55	5.208	0.135	0.580	1.481	0.910	
300	714.26	5.728	0.135	0.540	1.324	1.019	
Ammonia, NH ₃							
-50	703.69	4.463 × 10 ³	0.435 × 10 ⁻⁶	0.547	1.742 × 10 ⁻⁷	2.60	2.45 × 10 ⁻³
-40	691.68	4.467	0.406	0.547	1.775	2.28	
-30	679.34	4.476	0.387	0.549	1.801	2.15	
-20	666.69	4.509	0.381	0.547	1.819	2.09	
-10	653.55	4.564	0.378	0.543	1.825	2.07	
0	640.10	4.635	0.373	0.540	1.819	2.05	
10	626.16	4.714	0.368	0.531	1.801	2.04	
20	611.75	4.798	0.359	0.521	1.775	2.02	
30	596.37	4.890	0.349	0.507	1.742	2.01	
40	580.99	4.999	0.340	0.493	1.701	2.00	
50	564.33	5.116	0.330	0.476	1.654	1.99	
Carbon dioxide, CO ₂							
-50	1 156.34	1.84 × 10 ³	0.119 × 10 ⁻⁶	0.0855	0.4021 × 10 ⁻⁷	2.96	14.00 × 10 ⁻³
-40	1 117.77	1.88	0.118	0.1011	0.4810	2.46	
-30	1 076.76	1.97	0.117	0.1116	0.5272	2.22	
-20	1 032.39	2.05	0.115	0.1151	0.5445	2.12	
-10	983.38	2.18	0.113	0.1099	0.5133	2.20	
0	926.99	2.47	0.108	0.1045	0.4578	2.38	
10	860.03	3.14	0.101	0.0971	0.3608	2.80	
20	772.57	5.0	0.091	0.0872	0.2219	4.10	
30	597.81	36.4	0.080	0.0703	0.0279	28.7	

Table B-3 (SI). (continued)

t (°C)	ρ (kg/m ³)	c_p (J/kg·K)	ν (m ² /s)	k (W/m·K)	α (m ² /s)	Pr	β (K ⁻¹)
Sulfur dioxide, SO ₂							
-50	1 560.84	1.3595 × 10 ³	0.484 × 10 ⁻⁶	0.242	1.141 × 10 ⁻⁷	4.24	1.94 × 10 ⁻³
-40	1 536.81	1.3607	0.424	0.235	1.130	3.74	
-30	1 520.64	1.3616	0.371	0.230	1.117	3.31	
-20	1 488.60	1.3624	0.324	0.225	1.107	2.93	
-10	1 463.61	1.3628	0.288	0.218	1.097	2.62	
0	1 438.46	1.3636	0.257	0.211	1.081	2.38	
10	1 412.51	1.3645	0.232	0.204	1.066	2.18	
20	1 386.40	1.3653	0.210	0.199	1.050	2.00	
30	1 359.33	1.3662	0.190	0.192	1.035	1.83	
40	1 329.22	1.3674	0.173	0.185	1.019	1.70	
50	1 299.10	1.3683	0.162	0.177	0.999	1.61	
Methyl chloride, CH ₃ Cl							
-50	1 052.58	1.4759 × 10 ³	0.320 × 10 ⁻⁶	0.215	1.388 × 10 ⁻⁷	2.31	
-40	1 033.35	1.4826	0.318	0.209	1.368	2.32	
-30	1 016.53	1.4922	0.314	0.202	1.337	2.35	
-20	999.39	1.5043	0.309	0.196	1.301	2.38	
-10	981.45	1.5194	0.306	0.187	1.257	2.43	
0	962.39	1.5378	0.302	0.178	1.213	2.49	
10	942.36	1.5600	0.297	0.171	1.166	2.55	
20	923.31	1.5860	0.293	0.163	1.112	2.63	
30	903.12	1.6161	0.288	0.154	1.058	2.72	
40	883.10	1.6504	0.281	0.144	0.996	2.83	
50	861.15	1.6890	0.274	0.133	0.921	2.97	
Dichlorodifluoromethane (Freon), CCl ₂ F ₂							
-50	1 546.75	0.8750 × 10 ³	0.310 × 10 ⁻⁶	0.067	0.501 × 10 ⁻⁷	6.2	2.63 × 10 ⁻³
-40	1 518.71	0.8847	0.279	0.069	0.514	5.4	
-30	1 489.56	0.8956	0.253	0.069	0.526	4.8	
-20	1 460.57	0.9073	0.235	0.071	0.539	4.4	
-10	1 429.49	0.9203	0.221	0.073	0.550	4.0	
0	1 397.45	0.9345	0.214	0.073	0.557	3.8	
10	1 364.30	0.9496	0.203	0.073	0.560	3.6	
20	1 330.18	0.9659	0.198	0.073	0.560	3.5	
30	1 295.10	0.9835	0.194	0.071	0.560	3.5	
40	1 257.13	1.0019	0.191	0.069	0.555	3.5	
50	1 215.96	1.0216	0.190	0.067	0.545	3.5	
Eutectic calcium chloride solution, 29.9% CaCl ₂							
-50	1 319.76	2.608 × 10 ³	36.35 × 10 ⁻⁶	0.402	1.166 × 10 ⁻⁷	312	
-40	1 314.96	2.6356	24.97	0.415	1.200	208	
-30	1 310.15	2.6611	17.18	0.429	1.234	139	
-20	1 305.51	2.688	11.04	0.445	1.267	87.1	
-10	1 300.70	2.713	6.96	0.459	1.300	53.6	

Table B-3 (SI). (continued)

t (°C)	ρ (kg/m ³)	c_p (J/kg·K)	ν (m ² /s)	k (W/m·K)	α (m ² /s)	Pr	β (K ⁻¹)
Eutectic calcium chloride solution, 29.9% CaCl ₂ (continued)							
0	1 296.06	2.738 × 10 ³	4.39 × 10 ⁻⁶	0.472	1.332 × 10 ⁻⁷	33.0	
10	1 291.41	2.763	3.35	0.485	1.363	24.6	
20	1 286.61	2.788	2.72	0.498	1.394	19.6	
30	1 281.96	2.814	2.27	0.511	1.419	16.0	
40	1 277.16	2.839	1.92	0.523	1.445	13.3	
50	1 272.51	2.868	1.65	0.535	1.468	11.3	
Glycerin, C ₃ H ₅ (OH) ₃							
0	1 276.03	2.261 × 10 ³	0.008 31	0.282	0.983 × 10 ⁻⁷	84.7 × 10 ³	0.50 × 10 ⁻³
10	1 270.11	2.319	0.003 00	0.284	0.965	31.0	
20	1 264.02	2.386	0.001 18	0.286	0.947	12.5	
30	1 258.09	2.445	0.000 50	0.286	0.929	5.38	
40	1 252.01	2.512	0.000 22	0.286	0.914	2.45	
50	1 244.96	2.583	0.000 15	0.287	0.893	1.63	
Ethylene glycol, C ₂ H ₄ (OH) ₂							
0	1 130.75	2.294 × 10 ³	57.53 × 10 ⁻⁶	0.242	0.934 × 10 ⁻⁷	615	0.65 × 10 ⁻³
20	1 116.65	2.382	19.18	0.249	0.939	204	
40	1 101.43	2.474	8.69	0.256	0.939	93	
60	1 087.66	2.562	4.75	0.260	0.932	51	
80	1 077.56	2.650	2.98	0.261	0.921	32.4	
100	1 058.50	2.742	2.03	0.263	0.908	22.4	
Engine oil (unused)							
0	899.12	1.796 × 10 ³	0.004 28	0.147	0.911 × 10 ⁻⁷	47 100	0.70 × 10 ⁻³
20	888.23	1.880	0.000 90	0.145	0.872	10 400	
40	876.05	1.964	0.000 24	0.144	0.834	2 870	
60	864.04	2.047	0.839 × 10 ⁻⁴	0.140	0.800	1 050	
80	852.02	2.131	0.375	0.138	0.769	490	
100	840.01	2.219	0.203	0.137	0.738	276	
120	828.96	2.307	0.124	0.135	0.710	175	
140	816.94	2.395	0.080	0.133	0.686	116	
160	805.89	2.483	0.056	0.132	0.663	84	
Mercury, Hg							
0	13 628.22	0.1403 × 10 ³	0.124 × 10 ⁻⁶	8.20	42.99 × 10 ⁻⁷	0.0288	1.82 × 10 ⁻⁴
20	13 579.04	0.1394	0.114	8.69	46.06	0.0249	
50	13 505.84	0.1386	0.104	9.40	50.22	0.0207	
100	13 384.58	0.1373	0.0928	10.51	57.16	0.0162	
150	13 264.28	0.1365	0.0853	11.49	63.54	0.0134	
200	13 144.94	0.1570	0.0802	12.34	69.08	0.0116	
250	13 025.60	0.1357	0.0765	13.07	74.06	0.0103	
315.5	12 847	0.134	0.0673	14.02	81.5	0.0083	

*Adapted to SI units from E. R. G. Eckert and R. M. Drake, *Analysis of Heat and Mass Transfer*, ©1972, McGraw-Hill Book Company, New York, NY. Adapted by permission of the current copyright holder, E. R. G. Eckert.

Table B-4 (SI). Property values of gases at atmospheric pressure.*

T (K)	ρ (kg/m ³)	c_p (J/kg·K)	μ (kg/m·s)	ν (m ² /s)	k (W/m·K)	α (m ² /s)	Pr
Air							
100	3.6010	1.0266×10^3	0.6924×10^{-5}	1.923×10^{-6}	0.009 246	0.0250×10^{-4}	0.768
150	2.3675	1.0099	1.0283	4.343	0.013 735	0.0574	0.756
200	1.7684	1.0061	1.3289	7.490	0.018 09	0.1016	0.739
250	1.4128	1.0053	1.5990	11.310	0.022 27	0.1568	0.722
300	1.1774	1.0057	1.8462	15.690	0.026 24	0.2216	0.708
350	0.9980	1.0090	2.075	20.76	0.030 03	0.2983	0.697
400	0.8826	1.0140	2.286	25.90	0.033 65	0.3760	0.689
450	0.7833	1.0207	2.484	31.71	0.037 07	0.4636	0.683
500	0.7048	1.0295	2.671	37.90	0.040 38	0.5564	0.680
550	0.6423	1.0392	2.848	44.27	0.043 60	0.6532	0.680
600	0.5879	1.0551	3.018	51.34	0.046 59	0.7512	0.682
650	0.5430	1.0635	3.177	58.51	0.049 53	0.8578	0.682
700	0.5030	1.0752	3.332	66.25	0.052 30	0.9672	0.684
750	0.4709	1.0856	3.481	73.91	0.055 09	1.0774	0.686
800	0.4405	1.0978	3.625	82.29	0.057 79	1.1951	0.689
850	0.4149	1.1095	3.765	90.75	0.060 28	1.3097	0.692
900	0.3925	1.1212	3.899	99.3	0.062 79	1.4271	0.696
950	0.3716	1.1321	4.023	108.2	0.065 25	1.5510	0.699
1000	0.3524	1.1417	4.152	117.8	0.067 52	1.6779	0.702
1100	0.3204	1.160	4.44	138.6	0.073 2	1.969	0.704
1200	0.2947	1.179	4.69	159.1	0.078 2	2.251	0.707
1300	0.2707	1.197	4.93	182.1	0.083 7	2.583	0.705
1400	0.2515	1.214	5.17	205.5	0.089 1	2.920	0.705
1500	0.2355	1.230	5.40	229.1	0.094 6	3.266	0.705
1600	0.2211	1.248	5.63	254.5	0.100	3.624	0.705
1700	0.2082	1.267	5.85	280.9	0.105	3.977	0.705
1800	0.1970	1.287	6.07	308.1	0.111	4.379	0.704
1900	0.1858	1.309	6.29	338.5	0.117	4.811	0.704
2000	0.1762	1.338	6.50	369.0	0.124	5.260	0.702
2100	0.1682	1.372	6.72	399.6	0.131	5.680	0.703
2200	0.1602	1.419	6.93	432.6	0.139	6.115	0.707
2300	0.1538	1.482	7.14	464.0	0.149	6.537	0.710
2400	0.1458	1.574	7.35	504.0	0.161	7.016	0.718
2500	0.1394	1.688	7.57	543.0	0.175	7.437	0.730
Helium							
3		5.200×10^3	8.42×10^{-7}		0.0106		
33	1.465 7	5.200	50.2	3.42×10^{-6}	0.0353	$0.046 25 \times 10^{-4}$	0.74
144	3.379 9	5.200	125.5	37.11	0.0928	0.5275	0.70
200	0.243 5	5.200	156.6	64.38	0.1177	0.9288	0.694
255	0.190 6	5.200	181.7	95.50	0.1357	1.3675	0.70
366	0.132 80	5.200	230.5	173.6	0.1691	2.449	0.71
477	0.102 04	5.200	275.0	269.3	0.197	3.716	0.72
589	0.082 82	5.200	311.3	375.8	0.225	5.215	0.72
700	0.070 32	5.200	347.5	494.2	0.251	6.661	0.72
800	0.060 23	5.200	381.7	634.1	0.275	8.774	0.72
900	0.052 86	5.200	413.6	781.3	0.298	10.834	0.72

Table B-4 (SI). (continued)

T (K)	ρ (kg/m ³)	c_p (J/kg·K)	μ (kg/m·s)	ν (m ² /s)	k (W/m·K)	α (m ² /s)	Pr
Hydrogen							
30	0.847 22	10.840 × 10 ³	1.606 × 10 ⁻⁶	1.895 × 10 ⁻⁶	0.0228	0.024 93 × 10 ⁻⁴	0.759
50	0.509 55	10.501	2.516	4.880	0.0362	0.0676	0.721
100	0.245 72	11.229	4.212	17.14	0.0665	0.2408	0.712
150	0.163 71	12.602	5.595	34.18	0.0981	0.475	0.718
200	0.122 70	13.540	6.813	55.53	0.1282	0.772	0.719
250	0.098 19	14.059	7.919	80.64	0.1561	1.130	0.713
300	0.081 85	14.314	8.963	109.5	0.182	1.554	0.706
350	0.070 16	14.436	9.954	141.9	0.206	2.031	0.697
400	0.061 35	14.491	10.864	177.1	0.228	2.568	0.690
450	0.054 62	14.499	11.779	215.6	0.251	3.164	0.682
500	0.049 18	14.507	12.636	257.0	0.272	3.817	0.675
550	0.044 69	14.532	13.475	301.6	0.292	4.516	0.668
600	0.040 85	14.537	14.285	349.7	0.315	5.306	0.664
700	0.034 92	14.574	15.89	455.1	0.351	6.903	0.659
800	0.030 60	14.675	17.40	569	0.384	8.563	0.664
900	0.027 23	14.821	18.78	690	0.412	10.217	0.676
1000	0.024 51	14.968	20.16	822	0.440	11.997	0.686
1100	0.022 27	15.165	21.46	965	0.464	13.726	0.703
1200	0.020 50	15.366	22.75	1107	0.488	15.484	0.715
1300	0.018 90	15.575	24.08	1273	0.512	17.394	0.733
1333	0.018 42	15.638	24.44	1328	0.519	18.013	0.736
Oxygen							
100	3.9918	0.9479 × 10 ³	7.768 × 10 ⁻⁶	1.946 × 10 ⁻⁶	0.009 03	0.023 876 × 10 ⁻⁴	0.815
150	2.6190	0.9178	11.490	4.387	0.013 67	0.056 88	0.773
200	1.9559	0.9131	14.850	7.593	0.018 24	0.102 14	0.745
250	1.5618	0.9157	17.87	11.45	0.022 59	0.157 94	0.725
300	1.3007	0.9203	20.63	15.86	0.026 76	0.223 53	0.709
350	1.1133	0.9291	23.16	20.80	0.030 70	0.296 8	0.702
400	0.9755	0.9420	25.54	26.18	0.034 61	0.376 8	0.695
450	0.8682	0.9567	27.77	31.99	0.038 28	0.460 9	0.694
500	0.7801	0.9722	29.91	38.34	0.041 73	0.550 2	0.697
550	0.7096	0.9881	31.97	45.05	0.045 17	0.644 1	0.700
600	0.6504	1.0044	33.92	52.15	0.048 32	0.739 9	0.704
Nitrogen							
100	3.4808	1.0722 × 10 ³	6.862 × 10 ⁻⁶	1.971 × 10 ⁻⁶	0.009 450	0.025 319 × 10 ⁻⁴	0.786
200	1.7108	1.0429	12.947	7.568	0.018 24	0.102 24	0.747
300	1.1421	1.0408	17.84	15.63	0.026 20	0.220 44	0.713
400	0.8538	1.0459	21.98	25.74	0.033 35	0.373 4	0.691
500	0.6824	1.0555	25.70	37.66	0.039 84	0.553 0	0.684
600	0.5687	1.0756	29.11	51.19	0.045 80	0.748 6	0.686
700	0.4934	1.0969	32.13	65.13	0.051 23	0.946 6	0.691
800	0.4277	1.1225	34.84	81.46	0.056 09	1.168 5	0.700
900	0.3796	1.1464	37.49	91.06	0.060 70	1.394 6	0.711
1000	0.3412	1.1677	40.00	117.2	0.064 75	1.625 0	0.724
1100	0.3108	1.1857	42.28	136.0	0.068 50	1.859 1	0.736
1200	0.2851	1.2037	44.50	156.1	0.071 84	2.093 2	0.748

Table B-4 (SI). (continued)

T (K)	ρ (kg/m ³)	c_p (J/kg·K)	μ (kg/m·s)	ν (m ² /s)	k (W/m·K)	α (m ² /s)	Pr
Carbon dioxide							
220	2.4733	0.783×10^3	11.105×10^{-6}	4.490×10^{-6}	0.010 805	$0.059 20 \times 10^{-4}$	0.818
250	2.1657	0.804	12.590	5.813	0.012 884	0.074 01	0.793
300	1.7973	0.871	14.958	8.321	0.016 572	0.105 88	0.770
350	1.5362	0.900	17.205	11.19	0.020 47	0.148 08	0.755
400	1.3424	0.942	19.32	14.39	0.024 61	0.194 63	0.738
450	1.1918	0.980	21.34	17.90	0.028 97	0.248 13	0.721
500	1.0732	1.013	23.26	21.67	0.033 52	0.308 4	0.702
550	0.9739	1.047	25.08	25.74	0.038 21	0.375 0	0.685
600	0.8938	1.076	26.83	30.02	0.043 11	0.448 3	0.668
Carbon monoxide							
220	1.553 63	1.0429×10^3	13.832×10^{-6}	8.903×10^{-6}	0.019 06	$0.117 60 \times 10^{-4}$	0.758
250	0.841 0	1.0425	15.40	11.28	0.021 44	0.150 63	0.750
300	1.138 76	1.0421	17.843	15.67	0.025 25	0.212 80	0.737
350	0.974 25	1.0434	20.09	20.62	0.028 83	0.283 6	0.728
400	0.853 63	1.0484	22.19	25.99	0.032 26	0.360 5	0.722
450	0.758 48	1.0551	24.18	31.88	0.043 6	0.443 9	0.718
500	0.682 23	1.0635	26.06	38.19	0.038 63	0.532 4	0.718
550	0.620 24	1.0756	27.89	44.97	0.041 62	0.624 0	0.721
600	0.568 50	1.0877	29.60	52.06	0.044 46	0.719 0	0.724
Ammonia, NH ₃							
220	0.3828	2.198×10^3	7.255×10^{-6}	1.90×10^{-5}	0.0171	0.2054×10^{-4}	0.93
273	0.7929	2.177	9.353	1.18	0.0220	0.1308	0.90
323	0.6487	2.177	11.035	1.70	0.0270	0.1920	0.88
373	0.5590	2.236	12.886	2.30	0.0327	0.2619	0.87
423	0.4934	2.315	14.672	2.97	0.0391	0.3432	0.87
473	0.4405	2.395	16.49	3.74	0.0467	0.4421	0.84
Steam (H ₂ O vapor)							
380	0.5863	2.060×10^3	12.71×10^{-6}	2.16×10^{-5}	0.0246	0.2036×10^{-4}	1.060
400	0.5542	2.014	13.44	2.42	0.0261	0.2338	1.040
450	0.4902	1.980	15.25	3.11	0.0299	0.307	1.010
500	0.4405	1.985	17.04	3.86	0.0339	0.387	0.996
550	0.4005	1.997	18.84	4.70	0.0379	0.475	0.991
600	0.3652	2.026	20.67	5.66	0.0422	0.573	0.986
650	0.3380	2.056	22.47	6.64	0.0464	0.666	0.995
700	0.3140	2.085	24.26	7.72	0.0505	0.772	1.000
750	0.2931	2.119	26.04	8.88	0.0549	0.883	1.005
800	0.2739	2.152	27.86	10.20	0.0592	1.001	1.010
850	0.2579	2.186	29.69	11.52	0.0637	1.130	1.019

*From J. P. Holman, *Heat Transfer*, ©1997, McGraw-Hill Book Company, New York, NY, Reprinted by permission of the McGraw-Hill Companies.

Table B-1 (Engl.). (continued)

Metal	Properties at 68 °F				k, thermal conductivity, Btu/hr·ft·°F									
	ρ (lb/ft ³)	c_p (Btu/lb·°F)	k (Btu/hr·ft·°F)	α (ft ²)	-148 °F -100 °C	32 °F 0 °C	212 °F 100 °C	392 °F 200 °C	572 °F 300 °C	752 °F 400 °C	1112 °F 600 °C	1472 °F 800 °C	1832 °F 1000 °C	2192 °F 1200 °C
Copper:														
Pure	559	0.0915	223	4.353	235	223	219	216	213	210	204			
Aluminum bronze 95 Cu, 5 Al	541	0.098	48	0.903										
Bronze 75 Cu, 25 Sn	541	0.082	15	0.333										
Red Brass 85 Cu, 9 Sn, 6 Zn	544	0.092	35	0.699		34	41							
Brass 70 Cu, 30 Zn	532	0.092	64	1.322	51		74	83	85	85				
German silver 62 Cu, 15 Ni, 22 Zn	538	0.094	14.4	0.284	11.1		18	23	26	28				
Constantan 60 Cu, 40 Ni	557	0.098	13.1	0.237	12		12.8	15						
Magnesium:														
Pure	109	0.242	99	3.762	103	99	97	94	91					
Mg-Al (electrolytic) 6-8% Al, 1-2% Zn	113	0.24	38	1.397		30	36	43	48					
Mg-Mn 2% Mn	111	0.24	66	2.473	54	64	72	75						
Molybdenum	638	0.060	71	1.856	80	72	68	66	64	63	61	59	57	53
Nickel:														
Pure (99.9%)	556	0.1065	52	0.878	60	54	48	42	37	34				
Impure (99.2%)	556	0.106	40	0.677		40	37	34	32	30	32	36	39	40
Ni-Cr 90 Ni, 10 Cr	541	0.106	10	0.172		9.9	10.9	12.1	13.2	14.2				
80 Ni, 20 Cr	519	0.106	7.3	0.133		7.1	8.0	9.0	9.9	10.9	13.0			
Silver:														
Purest	657	0.0559	242	6.589	242	241	240	238						
Pure (99.9%)	657	0.0559	235	6.418	242	237	240	216	209	208				
Tungsten	1209	0.0321	94	2.430		96	87	82	77	73	65	44		
Zinc, pure	446	0.0918	64.8	1.591	66	65	63	61	58	54				
Tin, pure	456	0.0541	37	1.505	43	38.1	34	33						

*From E. R. G. Eckert and R. M. Drake, *Heat and Mass Transfer*, ©1959, McGraw-Hill Book Company, New York, NY, pp. 496-498. Used by permission of the McGraw-Hill Companies.

Table B-2 (Engl.). Property values of nonmetals.*

Substance	Temperature (°F)	<i>k</i> (Btu/hr·ft·°F)
Structural and heat-resistant materials:		
Asphalt	68–132	0.43–0.44
Bricks:		
Building brick, common	68	0.40
Building brick, face		0.76
Carborundum brick	1110	10.7
Carborundum brick	2550	6.4
Chrome brick	392	1.34
Chrome brick	1022	1.43
Chrome brick	1652	1.15
Diatomaceous earth, molded and fired	400	0.14
	1600	0.18
Fire-clay brick (burnt 2426 °F)	932	0.60
	1472	0.62
	2012	0.63
Fire-clay brick (burnt 2642 °F)	932	0.74
	1472	0.79
	2012	0.81
Fire-clay brick (Missouri)	392	0.58
	1112	0.85
	2552	1.02
Magnesite	400	2.2
	1200	1.6
	2200	1.1
Cement, Portland		0.17
Cement mortar	75	0.67
Concrete, cinder	75	0.44
Concrete, stone 1–2–4 mix	69	0.79
Glass, window	68	Avg. 0.45
Glass, borosilicate	86–167	0.63
Plaster, gypsum	70	0.28
Plaster, metal lath	70	0.27
Plaster, wood lath	70	0.16
Stones:		
Granite		1.0–2.3
Limestone	210–570	0.73–0.77
Marble		1.20–1.70
Sandstone	104	1.06
Wood (across the grain):		
Balsa, 8.8 lb per cu. ft	86	0.032
Cypress	86	0.056
Fir	75	0.063
Maple or oak	86	0.096
Yellow pine	75	0.085
White pine	86	0.065
SI Units		$\frac{W}{m \cdot k}$
To convert to SI units, multiply tabulated values by		1.729577

Table B-2 (Engl.). (continued)

Substance	Temperature (°F)	<i>k</i> (Btu/hr·ft·°F)
Insulating materials:		
Asbestos:		
Asbestos cement boards	68	0.43
Asbestos sheets	124	0.096
Asbestos felt, 40 laminations per in	{ 100	0.033
	{ 300	0.040
	{ 500	0.048
Asbestos felt, 20 laminations per in	{ 100	0.045
	{ 300	0.055
	{ 500	0.065
Asbestos, corrugated, 4 plies per in	{ 100	0.05
	{ 200	0.058
	{ 300	0.069
Asbestos cement		1.2
Asbestos, loosely packed	{ -50	0.086
	{ 32	0.089
	{ 210	0.093
Balsa wool, 2.2 lb per cu. ft	90	0.023
Cardboard, corrugated		0.037
Celotex	90	0.028
Corkboard, 10 lb per cu ft	86	0.025
Cork, regranulated	90	0.026
Cork, ground	90	0.025
Diatomaceous earth (Sil-o-cel)	32	0.035
Felt, hair	86	0.021
Felt, wool	86	0.03
Fiber insulating board	70	0.028
Glass wool, 1.5 lb per cu ft	75	0.022
Insulex, dry	90	0.037
		0.083
Kapok	86	0.020
Magnesia, 85%	{ 100	0.039
	{ 200	0.041
	{ 300	0.043
	{ 400	0.046
Rock wool, 10 lb per cu ft	90	0.023
Rock wool, loosely packed	{ 300	0.039
	{ 500	0.050
Sawdust	75	0.034
Silica aerogel	90	0.014
Wood shavings	75	0.034

*From A. I. Brown and S. M. Marco, *Introduction to Heat Transfer*, 2nd edn, ©1951, McGraw-Hill, New York, NY. Used by permission of the McGraw-Hill Companies.

Note: See p. 348 for SI unit conversion factor.

Table B-3 (Engl.). Property values of liquids in a saturated state.*

<i>T</i>		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr	β (1/°R)
°F	°C							
Water (H ₂ O)								
32	0	62.57	1.0074	1.925×10^{-5}	0.319	5.07×10^{-3}	13.6	0.10×10^{-3}
68	20	62.46	0.9988	1.083	0.345	5.54	7.02	
104	40	62.09	0.9980	0.708	0.363	5.86	4.34	
140	60	61.52	0.9994	0.514	0.376	6.02	3.02	
176	80	60.81	1.0023	0.392	0.386	6.34	2.22	
212	100	59.97	1.0070	0.316	0.393	6.51	1.74	
248	120	59.01	1.015	0.266	0.396	6.62	1.446	
284	140	57.95	1.023	0.230	0.395	6.68	1.241	
320	160	56.79	1.037	0.204	0.393	6.70	1.099	
356	180	55.50	1.055	0.186	0.390	6.68	1.004	
392	200	54.11	1.076	0.172	0.384	6.61	0.937	
428	220	52.59	1.101	0.161	0.377	6.51	0.891	
464	240	50.92	1.136	0.154	0.367	6.35	0.871	
500	260	49.06	1.182	0.148	0.353	6.11	0.874	
537	280	46.98	1.244	0.145	0.335	5.74	0.910	
572	300	44.59	1.368	0.145	0.312	5.13	1.019	
Ammonia (NH ₃)								
-58	-50	43.93	1.066	0.468×10^{-5}	0.316	6.75×10^{-3}	2.60	1.36×10^{-3}
-40	-40	43.18	1.067	0.437	0.316	6.88	2.28	
-22	-30	42.41	1.069	0.417	0.317	6.98	2.15	
-4	-20	41.62	1.077	0.410	0.316	7.05	2.09	
14	-10	40.80	1.090	0.407	0.314	7.07	2.07	
32	0	39.96	1.107	0.402	0.312	7.05	2.05	
50	10	39.09	1.126	0.396	0.307	6.98	2.04	
68	20	38.19	1.146	0.386	0.301	6.88	2.02	
86	30	37.23	1.168	0.376	0.293	6.75	2.01	
104	40	36.27	1.194	0.366	0.285	6.59	2.00	
122	50	35.23	1.222	0.355	0.275	6.41	1.99	
Carbon dioxide (CO ₂)								
-58	-50	72.19	0.44	0.128×10^{-5}	0.0494	1.558×10^{-3}	2.96	
-40	-40	69.78	0.45	0.127	0.0584	1.864	2.46	
-22	-30	67.22	0.47	0.126	0.0645	2.043	2.22	
-4	-20	64.45	0.49	0.124	0.0665	2.110	2.12	
14	-10	61.39	0.52	0.122	0.0635	1.989	2.20	
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—	$\frac{1}{\text{K}}$
To convert to SI units multiply tabulated values by		$1.601\,846 \times 10^1$	4.184×10^3	$9.290\,304 \times 10^{-2}$	1.729 577	$2.580\,640 \times 10^{-5}$	—	1.80

Table B-3 (Engl.). (continued)

<i>T</i>		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr	β (1/°R)
°F	°C							
Carbon dioxide (CO ₂) (cont.)								
32	0	57.87	0.59	0.117	0.0604	1.774	2.38	7.78×10^{-3}
50	10	53.69	0.75	0.109	0.0561	1.398	2.80	
68	20	48.23	1.2	0.098	0.0504	0.860	4.10	
86	30	37.32	8.7	0.086	0.0406	0.108	28.7	
Sulfur dioxide (SO ₂)								
-58	-50	97.44	0.3247	0.521×10^{-5}	0.140	4.42×10^{-3}	4.24	1.08×10^{-3}
-40	-40	95.94	0.3250	0.456	0.136	4.38	3.74	
-22	-30	94.43	0.3252	0.399	0.133	4.33	3.31	
-4	-20	92.93	0.3254	0.349	0.130	4.29	2.93	
14	-10	91.37	0.3255	0.310	0.126	4.25	2.62	
32	0	89.80	0.3257	0.277	0.122	4.19	2.38	
50	10	88.18	0.3259	0.250	0.118	4.13	2.18	
68	20	86.55	0.3261	0.226	0.115	4.07	2.00	
86	30	84.86	0.3263	0.204	0.111	4.01	1.83	
104	40	82.98	0.3266	0.186	0.107	3.95	1.70	
122	50	81.10	0.3268	0.174	0.102	3.87	1.61	
Methylchloride (CH ₃ Cl)								
-58	-50	65.71	0.3525	0.344×10^{-5}	0.124	5.38×10^{-1}	2.31	1.46×10^{-3}
-40	-40	64.51	0.3541	0.342	0.121	5.30	2.32	
-22	-30	63.46	0.3564	0.338	0.117	5.18	2.35	
-4	-20	62.39	0.3593	0.333	0.113	5.04	2.38	
14	-10	61.27	0.3629	0.329	0.108	4.87	2.43	
32	0	60.08	0.3673	0.325	0.103	4.70	2.49	
50	10	58.83	0.3726	0.320	0.099	4.52	2.55	
68	20	57.64	0.3788	0.315	0.094	4.31	2.63	
86	30	56.38	0.3860	0.310	0.089	4.10	2.72	
104	40	55.13	0.3942	0.303	0.083	3.86	2.83	
122	50	53.76	0.4034	0.295	0.077	3.57	2.97	
Dichlorodifluoromethane (Freon = 12)(CCl ₂ F ₂)								
-58	-50	96.56	0.2090	0.334×10^{-5}	0.039	1.94×10^{-3}	6.2	1.46×10^{-3}
-40	-40	94.81	0.2113	0.300	0.040	1.99	5.4	
-22	-30	92.99	0.2139	0.272	0.040	2.04	4.8	
-4	-20	91.18	0.2167	0.253	0.041	2.09	4.4	
14	-10	89.24	0.2198	0.238	0.042	2.13	4.0	
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—	$\frac{1}{\text{K}}$
To convert to SI units multiply tabulated values by		$1.601\ 846 \times 10^1$	4.184×10^3	$9.290\ 304 \times 10^{-2}$	1.729 577	$2.580\ 640 \times 10^{-5}$	—	1.80

Table B-3 (Engl.). (continued)

T		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr	β (1/°R)
°F	°C							
Dichlorodifluoromethane (Freon = 12)(CCl ₂ F ₂) (cont.)								
32	0	87.24	0.2232	0.230	0.042	2.16	3.8	
50	10	85.17	0.2268	0.219	0.042	2.17	3.6	
68	20	83.04	0.2307	0.213	0.042	2.17	3.5	
86	30	80.85	0.2349	0.209	0.041	2.17	3.5	
104	40	78.48	0.2393	0.206	0.040	2.15	3.5	
122	50	75.91	0.2440	0.204	0.039	2.11	3.5	
Eutectic calcium chloride solution (29.9% CaCl ₂)								
-58	-50	82.39	0.623	39.13 × 10 ⁻⁵	0.232	4.52 × 10 ⁻³	312	
-40	-40	82.09	0.6295	26.88	0.240	4.65	208	
-22	-30	81.79	0.6356	18.49	0.248	4.78	139	
-4	-20	81.50	0.642	11.88	0.257	4.91	87.1	
14	-10	81.20	0.648	7.49	0.265	5.04	53.6	
32	0	80.91	0.654	4.73	0.273	5.16	33.0	
50	10	80.62	0.660	3.61	0.280	5.28	24.6	
68	20	80.32	0.666	2.93	0.288	5.40	19.6	
86	30	80.03	0.672	2.44	0.295	5.50	16.0	
104	40	79.73	0.678	2.07	0.302	5.60	13.3	
122	50	79.44	0.685	1.78	0.309	5.69	11.3	
Glycerin [C ₃ H ₅ (OH) ₃]								
32	0	79.66	0.540	0.0895	0.163	3.81 × 10 ⁻³	84.7 × 10 ³	0.28 × 10 ⁻³
50	10	79.29	0.554	0.0323	0.164	3.74	31.0	
68	20	78.91	0.570	0.0127	0.165	3.67	12.5	
86	30	78.54	0.584	0.0054	0.165	3.60	5.38	
104	40	78.16	0.600	0.0024	0.165	3.54	2.45	
122	50	77.72	0.617	0.0016	0.166	3.46	1.63	
Ethylene glycol [C ₂ H ₄ (OH) ₂]								
32	0	70.59	0.548	61.92 × 10 ⁻⁵	0.140	3.62 × 10 ⁻³	615	0.36 × 10 ⁻³
68	20	69.71	0.569	20.64	0.144	3.64	204	
104	40	68.76	0.591	9.35	0.148	3.64	93	
140	60	67.90	0.612	5.11	0.150	3.61	51	
176	80	67.27	0.633	3.21	0.151	3.57	32.4	
212	100	66.08	0.655	2.18	0.152	3.52	22.4	
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg}\cdot\text{K}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m}\cdot\text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—	$\frac{1}{\text{K}}$
To convert to SI units multiply tabulated values by		1.601 846 × 10 ¹	4.184 × 10 ³	9.290 304 × 10 ⁻²	1.729 577	2.580 640 × 10 ⁻⁵	—	1.80

Table B-3 (Engl.). (continued)

T		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr	β (1/°R)
°F	°C							
Engine oil (unused)								
32	0	56.13	0.429	0.0461	0.085	3.53×10^{-3}	47 100	0.39×10^{-3}
68	20	55.45	0.449	0.0097	0.084	3.38	10 400	
104	40	54.69	0.469	0.0026	0.083	3.23	2 870	
140	60	53.94	0.489	0.903×10^{-3}	0.081	3.10	1 050	
176	80	53.19	0.509	0.404	0.080	2.98	490	
212	100	52.44	0.530	0.219	0.079	2.86	276	
248	120	51.75	0.551	0.133	0.078	2.75	175	
284	140	51.00	0.572	0.086	0.077	2.66	116	
320	160	50.31	0.593	0.060	0.076	2.57	84	
Mercury (Hg)								
32	0	850.78	0.0335	0.133×10^{-5}	4.74	166.6×10^{-3}	0.0288	1.01×10^{-4}
68	20	847.71	0.0333	0.123	5.02	178.5	0.0249	
122	50	843.14	0.0331	0.112	5.43	194.6	0.0207	
212	100	835.57	0.0328	0.0999	6.07	221.5	0.0162	
302	150	828.06	0.0326	0.0918	6.64	246.2	0.0134	
392	200	820.61	0.0375	0.0863	7.13	267.7	0.0116	
482	250	813.16	0.0324	0.0823	7.55	287.0	0.0103	
600	316	802	0.032	0.0724	8.10	316	0.0083	
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—	$\frac{1}{\text{K}}$
To convert to SI units multiply tabulated values by		$1.601\ 846 \times 10^1$	4.184×10^3	$9.290\ 304 \times 10^{-2}$	1.729 577	$2.580\ 640 \times 10^{-5}$	—	1.80

*From E. R. G. Eckert and R. M. Drake, *Heat and Mass Transfer*, ©1959, McGraw-Hill Book Company, New York, NY. Used by permission of the McGraw-Hill Companies.

Table B-4 (Engl.). Property values of gases at atmospheric pressure.*

<i>T</i>		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	μ_m (lb _m /ft·s)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr
°F	°C							
Air								
-280	-173	0.2248	0.2452	0.4653×10^{-5}	2.070×10^{-5}	0.005 342	0.096 91	0.770
-190	-123	0.1478	0.2412	0.6910	4.675	0.007 936	0.222 6	0.753
-100	-73	0.1104	0.2403	0.8930	8.062	0.010 45	0.393 9	0.739
-10	-23	0.0882	0.2401	1.074	10.22	0.012 87	0.510 0	0.722
80	27	0.0735	0.2402	1.241	16.88	0.015 16	0.858 7	0.708
170	77	0.0623	0.2410	1.394	22.38	0.017 35	1.156	0.697
260	127	0.0551	0.2422	1.536	27.88	0.019 44	1.457	0.689
350	177	0.0489	0.2438	1.669	31.06	0.021 42	1.636	0.683
440	227	0.0440	0.2459	1.795	40.80	0.023 33	2.156	0.680
530	277	0.0401	0.2482	1.914	47.73	0.025 19	2.531	0.680
620	327	0.0367	0.2520	2.028	55.26	0.026 92	2.911	0.680
710	377	0.0339	0.2540	2.135	62.98	0.028 62	3.324	0.682
800	427	0.0314	0.2568	2.239	71.31	0.030 22	3.748	0.684
890	477	0.0294	0.2593	2.339	79.56	0.031 83	4.175	0.686
980	527	0.0275	0.2622	2.436	88.58	0.033 39	4.631	0.689
1070	577	0.0259	0.2650	2.530	97.68	0.034 83	5.075	0.692
1160	627	0.0245	0.2678	2.620	106.9	0.036 28	5.530	0.696
1250	677	0.0232	0.2704	2.703	116.5	0.037 70	6.010	0.699
1340	727	0.0220	0.2727	2.790	126.8	0.039 01	6.502	0.702
1520	827	0.0200	0.2772	2.955	147.8	0.041 78	7.536	0.706
1700	927	0.0184	0.2815	3.109	169.0	0.044 10	8.514	0.714
1880	1027	0.0169	0.2860	3.258	192.8	0.046 41	9.602	0.722
2060	1127	0.0157	0.2900	3.398	216.4	0.048 80	10.72	0.726
2240	1227	0.0147	0.2939	3.533	240.3	0.050 98	11.80	0.734
2420	1327	0.0138	0.2982	3.668	265.8	0.053 48	12.88	0.741
2600	1427	0.0130	0.3028	3.792	291.7	0.055 50	14.00	0.749
2780	1527	0.0123	0.3075	3.915	318.3	0.057 50	15.09	0.759
2960	1627	0.0116	0.3128	4.029	347.1	0.059 1	16.40	0.767
3140	1727	0.0110	0.3196	4.168	378.8	0.061 2	17.41	0.783
3320	1827	0.0105	0.3278	4.301	409.9	0.063 2	18.36	0.803
3500	1927	0.0100	0.3390	4.398	439.8	0.064 6	19.05	0.831
3680	2027	0.0096	0.3541	4.513	470.1	0.066 3	19.61	0.863
3860	2127	0.0091	0.3759	4.611	506.9	0.068 1	19.92	0.916
4160	2293	0.0087	0.4031	4.750	546.0	0.070 9	20.21	0.972
Helium								
-456	-271		1.242	5.66×10^{-7}		0.0061		
-400	-240	0.091 5	1.242	33.7	3.68×10^{-5}	0.0204	0.1792	0.74
-200	-129	0.211	1.242	84.3	39.95	0.0536	2.044	0.70
-100	-73	0.015 2	1.242	105.2	69.30	0.0680	3.599	0.694
0	-18	0.011 9	1.242	122.1	102.8	0.0784	5.299	0.70
200	93	0.008 29	1.242	154.9	186.9	0.0977	9.490	0.71
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg} \cdot \text{K}}$	$\frac{\text{kg}}{\text{m} \cdot \text{s}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—
To convert to SI units multiply tabulated values by		$1.601\ 846 \times 10^1$	4.184×10^3	1.488 164	$9.290\ 304 \times 10^{-2}$	1.729 577	$2.580\ 640 \times 10^{-5}$	—

Table B-4 (Engl.). (continued)

<i>T</i>		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	μ_m (lb _m /ft·s)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr
°F	°C							
Helium								
400	204	0.006 37	1.242	184.8	289.9	0.114	14.40	0.72
600	316	0.005 17	1.242	209.2	404.5	0.130	20.21	0.72
800	427	0.004 39	1.242	233.5	531.9	0.145	25.81	0.72
1000	538	0.003 76	1.242	256.5	682.5	0.159	34.00	0.72
1200	649	0.003 30	1.242	277.9	841.0	0.172	41.98	0.72
Hydrogen								
-406	-243	0.052 89	2.589	1.079 × 10 ⁻⁶	2.040 × 10 ⁻⁵	0.0132	0.0966	0.759
-370	-223	0.031 81	2.508	1.691	5.253	0.0209	0.262	0.721
-280	-173	0.015 34	2.682	2.830	18.45	0.0384	0.933	0.712
-190	-123	0.010 22	3.010	3.760	36.79	0.0567	1.84	0.718
-100	-73	0.007 66	3.234	4.578	59.77	0.0741	2.99	0.719
-10	-23	0.006 13	3.358	5.321	86.80	0.0902	4.38	0.713
80	27	0.005 11	3.419	6.023	117.9	0.105	6.02	0.706
170	77	0.004 38	3.448	6.689	152.7	0.119	7.87	0.697
260	127	0.003 83	3.461	7.300	190.6	0.132	9.95	0.690
350	177	0.003 41	3.463	7.915	232.1	0.145	12.26	0.682
440	227	0.003 07	3.465	8.491	276.6	0.157	14.79	0.675
530	277	0.002 79	3.471	9.055	324.6	0.169	17.50	0.668
620	327	0.002 55	3.472	9.599	376.4	0.182	20.56	0.664
800	427	0.002 18	3.481	10.68	489.9	0.203	26.75	0.659
980	527	0.001 91	3.505	11.69	612	0.222	33.18	0.664
1160	627	0.001 70	3.540	12.62	743	0.238	39.59	0.676
1340	727	0.001 53	3.575	13.55	885	0.254	46.49	0.686
1520	827	0.001 39	3.622	14.42	1039	0.268	53.19	0.703
1700	927	0.001 28	3.670	15.29	1192	0.282	60.00	0.715
1880	1027	0.001 18	3.720	16.18	1370	0.296	67.40	0.733
1940	1060	0.001 15	3.735	16.42	1429	0.300	69.80	0.736
Oxygen								
-280	-173	0.2492	0.2264	5.220 × 10 ⁻⁶	2.095 × 10 ⁻⁵	0.005 22	0.092 52	0.815
-190	-123	0.1635	0.2192	7.721	4.722	0.007 90	0.220 4	0.773
-100	-73	0.1221	0.2181	9.979	8.173	0.010 54	0.395 8	0.745
-10	-23	0.0975	0.2187	12.01	12.32	0.013 05	0.612 0	0.725
80	27	0.0812	0.2198	13.86	17.07	0.015 46	0.866 2	0.709
170	77	0.0695	0.2219	15.56	22.39	0.017 74	1.150	0.702
260	127	0.0609	0.2250	17.16	28.18	0.020 00	1.460	0.695
350	177	0.0542	0.2285	18.66	34.43	0.022 12	1.786	0.694
440	227	0.0487	0.2322	20.10	41.27	0.024 11	2.132	0.697
530	277	0.0443	0.2360	21.48	48.49	0.026 10	2.496	0.700
620	327	0.0406	0.2399	22.79	56.13	0.027 92	2.867	0.704
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg} \cdot \text{K}}$	$\frac{\text{kg}}{\text{m} \cdot \text{s}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—
To convert to SI units multiply tabulated values by		1.601 846 × 10 ³	4.184 × 10 ³	1.488 164	9.290 304 × 10 ⁻²	1.729 577	2.580 640 × 10 ⁻⁵	—

Table B-4 (Engl.). (continued)

T		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	μ_m (lb _m /ft·s)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr
°F	°C							
Nitrogen								
-280	-173	0.2173	0.2561	4.611×10^{-6}	2.122×10^{-5}	0.005 460	0.098 11	0.786
-100	-73	0.1068	0.2491	8.700	8.146	0.010 54	0.396 2	0.747
80	27	0.0713	0.2486	11.99	16.82	0.015 14	0.854 2	0.713
260	127	0.0533	0.2498	14.77	27.71	0.019 27	1.447	0.691
440	227	0.0426	0.2521	17.27	40.54	0.023 02	2.143	0.684
620	327	0.0355	0.2569	19.56	55.10	0.026 46	2.901	0.686
800	427	0.0308	0.2620	21.59	70.10	0.029 60	3.668	0.691
980	527	0.0267	0.2681	23.41	87.68	0.032 41	4.528	0.700
1160	627	0.0237	0.2738	25.19	98.02	0.035 07	5.404	0.711
1340	727	0.0213	0.2789	26.88	126.2	0.037 41	6.297	0.724
1520	827	0.0194	0.2832	28.41	146.4	0.039 58	7.204	0.736
1700	927	0.0178	0.2875	29.90	168.0	0.041 51	8.111	0.748
Carbon dioxide								
-64	-53	0.1544	0.187	7.462×10^{-6}	4.833×10^{-5}	0.006 243	0.2294	0.818
-10	-23	0.1352	0.192	8.460	6.257	0.007 444	0.2868	0.793
80	27	0.1122	0.208	10.051	8.957	0.009 575	0.4103	0.770
170	77	0.0959	0.215	11.561	12.05	0.011 83	0.5738	0.755
260	127	0.0838	0.225	12.98	15.49	0.014 22	0.7542	0.738
350	177	0.0744	0.234	14.34	19.27	0.016 74	0.9615	0.721
440	227	0.0670	0.242	15.63	23.33	0.019 37	1.195	0.702
530	277	0.0608	0.250	16.85	27.71	0.022 08	1.453	0.685
620	327	0.0558	0.257	18.03	32.31	0.024 91	1.737	0.668
Carbon monoxide								
-64	-53	0.096 99	0.2491	9.295×10^{-6}	9.583×10^{-5}	0.011 01	0.4557	0.758
-10	-23	0.052 5	0.2490	10.35	12.14	0.012 39	0.5837	0.750
80	27	0.071 09	0.2489	11.990	16.87	0.014 59	0.8246	0.737
170	77	0.060 82	0.2492	13.50	22.20	0.016 66	1.099	0.728
260	127	0.053 29	0.2504	14.91	27.98	0.018 64	1.397	0.722
350	177	0.047 35	0.2520	16.25	34.32	0.025 2	1.720	0.718
440	227	0.042 59	0.2540	17.51	41.11	0.022 32	2.063	0.718
530	277	0.038 72	0.2569	18.74	48.40	0.024 05	2.418	0.721
620	327	0.035 49	0.2598	19.89	56.04	0.025 69	2.786	0.724
Ammonia (NH ₃)								
-58	-50	0.0239	0.525	4.875×10^{-6}	2.04×10^{-4}	0.0099	0.796	0.93
32	0	0.0495	0.520	6.285	1.27	0.0127	0.507	0.90
122	50	0.0405	0.520	7.415	1.83	0.0156	0.744	0.88
212	100	0.0349	0.534	8.659	2.48	0.0189	1.015	0.87
302	150	0.0308	0.553	9.859	3.20	0.0226	1.330	0.87
392	200	0.0275	0.572	11.08	4.03	0.0270	1.713	0.84
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg} \cdot \text{K}}$	$\frac{\text{kg}}{\text{m} \cdot \text{s}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—
To convert to SI units multiply tabulated values by		$1.601\ 846 \times 10^1$	4.184×10^3	1.488 164	$9.290\ 304 \times 10^{-2}$	1.729 577	$2.580\ 640 \times 10^{-5}$	—

Table B-4 (Engl.). (continued)

T		ρ (lb _m /ft ³)	c_p (Btu/lb _m ·°F)	μ^m (lb _m /ft·s)	ν (ft ² /s)	k (Btu/hr·ft·°F)	α (ft ² /hr)	Pr
°F	°C							
Steam (H ₂ O vapor)								
224	107	0.0366	0.492	8.54×10^{-6}	2.33×10^{-4}	0.0142	0.789	1.060
260	127	0.0346	0.481	9.03	2.61	0.0151	0.906	1.040
350	177	0.0306	0.473	10.25	3.35	0.0173	1.19	1.010
440	227	0.0275	0.474	11.45	4.16	0.0196	1.50	0.996
530	277	0.0250	0.477	12.66	5.06	0.0219	1.84	0.991
620	327	0.0228	0.484	13.89	6.09	0.0244	2.22	0.986
710	377	0.0211	0.491	15.10	7.15	0.0268	2.58	0.995
800	427	0.0196	0.498	16.30	8.31	0.0292	2.99	1.000
890	477	0.0183	0.506	17.50	9.56	0.0317	3.42	1.005
980	527	0.0171	0.514	18.72	10.98	0.0342	3.88	1.010
1070	577	0.0161	0.522	19.95	12.40	0.0368	4.38	1.019
SI Units		$\frac{\text{kg}}{\text{m}^3}$	$\frac{\text{J}}{\text{kg} \cdot \text{K}}$	$\frac{\text{kg}}{\text{m} \cdot \text{s}}$	$\frac{\text{m}^2}{\text{s}}$	$\frac{\text{W}}{\text{m} \cdot \text{K}}$	$\frac{\text{m}^2}{\text{s}}$	—
To convert to SI units multiply tabulated values by		$1.601\,846 \times 10^1$	4.184×10^3	1.488 164	$9.290\,304 \times 10^{-2}$	1.729 577	$2.580\,640 \times 10^{-5}$	—

*From E. R. G. Eckert and R. M. Drake, *Heat and Mass Transfer*, ©1959, McGraw-Hill Book Company, New York, NY. Used by permission of the McGraw-Hill Companies.

Table B-5 (Engl.). Critical constants and molecular weights of gases.

Gas	Molecular Weight	Critical Constants*		
		p_c (atm)	T_c (°R)	T_c (K)
Air	28.95	37.2	238.4	132.4
Argon	39.944	48.0	272.0	151.1
Oxygen	32	49.7	277.8	154.3
Nitrogen	28.02	33.5	226.9	126.0
Carbon dioxide	44.01	73.0	547.7	304.3
Carbon monoxide	28.01	35.0	241.5	134.2
Hydrogen	2.02	12.8	59.9	33.3
Ethyl alcohol	46.0	63.1	929.3	516.3
Benzene	78.0	47.7	1011	562.0
Freon-12	120.92	39.6	692.4	384.4
Ammonia	17.03	111.5	730.0	406.0
Helium	4.00	2.26	9.47	5.26
Mercury vapor	200.61	>200	>3281.7	>1822.0
Methane	16.03	45.8	343.2	190.7
Propane	44.09	42.0	665.9	369.9
Water	18.016	218.3	1165.3	647.4
Xenon	131.3	58.0	521.55	289.75

Index

- Absorption, monochromatic, 309
- Absorptivity, 289, 309, 315
- Acceleration, particle, 133
- Adiabatic line, 60
- Angle factor (*see* Configuration factor)
- Angstrom (unit), 289
- Archimedes' principle, 124

- Back substitution, 64, 76, 77
- Barometer, 131
- Bernard cells, 229
- Bernoulli's equation, 129, 139, 140
- Bessel's differential equation, 28
- Biot modulus (number), 87, 88, 104, 105, 108
- Black surfaces, 296
- Blackbody, 2, 291
 - radiation, 291
 - radiation functions, 293
 - spectral distribution, 292
- Blasius' equation, 145, 147
- Block change, 64
- Boiling, 245
 - crisis, 246
 - curve, 245
 - film, 245, 246, 248
 - flow (convection), 249
 - nucleate, 245, 246, 250, 260
 - pool, 245, 246
- Boundary conditions
 - convective (*see* Convective boundary) conditions
 - sine-function, 70
- Boundary layer
 - hydrodynamic (isothermal), 144
 - thermal, 149
- Boundary layer thickness, 159, 164, 202, 203, 213
 - hydrodynamic, 165, 169
 - thermal, 165, 169
- Bromley equation, 248
- Buoyancy force, 124
- Burnout, 246, 256
- Burnout point, 246

- Capacitance, thermal (*see* Thermal capacitance)
- Characteristic dimension, 88, 103, 104
- Clausius-Clapeyron equation, 267
- Coefficient:
 - convective heat transfer, 2
 - monochromatic absorption, 309
 - overall heat-transfer, 54
- Colburn factor, 189
- Composite wall, 33, 34

- Compressibility, liquids (table), 341, 350
- Concentric spheres, free convection, 231, 240
- Condensation, 245
 - dropwise, 251
 - laminar flow, 252
 - turbulent flow, 254
- Conductances, 61, 66
- Conduction, 1
- Conduction equation, 30
 - general, 16, 87
 - plane wall, 18
 - radial systems, 19
 - steady-state, 16, 32
 - steady-state, multidimensional, 56
 - time-varying, 87
 - two-dimensional, 70, 71
- Conductive shape factor (*see* Shape factor, conductive)
- Conductivity (*see* Thermal conductivity)
- Configuration factors, 296, 316, 317
 - gray body, 306
 - modified, 302, 321
 - properties, 298
- Conservation of energy, 129
- Conservation of mass, 127
- Continuity equation, 127, 135, 137, 140
 - differential form, 127, 136
 - vector form, 127
- Continuum, 3
- Control volume, 149
- Convection, 1
 - forced, 144, 184
 - mixed, 231
 - natural (*see* Free convection)
 - (*see also* Free convection)
- Convective acceleration, 125
- Convective boundary conditions, 22
 - chart solutions, 92
 - semi-infinite body, 91
 - slab of finite thickness, 91
- Convective heat-transfer coefficient, 189, 203
- Conversion factor, 328
- Cooling tower, 216
- Coordinate systems, 17
- Critical constants, gases, 358
- Critical length, 185, 206
- Critical radius, 48, 54
- Critical thickness, 25
- Cross flow:
 - single cylinder, 198
 - single sphere, 198
 - tube bundles, 199
- Curved boundary, nodal equation, 69
- Curvilinear square, 59, 60

- Cylinder:
 cross flow, 198
 hollow, 37
- Darcy-Weisbach equation, 152, 172, 190, 208
- Density, 3, 10
 gases (table), 344
 liquids (table), 341, 350
 metals (table), 335, 347
 nonmetals (table), 338, 348
- Diffusivity, thermal (*see* Thermal diffusivity)
- Dittus-Boelter equation, 194, 209
- Divergence, 128
- Drag, 164, 169, 203, 205, 213
 coefficient, 196, 213
 coefficient (table), 197
 form or profile, 160, 195, 213
 friction, 188
 skin-friction, 160, 195, 213
- Ebullition, 245
- Eddy diffusivity, 186
- Eddy viscosity, 126
- Effectiveness, heat exchanger, 274, 284
 table, 276
- Efficiency, fin (*see* Fin efficiency)
- Eigenvalues, 92
- Electrical analog:
 conduction, 61, 86
 radiation, 305
- Electromagnetic spectrum, 289
- Emissive power, 290
 blackbody, 291, 313
 hemispherical, 290
 monochromatic, 292
 total, 314
- Emissivity, 2, 315
 carbon dioxide, 310, 311
 gas, 324
 monochromatic, 294, 309
 table, 359
 total, 294
 water vapour, 312
- Empirical correlations, free convection, 226
- Enclosed spaces, free convection, 226
 (*see also* Horizontal layers; Vertical enclosed spaces)
- Enclosures:
 black, 301
 gray, 306, 323
- Energy equation, 141
 integral, 225
 steady, 165
- Energy gradient, 128
- English Engineering system, 5, 6
- Enthalpy, 129
 change, in condensation, 265
- Entrance region, heat-transfer, 194, 212
- Entry length, friction factor, 191
 tube flow, hydrodynamic, 174
 tube flow, thermal, 174
- Equation of motion, 137, 184
 steady laminar flow, 158
- Equivalent beam length, 311
- Equivalent length, 191, 208
- Error function, 89
- Euler number, 127
- Eulerian approach, 125
- Excess temperature, 245, 258
- Film boiling, 282
 flow, 251
- Film temperature, 150, 190, 239, 248, 255
- Fin efficiency, 29, 53
- Finite-difference approximations, 99
- Finite-difference equation:
 explicit, 99
 implicit, 102
- Fins, 25, 50
 annular, 28, 52, 53
 nonuniform cross section, 27
 rectangular, 26, 55, 79
 rod, 49, 50, 51
 triangular, 29
 uniform cross section, 25
 vertical, 264
- Fittings, pipe, 191
- Flat plate:
 flow with heat transfer, 189
 isothermal flow, 188
- Flow:
 fully developed, 151
 incompressible, 127
 irrotational, 137
 laminar, 125, 144
 nonuniform, 125
 slug, 151
 steady, 125
 turbulent, 125, 184
 uniform, 125
 unsteady, 125
- Flow field, 133
- Flow with heat transfer, 193
- Fluid derivative (*see* Substantial derivative)
- Fluid dynamics, 124
- Fluid mechanics, 123
- Fluid statics, 123
- Flux plotting, 72
- Form drag (*see* Drag, form or profile)
- Fouling, 275
- Fouling factors, 275, 283
- Fourier equation, 16
 law, 1, 31, 32

- Fourier equation (*Cont.*)
 modulus (number), 88, 103, 105
- Free convection, 221
 integral solution, 225
 similarity solution, 223
- Freehand plotting, 60, 73, 74, 84
- Friction factor, 152, 207
 table, 153
- Frictionless fluid, 123
 (*see also* Perfect fluid)
- Froude number, 127, 135
- Gaussian elimination, 63, 76, 77, 102, 322
 computer program, 77
 flow diagram, 65
- Gaussian error function, 89
- Gauss–Seidel method, 67, 83
- Graetz number, 241
- Grashof number, 221, 235, 236, 239, 240, 241
- Gravitational acceleration, 10
- Gray body, 2, 294, 295
 heat transfer, 321
- Gray enclosure, 306, 323
- Gray surfaces, 303
- Gröber chart
 cylinder, 95
 slab, 93
 sphere, 96, 98
- Hagen-Poiseuille equation, 153, 171
- Hausen equation, 157
- Head:
 elevation, 129
 pressure, 129
 total, 129
 velocity, 129
- Heat exchanger, 268
 correction factors, 272
 counterflow, 268, 278
 crossflow, 268, 281, 284, 286
 double-pipe, 268, 278, 283, 284
 flat-plate, 268
 parallel-flow, 268
 shell-and-tube, 268, 280, 285
- Heat flow lanes, 59
- Heat generation, 16, 20, 39, 40
- Heat transfer, steady-state, 6
- Heat transfer coefficient, 206, 209, 226
 laminar tube flow, 155
 local, 170
 overall, 23
 sphere, 214
- Heisler chart:
 cylinder, 95
 slab, 93
 sphere, 95, 96, 97
- Hohlraum, 291, 313
- Horizontal cylinder, forced convection, 232
- Horizontal layers, free convection:
 air, 229
 liquids, 229
- Horsepower, 141
- Hydraulic diameter, 153
 gradient, 128
 radius, 137
- Hydrometer, 132
- Hydrostatic equation, 123, 131, 140
- Impact tube, 140
 (*see also* Pitot tube)
- Incompressible laminar boundary layer, 165
- Insulation:
 critical thickness, 25, 47
 pipe, 35, 43
- Integral equation:
 energy, 151, 166, 167
 momentum, 147, 161, 202
- Intensity:
 blackbody, 294
 radiation, 291
- Internal energy, 16, 129
- Irradiation, 304
- Isotherms, 59, 60
- j*-factor, 189
- Kirchhoff's law, 293, 314
- Lagrangian method, 125
- Laminar tube flow:
 Nusselt number, 172
 pressure drop, 171, 172
 thermal profile, 177
 velocity distribution, 170
 velocity profile, 174, 176, 177
- Langhaar equation, 152
- Laplace equation, 17, 56, 61
- Latz Equation, 190, 194
- Leibniz' rule, 90
- Liquid metals, 200
- Log-mean temperature difference, 270, 282, 283
- Loss coefficient, 191
- Losses, minor, 191
- Lumped analysis, 88, 103, 104, 105, 108
 multiple system, 106
- Lumped system, 108
- Mach number, 127
- Manometer, 132
 differential, 132
- Mass velocity, 127
- Matrix, 78
 inversion, 63

- Minor losses, 191
- Molecular weights, gases, 358
- Momentum equation, integral, 225
- Moody's diagram, 191, 208
- Multidimensional system, 98

- Navier-Stokes equations, 184
- Newton's law of cooling, 2, 106, 154
- Nodal equation, 63, 64, 78
 - explicit, 100, 102
 - exterior corner, 79
 - Gauss-Seidel method, 67, 83
 - implicit, 102
 - stability requirements, 101
 - table, 69
- Nodal points, 61
 - exterior, 68
 - interior, 69
- Nodal temperatures, 79, 80
- Noncircular ducts, 153
- No-slip condition, 144
- NTU method, 274, 283, 286
- Numerical analysis, 61, 99
- Nusselt number, 151, 155
 - free convection, 224, 226

- Ohmic power, 239
- Ohm's law, 19
- Oliver's equation, 241
- One-seventh-power law, 188, 202
- Ostrach solution, 223
- Overall heat-transfer coefficient, 270
 - table, 271

- Pascal's law, 123, 130
- Peak heat flux (boiling), 246, 247, 251, 256, 257
- Pebble-bed heaters, 196
- Peclet number, 201
- Perfect fluid, 126
 - (*see also* Frictionless fluid)
- Pipe flow, 154
 - isothermal, 151
 - turbulent, isothermal, 190
- Pitot tube, 140, 159
- Pitot-static tube, 139
- Planck radiation functions, 293
- Planck's Law, 292, 314
- Pohlhausen solution, 150
- Poisson equation, 17
- Power-law velocity profile, 190, 206
- Prandtl number, 150
 - gases (table), 344
 - liquids (table), 341, 350
- Prandtl's boundary layer equations, 144
- Pressure:
 - absolute, 123
 - atmospheric, 123
 - Pressure (*Cont.*)
 - barometric, 123, 131
 - gauge, 123
 - variation with depth, 131
 - Pressure, sensitivity to, 13
 - Pressure drop, 208
 - in fittings, 191
 - Profile drag (*see* Drag, form or profile)
 - Prototype, 126, 135

- Radiation, 2, 289
 - gases and vapors, 309
 - shields, 324
- Radiation loss, 44
- Radiosity, 290, 304
- Rayleigh number, 222
- Rayleigh or Buckingham Pi theorem, 126
- Real fluid, 126
- Real surface emission, 295
- Reciprocity theorem, 301, 302
- Recuperator, 268
- Reference temperature, 222, 224
- Reflectivity, 289
- Reflector:
 - diffuse, 290
 - specular, 290
- Relative roughness (*see* Roughness of pipes, relative)
- Relaxation, 64, 80
 - table, 66
- Reradiating surfaces, 302, 319
- Residual equations, 64
- Resistance, thermal (*see* Thermal resistance)
- Reynold's analogy, 187
 - tube flow, 191
- Reynold's number, 125, 127, 134, 135, 241
- Reynold's stress, 185
- Rohsenow equation, 246, 258, 259
- Roughness height, 191
- Roughness of pipes, 191
 - relative, 191, 208

- Scale buildup, 283
- Semi-infinite body, 89, 111
- Separation of variables, 58, 92, 98
- Separation point, 195
- Shape factor:
 - conductive, 59, 74, 76
 - table, 62
- Shear stress, 126, 146
- Shielding, radiation, 307
- SI units, 5, 11, 43, 54
 - conversions, 12
- Sieder-Tate equation, 212
- Similarity:
 - geometric, 126, 135
 - kinematic, 126

- Similarity (*Cont.*)
 parameter, 150, 234
 solution, 234
- Similitude, 126
- Skin-friction coefficient, 146, 160, 188, 202, 203, 205, 213
 average, 163
 local, 163
- Skin-friction drag, 160, 195, 213
- Solar radiant flux, 311
- Specific gravity, 4, 10
- Specific heat, 4
 gases (table), 344
 liquids (table), 341, 350
 metals (table), 335, 347
 nonmetals (table), 338, 348
- Specific volume, 3
- Sphere, cross flow, 198
- Stagnation point, 139
- Stanton number, 189
- Steady state, 1
- Stefan–Boltzmann constant, 291
 equation or law, 2, 291
- Stream filament, 124
- Stream function, 145, 150
- Stream tube, 124
- Streamlines, 124, 128, 133
- Stress, apparent or Reynolds, 185
- Stretching factor, 145
- Subcooling, 260
- Submerged bodies, 195
- Substantial derivative, 125
- Superposition, 58, 85
- Surface tension, 247
- Surfaces:
 diffuse, 290
 specular, 290
- Taylor's series, 31
- Temperature distribution:
 counterflow heat exchanger, 278
 parallel-flow heat exchanger, 278
- Thermal capacitance, 89, 103, 106
- Thermal conductivity, 1, 2, 3, 7, 8, 12
 gases, 3
 gases (chart), 333
 gases (table), 344
 linear, 35, 36
 liquids, 3
 liquids (table), 341, 350
 metals (table), 335, 347
 nonmetals (table), 338, 348
 solids, 2
 variable, 20
- Thermal diffusivity, 4, 10
 gases (table), 344
- Thermal diffusivity (*Cont.*)
 liquids (table), 341, 350
 metals (table), 335, 347
- Thermal entry length, 181
- Thermal entry region, 154
- Thermal flux, radiant, 8
- Thermal power generation, 13
- Thermal radiation, 289
- Thermal resistance, 18, 23, 33, 89
- Thermal time constant, 89, 104
- Total derivative (*see* Substantial derivative)
- Transcendental equation, 92
- Transient conduction, 89
 chart solution, 113, 121
 chart solution, three-dimensional, 115, 116, 117
 numerical solution, 117
- Transient cooling, 87, 114
- Transient temperature, 103
- Transmissivity, 289, 311
 monochromatic, 309
- Triangularization (*see* Gaussian elimination)
- Tube bank, 216
- Tube bundle, 216
 cross flow, 199
- Tube flow:
 entry length, 152
 fully developed region, 152
- Turbulent flow, 184
- Unit change, 64, 66
- Units systems (table), 6
- Vacuum, 123
- Velocity, power-law, 190
- Velocity field, 137
- Velocity potential, 137
- Velocity profile, 162
 cubic, 164
 parabolic, 152
- Vertical enclosed spaces, free convection, 220, 233
- View factor (*see* Configuration factors)
- Viscosity, 4
 absolute, 5
 dynamic, 5, 9, 11, 331
 eddy, 185
 gases, 334
 gases (table), 344
 kinematic, 5, 11, 332
 liquids (table), 341, 350
- Viscous fluid, 126
- Volume expansion, coefficient of, 222
- von Kármán integral technique, 147, 151, 163
- Weber number, 127
- Wien's displacement law, 292, 314
- Work, flow, 129
 shaft, 129