VOLUME XXX

NUMBER SIX

# THE NATIONAL GEOGRAPHIC MAGAZINE

DECEMBER, 1916

CONTENTS

### LONELY AUSTRALIA

THE UNIQUE CONTINENT

BY HERBERT E. GREGORY

With 80 Illustrations

PUBLISHED BY THE
NATIONAL GEOGRAPHIC SOCIETY

HUBBARD MEMORIAL HALL

WASHINGTON, D.C.

\$2.50 AYEAR

25 CTS A COPY

### NATIONAL GEOGRAPHIC SOCIETY

### HUBBARD MEMORIAL HALL

SIXTEENTH AND M STREETS, WASHINGTON, D. C.

O. H. TITTMANN . PRESIDENT JOHN E. PILLSBURY . VICE-PRESIDENT GILBERT H. GROSVENOR, DIRECTOR AND EDITOR JOHN JOY EDSON . TREASURER JOHN OLIVER LA GORCE . ASSOCIATE EDITOR GEORGE W. HUTCHISON, ASSISTANT SECHETARY O. P. AUSTIN . SECHETARY WILLIAM J. SHOWALTER . ASSISTANT EDITOR

#### BOARD OF MANAGERS

#### 1914-1916

### ALEXANDER GRAHAM BELL.

### J. HOWARD GORE Prof. Emeritus Mathematica. The Geo. Washington Univ.

#### A. W. GREELY Arctic fixplerer, Major Gen'l.

### U. S. Army.

### Editor of National Geographic Magazine

### GEORGE OTIS SMITH Director of U. S. Geological

### O. H. Tettmann

#### Formerly Superintendent of U.S. Coast and Geodetic Survey

#### HENRY WHITE

Formerly U. S. Ambuseador to France, Haly, etc.

### JOHN M. WILSON

Brigadier General U. S. Army, Formerly Chief of Engineers

#### 1915-1917

### CHARLES J. BELL PRESIDENT American Security

President American Security

### JOHN JOY EDSON

President Washington Loan & Treat Company

### DAVID FAIRCHILD

In Charge of Agricultural Ex-

### C. HART MERRIAM

Member National Academy of Sciences

### O. P. AUSTIN

Statistician

#### GEORGE R. PUTNAM

Commissioner U.S. Bureau of

### GEORGE SHIRAS, JD

Formarly Member U. S. Congress, Pannal Naturalist, and Wild-Game Photographer

### GRANT SQUIRES

New York

#### 1916-1918

#### FRANKLIN K. LANE Secretary of the Interior

#### HENRY F. BLOUNT

Vice-President American Security and Trust Company

#### C. M. CHESTER

Rear Admiral U. S. Navy. Formerly Supt U. S. Naval. Observatory

#### FREDERICK V. COVILLE

Formerly President of Wastington Academy of Sciences

#### JOHN E. PILLSBURY

Rear Admiral U. S. Navy, Parmerly Chief Bureau of Navigation

#### RUDOLPH KAUFFMANN

Managing Editor The Evening Star

#### T. L. MACDONALD

M. D., F. A. C. S.

### S. N. D. NORTH

Formerly Director 11, S. Bu-

To carry out the purpose for which it was founded twenty-seven years ago, namely, "the increase and diffusion of geographic knowledge," the National Geographic Society publishes this Magazine. All receipts from the publication are invested in the Magazine itself or expended directly to promote geographic knowledge and the study of geography. Articles or photographs from members of the Society, or other friends, are desired. For material that the Society can use, adequate remuneration is made. Contributions should be accompanied by an addressed return envelope and postage, and be addressed:

GILBERT H. GROSVENOR, EDITOR

#### CONTRIBUTING EDITORS

A. W. GREELY
C. HART MERRIAM
O. H. TITTMANN
ROBERT HOLLISTER CHAPMAN
WALTER T. SWINGLE

ALEXANDER GRAHAM BELL DAVID FAIRCHILD HUGH M. SMITH N. H. DARTON FRANK M. CHAPMAN

Oil Fields of Pennsylvaniaalong the route of the Lincoln Highway

### The Sum of Tire Virtue

All that extreme flexibility in a tire can mean in reduced engine effort, lower gasoline cost and greater comfort—is delivered by Goodyear Cord Tires.

All that extreme strength can mean-in longer mileage, greater security and sounder economyis delivered also.


Goodyear Cord Tires are the sum of tire virtue, from whatever standpoint you view them.

The canvas tire has not been made that can approach the efficiency of their construction, nor the rival tire that can claim a level with their quality.

They hold by downright excellence their commanding position as the superior tire of America.

> Guedyear Tires, Heavy Tourist Tubes and "Tire-Suver" Accessories are easy to get from Guagrean Service Station Dealers everywhere

The Goodyear Tire & Rubber Co., Akron, Ohio

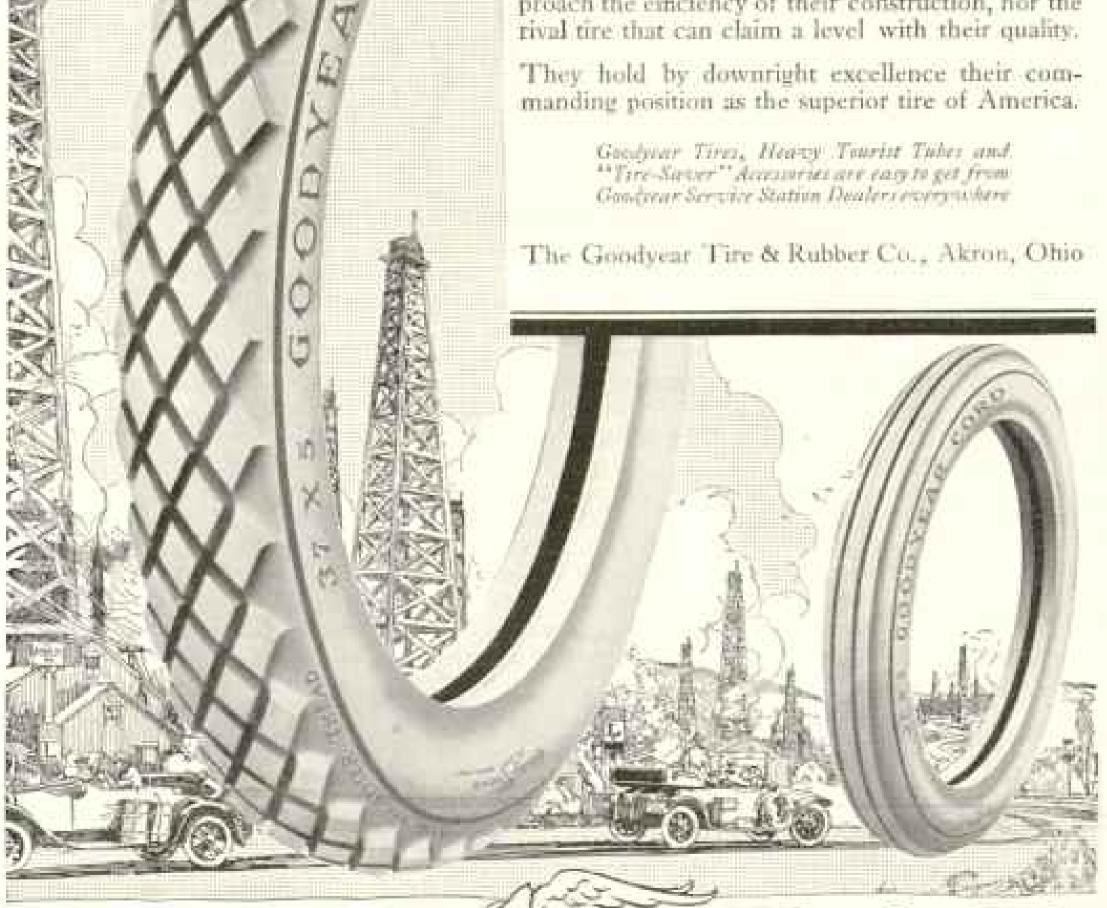



We are publishing this advertisement as a warning that if you want the Encyclopaedia Britannica printed on genuine India paper, you must buy it within a short time. If you were warned that your fire insurance policy was about to expire, you would be quick to renew it. You must also be quick if you would secure the Britannica, which is insurance against ignorance.

We cannot secure more India paper on which to print this monumental work of knowledge. This thin but tough paper has transformed the Britannica

volumes into the handsomest, most convenient books you ever saw.

When the comparatively few sets now on hand are gone, as they very soon will be, we cannot renew this opportunity to secure the greatest of all works—the Britannica—in the most valuable form—printed on genuine India paper. This is a bargain that cannot be duplicated—act upon it at once by sending the coupon on the adjoining page.

Whether you buy or not, you should at least investigate. You can do it by

simply marking and mailing the coupon on the opposite page.

### War cuts off the supply of India paper

Just as we were about to reprint a further supply of the Encyclopaedia Britannica on this superb paper, word came that no more flax (from which India paper is made) could be obtained

because of the war.

The superior grade of flax used for India paper (the kind used in making linen) is grown only in Germany, Belgium and Great Britain. War has crippled the flax industry in the first two countries indefinitely and Great Britain has placed an embargo on her supply. We are advised that this flax cannot be bought in sizable quantities for years to come. Hence the comparatively few sets of the Britannica now on hand are the last printed on India paper that can be offered.

They will be sold to first applicants for only \$1 down and \$3 a month for the "Handy Volume"

Issue (for cheapest binding).

The point we wish to emphasize here is not the low price and convenient terms, the vast scope and reliability of the Britannica, or the many advantages of India paper—you can learn all about these points by sending the coupon. What we want to impress upon you here is that the sets now on hand printed on genuine India paper are the last that we can offer and that this is the

time for immediate action. Send NOW, coupon on next page



The Britannica will stimulate you to improve your education whether or not you've had a college education. It will furnish you with a teacher of any subject you wish to study—a teacher who is master of his subject and tells what he knows in clear, simple language—a teacher who is always at your command.

It will give you the answer to the thousand-and-one questions that the morning paper, lectures, sermons and books prompt in every active mind. It will make everything you see, read and hear more interesting.

It will put you in touch with all the interesting people in the world, with their work and their ideas. It will give you hundreds of live topics to talk about.

It will help you form an intelligent opinion on all the questions of the day and follow the course of current events both at home and abroad.

It will enable you to lay out a plan of education for your children and keep abreast with their studies.

Don't "put it off till tomorrow." Send coupon right now for full information on any of the following works—all printed on genuine India paper and all extremely limited in supply. Mark coupon for book describing the work you are most interested in.

THE ENCYCLOPAEDIA BRITANNICA, Cambridge issue, in 29 volumes, 1 inch thick, large pages, large type, 30,000 pages, 41,000 authoritative articles, 44,000,000 words, 1,500 noted contributors, 15,000 illustrations, full-page plates and maps—sent for a first payment of \$5.00 and a limited number of monthly payments of the same amount. (Out of 75,000 sets printed, less than 1500 sets are left.)

The popular edition known as THE "HANDY VOLUME" ISSUE is precisely the same as the Cambridge issue in every detail except size, and sells at nearly 60% less. Each volume measures 6% inches wide by 8% inches high by 1 inch thick. It will be sent for a first payment of only \$1.00 and \$3.00 a month for a limited period.

We also have on hand a small supply of the famous CENTURY DICTIONARY (revised), the only complete dictionary of the English language. 325,000 words fully defined by 600,000 concise explanations, 10,000 illustrations, more than 8,000 pages—which, by a new invention, have been bound into a single volume for instant and easy reference. Sent for a first payment of \$1.00, to be followed by a few monthly payments of \$3.00.

Sets of the above can be seen at the following offices of the Encyclopaedia Britannica:

NEW YORK, 129 West 32nd Street CHICAGO, 920 Manhattan Boilding PHILADELPHIA, N. E. Cor., 15th & Walnut CLEVELAND, Society for Savings Building SAN FRANCISCO, 783 Manadanck Building

| TH  | eut an X in the square for book or books wanted and mail at once. E ENCYCLOPAEDIA BRITANNICA 120 W. 32nd Street, New York   |
|-----|---|
|     | Please send me, free, your book describing T<br>Encyclopaedia Britannica, Cambridge issue. (This<br>the large-type, large-page, high-priced issue. Out<br>75,000 sets printed, less than 1500 sets are left.) |
|     | The "Book of a Hundred Wonders," describing to<br>Encyclopaedia Britannica, "Handy Volume" Issue<br>(This is the popular low-priced issue, of which 75,0<br>sets were sold in six months.)                    |
|     | The Century Dictionary, 10 volumes, 8250 pages, bour in one volume.   |
|     | Also quote me prices and terms on which these wor<br>may be purchased.  |
| Nar | II C  |
| Add | ress  |



An Advertisement by The Pullman Company

Anticipation of those details of personal service, or equipment, which

may add to the passengers' comfort, convenience or safety, is a responsibility which the Pullman Company for fifty years, has consistently fulfilled.

In order that no improvement might be neglected, every practical suggestion is actually incorporated in a car under construction in our shops, and once a month these suggested improvements are personally inspected by the Committee on Standards composed of the higher officials of the Company.

The development of the sleeping car, the parlor car and the enclosed vestibule are characteristic steps in the constant advance made by the Pullman Company in the perfection of its equipment. To this end every new invention practical for Pullman car construction is carefully considered, and, if contributing to safety or convenience is adapted to car requirements.

Many of these improvements are of a highly technical nature and contribute chiefly to safety. Others result primarily in added comfort, or convenience to passengers. All serve to anticipate the passengers' requirements and meet the most exacting demands of the traveling public.

# The Cost of Starting and Stopping Reduced by the

### MARINON 54

RAILWAY experts estimate to start and stop a train fifty times a day costs \$12,000 to \$18,000 per year. Weight is a ruling factor, and on that basis what does it cost to stop and start a motor car?

Do like the railways—consider the wear on brakes and tires, the racking grind on your car, the strain in creating momentum.

In these respects, the Marmon 34 saves 25 percent, we estimate, due to its half-ton lighter weight and scientific construction. Marmon owners already know that this car saves from 50 to 75 percent in gasoline compared with cars of equal size and power. They know that their tires give hundreds of miles more service than on other cars of this class that they have owned.


The saving in starting and stopping they measure by absence of rattles, squeaks, and repairs, by the sustained perfection of the Marmon, and by the case of handling it hours at a stretch.


Before this Marmon came, lightness went only with cars of short wheel-base and it meant hard riding. Luxury cars, it was thought, must be heavy to give the degree of comfort, the size, and the power that men demand.

Marmon acientific principles of construction and the extensive use of aluminum have upset those old traditions. Here, now, is the leading Luxury car of the year, 1100 pounds lighter.

Because of its 136-inch wheel-base, low hung body, low center of gravity, and perfect balance—the Marmon holds the road at high speeds notwithstanding its unparalleled lightness.

### Nordyke & Marmon Company Indianapolis, Ind.

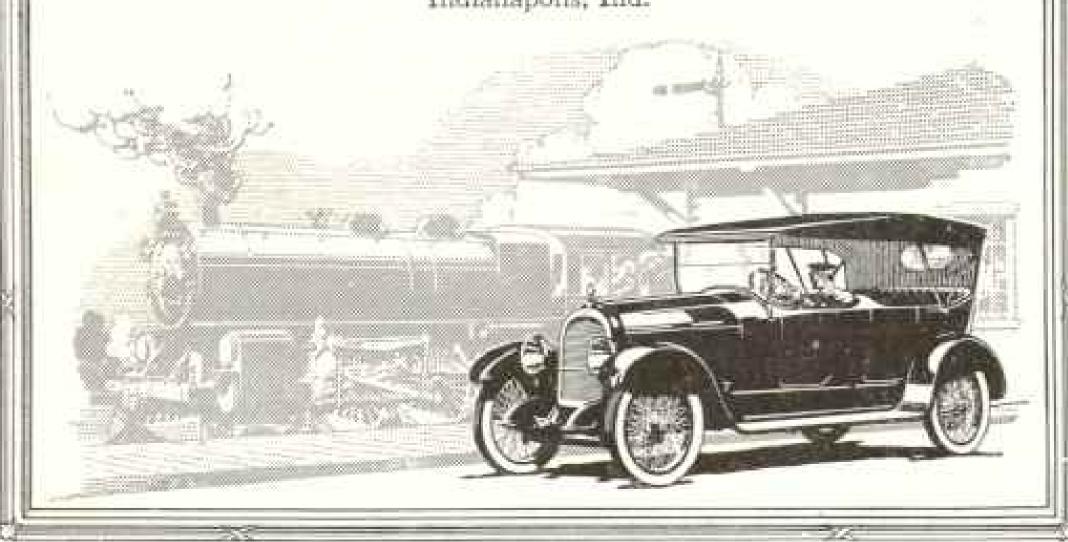

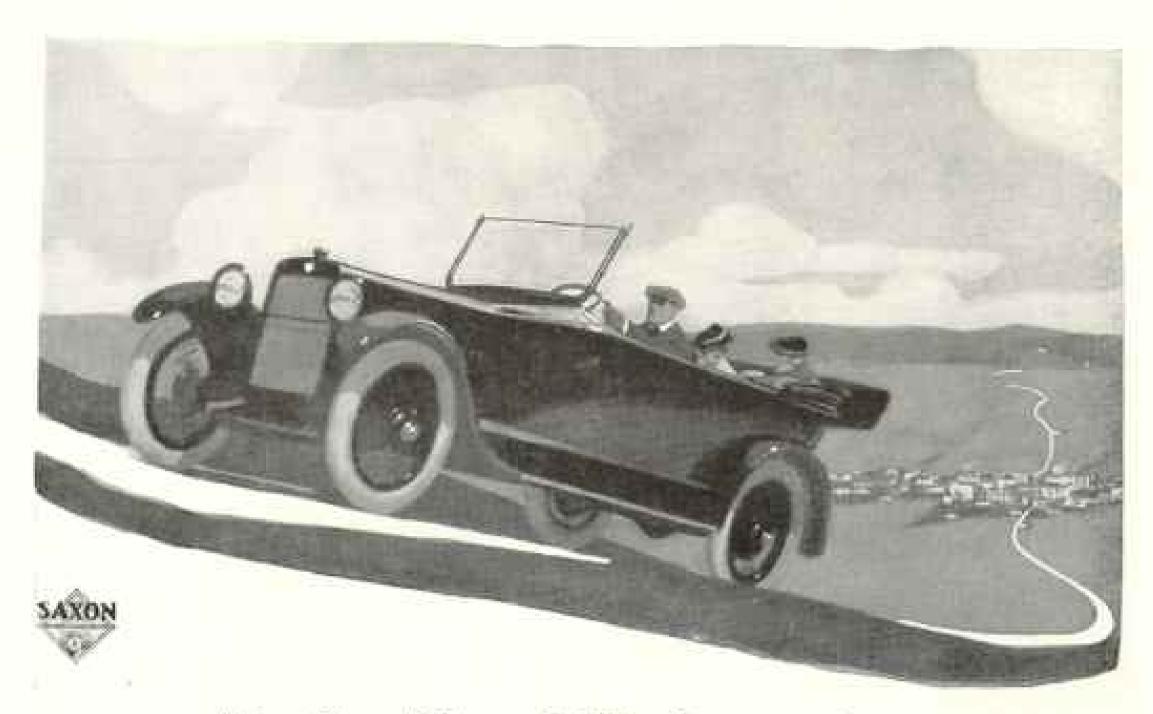

### "A Car That Will Out-perform Any Other in Its Price-class"

After all, performance is the most jealously prized motor-car attribute.

And when you come to seek the reason for the overwhelming success of Saxon "Six" you'll find it, most likely, in its ability to out-perform any other in its field.

Since the first Saxon "Six" went into service, some two years back, it has been passing through a constant state of development.

Uniform torque-perfect power-flow-was the standard sought and now attained.

Each explosion merges into the next—with no interval interposing to produce the

vibration that shortens the life and impairs the efficiency of less able motors.

Consider, for instance, a comparative case if you would know how surprisingly Saxon "Six" surpasses any other at less than \$1200.

Running one of the best known cars of less than six cylinders at 20 miles per hour, there are 1,512.73 power impulses per minute.

Running Saxon "Six"—under the same conditions at 20 miles per hour, there are 2,993.925 power impulses per minute.

That is to say, Saxon "Six" produces 97.9% more impulses per minute at a 20-mile-per-hour speed than this well known car of "less-than-six-cylinders." This is practically perfect continuity of power-flow.

Think how much less friction there is in the Saxon "Six" motor.

Think how much longer life this gives Saxon "Six," since friction is the greatest enemy to a motor's endurance.

Translated into dollars and cents, think how little will be your repair service cost on Saxon "Six" as compared to the car with lessthan-six-cylinders.

You will find the super-ability of this Saxon "Six" motor reflected to your benefit in many ways.

First, in unusual quietness and smoothness. Engineers estimate the power-flow smoothness of Saxon "Six" to be nearly 98% greater than that of the "lessthan-six."

Second, in astounding quickness of "pick-up" - from standing start to 45 miles per hour in 23 seconds.

This "less-than-six" we cite required 30 seconds in that test.

Third, in amazing flexibility.
Seldom indeed do Saxon
"Six" owners resort to genr
shifting.

Fourth, in unrivaled pulling power.


Saxon "Six" is \$815 f. o. b. Detroit.

SAXON "SIX"

Saxon Motor Car Corporation, Detroit



### DURAND Steel Lockers

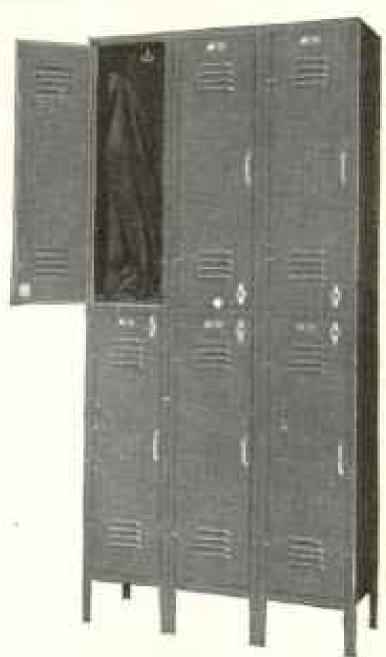

TYPE L. D.

THE superiority of Durand Steel Lockers lies not only in their practical design and expert workmanship, but also in their unusually handsome appearance and the beauty of the enamel finish.


Durand Steel Lockers are fireproof, practically indestructible, sanitary, and convenient. They are adapted for offices, factories, schools, hotels, clubs, gymnasia, and wherever lockers are used.

Reasonable in price. Write today for catalogue.

We are also manufacturers of steel shelving, steel bins, and general steel factory equipment.

### DURAND STEEL LOCKER CO.

1507 Ft. Dearborn Bk. Bldg. Chicago 907 Vanderbilt Bldg. New York

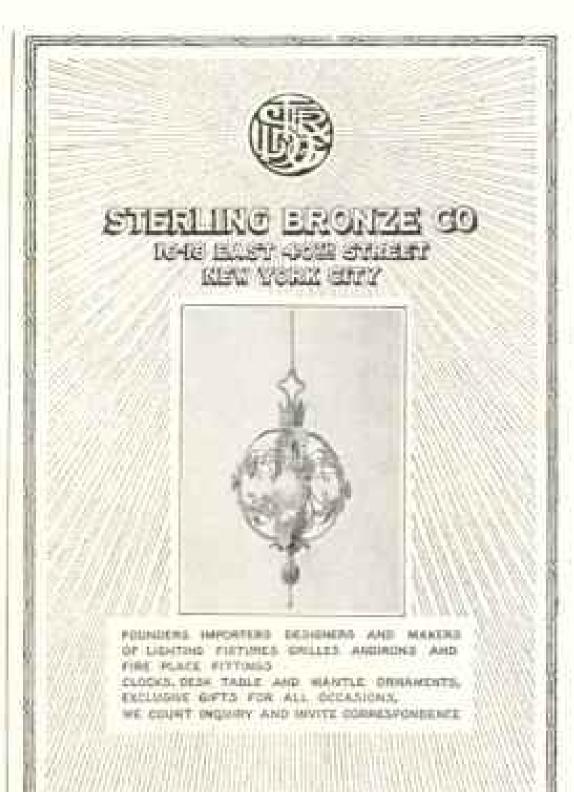

### HICROGRAPHY ESS-IVES COLOR PHOTOGRAPH

RAVELERS, explorers, scientists and professional and amateur photographers who have refrained from the pleasures of color photography because it entailed the purchase of an additional camera, hail the advent of the


### Hiblock

—a pack of three sensitized color plates, in a plate-holder, by which the photographer can take color photographs with his own camera, retaining all of nature's color. Only one exposure is necessary. Booklet telling how the Hiblock operates sent free on request.

### HESS-IVES CORPORATION

1201 Race Street

Philadelphia

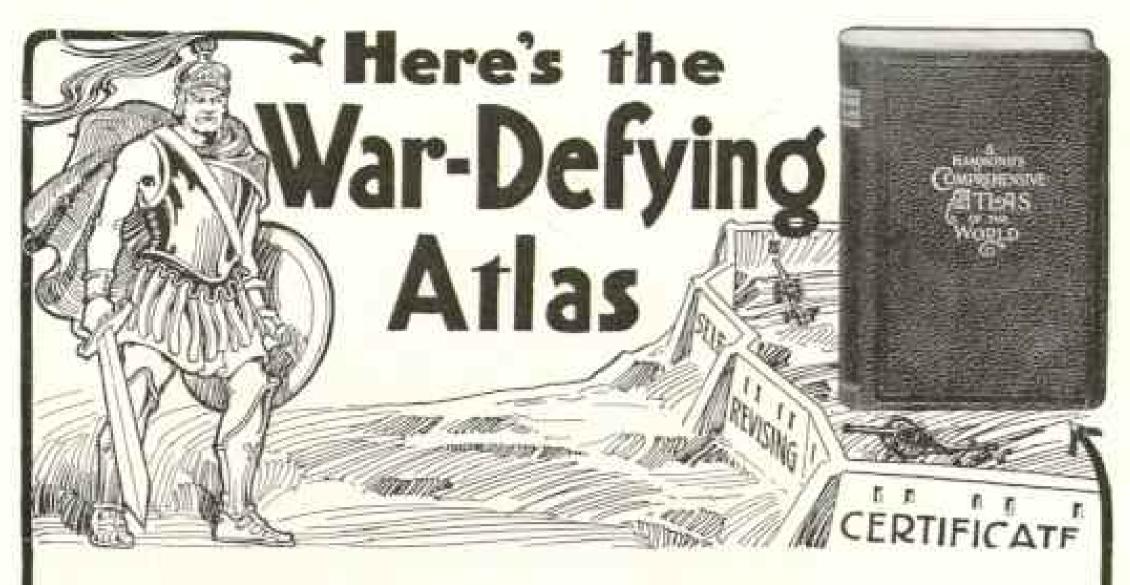

History shows us that wars have generally resulted in great changes of political boundaries, thereby making all maps and atlases of the regions involved out of date and useless. The present European conflict may even exceed all previous wars in these respects, but it has met its Waterloo in one particular—an atlas that it cannot antiquate. This is

# Hammond's 1917 Self-Revising Comprehensive Atlas of the World

It is the unique "self-revising" feature that permits this atlas to dely the war and makes it an arise of tomorrow as well as of today. In each atlas is a cerdiscuss entitling the owner to a stateen page supplement of maps of the countries affected, showing the new boundaries as determined by the peace treaties, to be mailed within slaty days after the results of same are known. This supplement will bring your ating up to date and give you maps showing Europe before and after the war in one complete volume.

Now, as never before, you need a good atlas. Intelligent understanding of momentous, history-making events, which crowd the newspapers every day, is impossible without up to-date large scale maps at hand for frequent use. The Comprehensive contains: special war maps of the several European frontiers, an that a clear conception of the Great War may be tad, and the large scale individual maps of the Senter. Canadian Provinces, and all other portions of the World can be consilted profitably every day,

### A New Idea In Atlas-Making

Hammond's Comprehensive Attas of the World is a compact, octavo volume, convenient to handle, handsomely bound in genuine flexible leather. It overcomes the objections to ordinary large, Tlat, unwieldly atlases. It will ornament a library table or fit in your bookcase shell. There are 512 pages in this book. 256 of which are maps, heautifully printed in colors. Each map occupies two, four, alz, or eight pages, as required, thus achieving the long-sought ideal in uthas making - large scale maps in a practical book of bundy size, 05 x 63 x 15 (neber.

### 50 PER CENT DISCOUNT TO GEOGRAPHIC READERS

In order to get quick and tavorable publicity for this 1917 Self-Revising Atha, we offer it to you at \$2.50, post-mid, which is 50 per next discount from list price. This introductory offer is open for 90 days only.

C.S. Hadramoni & Co. 34 Church St., New York

MONEY BACK If Not Satisfied GET YOUR COPY NOW! Mail Coupon Today


\$2.50, for which please mail me is topy of your virt bell. Remaing Computership Attenof the World, fris maneethan that I have the printlege of estarning the book within in days after its stcentrand than you will exhaud my money. gliss the postage, on retires of the allus.

Send for Catalogue of our Other Publications

C. S. HAMMOND & COMPANY

THE NEW YORK MAP HOUSE

34 Church Street (Hudson Terminal), New York

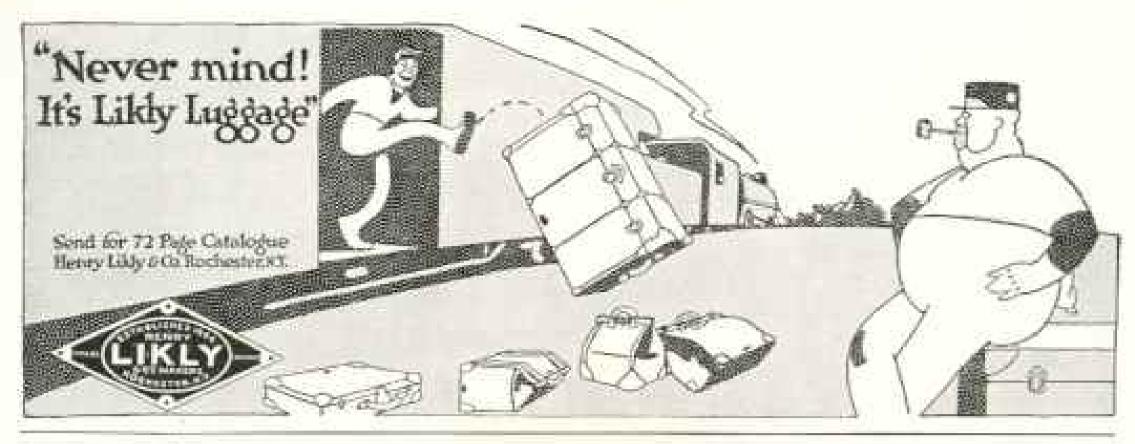



### \$5 for this "4-Room" Dodson Wren House

Built of oak; roof of cypress with copper coping. Hangs from a limb.

### Brings The Birds

Mr. Dodson, a director of the American Andulion Association, has spent 22 years learning how to build bird houses that attract the birds. Wrens, bluebirds, and martins, such must have its own especial stric of house. The slabt kind—the Dodson kind—brings had the families year after year. Their periodical has been a labor of lose.

A big house like this will being one or two taxelles of wrom to live with you next summer—sherrly. Edendly, and musical hind tenants that pay rent by contributing to the general loy of living.

If you want the hirds next summer, get your houses now and set them up to "weather." The birds like them benefined Book Free. The illustrated Domon book tells how to arrow; native birds to your garden. With it we send also free, a beautiful picture, in color, from "Nature Scighbors," worthy of framing. Write to

JOSEPH H. DODSON, 702 S. HARRISON AVENUE, KANKAKEE, ILL.



winter freeding

dertions, etc., All

are patented.

### The National Geographic Magazine

is treasured by each and all of its subscribers; its pages are full of items of interest too valuable to be thrown away or carelessly handled.

### Let Us Bind Them For You

Put them in book form, both beantiful and economical: make them

an attractive addition to your library. Send for free backlet, illustrating different styles of blading, quoting prices, and girting shipping terrections. All work guarantees.

Burgmeier Book Bindery, ART BINDERS CHICAGO, ILLINOIS





ra No. 12, Wetster ber

RUSTIC Bird Houses are the best, and Crescent make are the best Rustic

Ones :: \$1.25 each, three for \$3.50.

Booklet, "Eard Architecture," free with every order.

Canaling with 50 libertration. Pared Dat propost makin third week.

THE CRESCENT CO., "Birdville," TOMS RIVER, N. J.

WEBSTER'S NEW INTERNATIONAL DICTIONARY

Whatever your question; — he it the pronunciation of a new term; the spelling of a puzzling word; the location of Nigeria, the meaning of tractor, white coal etc., this New Creation contains a clear, accurate, final answer.

G. & C. MERRIAM CO., SPRINGFIELD, MASS. HOULAN AND INDIA-PRAPER



### What 15 cts. Bring You From Nation's Capital

The little matter of 15c is stamps or coin will bring you the Pathinder for 13 weeks on trial. The Pathinder is an illustrated weekly, published at the Nation's Center, for the Nation; a paper that prints all the news of the world and that wills the truth and only the truth; now in its 25d year. This paper fills the bill without supplying the purse; it come but \$1 a year. If you want to keep posted on what is going on in the world, at the least expense of time or meany, this is your means. If you want a paper in your home which is elected, reliable, entertaining, wholesome, the Pathinder is your. If you would appreciate a paper which puts everything clearly, fairly, heights being the fact that you might like such a paper, and we will send the Pathinder on probation 13 weeks. The 15c does not tensy us, lot we are glad to invest in New Friends. THE PATHFINDER PUBLISHING CO., Box 33. WASHINGTON, D. C.



### THE FRANKLIN CAR

HEREVER you go nowadays and hear men talking motor cars, you will find that one man has just bought the make of car the other has just abandsned.

This means that most buyers are still groping for real standards by which to judge motor car efficiency.

New cars come out, old cars work up new features and 'talking points' - and so the trade shifts.

Watching all this is the solid group of Franklin owners, solve de not change.

These men and their families know what they have in the Franklin Car and stick to it. It is the rarest exception for one of them to change—and then he always comes back again. Our records thou this. What holds these men? What makes them talk Franklins? Why has the demand for Franklin Cars doubled, and doubled, and then doubled again within the last two years?

Perhaps it is because these menknow some things that the average motorist does not know:—things about comfort and safety, gasoline economy, tire saving, effortless control, a new mastery of road and traffic conditions.

The man who has driven a Franklin and any other make of car knows that he can drive his Franklin farther, on longer trips, with less fatigue, with less trouble, and at less cost than any other car he ever owned.

The Franklin dealer in your town can prove this to you. Ask him.

Thering Cov. 2280 Bm. \$1850.00 Calender 2405 Bm. \$2550.00 Then Car 2510 Bm. \$3000.00 Remained 2160 Bm. \$1800.00 Seeler 2510 Bm. 2750.00 Linearine 2620 Bm. \$1000.00 Franchinger Remaine 2280 Bm. 1830.00 Brenigham 2515 Bm. 2700.00 All Prince F. O. R. Semont

### FRANKLIN AUTOMOBILE COMPANY

SYRACUSE, N. Y., U. S. A.


# DODGE BROTHERS CLOSED CAR

A convertible sedan such as you would expect from Dodge Brothers. A pleasing combination of smartness and comfort. Designed and built complete in Dodge Brothers works.

The price of the sedan complete is \$1185 (f. o. b. Detroit).

Canadian price, \$1685 (add freight from Detroit).

DODGE BROTHERS, DETROIT

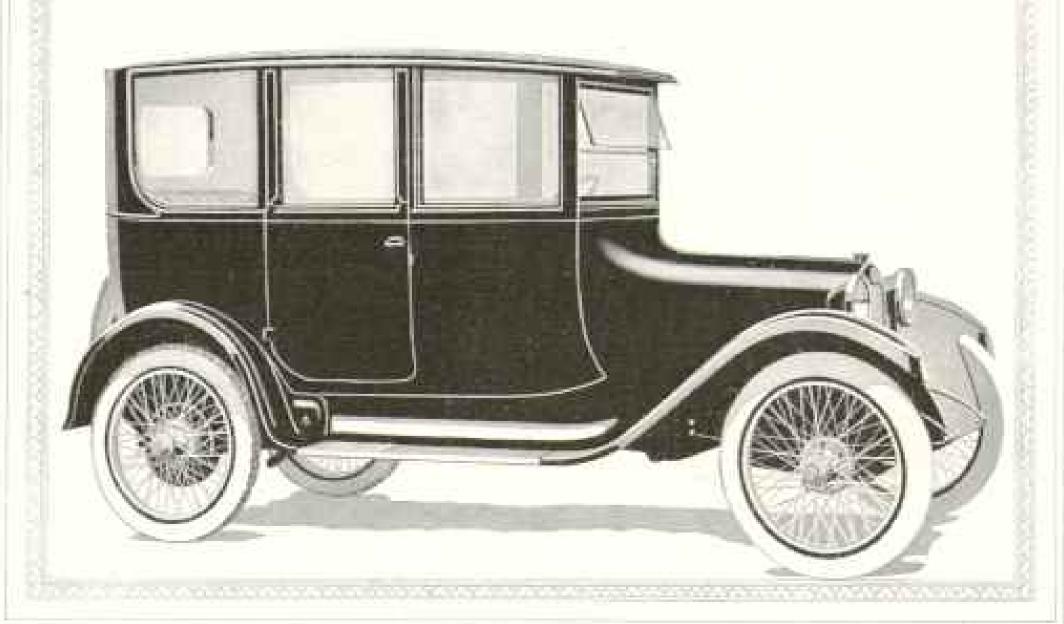

## Mister Man and Mister Manager

R. MAN lives in our town. He has lived there quite a while. He directs a business that is marking time, but he does not know it. That's why he's Mr. Man perhaps.

His salesmen plod listlessly from the Can't-See-Yous to the Nothing-Doings. They live

on crumbs.

He advertises now and then, but if you should ask about his follow-up he would not understand. To him a postage stamp presents no opportunities.

His stock clerk brushes cobwebs from the shelves. Printed matter long since obsolete lies in yellowed wrappers.

But he is not the only Mr. Man. You may know his counterpart.

Mr. Manager also lives in our town. He has lived there quite a while as well. He manages a business that is growing fast. Perhaps that's because he's Mr. Manager.

His salesmen are keen and bright. He paves the way for them with Multigraphed letters and printed folders and they're on the jump from the Expecting-Yous to the Glad-You've-Comes.

He advertises persistently and his follow-up is what it's named. To him a postage stamp is a golden opportunity. His mailing lists are busy every minute. His stock clerk never

saw a spider. With their Multigraph they need only print the actual quantities they need. So dead forms are unknown and age can not creep upon their printed matter.

But he is not the only Mr. Manager, and these are not the only things he accomplishes with his right-hand aid, the Multigraph.

You know his counterpart-if you

know a Multigraph user most anywhere. And the Mr. Manager you know will gladly tell you of his Multigraph accomplishments, if you'll ask him; or we'll gladly tell you of those of many others, if you'll ask us.

And either way, as a Mr. Manager, you'll see the possibilities.



Multigraph Senior - illectically driven and completely equipped for high-grade printing with printers' ink type of electrotypes, or for producing typewritten Letters its quantities. Priors, \$570 in \$720. Hand-drives models, \$300 up. From payments.



You can't buy a Multigraph unless you need it

| The | Multigraph,  | 1821 [    | E_40th  | St., Cle   | velano |
|-----|--------------|-----------|---------|------------|--------|
|     | Tell me more | about 3tu | Namph p | edidition. |        |

| Nam              | <br>     |  |
|------------------|----------|--|
| Official Peoples |          |  |
| Pine             |          |  |
| Street Address   |          |  |
| Town             | <br>5tm; |  |

### 35 Years Without a Dollar Loss to An Investor

Each successive year is a milestone in the record of this House. Three and one-half decades ago, this business was founded on this fundamental principal: Complete safety and thorough protection of the investor.

How closely we have followed this principle our record indicates —a record of sound securities bought and sold, and thorough service to investors rendered for more than a generation.

### 5½% January Investments

We are now offering a varied list of sound and attractive first mortgage serial real estate bonds, sufeguarded under the Straus Plan, to not 5½%. Each issue is directly secured by a first mortgage on a high grade building and land.

These properties are situated in New York, Chicago, Detroit, Baltimore, Pittsburg, Kansas City, St. Louis, Cleveland, Minneapolis, Los Angeles, and other large and prosperous cities. We have purchased these bonds after careful investigation and recommend them as safe investments.

Write today for Circular No. L-656

# S.W. STRAUS & CO. INCOMPORATE INCOMPORATE

Exclusively a Specialist Band House
35 Years without a Dollar Loss to an Investor

### A wide choice of Chicago Investments

HORIGINAL CORE COMPANION AND THE PROPERTY OF T

Safeguarded by

- Our more than 50 years' successful experience in handling Chicago investments.
- Expert investigation by men with years of training in this field.
- Conservative valuations, based upon our own carefully kept records of values in every part of the city for more than 50 years.
- Title guarantee policy and all legal proceedings approved by our own Legal Department.

THE CONTROLLED BY THE PROPERTY OF THE PROPERTY

 Outright purchase of all securities which we, in turn, offer to investors. Densininations of \$100, \$500, and \$1,000.
 Rate, 5 ½ and 6 %.

Write for Circular No. 958 D

### Peabody, Houghteling & Co.

(Established 1865)

10 South La Salle Street, Chicago



The service that belongs rightfully to the sale of memorials must embrace:—an artistic sense that considers the conditions under which each individual memorial is erected; the focation: the natural setting; the surroundings—a practical knowledge and experience that are both a protection and a guide to the purchaser—a sympathetic attitude toward the purchaser attitude toward the purchaser attitude toward the purchaser attitude toward the purchaser attitude to

We will be glad to furnish suggestions for a memorial to meet your ideas of price.

Write for Portfolio C.



### Investment Elements

1-In variety of issues

2—In range of maturities

3—In diversity of locations

4-In breadth of markets

-our lists offer unusual opportunities for institutional and individual investors to practice the sound principle of diversification of investments.

Send for December List AN-53, showing comprehensive selection of Municipal, Railroad, Industrial, Public Utility, and Foreign Government Bonds.

### The National City Company

National City Bank Building, New York

#### CORRESPONDENT OFFICES

PHILAGELPHIA, PA-SHIT COMMING NO. BALTIMORE, MAI Manager Bidg. Walkerbaahun, Pa-

Minney Walth Bildge

District, MAAA.
El Congress III.
ACRANY, N. V.
Cheen Bidg.
SANAAS Cray, M.O.
Republic Bidg.

PVVFSHORGE, PA. Fernore Beck Bidg. BUVVALIA, N. V. Murine Bank Bidg. London, Emstanti Elionbied M. CHICAGO, ILL.
LIP No. La Balle No.
CLIEVELANII. O.
GIORITION WING:
ST. LOUIT, MoHurk of Connecte Budy.

BAN FRAMITHEN, CAL, GA CHROPIA NO. DEPROPE, MICH. SOME BOOK BING. WARRINGTON, D. C. PALLYON NO. N. D. C.



### Municipal Bonds— The Premier Investment

No security is more convenient, being free from the Federal Income Tax. No investment is better secured, having the faith, credit and taxing power of the issuing community

behind it. For these reasons a ready market always exists.

There is a reason why the Government accepts only Municipal and Government Bonds to secure Postal Savings Deposits. Experienced Investors will tell you why this is—the safety of the investment.


Our free booklet N-12, "The Premier Investment," describes these securities in detail. Write the nearest office for it.

### William R. Compton Company

New York 14 Wall Street Chicago 105 S. La Salle Street

Municipal Bonds

St. Louis 408 Olive Street Cincinnati 102 Union Trust Bldg.

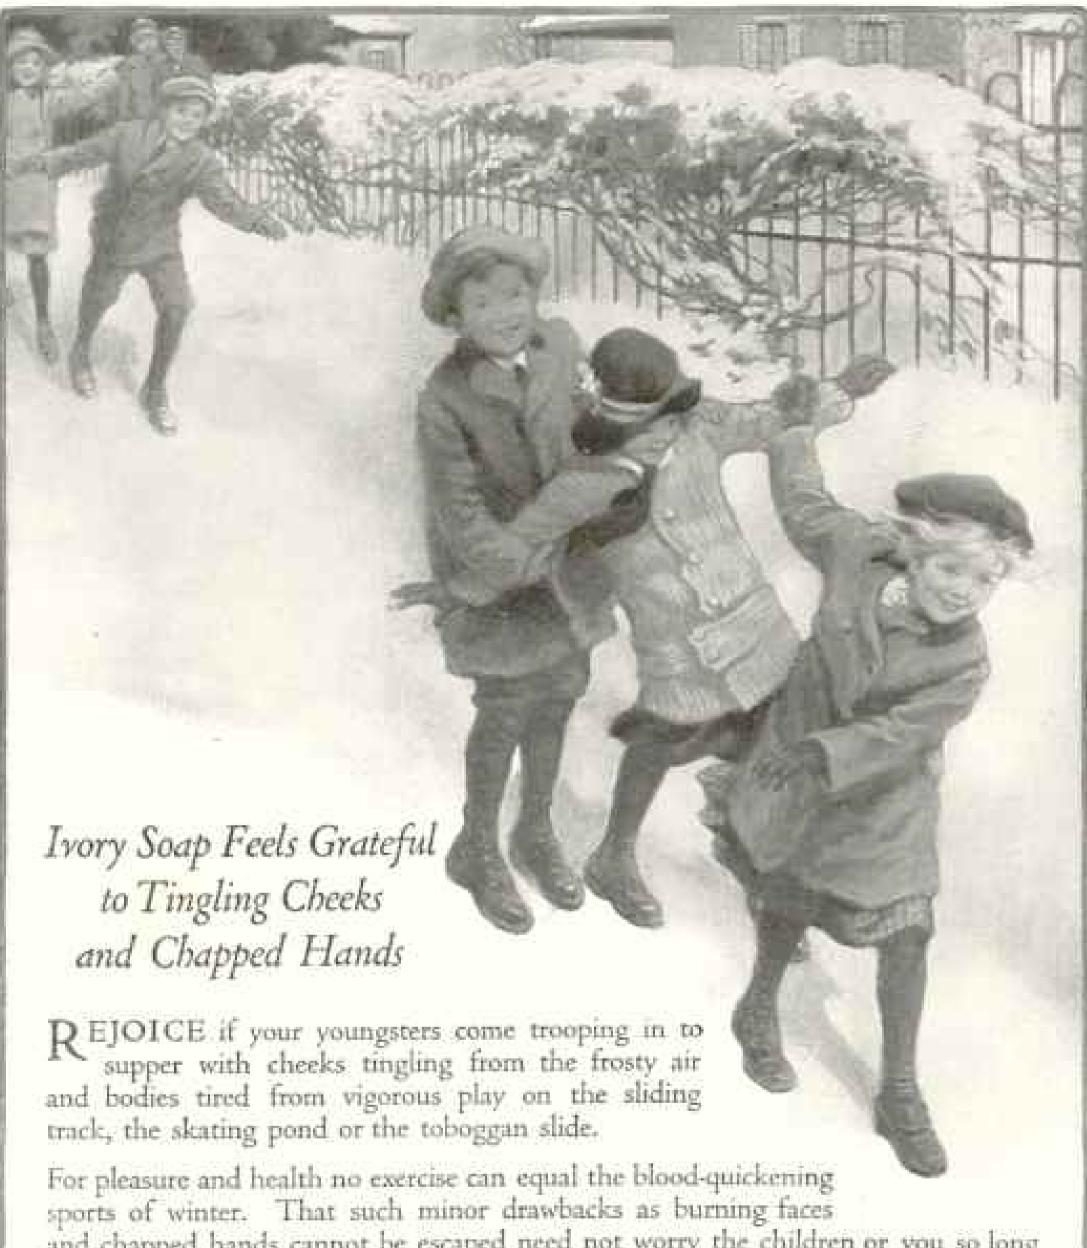


and chapped hands cannot be escaped need not worry the children or you so long as Ivory Soap is in the house.

No matter how sensitive their skins, it will be no hardship to bathe with Ivory. Because it is free from uncombined alkali and all harsh materials Ivory Soap feels as mild and grateful to a smarting skin as to one not affected by the cold.

IVORY SOAP... 99#% PURE



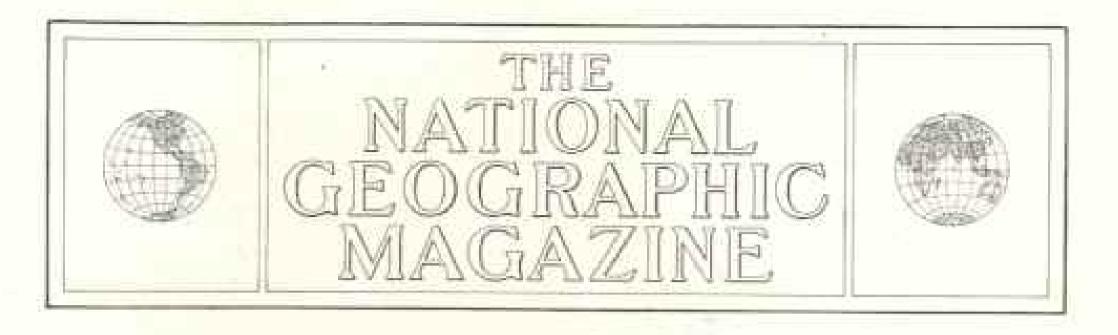

### LONELY AUSTRALIA: THE UNIQUE CONTINENT

BY HERBERT E. GREGORY

USTRALIA is the most isolated of all inhabited continents and is remote from the center of all of the world's activities. Northward the sailing distance to Japan is approximately 3,000 nautical miles; to India, 2,500 miles. South America is 7,000 miles to the east; and Africa an equal distance west.

From London to the capital of Australia ships by the Suez route traverse approximately 11,000 miles of water and by the Panama Canal, 12,734 miles. From California ports the routes via Samoa, or Fiji, or Tahiti cover a quarter of the circumference of the earth. Australia's only large civilized neighbor within a

radius of 1,000 miles is Java.

The continent, lying thus far outside the ordinary routes of travel, is rarely visited by Americans. For most of us knowledge of this fascinating land is obtained by a study of a few pages in the back of school geographies—pages descriptive of "Australia and New Zealand" and accompanied by a map of "Australia and the Islands of the Pacific" on a scale too small for the recognition of significant features.

### AUSTRALIA AND NEW ZEALAND ARE UNLIKE


One of the first surprises awaiting the tourist from the Northern Hemisphere is to find that Australia and New Zealand may not be grouped as two islands of

like appearance, differing mainly in size; near neighbors which may be treated as a unit. New Zealand is nearly twice as far from Australia as Bermuda is from New York, and is not only east but also south.


Four days' travel across a chilly sea is required for the traverse from Wellington to Sydney, and after exchanging the chill midsummer climate of the New Zealand Lake region for the heat of Adelaide, one readily accepts the evidence of the map that the southern coast of the Australian mainland has the latitude of central New Jersey, while the southernmost of the three islands which comprise the Dominion of New Zealand occupies the position of southern Newfoundland

(see map, page 477).

In climate and vegetation the two dominions are as unlike as Norway and South Carolina. New Zealand is a land of mountains, gorges, rivers, and fiords. The higher peaks of the South Island are eternally snow-capped and the glaciers of its southern Alps rival those of Switzerland. The surrounding seas are too cold for corals. Among the mountains of the North Island volcanic fires are still active and the geysers and hot springs are little less impressive than those of the Yellowstone Park. The aboriginal inhabitants of New Zealand, at the time of their discovery by Captain Cook, were the most advanced of all the South Pacific races,

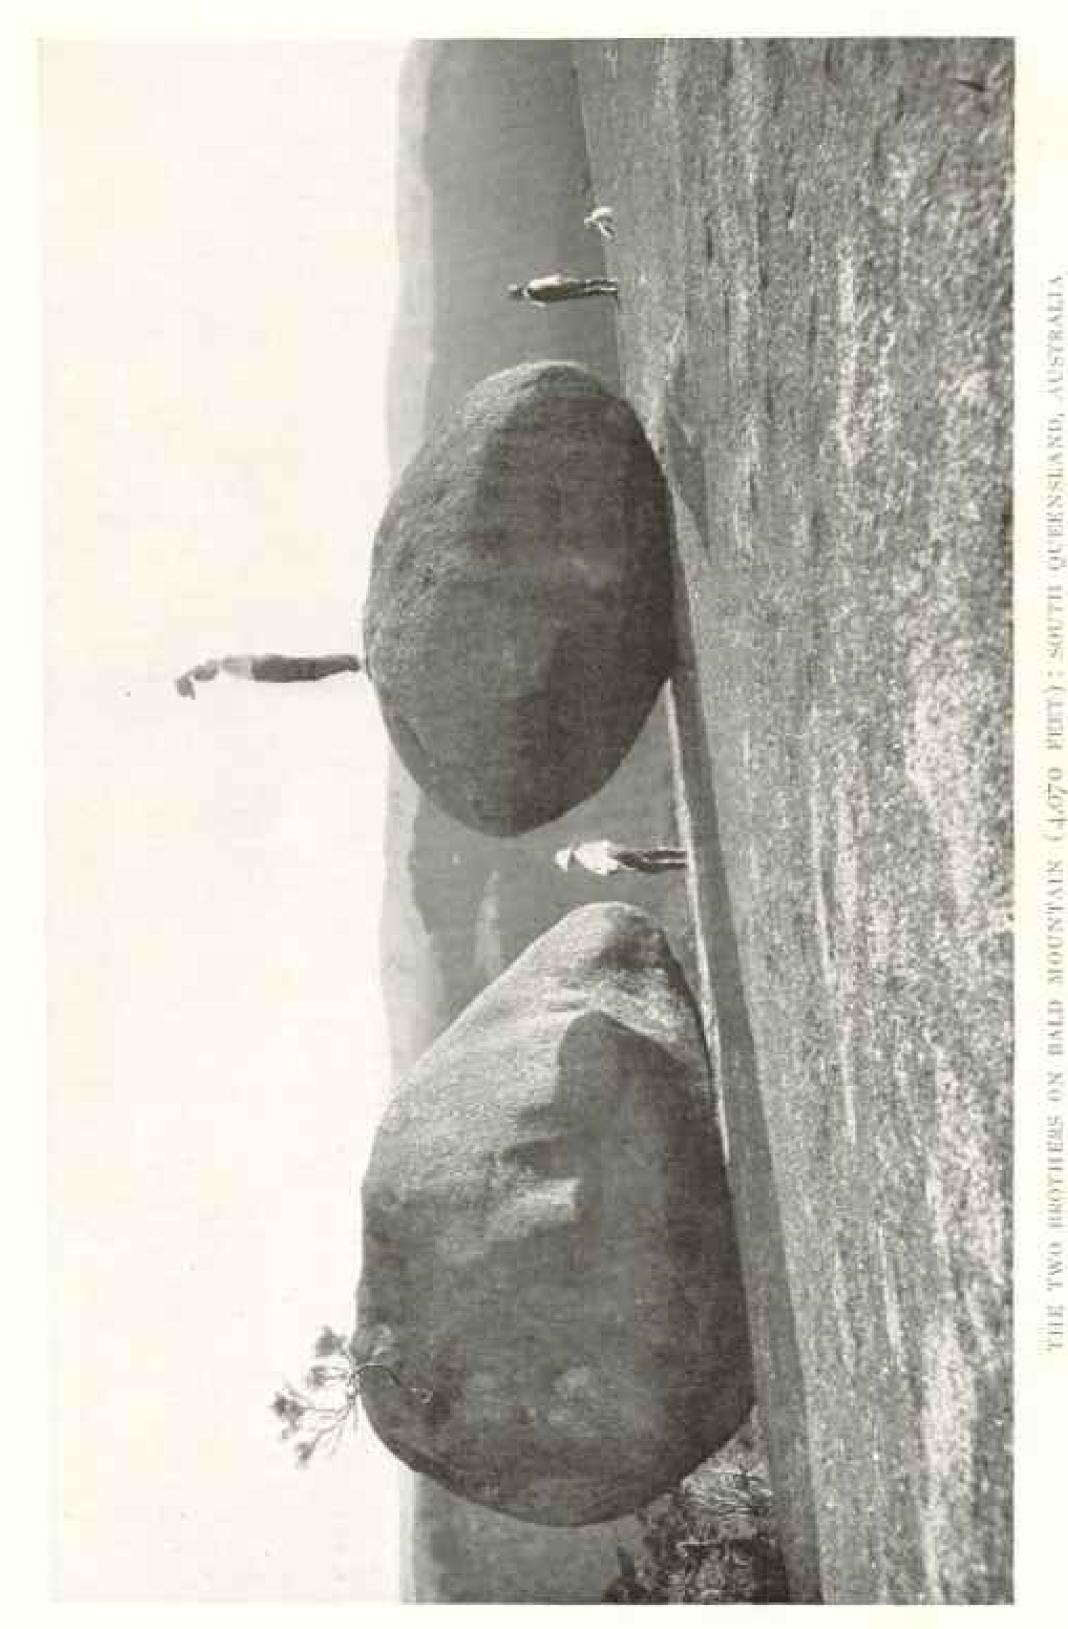

appear in contrast with the white man. While the Caucasian history of Australia is only a little actilement in 1788, when Botany Bay was colonized, its geological history ranks with the oldest There relies of a hygone guotogic age here over a hundred years old, dating from the first on earth.

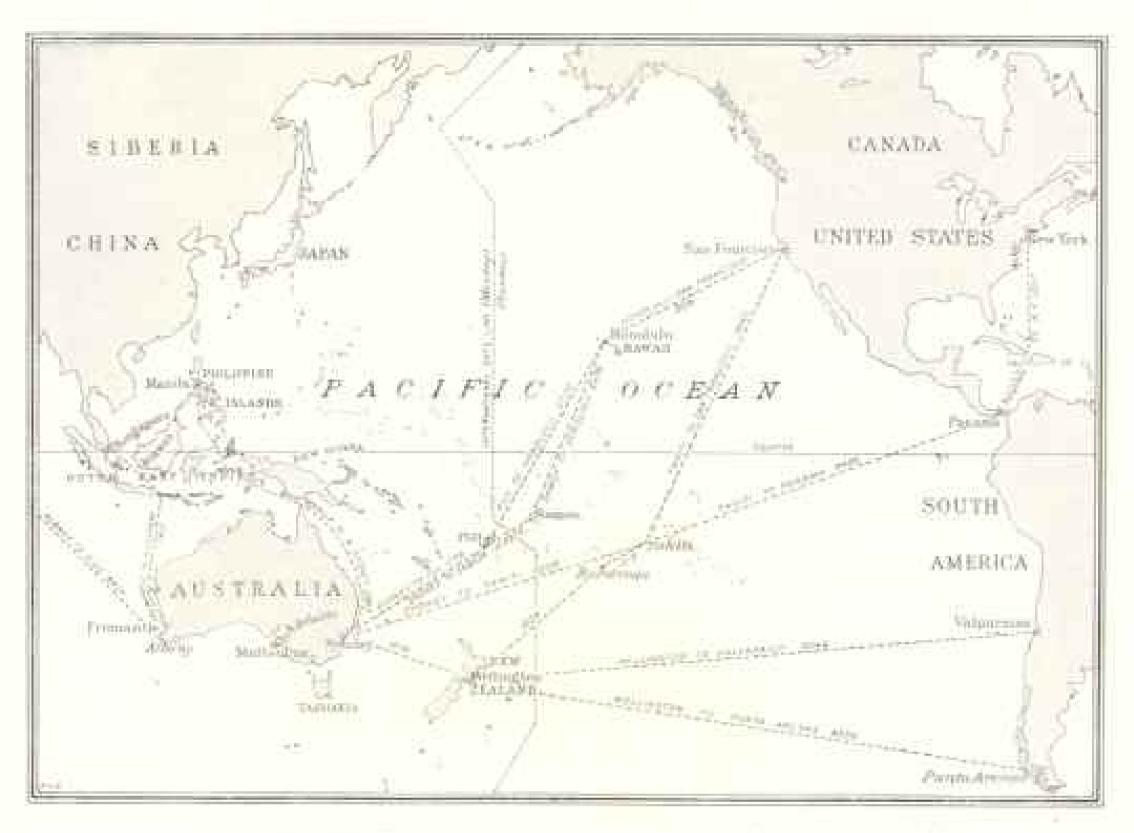

MAR SHOWENG THE ESOLATION OF AUSTRALIA (SEE PAGE 474)

while the aborigines of Australia are the lowest in intelligence of all human beings.

Australia is in no sense inferior to New Zealand in geographic interest, but lofty peaks, profound canyons, and active volcanoes are lacking; its rivers are unimpressive and its permanent lakes small and few in number; it is a continent composed of plains interrupted by ridges and mountain knobs.

Unique vegetation of remarkable variety and beauty (see page 486), animal life of by-gone geological periods (see page 502), and an aboriginal population, the lowest in the scale of beings having human form, stand out as features distinctly Australian—a never-ending source of interest to the geographer.

Australia is a large country. It is about fourteen times the size of France or Germany, twenty-five times the size of Italy, Hungary, or Ecuador, and two and one-half times the size of Argentina! its chief competitor in the Southern Hemisphere. Its area is equal to three-fourths of Europe, one-third of all North Amer-


ica, and one-fourth of the British Em-

SOME COMPARISONS WITH THE ENTED STATES.

The continent is almost exactly the size and is nearly the shape of the United States (see map, page 476).

Of outlying provinces, Australia has the tropical land of Papua to offset arctic Alaska. The Commonwealth is responsible also for the rich little Lord Howe Island and for 800 inhabitants of Norfolk Island, descendants of Tahitian women and British sailors—mutineers of the famous ship Rounty.

Australia is the most level in surface and regular in outline of all the continents, and even of most large islands. It is also the lowest continent, with an average elevation about that of Ohio. Its surface lacks variety. The change from one type of topography is so gradual and significant natural features are so few and so widely spaced that, with the exception of the Murray River, they are

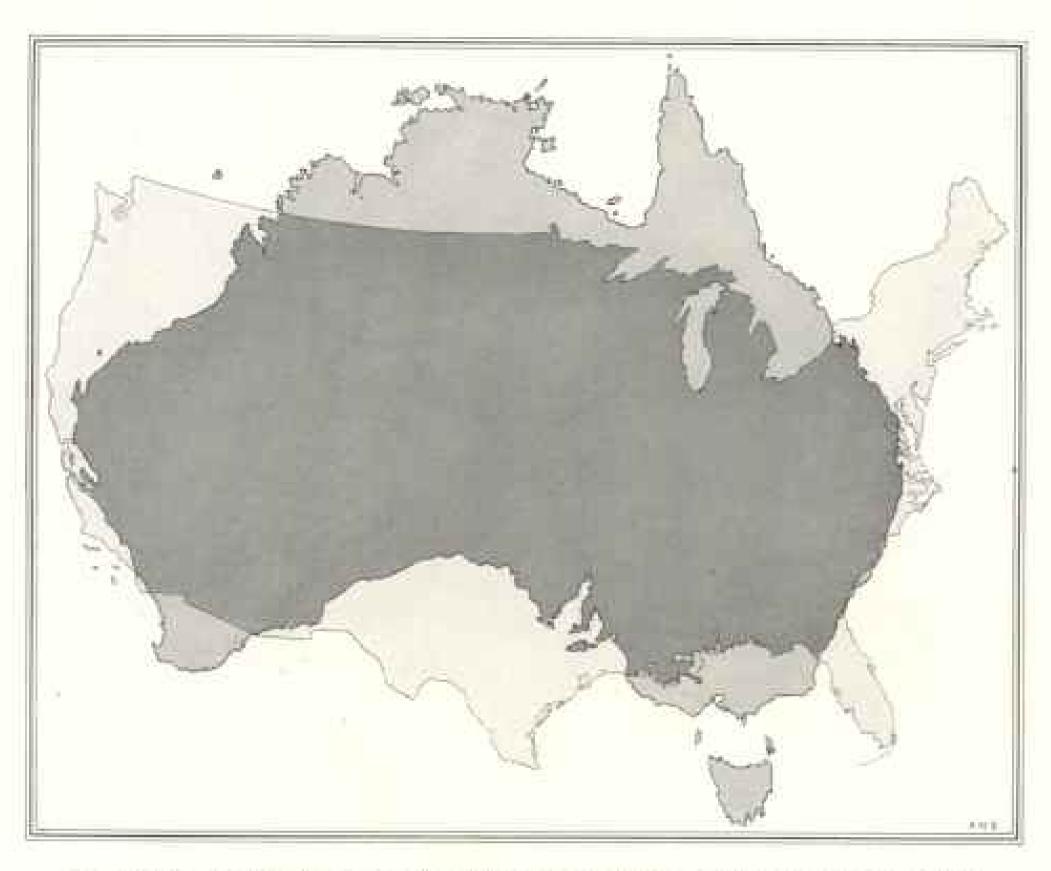

OUTLINE MAP OF AUSTRALIA ON OUTLINE OF THE UNITED STATES, TO SHOW RELATIVE SIZES

If we except the lakes, the land area of the continental United States is 2,073,800 square miles, and of Australia 2,074,581 square miles, a difference in favor of Australia of 691 square miles.


not utilized in marking the boundaries of States.

Except for the low coastal mountains, the obstructions to transcontinental railroads from Queensland to Perth or from Port Augusta to Port Darwin are less than those between Pittsburgh and Denver (see also page 489).

The traveler in search of duplicates of the Canadian Rockies, the Yosemite, the Grand Canyon, of Norwegian fiords and Alpine scenery, need not visit Australia. Its mountain scenery is that of the southern Appalachians, the White Mountains, and the low ranges of Arizona. Its plains and plateaus are comparable with those of the Rocky Mountain foothills and the arid expanses of Utah, Idaho, and Oregon. The blunt granite cap of Mt. Kosciusko, 7,328 feet above sea, is the culminating point of land. A half dozen peaks reach the height of Mt. Washington, and something like one per cent of the entire land area rises as high as the Catskills.

Although the mountains are low compared with those of other continents, their influence is great, for nowhere is their control of rainfall and consequent distribution of vegetation and people better exemplified. A bird's-eye view of Australia shows a belt of vegetation extending along its north, east, and southeast edges, with a patch on the extreme southwest corner and another covering most of the island of Tasmania. In these regions the people live. The remainder of the big island presents an enormous expanse of brown and gray soils and rock, dotted with patches of vegetation on dunes and on isolated highlands and strips of green along watercourses.

The cause is not difficult to find. The trade winds abundantly supply the north-east coast, but carry little water beyond:

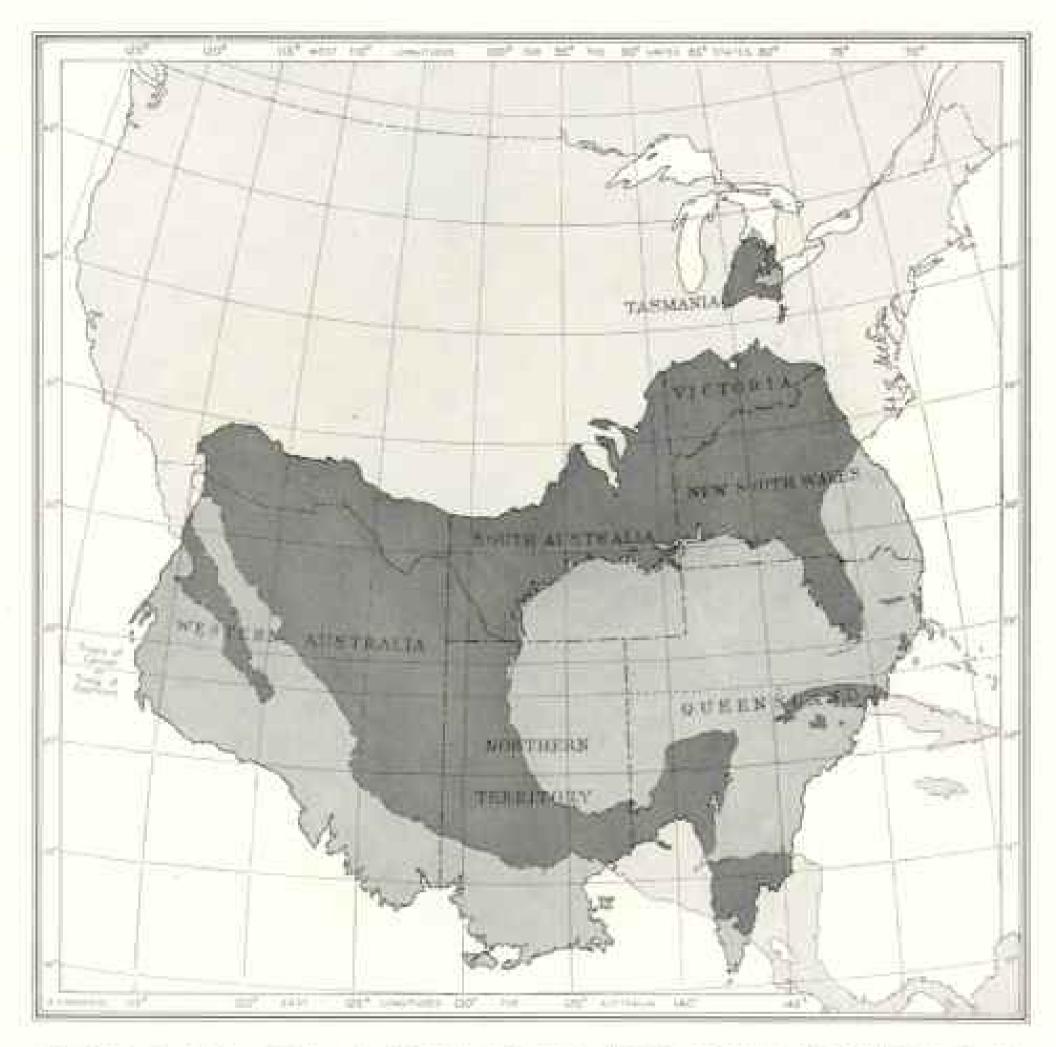

OUTLINE MAP OF AUSTRALIA SUPERPOSED ON OUTLINE OF PART OF NORTH AMERICA OF SAME SCALE, IN CORRECT LATITUDE


Only one-twentieth of the total area of Australia lies in a latitude farther removed from the Equator than Chattanooga, Tennessee, Clarendon, Texas, and Albuquerque, New Mexico. Considerably less than one-third of its area lies in a cooler latitude than the sugar-cane lands of Louisiana.

the westerlies, the "roaring forties" of the sailor, deposit their moisture on the lands along Bass Strait and on the southwest tip of the continent, but have little or none to carry inland. The north coast is alternately drenched and dried with the coming and going of monsoons. The center of the continent is therefore arid, large parts are desert, and the numerous large lakes shown on the map are expanses of salt mud covered with water by infrequent rains (see page 488).

Australia's streams are fewer and carry less water than those of any other continent.

AUSTRALIA HAS NO RIVERS LIKE OURS

There are in Australia no Colorados or Columbias or Tennessees, trenching plateaus and crossing mountain chains, and no counterparts of the thousands of spring-fed brooks and streams issuing from lakes widely scattered over the country. The St. Lawrence system of lakes and rivers of large volume and steady flow is the very antithesis of anything found in Australia. The large area in Utah and Nevada from which dwindling streams never escape to the sea is represented in Australia by an enormous

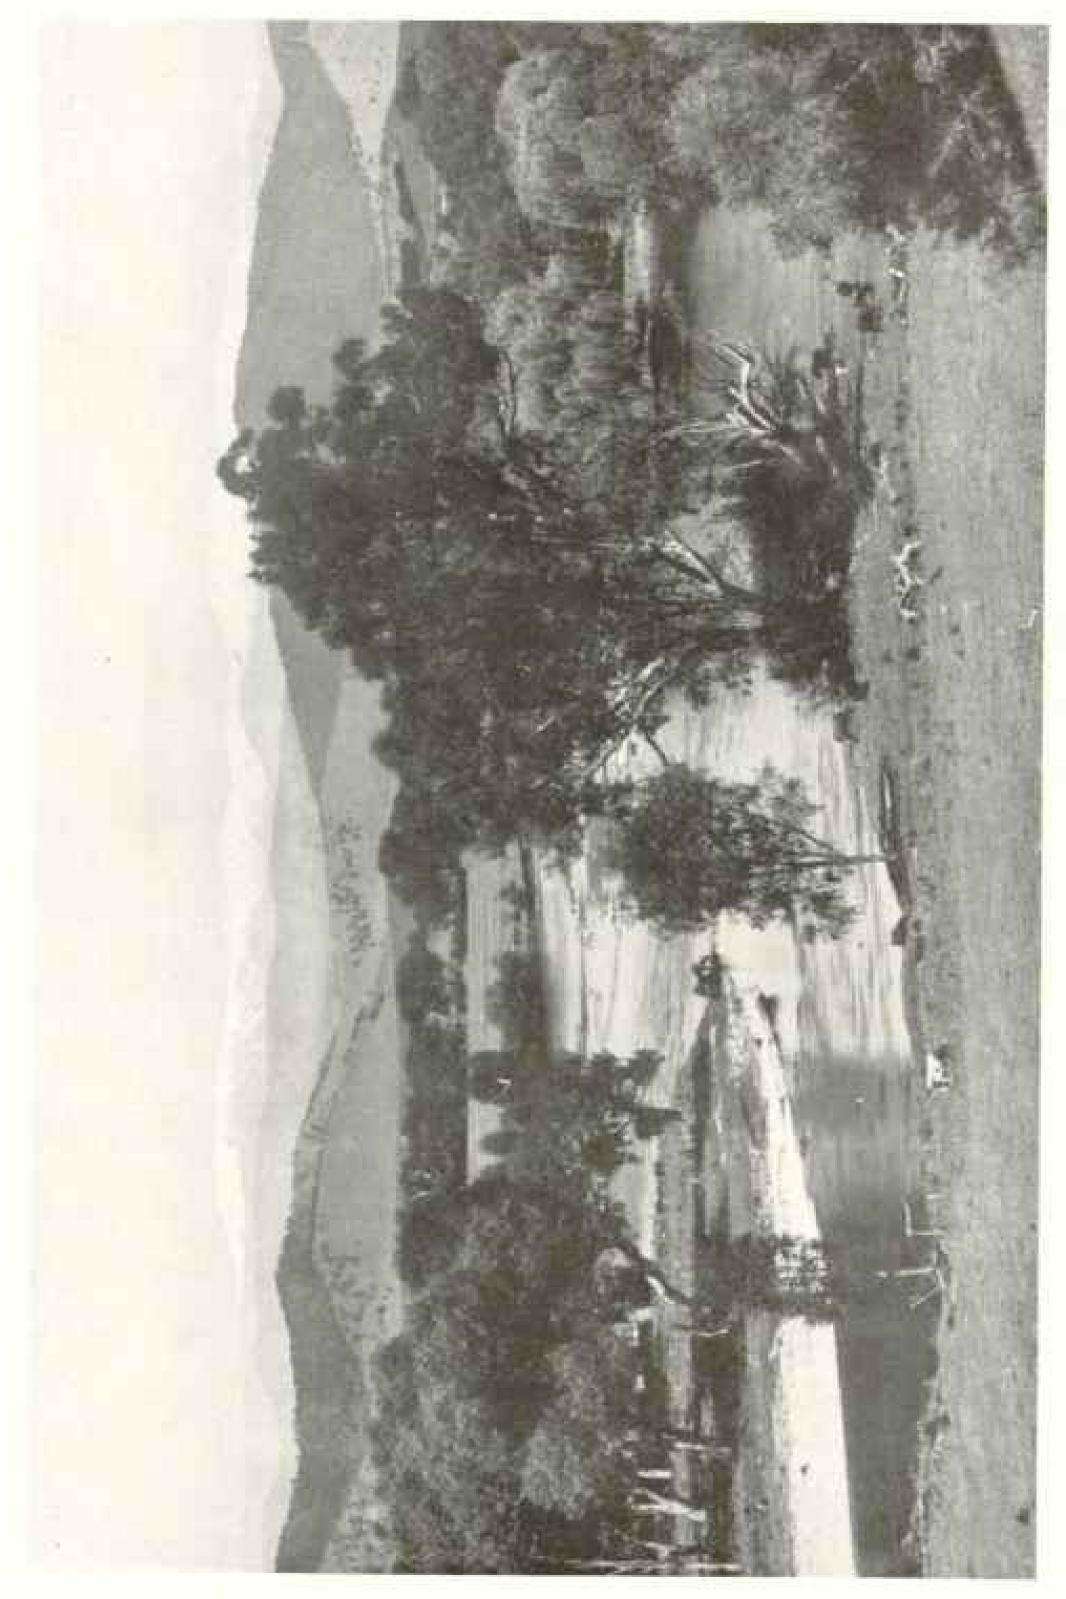

, MOUNT ROBEIUSKU (7,328 PEET), AND THE UPPER AUSRAY RIVER: VICTORIA THE HIGHEST PEAK IN AUSTRALIA

expanse of territory, comprising fully half of the continent.

The heart of the United States is a well-watered land of fields and woods and cities; the corresponding part of Australia is dry and barren and thinly

populated.

The Murray-Darling is the one great river system of Australia. From the source of its uppermost branch, the Condamine, in the highlands of Queensland, So miles from the edge of the continent, to its mouth, through the sand reef of the Coorong, the stream travels 2,310 miles, receiving supplies from 414,000 square miles of land. It drains five-sixths of New South Wales, more than one-half of Victoria, and nearly one-seventh of the entire Australian Continent (see map on

pages 480-481).

In relative length and area drained, it is the Missouri-Mississippi of Australia; but in other respects the two systems are quite unlike. The Mississippi, whose basin occupies nearly three-sevenths of the United States, flows through the heart of the country and receives abundant water from mountains on either side. The Murray is on the edge of the continent, far removed from the interior; its course lies between well-watered highlands on the east and arid plains on the west. The Mississippi receives supplies from nearly every part of the 1,250,000 square miles of its basin; the Murray receives effective contributions from only 160,000 square miles; from the remaining 254,000 square miles the water is lost before it enters the main stream, and the dry air abstracts further toll from the river itself.

Instead of a delta pushed out to sea, the Murray terminates in a lagoon inclosed by a barrier of sand pierced by an inlet with scarcely seven feet of water.

Because of its unfavorable outlet, its small volume, its snags and sand-bars and great sinuosities, navigation of the Murray is limited to small, light-draft steamers towing one or two barges. Regular traffic in grain and wool is maintained during seven months of the year from the mouth of the river to Wentworth, 500 miles, and small boats reach Albury.

During times of exceptional floods

boats have reached Walgett on the Darling, 1,900 miles from the sea. In the flood year of 1870 a steamer went beyond the Queensland border along a river 60 miles wide, and in 1890 steamers on the Darling between Wentworth and Burke "traveled for hours without seeing any land, and in one instance discharged cargo 25 miles from the ordinary channel of the river." But a few years later (1902-1903) the Darling ceased to flow for eleven months. During exceptional years the bed of the Murray is partly dry and the waters near its mouth become too salt for stock.


### THIS GREAT CONTINENT WAS NOT DISCOV-ERED UNTIL JUST BEFORE OUR REVOLUTION

That the size and form of a land-mass nearly as large as Europe should have remained unknown until 1770 is most remarkable.


Louis de Torres, sailing from Peru (1606), thought the northern Queensland coast another of those island groups (Marquesas, Solomon, New Hebrides) through which he had passed. The Dutch proceeding from Java several times met the west and north of Australia, but learned little regarding the land. They reported a "barren," "wild" country, inhabited by "barbarous," "cruel," "black" people. Abel Tasman, in 1642, found Van Diemens Land, Tasmania, which he left in disgust. Following the westerly winds he sailed cast, found New Zealand, but missed the Australian coast.

In 1688 William Dampier, an English buccaneer, landed in West Australia, and the following year mapped the coast, which he described as "sandy and waterless," with stunted trees, inhabited by "the miserablest people in the world."

These early explorers were singularly unfortunate in the route which they traversed. They visited the tropical belt of northern Australia, the inhospitable shores of western Australia, and sailed along the southern coast, where cliffs prevented landing and where for a distance of nearly 1,000 miles no water was procurable other than that from their ships. The attractive parts of the country were not seen at all. Small wonder that little

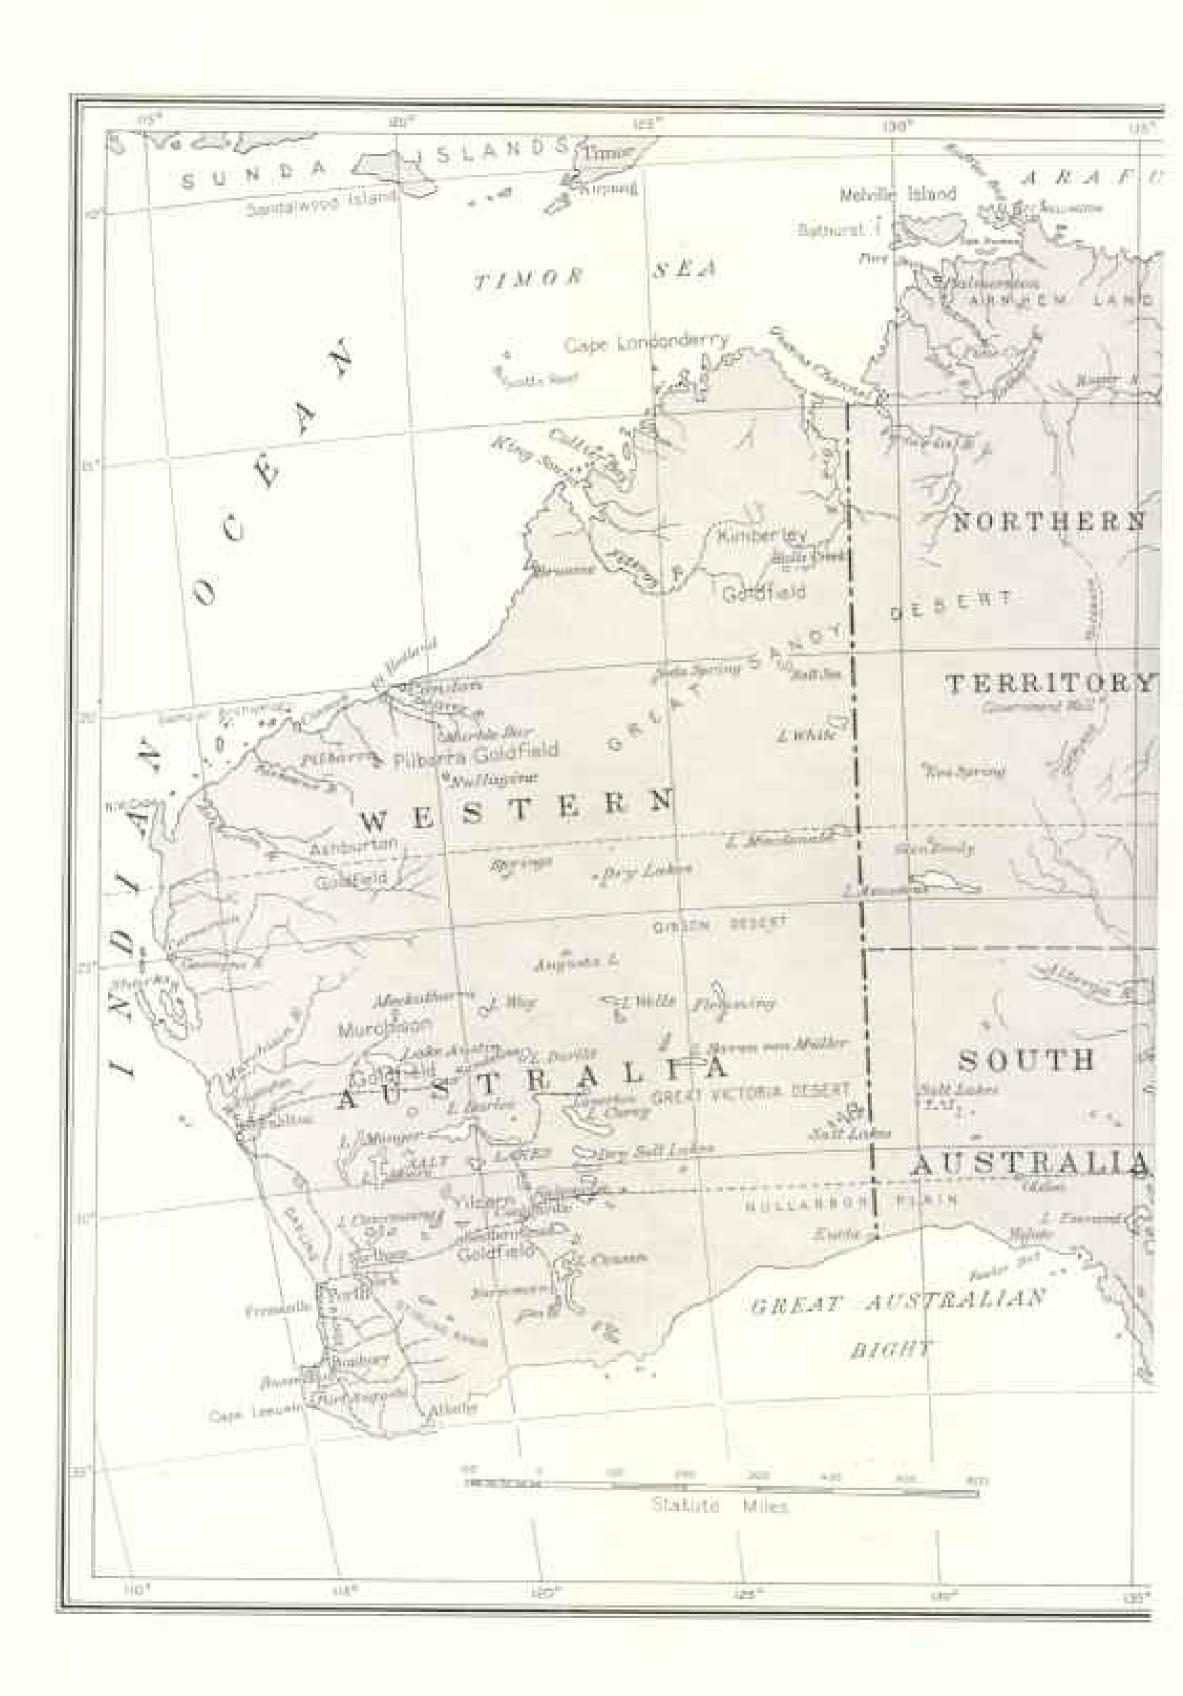




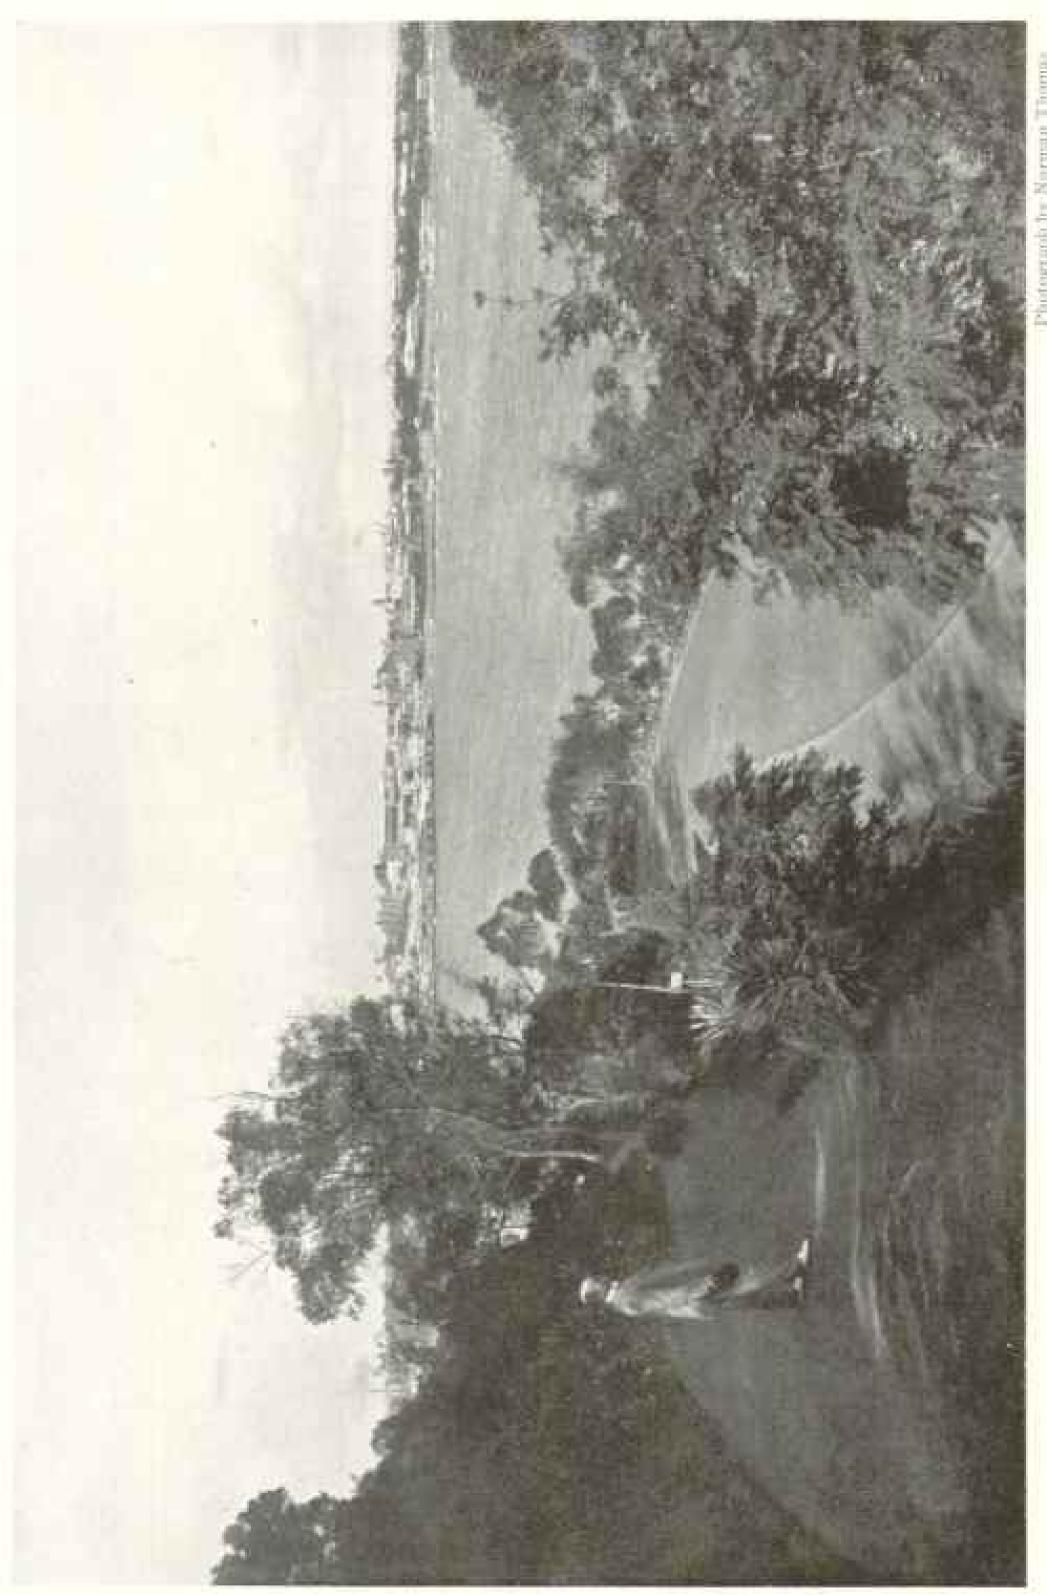

Photograph by Norman Thomas


THE CAPITAL OF WEST AUSTRALIA, AND SWAN HIVER PERTH

Upon the opposite edge of the Australian Continent, 2,000 miles almost due west from Sydney, is Perth, the capital of Western Australia, a city of perhaps so,000 inhabitants. A little to the south is Cape Leeuwin, the first land seen by the traveler sading to Australia via the Suez Canal and through the Indian Ocean, which received its name from the little Dutch thip which discovered it, the name of whose commander is lost (see map, pages 489-481).

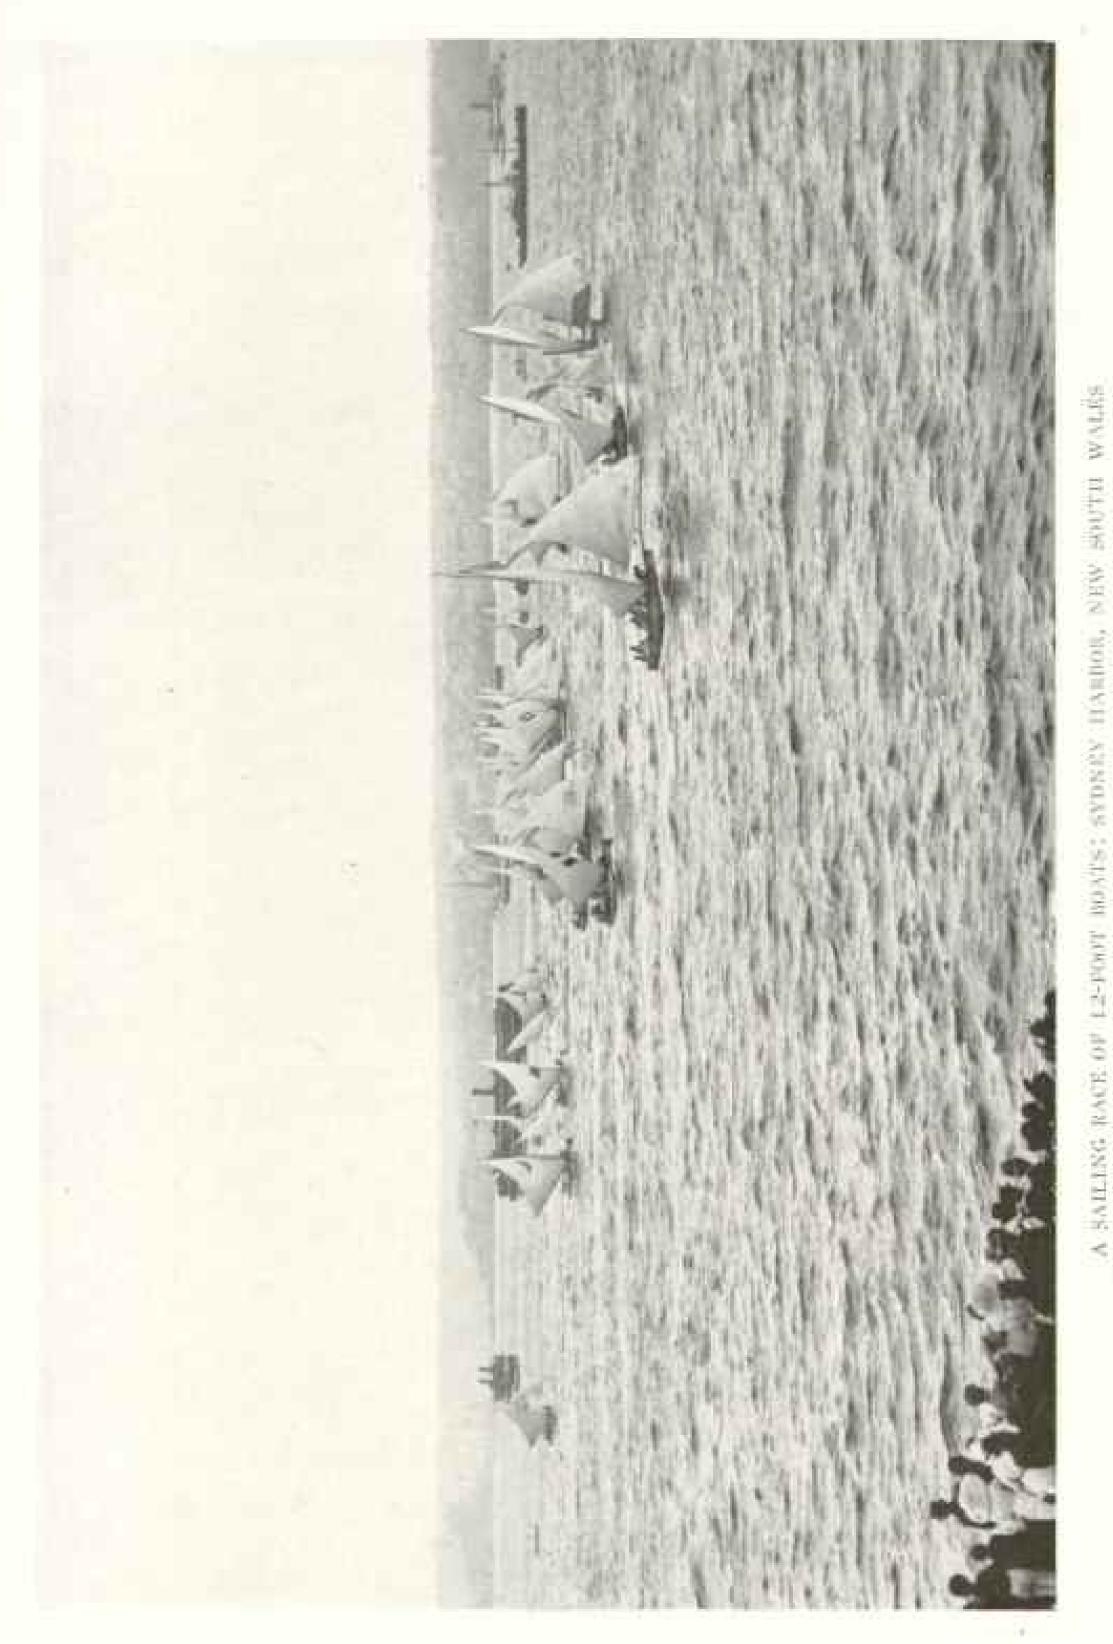

A SAILING RACE OF 12-PONT BOATS: SYDNEY NEW SPUTTI WALKS

The history of Australia begins with the year 1788, when 1,035 convicts were landed at Sydney Cove, the first settlement of white men on the continent. In natural advantages Sydney's harbor is unsurpassed on the North Atlantic coast (see page 485).

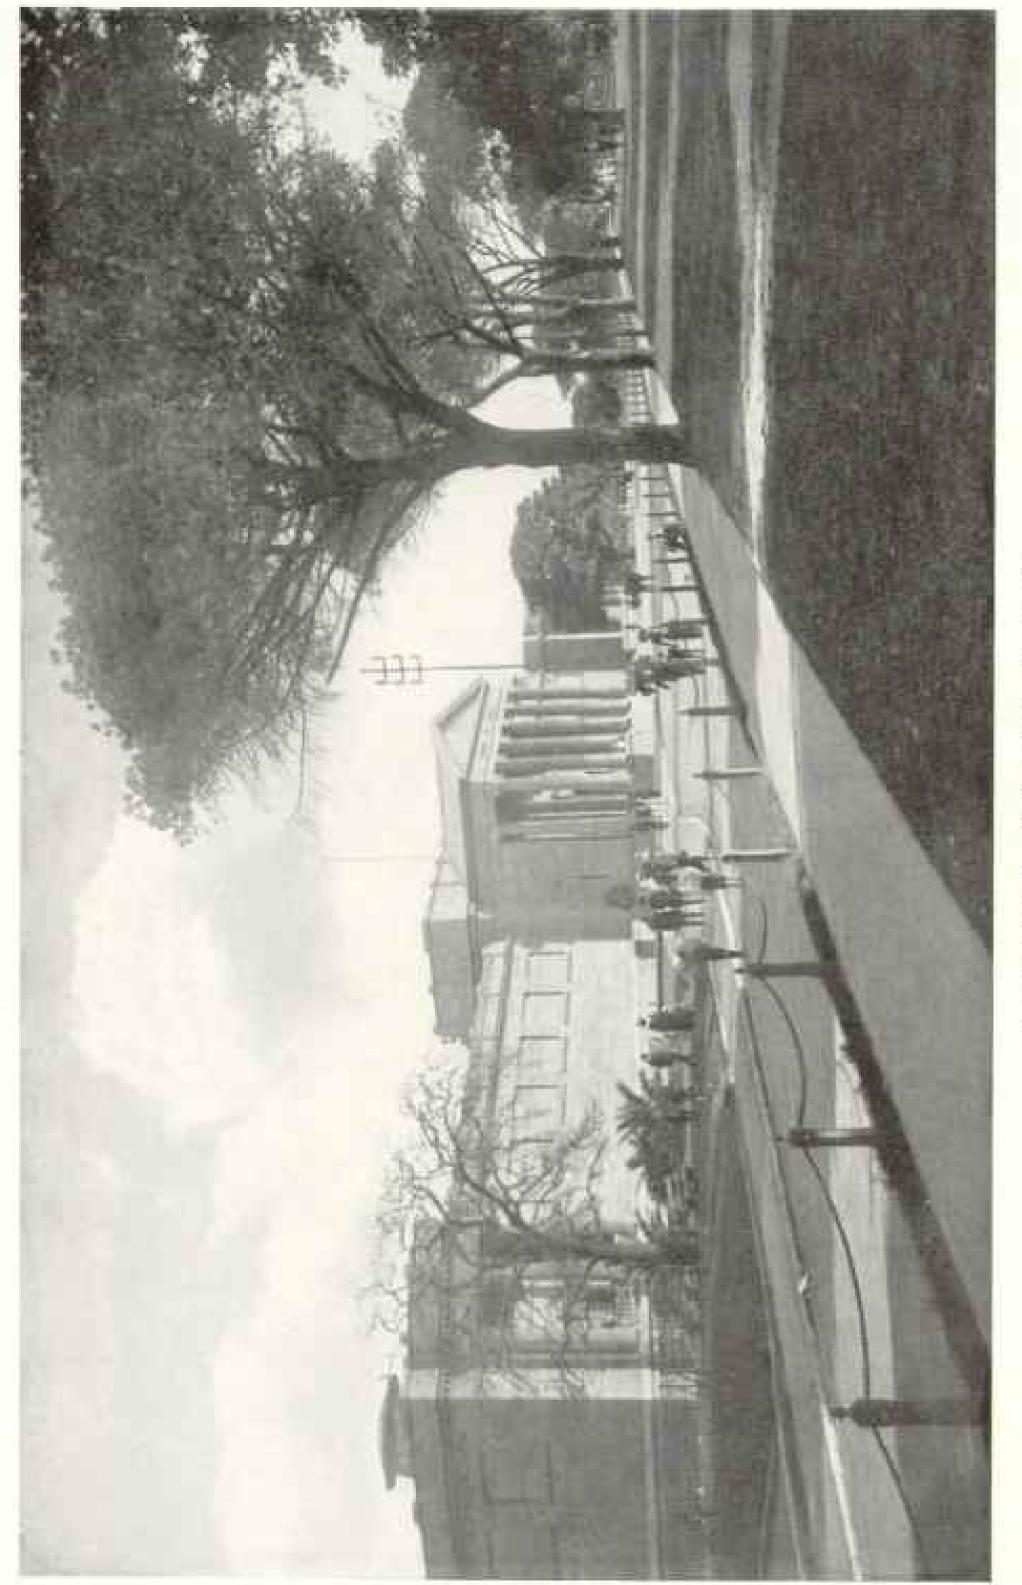

THE MATIONAL ART GALLERY OF SYDNEY

Sydney is the seventh city in size in the British Empire, being exceeded only by London, Calcutta, Bombay, Glasgow, Liverpool, and Man-chester, it is about the nice of Boston of St. Louis, two of the five largest cities of North America. Its population is exceeded in the South era Hemisphere only by Buenos Aires and Bio de Janeiro.

was heard of the Great South Land for nearly one hundred years after Dampier made his official report to King William.

One is minded to compare the experiences of these Pacific navigators with
those of the discoverers of North America. The English and Dutch, like their
predecessors, the Spanish, found the
North Atlantic scaboard "pleasant land,"
well watered, clothed with vegetation,
with obviously fertile soil, inhabited by a
virile race. If Columbus had first landed
on the barren shores of Lower California,
explored the Gulf of California, and sent
scouts into the Sonoran and Gila deserts,
the story to be told of a new world would
have had a far different wording.

The uncertainty surrounding the distribution of land in the South Pacific was dissolved by the English scientific expedition of 1768-1770, under Captain Cook. After circummavigating the islands of New Zealand, Cook set his course westward toward Tasmania, but, luckily, was carried by storm winds to the east coast of Australia. Proceeding northward, he discovered the Great Barrier reef, and passed through Torres Strait, proving Australia to be a land-mass of great dimensions. Cook's expedition revealed for the first time the presence of wide belts of fertile land in Australia, and his landing at Botany Bay, Sydney, April 28, 1770, was destined to result in acquiring a continent for the British Crown.

### THE SETTLEMENT OF AUSTRALIA RESULTED FROM THE AMERICAN REVOLUTION

Curiously enough, the establishment of the first colony on the new-found continent is an episode in the history of the United States. It was proposed by the British Government to utilize the land as a home for the "Loyalists" (Tories) who found life in the American Colonies uncomfortable at the close of the Revolutionary War. They were to be supplied with land and money, and Malay slaves or English convicts were to be provided as laborers.

Fear of the French fleet and the removal of many Tories to Canada led to the abandonment of this scheme, but another use for Botany Bay was soon discovered. Place must be found for undesirable citizens, who, before the Revolution, had been sent to America at the rate of one thousand a year, and New South Wales met the requirements. The history of Australia begins with the year 1788, when ten hundred and thirty-five convicts under military escort landed at Sydney Cove.

In looking back over the history of the original settlement at Sydney, at first it seems strange that the base of the Blue Mountains, a plateau 3,000 feet in height and a day's ride from the coast, should mark the edge of known land for twenty-

five years after colonization.

There are, however, good reasons for this seeming lack of enterprise. The Blue Mountains, though not lofty, are broad, and constitute a formidable barrier. There are no long valleys heading in practicable passes and furnishing access from the east and the west; the stream heads are boxes inclosed by walls, and it was only when the narrow divides were chosen for causeways that the passage of the mountain was successfully accomplished (see page 487).

The famous "zigzags" of the first railroad, now replaced by a dozen expensive
tunnels required for the precipitous descent of 2,000 feet, give even the casual
tourist an impression of the ruggedness
of the plateau; and when one is led out
onto one of a hundred flat-topped promontories and gazes down into canyons
whose walls may be scaled only by an experienced mountaineer and looks out over
a tangle of canyons and cliffs and tables
at lower levels, he realizes that "magnificent scenery" for the present generation
must have been "disheartening obstacles"
to the scout in search of tillable land.

It is as if the only feasible crossing of the Appalachians which confined the American colonists to the coastal belt were through the most rugged portion of West Virginia rather than along the Mohawk or through the Cumberland Cap.

The drought of 1813 appears to have been the force which compelled the leaders of the now prosperous colony to undertake a systematic search for new lands among and beyond the barriers which held them close to the sea.

The history of the effort to discover what lay back of these coastal regions in the "land of the never-never"; to find the

nature and extent of the heritage now firmly in English hands is a disheartening but fascinating story. Whatever route was chosen the results were the same: tales of hardship and disaster and reports of no good land.

#### TALES OF UNSURPASSED COURAGE

One of the most dramatic incidents was the discovery of the Darling River by a group of worn-out, disheartened men traversing a scorched, waterless plam. A great river was found, but its waters were salt! The experience of Sturt's men carried involuntarily through the gorge of the Murrumbidgee into the broad channel of the Murray; their journey to the sea down an unknown river which followed an undreamed course, and their arduous return up 800 miles of current, with the scantiest of fare and amid bostile blackfellows, constitutes a record of endurance and resource comparable with Powell's descent of the Colorado canyons:

Parties from Sydney found little of value beyond the Darling; Bourke and Wills from Melbourne perished of starvation on Cooper Creek. Leichhardt disappeared utterly. From Port Lincoln and Adelaide, Eyre traversed the coast of South Australia, finding only three waterholes in 300 miles, and penetrated to the center of that State only to discover its watercourses dry and its lake beds coated with brine. Stuart, in 1862, succeeded in making a complete traverse of the continent from south to north, but found little on which to base the nation's future.

From the tropical portions of the Commonwealth came the same tale. The settlement established on Melville Island in 1824 was abandoned in 1829, in spite of the rich soil, good surplus of fresh water, and abundance of tropical fruit. Fort Wellington, on Raffles Bay, retained its colonists for only three years. Kennedy, on York peninsula, was killed by the natives; his companions starved to death.

As a record of human endeavor the explorations of Australia during these years constitute a chapter in history for which the United States has no parallel. The pioneers who crossed the Alleghanies found fertile country beyond; the trappers and traders on our northern boundaries were in country abundantly supplied with food and water; the men who pushed their way across the great plains had forage and water for their animals and wild game for themselves. The forty-niners who crossed the deserts of Utah and Nevada were encouraged by knowledge of California beyond. Only the Spanish explorers from Mexico and pioneer travelers through the deserts of Arizona and southern California can appreciate the suffering and understand the failures of the heroic Australian scouts.

To the colonists grouped about the five cities on the mainland the results of these explorations between 1840 and 1860 must have been disheartening. The center of the great continent, which their hopes had pictured as grass-covered plains, fertile valleys, lakes, and timbered highlands, interspersed perhaps with arid stretches, had turned out to be one of the most extensive deserts in the world, into which streams rising near the coast were lost in a sea of rock and sand.


It is as if the people of the United States should wake up some morning and find that all the land between the Alleghanies and the Sierra Nevadas had been converted into plains like the arid stretches of Utah.

However, persistent explorations gradually disclosed to the Australians that their continent, in spite of its arid expanse, had well-watered agricultural lands for many millions of peoples, and that the resources in timber and oces and grazing lands were unusually large.

#### PORESTS OF ANCIENT LINEAGE


To me the most lasting impressions of Australia are of its wonderful woods. One readily understands why the Australian loves his trees. The groves of giant encalyptus form pictures never forgotten, and the scent of the wattle brings a homesick feeling like the smell of the sage to a Westerner.

The flora is not only beautiful, it is unique, and has no counterpart in other lands. Of the 10,000 species of plants most of them are purely Australian, and are unknown even in New Zealand. The general impression one gets of Australian

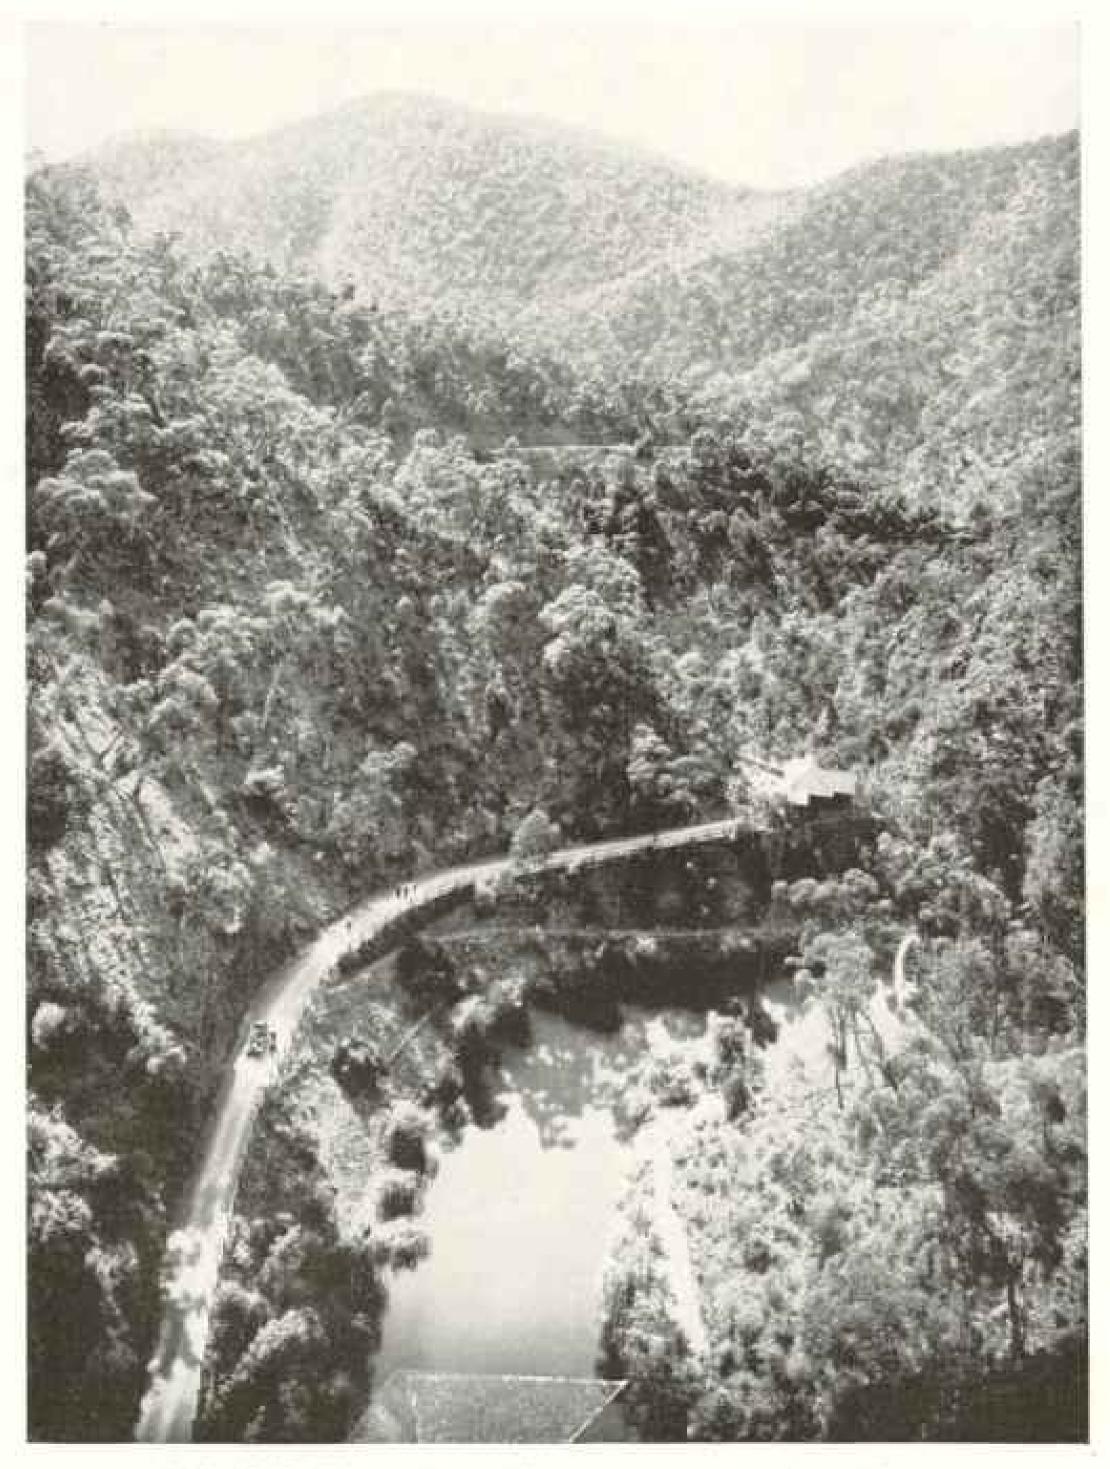

A ROAD SEENE NEAR GRAND ARCH, JENGLAN CAVES, NEW SOUTH WALES

For many years the beautiful Blue Mountains of New South Wales were a barrier to the interior for the early colonists. With many mouths to be fed, an extension of territory became imperative, and an expedition under the leadership of a Kentish farmer, George Blaxland, for whom Mt. Blaxland was named, found a way through the mountains to the fertile country beyond. Now motor-cars glide through these mountains over smooth roads and tourists stop off en route to see the wonderful Jenolan Caves with their remarkable stalactitic formations.

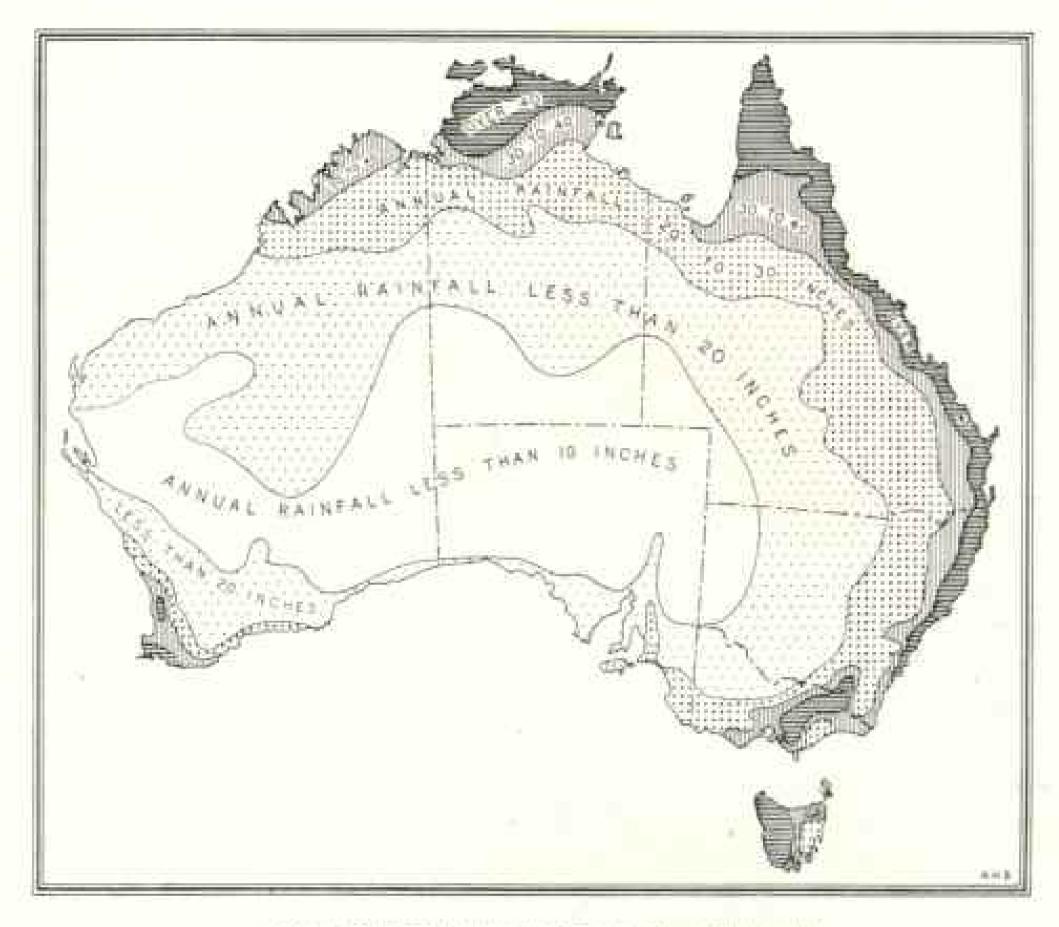

A MAP SHOWING THE RAINFALL IN AUSTRALIA


More than two thirds of the territory of Australia has less than twenty inches of rainfall a year. Washington, D. C., has 43 inches; Boston, 43; Chicago, 33; Kansas City, 37; Atlanta, 49; New Orleans, 57; Denver, 14; San Francisco, 22, and Scattle, 36. Being without high mountains, the continent has no summer snows to molt, which renders irrigation, except by artesian wells, almost impossible. Fortunately the configuration of bedrock makes artesian irrigation possible in many places, though the water so obtained is usually brackish.

forests is their total unlikeness to anything seen elsewhere. The great forests of timber trees are not damp and shaded and all of one species, but are well lighted and filled with other forests of shorter trees; in places the woods consist of large widely-spaced trees surrounded only by bunch grass, and even in areas where water is not to be found on the surface for hundreds of square miles true forests of low trees are present.

Forms which may be recognized as rulip, lily, honeysuckle, and fern take on a surprising aspect. They are not garden flowers, but trees, and the landscape of which they form a part reminds one of the hypothetical representations in books of science of a landscape of Mesozoic time, a period antedating our own by millions of years.

The trees are indeed those of a bygone age. In America and Europe shadowy forms of fossil leaves of strange plant species are gathered from the rock and studied with interest; in Australia many of these ancient trees are living. The impression that one is looking at a land-scape which has forever disappeared from other parts of the world is so vivid that the elms and maples and oaks in some of the city streets strike a jarring note. The transition from Jurassic to modern times is painfully abrupt.

With a flora of such great interest, it occasions no surprise to find that Australia is the home of many eminent botanists,

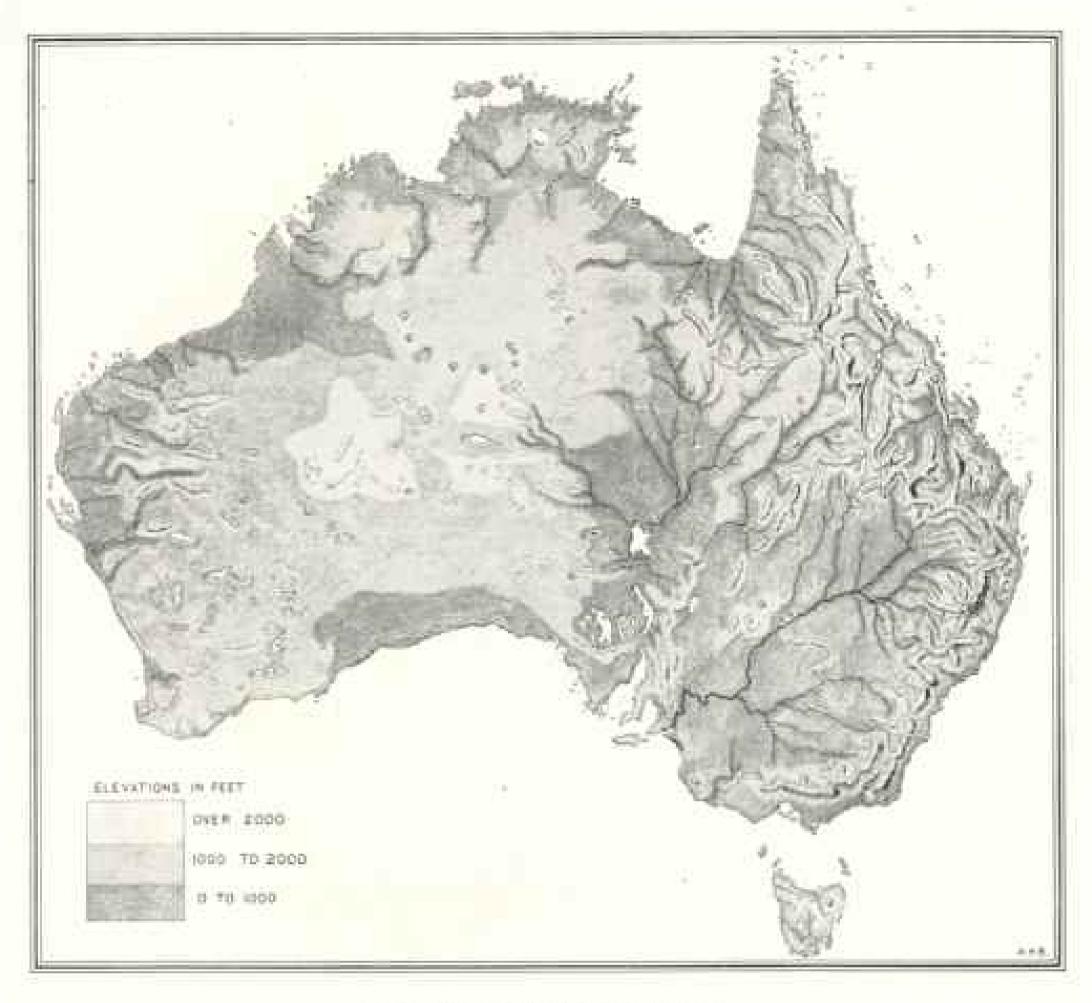

PHYSICAL MAP OF AUSTRALIA

The very small area in Australia having an elevation of more than two thousand feet is clearly shown. Perhaps more striking even than this is the fact that, except for a very tiny area lying back of the coast in the southeast corner, there are no elevations exceeding four thousand feet.


and that geologic history is a common subject of study in schools; but I sometimes wonder why the kangaroo and emu occupy the commonwealth coat of arms to the exclusion of the gums and the wattle, about which the finer sentiments of Australia center.

### AUSTRALIA'S NATIONAL TREE

Australia is the home of the wonderful eucalyptus, a tree about which a fair-sized library of books and pamphlets has been written, without exhausting the subject. For geological ages the eucalypts have remained undisturbed in this "biological backwater," and, spreading over the continent, have adapted themselves to many


varieties of soil and climate and elevation. About 300 species have already been discovered in the small part of the continent explored by botanists.

It is a hopeless task for the tourist to gain an acquaintance with this national tree. As we passed through woods and open spaces, seeing trees of widely different aspect—different in form and method of branching, different in color and kind of bark, different in shape and size and color of leaf, some oozing gum, others clean and dry—it was disconcerting to be quietly told by our botanist-guide that this surprising array of trees "includes only varieties of the genus encalyptus." It is as if the traveler in New England were

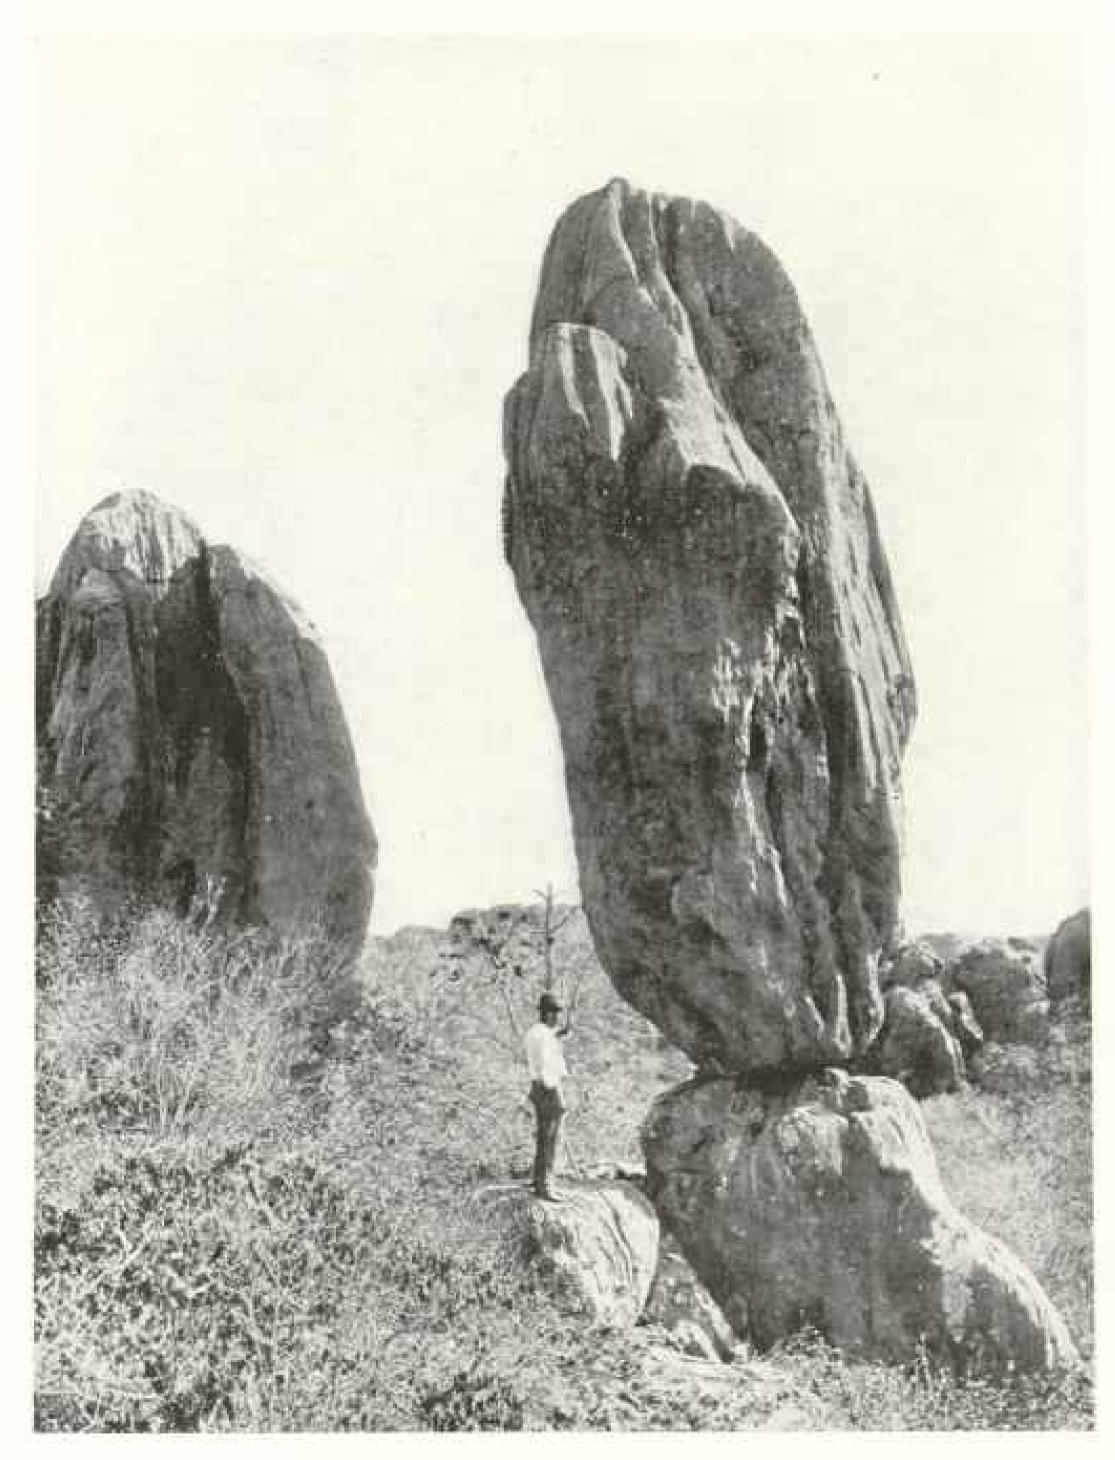

BALANCING ROCK; NEW SOUTH WALES

Australia is a land of the strange and curious, unlike any other on earth. While both its fauna and flora are unusual to a startling degree, its geology is unique. Science claims for it the distinction of being one of the oldest land surfaces.

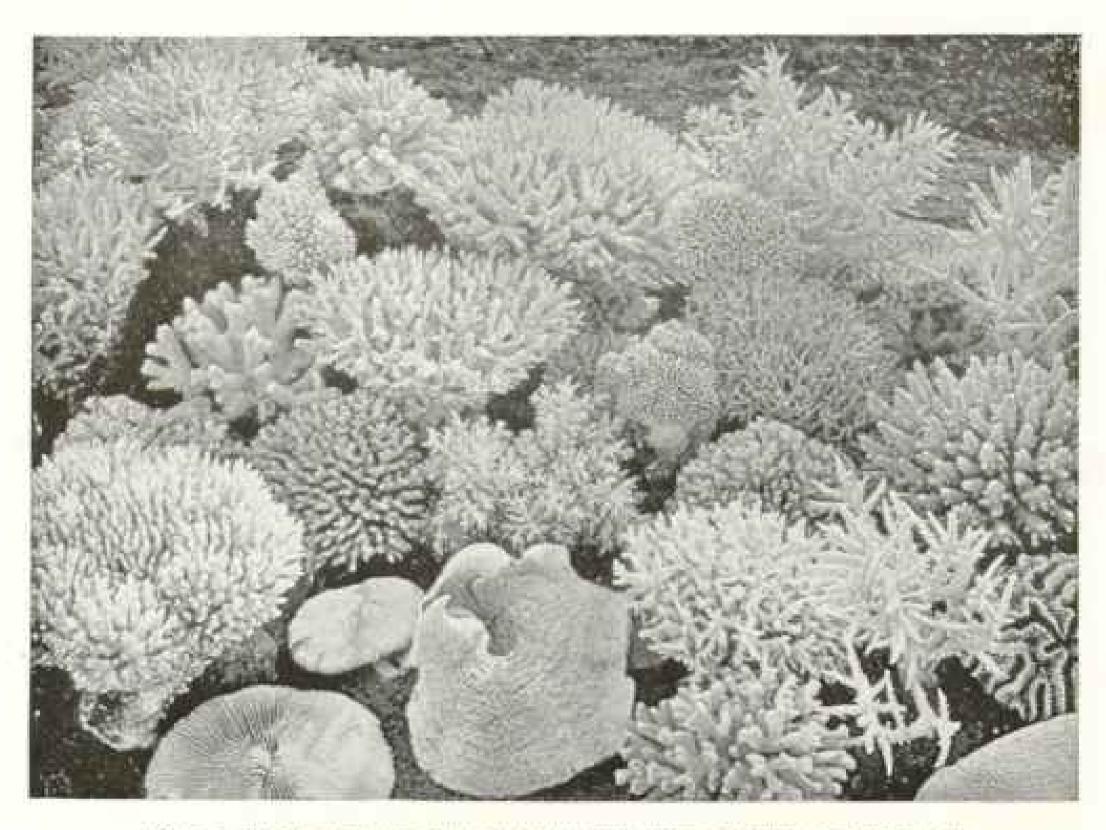

CORALS FROM THE AUSTRALIAN BARRIER BERF, NORTH QUEENSLAND

Ages of time and the lives of myriads of coral polyps have gone to make up countless forms like these in the Great Barrier Reef off the coast of Queensland, the largest coral formation in the world, 1,200 miles in length. The explorer Captain James Cook almost lost his ship on the reef in 1870; but today, when the openings through it are known and charted, as well as the channel which it protects, the barrier is regarded as a boon to coasting vessels.

told that all the maples, oaks, chestnuts, elms, birches, and cedars, and even apples and cherries, were but species of the

genus hickory.

The Australian is likewise embarassed by these prolific variations of encalyptus. The trees in general are "gums"—white gums, red gums, blue gums, spotted gums, cabbage gums—or ironbark, stringy bark, woolly bark, smooth bark, and when distinctions are necessary we get such combinations as narrow-leaved-red-ironbark, or broad-leaved-yellow-stringy-bark.

# LEAVES THAT GROW VERTICALLY INSTEAD OF HORIZONTALLY


Where conditions are favorable, the encalypts form forests of straight, slender trees; where soil is poor, they are wide-spaced and branch like the California oaks; on sand plains they develop an enormous root, from which spring a number of thin round stems leading to a

canopy of scattering leaves; and even where soil and rain are practically absent

the genus is represented.

Eucalypts are evergreens, which shed their bark, but not their leaves; but they are not shade trees. The leaves are placed in inclined rather than in horizontal positions, and the passage of light is but little obstructed. For this reason, smaller trees and bushes and grass grow underneath, and the woods in places assume the appearance of a jungle from which arise the towering shafts of trees. It is interesting to note that primitive types of encalyptus, as well as the young of more modern types, have horizontal leaves, pointing to a time in the geologic past when the climate was more congenial and no precautions to conserve moisture need be taken.


The encalypts include some of the tallest trees in the world. The Victorian Forests Department records trees which

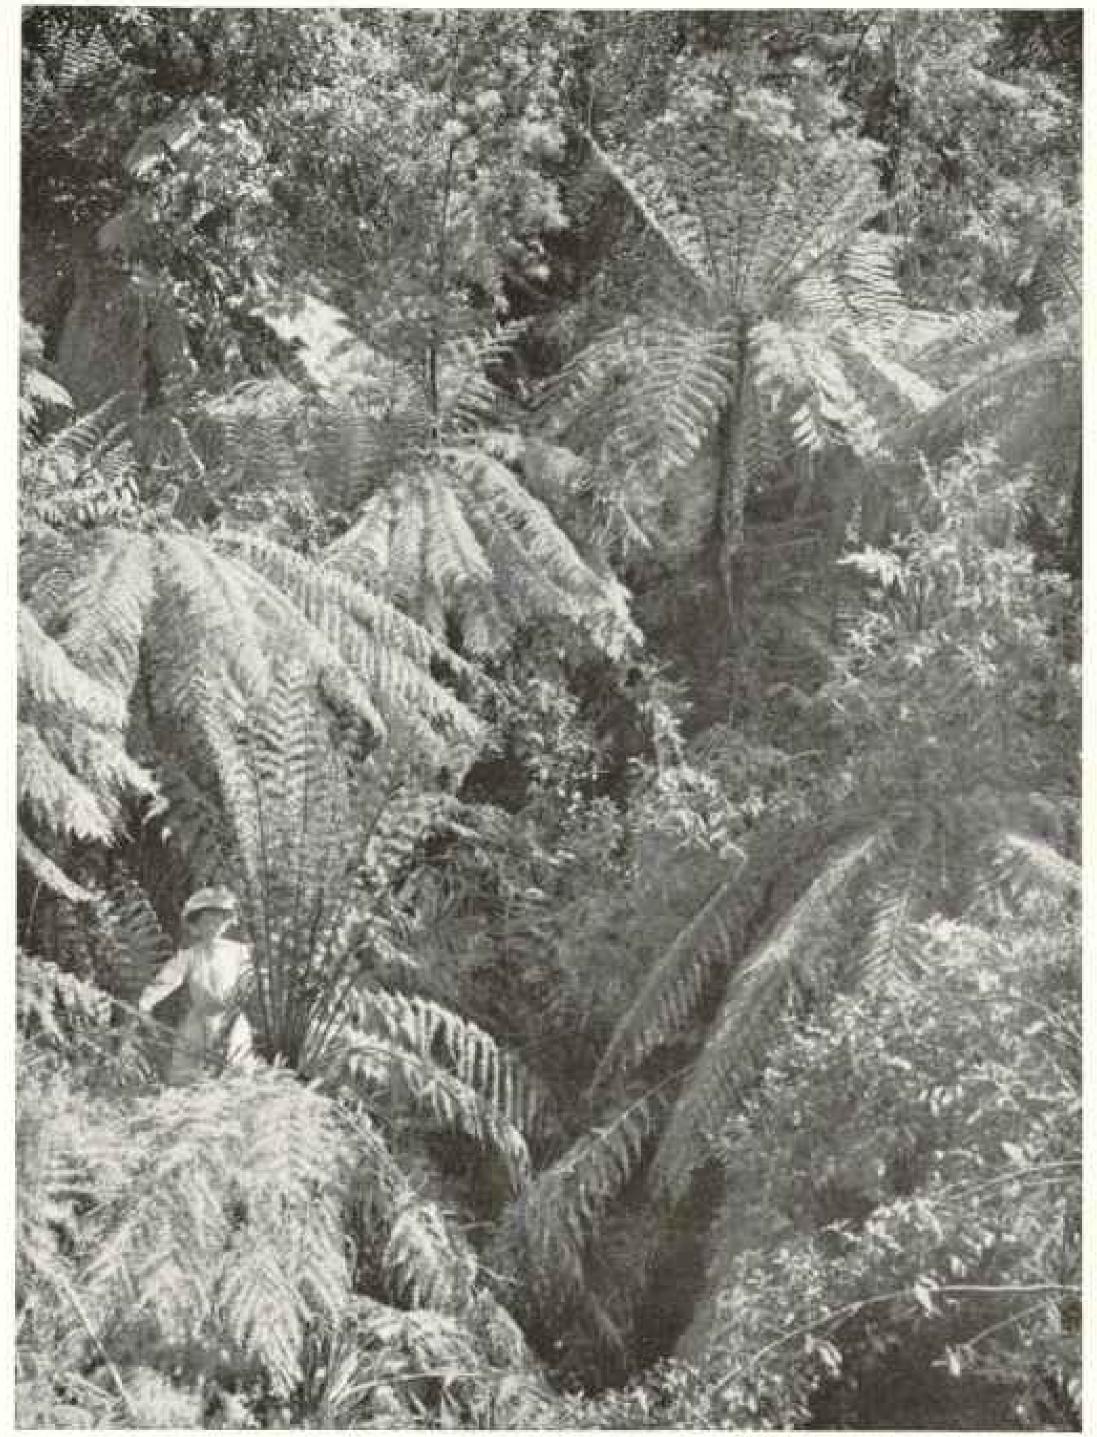

Photograph from Janet M. Commings


# A FERN-TREE GULLY IN VICTORIA, AUSTRALIA

No other continent is so rich in ferns as Australia. Just as its long isolation kept out the animals of other continents and allowed species of old geologic ages to persist, so also that isolation has resulted in the continuance of plant forms there that have lost the race for existence in other continents. Among these are some of the great tree ferns that are met with elsewhere only in fessil form.

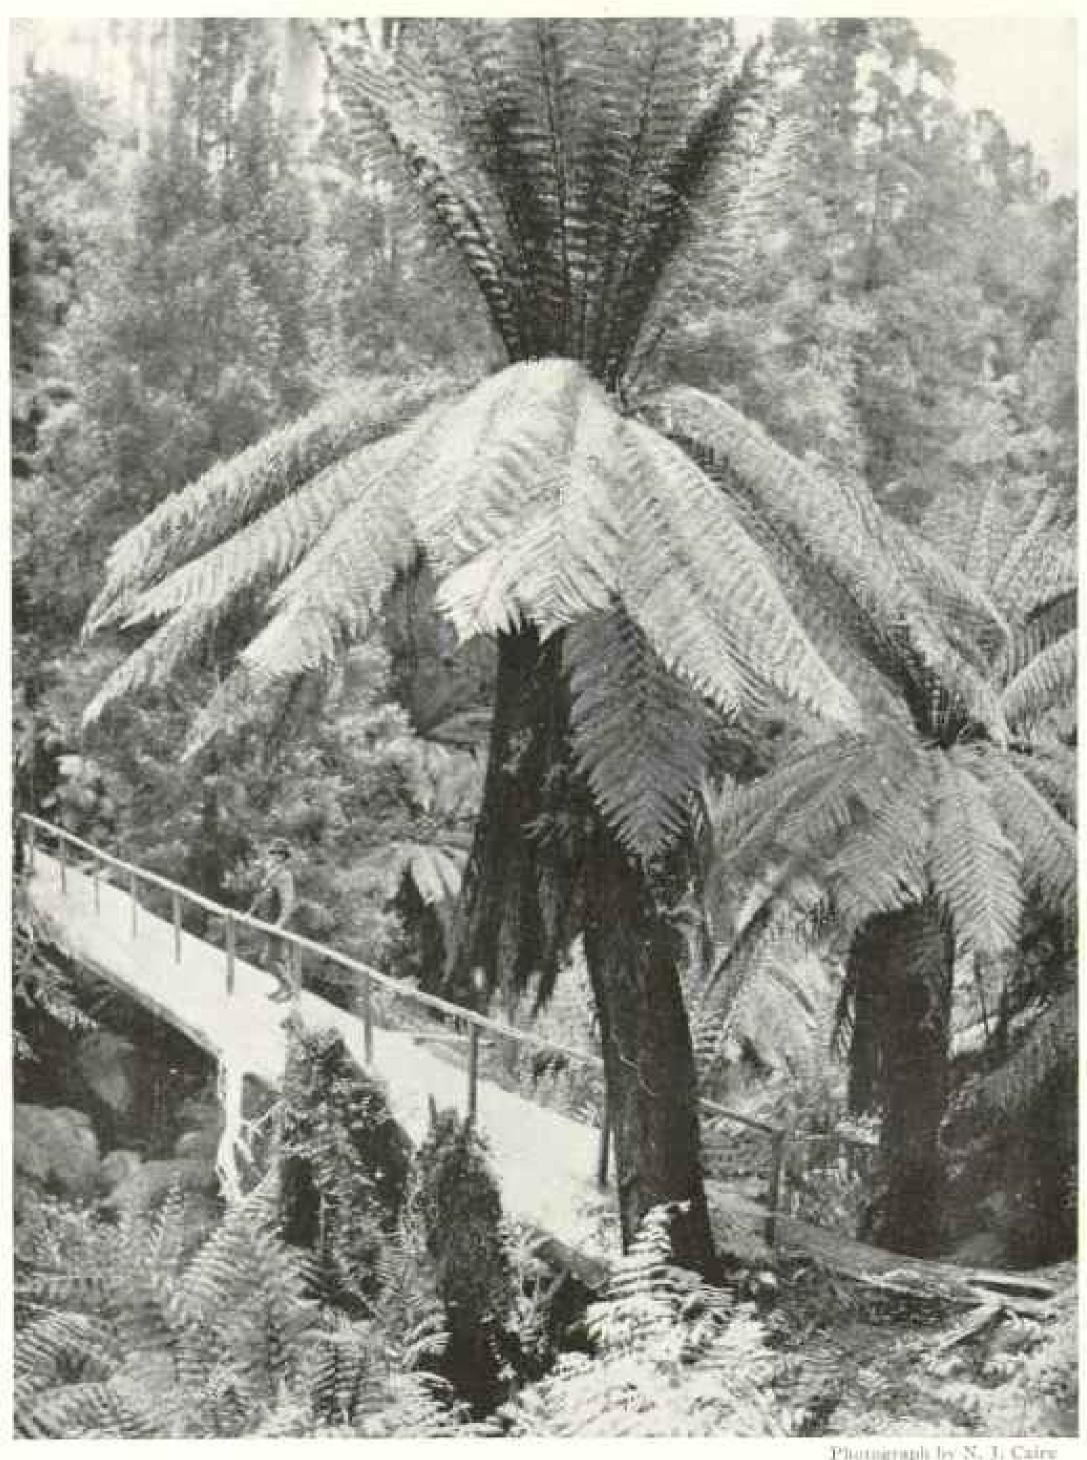

Photograph by N. J. Caire

GIANT TREE BRIDGE OVER RIVER TARWAN; GIPPSLAND, VICTORIA Australia's trees are largely forms that lived and became extinct in our own land more than one million years ago

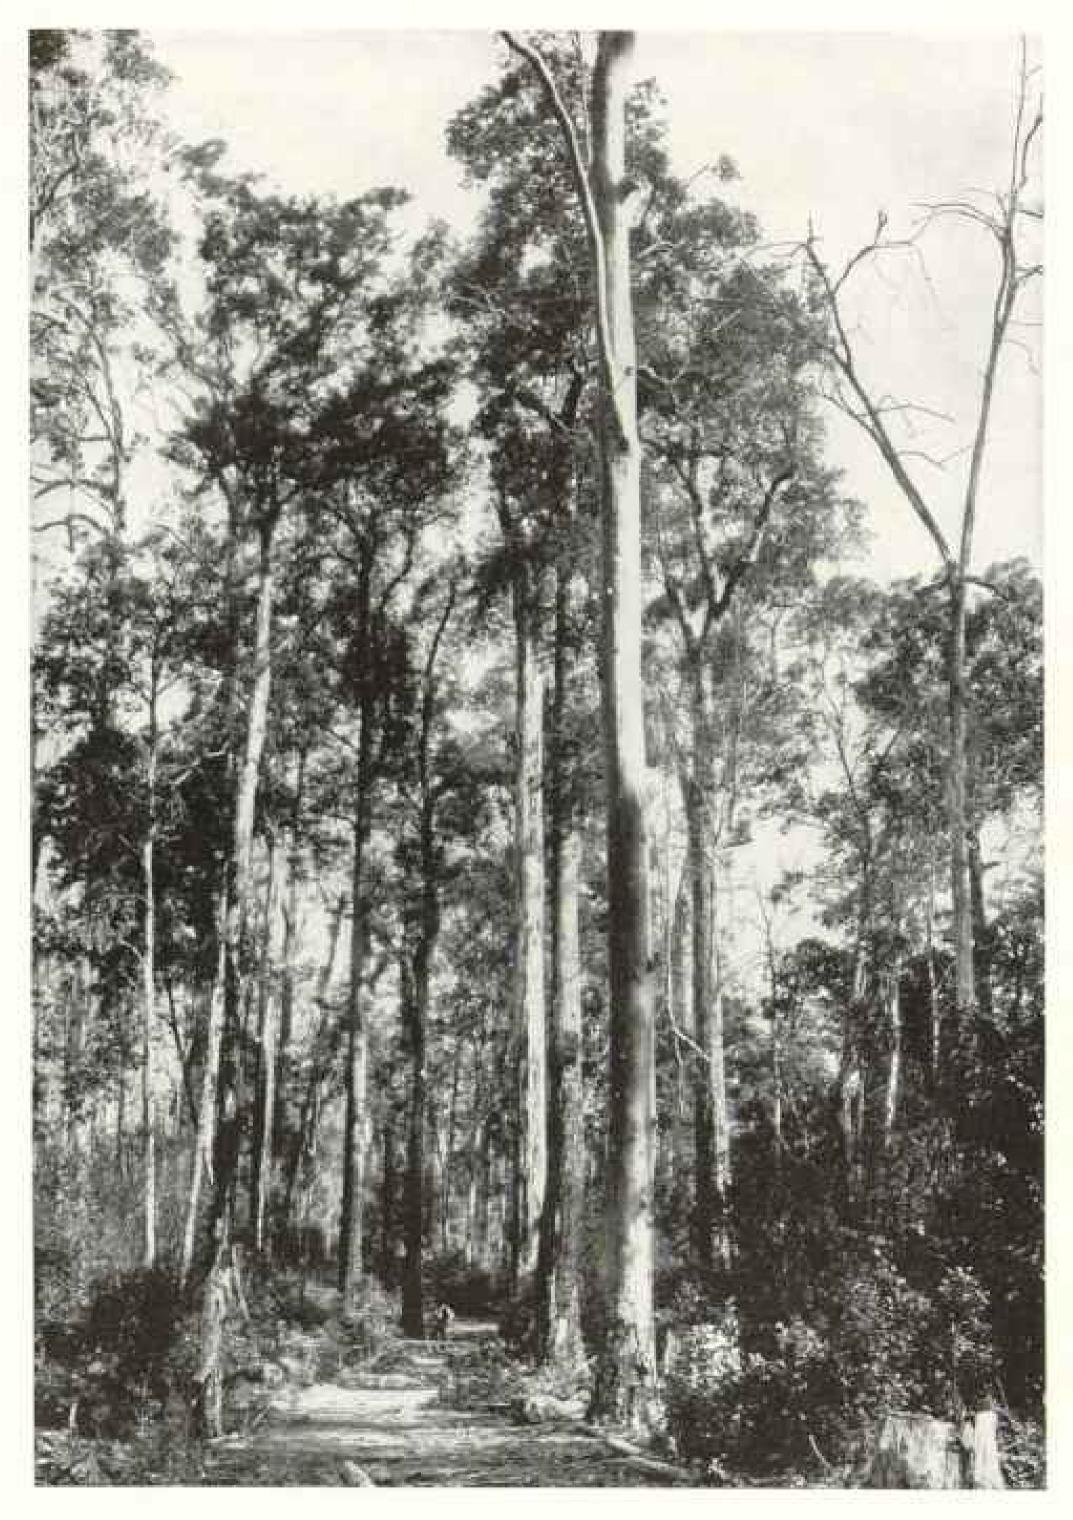

A FOREST SCENE (GROUP OF TUEPENTINE TREES) : NEW SOUTH WALES

Encalyptus trees grow about seven times more rapidly than oak or hickory, and they also reproduce themselves even more readily than these popular American trees. Their strength is twice that of the English oak. Note the man.

measure 329, 333, and 342 feet, and states that there are "scores of trees about 300 feet in height." The surveyor of the Dandenong ranges made notes of the tallest trees felled during an eight-year period and reports that "all those measured

were over 300 feet in length."

Encalyptus trees reproduce themselves readily and grow about seven times more rapidly than oak or hickory. From a ton of bark of the gimlet tree was obtained by analysis 416 pounds of tannin extract and 308 pounds of oxalic acid. From the gum and leaves of these trees come also the highly valuable encalyptus oils, from which no less than twenty-seven constituents have been distilled for pharmaceutical purposes and for the separation of metals by the flotation process.

The encalyptus is the great timber tree of the continent. Of sixty varieties in Victoria, twenty have high commercial value and are finding an ever-increasing market. The Tasmanian blue gum is one of the strongest, densest, and most durable woods in the world. Timbers 2 feet square, exceeding too feet in length, are readily obtained, and, when used for piling, need not be weighted, for the density of the wood is such that it sinks in water.

#### THEIR STRENGTH HEMARKABLE

Their strength is twice that of English oak, and they are practically immune from attack by the Teredo, which plays such havor with ordinary timbers. In Tasmania railroad ties or paving blocks of blue gum and stringy bark have a life of fifteen to twenty years—three times that of ordinary woods. In the dryer climate of Victoria blue-gum sleepers have been in service for nearly forty years. Shingles from peppermint gum have a life of thirty to forty years.

life of thirty to forty years.

The jarrah, a eucalyptus of

The jarrah, a eucalyptus of West Australia, is another famous tree. It is one of the few woods of the world which successfully resist the ravages of white auts; it is practically immune from the attacks of marine borers, and, like the iron bark of Victoria and New South Wales, has been known to withstand fire better than iron girders. Piles of sawn jarrah driven at Port Adelaide in 1868 "showed no signs of decay in 1910."

The forests of West Australia also sup-

It is straight and tall, reaching heights of 300 feet and 120 to 180 feet to the first branch. Like the jarrah, its timber is widely used where strength and durability are requisites. The karri planking of a dismantled ship, which had plowed the seas for thirty years, was sawed into blocks and used for paving. A log of karri which had lain forty-six years in mud below high-water mark was found by a Royal Commission to be "perfectly sound." Their life as railroad ties is twenty-five to thirty-five years.

# AUSTRALIA DESTROYING HER TREES

In view of the present and prospective value of Australia's national tree, it is a little surprising to find that cutting and burning is proceeding with scant scientific supervision. California and South America are planting eucalypts; Australia is cutting them down.


Australian hardwoods rival mahogany in beauty and susceptibility of polish, and are unsurpassed among the world's timbers in strength, durability, and resistance to fungous and insect attacks.

But soft woods for ordinary construction purposes are not abundant, and the imports of lumber are correspondingly large. During 1913 timber to the value of \$10,000,000 reached the commonwealth from foreign parts, 70 per cent of it from the United States; in return, Australia exported undressed hardwoods of about half that value chiefly to New Zealand, South Africa, India, and England.

One effect of the scarcity of suitable lumber is shown in the extensive use of galvanized iron in building. Iron replaces shingles for roofing, and in parts of the country practically no other building material is used.

THE ANIMALS OF OTHER CONTINENTS— HORSES, CATTLE, PIGS, TIGERS, LIONS— UNKNOWN IN AUSTRALIA

The animals of Australia are so distinct from the rest of the world that some have proposed two great zoological realms: Australian and non-Australian. The peculiarity lies not only in the fact that Australian types are not found elsewhere, but also that families like the cats and

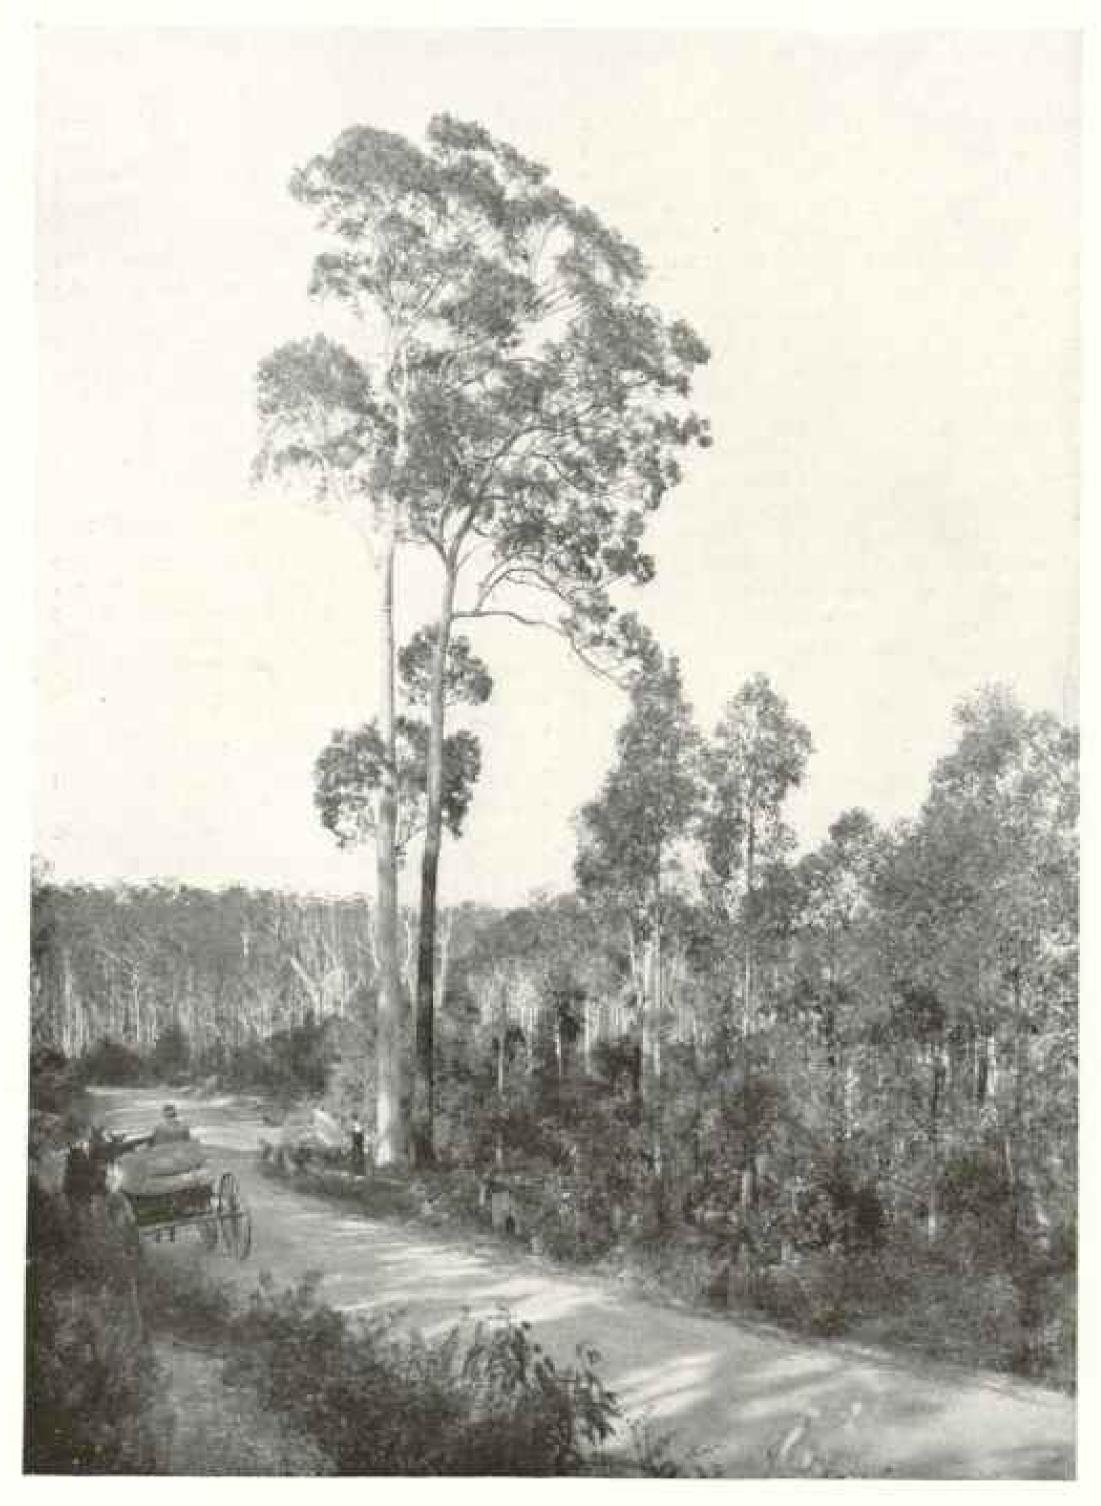

FOREST TWENS: AN IRONBARK AND A SPOTTED GUM

The ironbark is a species of the encalyptus, very highly prized in work requiring great strength and durability. Often it is preferred to steel and iron for girders and supporting columns, since it is almost impervious to fire and does not bend or buckle when exposed to unusual heat.

the pigs, which are found native on all other continents and on many islands, are absent from Australia,

The continent has so long been isolated that the passage for animals from other land-masses has been closed for millions Species and genera have of vears. evolved, and some even disappeared, in other continents, while Australia remained apart, and so it comes about that most of the forms known in other lands are represented neither by living nor by fossil species. The barrier of water which protects Australia from animal immigrants from other countries was formed at the beginning of the "Age of Mammals," before the prominent elements in the world's fanna-cats, swine, horses, cattle, sheep, elephants, camels, rats, rabbits, bears, monkeys, etc. - had originated. These, therefore, are not native to Australia, which possessed mammals of only the most primitive types.

# THE WORLD'S STRANGEST ANIMALS

The great animal groups—the lizards, tortoises, snakes, birds, fishes, crabs, etc .which developed in geological periods before the land bridges to other countries had been destroyed, are represented in Australia, but they have evolved along distinct lines, and most of the genera and species are peculiar to the continent.

The most primitive order of manimals, the monotremes, are confined to Australia. There is the platypus, a strange beast which lays eggs like a turtle, but suckles its young; has horny pads for teeth and a bill like the duck; its front feet are webbed, and both back and front feet have claws. Little wonder that he has received many names, or that his seientific designation is Ornithorhynchus paradoxus (see page 498).

The spiny ant-eater is another strange mammal. He looks and acts like a hedgehog, but he has a long beak and a longer tongue, covered with a sticky substance, with which he captures quantities of ants. He not only burrows vertically into the ground with great rapidity, but also climbs with surprising agility. Like the platypus, the spiny ant-eater lays eggs which are hatched in a pouch and the young reared on the mother's milk.

The kangaroo is Australia's national animal, and the group to which it belongs, the marsupials, is typically Australian, Marsupials-mammals whose young are born very immature and then transferred to a pouch and suckled-have been long extinct in Europe and are represented in America by unimportant survivors, like the opossum. They belong to a past geological age, and have survived and flourish in Australia only because the entrance of carnivorous beasts has been barred by the protecting zone of water. Primitive forms have been allowed to persist, and degenerate forms have not been eliminated.

#### COUSINS OF OUR POSSUM

Like the eucalyptus of the plant world, marsupials have dominated the animal kingdom of Australia, and in their adjustment to a varied environment have evolved species very unlike in form and manner of life. In size they range from the giant kangaroo, the height of a man, to creatures no larger than mice, and extinct forms include diprotodon as large as a rhinoceros, kangaroos more than 10 feet high, and a huge carmivorous beast as big as a polar bear.

Some marsupials live in trees; others roam the woods or desert; still others burrow in the ground. Some species eat grass; others live on leaves. One large group is carnivorous, eating flesh or insects; another eats food of all kinds. Some are nocturnal; others seek their


food by day.

#### AN ANIMAL WITH FIFTY-FOUR TEXTH


The Tasmanian devil is a ferocious beast; other forms are harmless, and some are affectionate pets. One species is blind; another has toes like the deer. Some have few teeth, but the striped anteater has fifty-four, the greatest number in any living land mammal.

The great diversity of species is reflected by the popular names-tiger, pative cat, weasel, mole, rat, mouse, wolf, bear, flying squirrel, opossum, ant-cater, in addition to the terms kangaroo, wallaby, wombat, bandicoot, obtained from the aborigines; but all are marsupials.

The kangaroos and the closely related

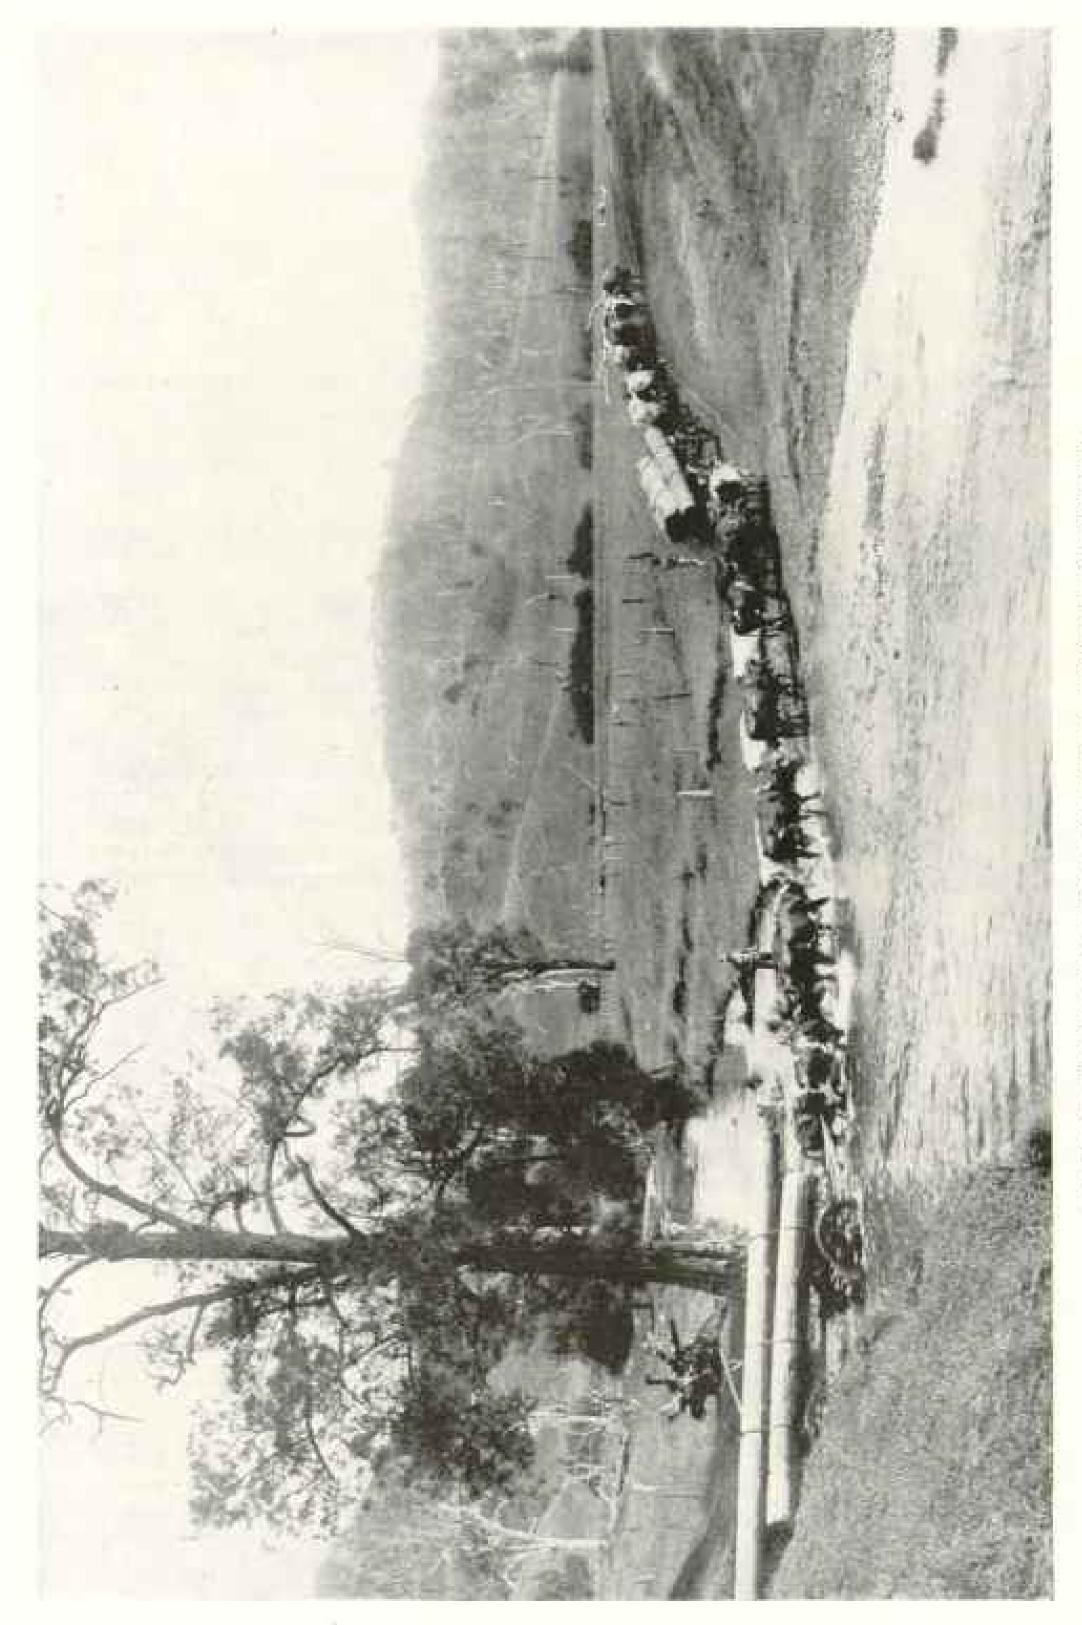

HAULING TIMBER TO MILLS: LAMINGTON, BEAUDESERT DISTRICT

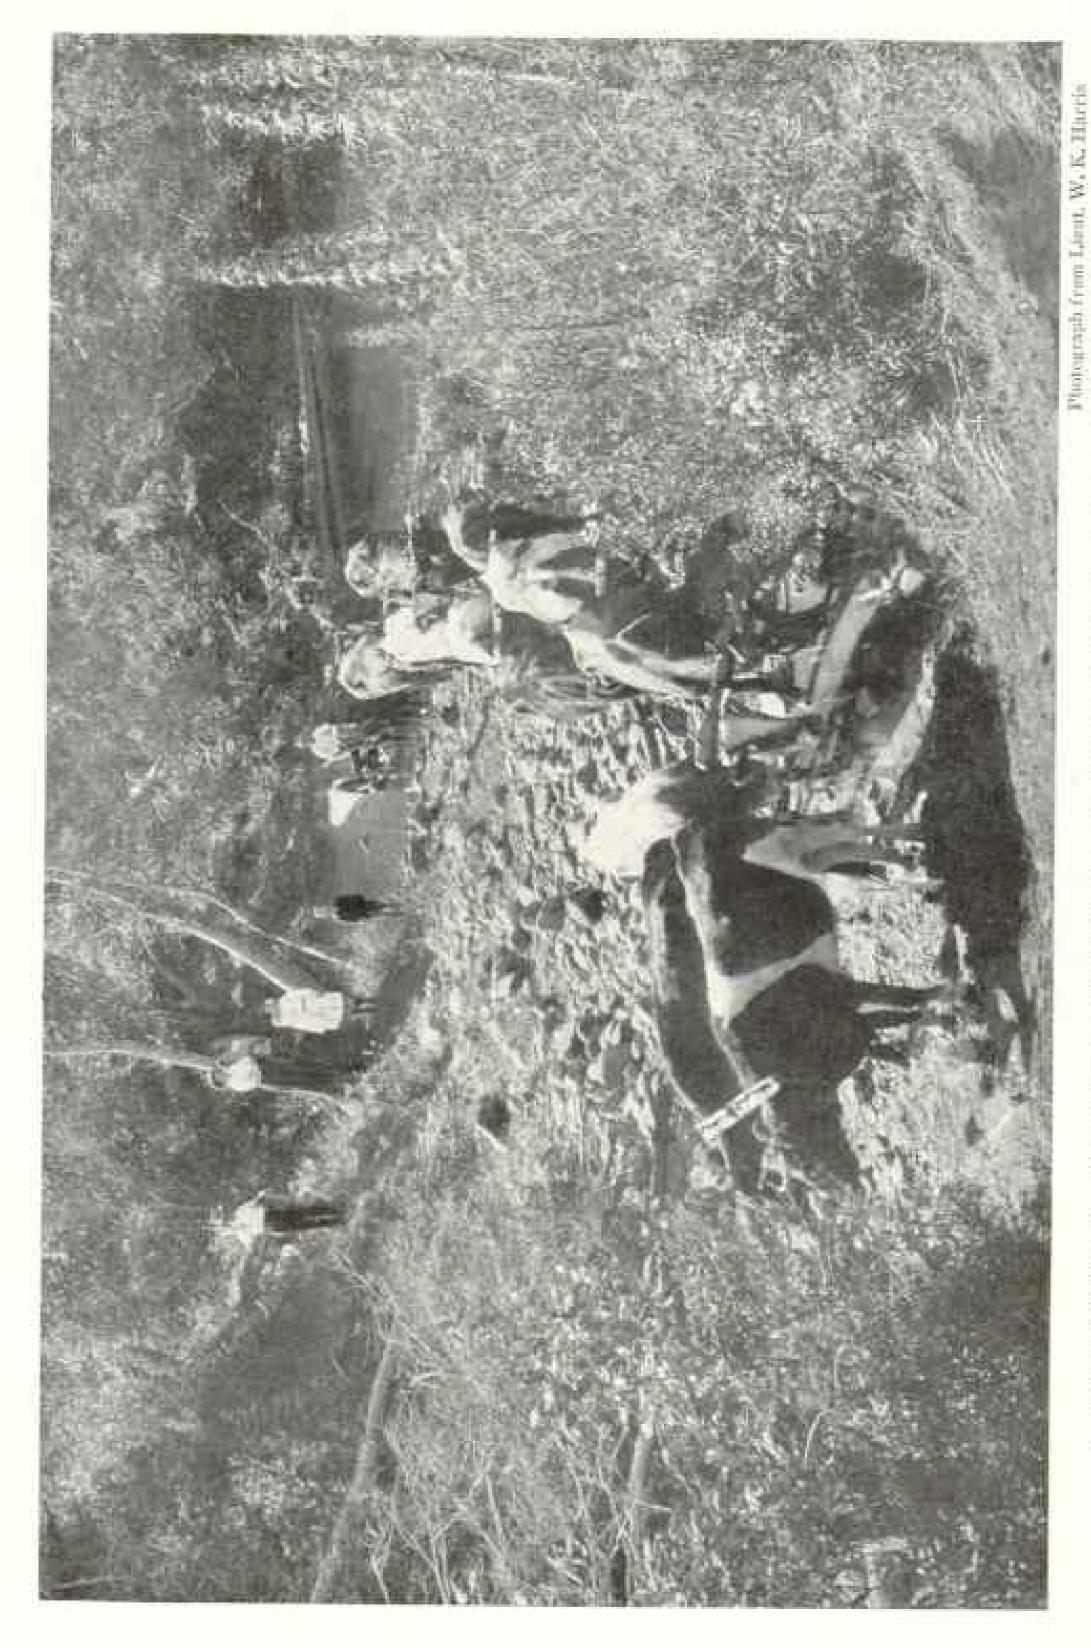

WHILY IN THE "DIG SCRUB," NORTH COAST DISTRICT OF NEW SOUTH WALES TIMBER-GETTER AND HIS



Photograph by Beattle

A RUCALVPTUS LOG FROM TASMANIA

A great many of these logs are sawed up into paving blocks and exported to the ends of the earth (see page 405)

wallabies are the commonest of the larger Australian mammals. They play the rôle of the American buffalo, formerly feeding by thousands on the grass-covered plains, but are now disappearing under the attack of the sportsman and fur merchant. In earlier days they formed the chief item of food for the native "blackfellows" and for the pioneers. They are generally harmless and shy, and when approached the females hastily gather their young into their pouches and retreat to shelter by a series of enormous hops at a rate exceeding 15 miles an hour, When attacked at close quarters they defend themselves vigorously.

An "old man" kangaroo standing on his hind legs and tail, with his head as high as that of a man, is no mean antagonist. He boxes skillfully, and with his powerful hind leg and claw can rip up a dog at a single stroke. When streams or lakes are handy he seizes a dog, or even a man, and holds him beneath the water until life is extinct.


The "native bear," or koala, belies his name except in form. He is a lethargic, unintelligent, fluffy little creature, an attractive though unresponsive pet. In the

night-time he feeds on the leaves of the gum trees; during the day he usually sleeps curled up in the fork of a branch. The young spend their time in their mother's pouch or hanging to the fur on her back. The wombat plays the part of the woodchuck; the bandicoot is the rat, and the Tasmanian wolf the wild cat, of the marsupial family. The most numerous group of marsupials, like their namesakes, the possum of the South, hide away in daytime in hollow logs or trees, or hold themselves on branches with their long, prehensile tails, coming out after dark to feed on leaves or fruit. Their fur is in great demand.

## A HUNDRED KINDS OF SNAKES!

Australia is supplied with 100 species of snakes, three-fourths of them venomous. The big pythons and rock-snakes are harmless, but as one travels from the tropics southward the dangerous varieties increase in number, and in Tasmania all are venomous, though only five are really deadly, and fortunately these are rarely seen.

The continent is also abundantly supplied with lizards. Three hundred and

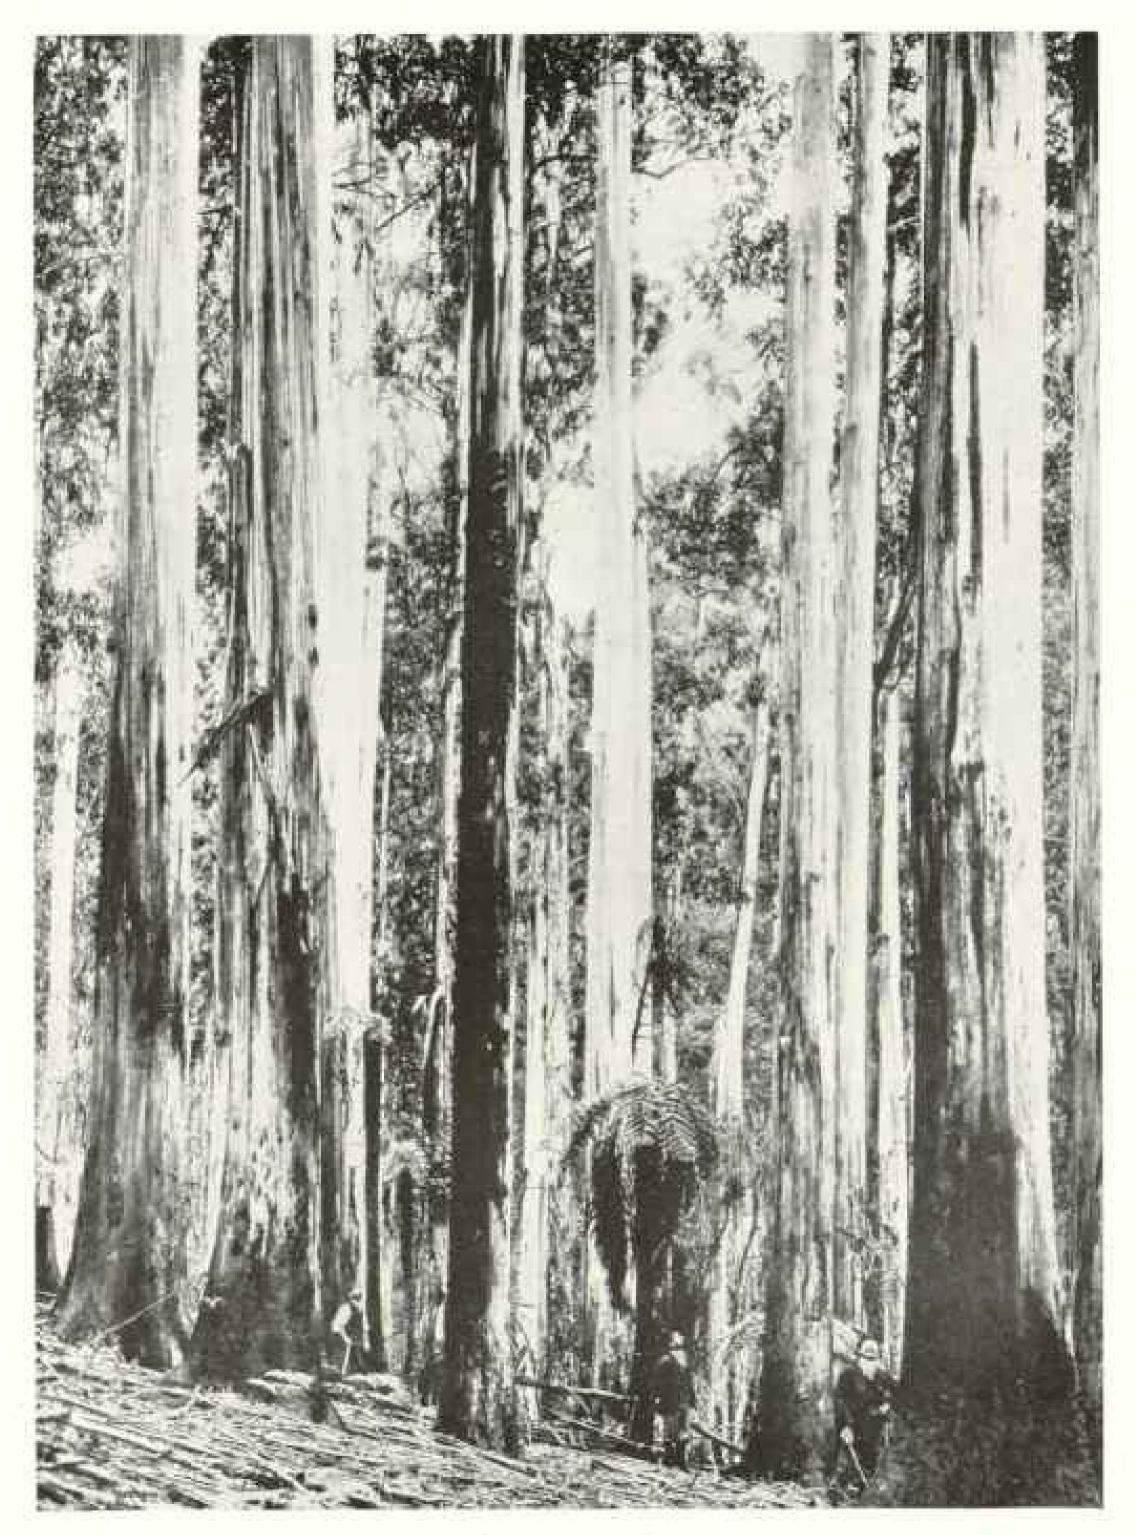

POREST OF EUCALYPTUS (MANNA GUM): NOTE THE THREE MEN

"To me the most lasting impressions of Australia are of its wonderful woods. One readily understands why the Australian loves his trees. The groves of giant encalyptus form pictures never forgotten, and the scent of the wattle brings a homesick feeling like the smell of the sage to a Westerner" (see text, page 486).



Photograph of specimen in 17. S. National Museum

# AN ANIMAL THAT LAYS EGGS LIKE A TURTLE AND SUCKLES ITS YOUNG: THE PLATYPUS OF AUSTRALIA

This is a web-footed, beaver-tailed, duck-billed creature which inhabits the river banks of Australia and Tasmania. When it was first described the scientific world thought the naturalist who reported it a nature faker. Even when a stuffed specimen was sent to England there were those who believed it a "fabrication out of the whole skin." It has teeth with which to chew its food, but it lacks an external ear, although its hearing is most acute.


ninety species are recorded, and they may be seen not only in woods and prairies and deserts, in the water, among rocks, and in trees, but also in the less frequented city streets. The monitors, or "ignanas," attain lengths exceeding 6 feet. Their favorite food is young birds and eggs, which they seeme by climbing trees corkscrew fashion or robbing poultry yards. Skinks are the most abundant lizards and form an interesting series in which limbs become gradually shorter and toes gradually disappear until "the fore limbs have vanished and the hinder are reduced to rudiments with a solitary toe."

The strangest of all lizards are the legless one, one family of which is found only in Australia. They look and move like snakes, for which they are often mistaken. One of the forms (Pygopus lepidopus), locally called the slow-worm, is

ninety species are recorded, and they may be seen not only in woods and prairies and deserts, in the water, among rocks, and in trees, but also in the less frequented city streets. The monitors, or "igual anas," attain lengths exceeding 6 feet. Their favorite food is young birds and Colorado plateaus.

## WAS AUSTRALIA EVER CONNECTED WITH SOUTH AMERICA?

The lizards, also most of the flying birds, crayfish, and insects, have their nearest allies in the Malay Islands to the north, and indicate a former land connection through the Pacific islands to Asia. The animals of more ancient lineage, like the marsupials, the air-breathing fish, and the giant earthworms, have their nearest living relatives in South America, and suggest that at some time far back in the history of the world the thousands of

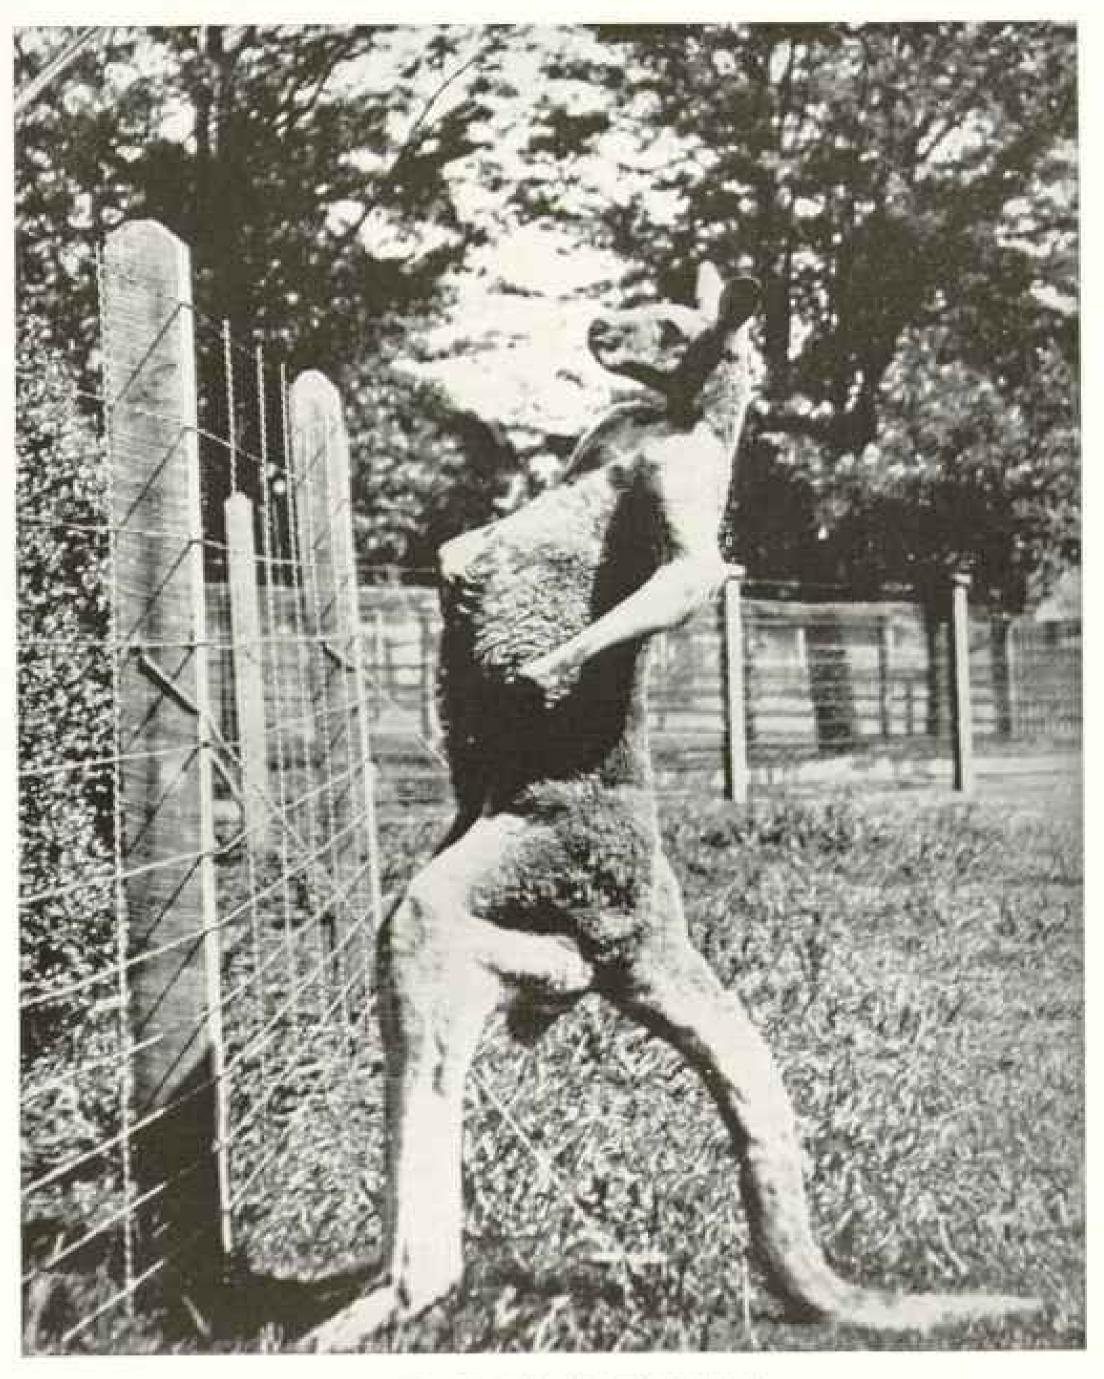

A KANGAROO OF NEW SOUTH WALES

"An 'old man' kangaroo standing on his hind legs and tail, with his head as high as that of a man, is no mean antagonist. He boxes skillfully, and with his powerful hind leg and claw can rip up a dog at a single stroke. When streams or lakes are handy, he seizes a dog or even a man and holds him beneath the water until life is extinct" (see text, page 500).

or even a man, and holds him beneath the water until life is extinct" (see text, page 500);

Australia may be said to be a museum in which mimals that became extinct in other parts of the world ages ago still persist in a modified form. The kangardo is a representative of the general type—the marsupial. And of the kangardos there are many species, from the big grays and reds, the size of a man, to creatures no larger than mice (see page 407).



Photograph by H. W. Kilbarn

# THE PET KANGAROO AND HIS TRAINER: AUSTRALIA (SEE PAGE 497)

Many circuses have boxing kangaroos. In nature, the kangaroo, when attacked and a line of retreat is not open, usually backs up against a tree and defends itself with its fore feet. Trainers turn this method of defense to their advantage by putting boxing-gloves on the kangaroo's fore feet, and then training him in the manly art of self-defense; and the boxer who can break through a kangaroo's guard is a good one.

miles of sea now separating that continent from Australia were crossed by a bridge of land.

The lover of insects finds Australia an interesting and but partially explored field. Spiders, butterflies, beetles, moths, wasps, bees, cicadæ, are abundant, widely-distributed, and include many forms of great beauty and unusual habit. Some of them are unique. The number of bush flies which occur in summer is incredible. In the arid regions it is impossible to eat with even a semblance of comfort between sumrise and sunset, and traveling without the protection of a head-net is possible only for the skin-hardened bushman.

Of the neuroptera, the best-known and best-hated species is the white ant—a termite of unusual destructive ability. He flourishes in deserts, in woods, and makes his way into city buildings. Supports of houses must be protected by caps of iron, for few timbers are immune from his

attack. If printed accounts are to be believed, lead boxes and pipes are not beyond the range of his voracious appetite. The mounds built by the white ants are odd-looking structures, firm as soft wood and of various shapes. Mounds like miniature haystacks scattered through the woodlands or as thickly set as trees in a forest are familiar sights in parts of the continent. Shaft-like nests resembling decayed stumps attain heights of 6 to 10 feet (see page 505).

#### A LAND OF DEAUTIFUL RIRES

Australia is stocked with beautiful birds, many of them of unusual aspect. The man who originated the popular saying that "Australian birds have plumage, but no song," must have lived in a sound-proof box. Among the 775 species are included some of the most brilliantly colored, sweetest voiced, and most unusual hirds in the world.

Along the northeast coast is the bower



THESE OVEER ROCKS ARE NESTS BUILT BY THE WILLTE ANTS (SEE PAGE 504)

bird, which adorns its nest and decorates its playing ground with shells, seeds, and other bright objects, not despising brass buttons and cartridge cases (page 507).


The lyre bird, famous for its plumage, is the rival of the mocking-bird of the South in sweetness of tone and skill as a mimic. The crow-shrikes ("magpies"), the brown flycatcher ("Jacky Winter"), the bush warbler, the rock warbler, the reed warbler, the bush lark, the cuckoos, the honey enters, and the "Willy-Wagtail" constitute parts of a bird chorus difficult to surpass. Cockatoos are as common in Australia as crows in the Central West; even in the desert flocks were frequently seen. Some of them are excellent talkers, most of them gorgeously dressed.

A most surprising bird is the kookooburra, or laughing jackass. All at once in the quiet bush come loud peals of uproarious, mocking laughter. One is not inclined to join in the merriment—it all seems as foolish and weird as if an idiot boy were disturbing a congregation in church. When the source of the laughter is located, it turns out to be a silly-looking bird with clumsy, square body and open mouth sitting unconcernedly on a stump. Some animals look so foolish, say and do such silly things, and yet are so patient and friendly that affection involuntarily goes out to them. The kookooburra is one of these and the bird which mocked me at Mt. Gambier, and the solemn little fellow which toddled about the yard of my bostess at Melbourne will long remain in memory (see page 506).

#### A BURD-BUILT INCUBATOR

The ibis occur by thousands, and the gigantic black-necked stork, or jabiru, standing 5 feet high, inhabits the swamps of the northern coast, while the graceful black swan frequents the estuaries and lakes. The mallee hen and the brush turkey build mounds of sticks, leaves, and earth 3 to 10 feet high. The eggs are laid in burrows excavated in the mound and are left to be hatched by the heat resulting from decomposing vegetable matter—a home-made community incubator.

The cassowary of the forests of Queensland and Papua and the emu, which is found throughout the continent, are unknown outside the Australian region. The emu is the national bird and shares with the kangaroo the task of upholding the shield on the commonwealth coat of arms. It is a powerful bird, can

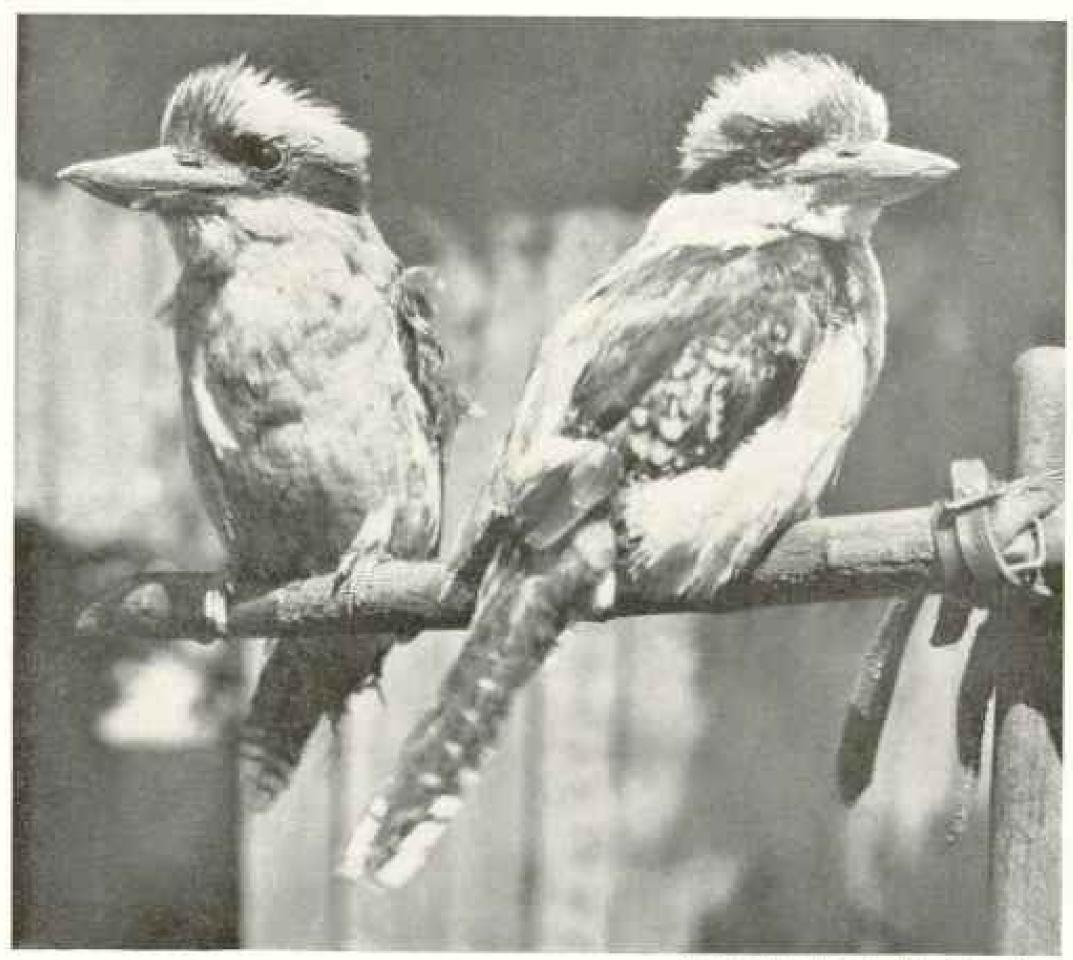

THE LAUGHING JACKASS (SEE PAGE 505)

run at the rate of 15 to 20 miles an hour, and break an ordinary fence by impact.

The ostrich has been introduced into South Australia and the export of its plumes bids fair to assume considerable proportions. Stray ostriches are occasionally met with. On a smooth stretch of desert road north of Port Augusta we had an opportunity to gauge their speed. It was a neck and neck race for 2 miles, with the motor cyclometer registering 30 miles an hour.

#### THE ORIGINAL AUSTRALIANS

The isolation of the Australian Continent, so clearly reflected in its fauna and flora, has left its stamp on the native race. Like the kangaroo and the tree fern, the aboriginal is a remnant of bygone days. Paleolithic man, whose primitive tools are eagerly sought in the caves and gravels of Europe, was alive in Tasmania within the memory of people now living, and Neolithic man is roaming the deserts of Australia by hundreds.

Though comparatively little is known of the aborigines and many tribes have never been studied, there is general agreement that the "blackfellow" is on the lowest rung and perhaps at the very bottom of the ladder of civilization. In the opinion of Andrew Lang, "they are infinitely beneath the status in culture of Paleolithic man of the mammoth and reindeer period," and their "manners and rites were far the most archaic of all with which we are acquainted."

The Australian native\* is unlike the

"The term "native" is used in the American sense. In Australia the term is applied to native-born whites. The original inhabitants are "blackfellows" or aborigines.



From "Birds of Australia," by John Goold

A BUID THAT BUILDS A PLAYHOUSE AND GARDEN-THE AUSTRALIAN BOWER BURD

There are several species of bower birds, chief among them the Satin and the Newton-The Satin bower bird is the best known. When the bowers were first discovered it was supposed that they were playbouses built by the native children; but, as a matter of fact, they are the dance halls of bird land. The nests are built in the trees and have no connection with the playbouses. The male birds build these latter and gather every bright and shining object they can find to adorn the entrance to the bower. When it is completed, according to one who has watched them, little "at homes" are given daily, at which the males meet and pay their court to their lady loves, now bowing and scraping, now playing hide and seek through the bower, and now doing an absurdly dignified dance for their edification. Newton's bower bird decorates its bower with fresh flowers every day, and if a visiting male bird wants a light all he has to do is to disturb one of these flowers. The master of the bower proceeds with the painful duty of teaching him how to behave in company, while the remainder of the party raise a great racket, but never interfere. A naturalist studying them disarranged one of their flowers, but each time he did it the bower master rearranged it with great care.

American Indian in physique and facial expression. His range in height is about that of Europeans. Some individuals are strongly built, but in general only the upper part of the body is well developed. The legs are usually thin and long, with inconspicuous calves, the great toe is "loose," and the foot is about as useful as the small, delicately formed hands in picking up objects. A long skull, with a low, flat forehead and brows overhanging deep-set, intelligent eyes, a heavy lower jaw, strong teeth, and a nose broad and very flat, with wide nostrils, are conspicu-

ous features. His cranial capacity is 75, as compared with 83 for the African negro. Wavy or curly hair, not woolly or frizzy, of auburn or black tones, is abundant not only on the head and face, but in some cases covers the body, and many new-born children are coated with long downy hair.

# LITTLE USE FOR CLOTHING

With the arts the native is little acquainted. He has no permanent buildings. His shelter is a cave or overhanging rock, sometimes a piece of back to ward off rain or branches to shield him-



Photograph from Beetin Photo News Co.

## THE NATIONAL BIRD-THE EMU

The entit is a bird that has relied on its legs for so long and used its wings so little that it now cannot fly if it wants to, its wings having degenerated into mere rudimentary members. It lights only in self-defense, but it can lock solewise as well as backward, sometimes with force enough to break a man's leg. Papa Emn is an ampable person, taking most of the cares of the household off the shoulders of his mate. The ostrich has plumes and only two toes, while the emn's feathers almost resemble hair, and it has three toes (see page 505).

self from the sun. He does not bother with clothes except when the weather is particularly bad, and then bark or the skin of the kangaroo is used without sewing or fashioning. Some tribes use rushes and seaweed for temporary clothing or make a blanket from the dried scum of lakes. For boats pieces of bark tied at the end and dambed with clay suffice.

He makes no pottery, and cooking utensils are represented by stones for crushing roots and seeds, stone knives, and a rudely fashioned scoop which serves as a dish, a spade, and as a receptacle for carrying water. He knows nothing of agriculture, and his one domesticated animal is the dingo, a half-wild dog.

The geography of Australia is such that localities where food and water are sufficient for a large number of people are very source. There are no wild cereals, and the native fruits are few in

number, restricted in distribution and of meager nutriment, while water must be searched for over half the continent. The different tribes therefore have no fixed abode beyond vaguely defined limits inside of which they roam in search of food like packs of hunting animals. The groups are necessarily small and their relations are governed by fear and suspicion. Infrequent contact has resulted in the development of many languages within the same race. In "one district less than 300 miles square seven languages are spoken, one of them in two dialects, one in five."

# MOST EXPERT OF HUNTERS

In endurance and speed he is not the equal of the American Indian, and his weapons of wood and poorly fashioned stones are effective only at short range; but as a hunter the native Australian is marvelously adjusted to his environment.



Photograph by B. W. Kathurn

# THE HATPY NATIVE KANGAROO HUNTERS: QUEENSLAND

His success lies in an intimate knowledge of the habits of animals on land, in the ground, in trees, and under water, and his wonderfully developed powers of observation.

He decoys pelicans by imitating their cries, catches ducks by diving below them, locates an opossum in a tree by marks on the bark or by the flight of mosquitoes. finds snakes by observing the action of birds, and follows a bee to its store of honey. Any animal which leaves a track, however dim, in sand, on rock, or in the grass, falls an easy prey to the blackfellow. Children are taught to track lizards and snakes over bare rocks and to find their absent mother by following tracks too indistinct to serve as a guide for an European. When a white man is lost in the desert or a child strays from home, the final resort is to secure a "black tracker."

When in search of game or enemies, the native is armed with a stone hatchet, a boomerang, and a stout club, all stuck in a belt made of cords spun from hair or fur, and with a sheaf of selected spears and a throwing stick carried in the hand. The spear is the principal weapon—long ones armed with stone or barbed wood for war and shorter ones of reeds tipped with hard wood, or still shorter-pointed sticks for hunting. The effective range of the spear is greatly increased by the use of a wommera or spear-thrower.

## THE INVENTOR OF THE BOOMERANG

Clubs of all sorts are hurled at prey or human enemies. The best-known form is the boomerang, made of a curved piece of heavy wood about 2 feet long and 2 inches wide. The well-known return boomerang, round on one side, flat on the other, and slightly twisted on its axis, is used as a plaything or to hurl at flocks of birds in the sky. The war and hunting boomerangs are heavier; they do not return to the thrower, but are deadly weapons at ranges inside of about 400 feet.

Faced with starvation, the native knows



SOUTH AUSTRALIAN BLACKFELLOWS: THESE SAVACES RANK LOWEST IN INTELLIGENCE OF ALL HUMAN BEINGS Phattigouph by C. P. Scott

nothing of property rights; food is to be obtained wherever found, either in the open or in possession of his fellows or of the immigrants. When his hunger is satisfied the next strongest man may have the remains.

form his chief food supplies; but no animal or nourishing plant is neglected. The diet of the north Queensland aborigines includes 240 plants and 93 species of mollusks. Ants, caterpillars, moths, beetles, and grubs of all sorts are eaten raw or cooked. Honey, birds' eggs, and young birds are obtained from trees by use of a climbing rope or by cutting notches with his stone batchet. The native is fond of snakes and lizards, which are cooked on hot stones covered with leaves and earth.

Human flesh is not a regular article of diet, but when conditions are hard men who have fallen in battle or died of disease are added to the food supply, and infants are killed and sometimes eaten by their parents. Captives are commonly slaughtered and caten, sometimes for ceremonial purposes, sometimes to satisfy hunger. The flesh of the native or Chinese or Malay, whose diet is vegetable, is said to be preferred to that of Europeans, which is tougher and more salt.

The blackfellow is not a "degraded savage," but rather a primitive man placed in an unfavorable environment. When food and water are abundant the aboriginal is kind to the infirm, and even shows traits of generosity and gratitude. When the struggle for existence is severe he becomes an animal searching for its prey. Mentally he is a weak child, with uncontrolled feelings, without mitiative or sense of responsibility. In many respects he is intelligent and profits by education, but abstract ideas are apparently beyond his reach. His ignorance, suspicion, and fear, rather than viciousness and evil intentions, make him dangerous to strangers.

The story of the relations between aborigines and whites of Australia repeats a chapter in American history. Organized brutal treatment in Victoria practically ended with the Myall Creek massacre, in 1839, during which thirty or forty men, women, and children were murdered by the whites. The Queensland natives suffered unbelievable cruelties at the hands of the white settlers as late as 1860-1870, and not until 1897 did West Australia undertake their protection. In Tasmania a great hunting bee, in which 3,000 Europeans of all classes took part, was organized in 1830 to exterminate the native race. From the slaughter about 200 were rescued and placed within a reservation; by 1847 only 44 natives remained. In 1876 Truganini died and the Tasmanian race became extinct.


The natives on the mainland are now under the protection of the government, but "the birth rate has dropped amazingly" and it is doubtful if any large number can survive the process of civilization.

#### OUR PRIMITIVE ANCESTORS

The origin and migration of the Australian native stock is a fascinating story, whose outlines and chapter headings only have been written. The Tasmanians were perhaps a separate group related to the Papuans. Unlike the native of the mainland, their hair was coarse, short, woolly; they had no boomerang, no wonunera, knew nothing of polished stone implements, and their boats were rafts made of reeds.

Tasmania before the Glacial Period, when its island home formed part of the continent. The great antiquity of the race on the mainland is demonstrated directly by the discovery of stone hatchets buried in peat beneath extensive deposits of marine clays 15 feet below sea-level, and no less conclusively by the great development of languages and dialects and the absence among the tribes of traditions of migration.

A feature of peculiar interest is the almost universally accepted conclusion that the aboriginal stock of Australia belongs to the Indo-Aryan or Caucasian race. Their nearest relatives are the Veddahs of Ceylon and the Dravidian races of the Deccan plateau. Although perhaps the most primitive of the world's inhabitants, tucked away on an extremity of the world's lands and isolated for a whole geological period, they are our own

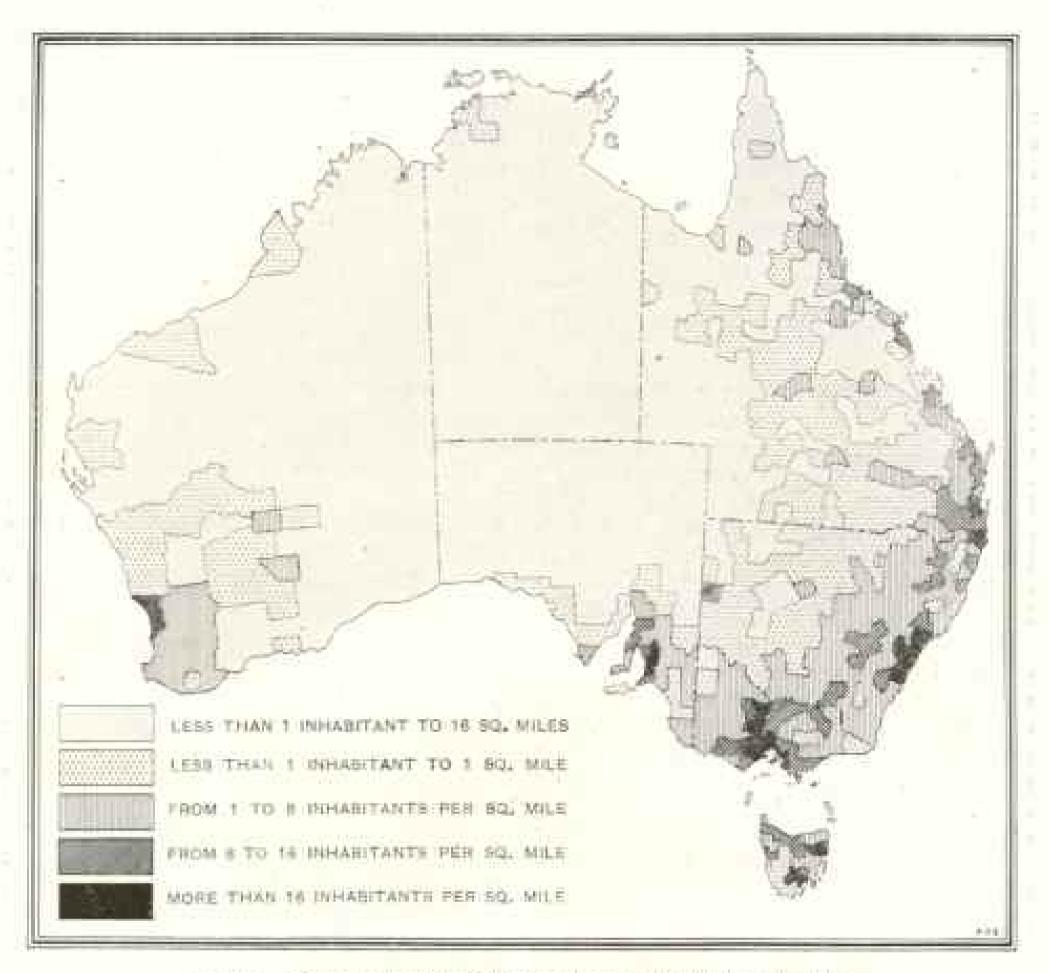

A MAP TO SHOW THE DISTRIBUTION OF THE POPULATION

racial relatives and picture the life of our extending from the Gulf of Mexico to ancestors. Quebec, in addition to Minnesota, North

## MOST OF THE PROPER LIVE ON THE SEACOAST

Australia is the size of the United States; its density of population is less than that of Arizona (1.67 persons to the square mile). The continent is less thickly populated than Russia in Asia, or the similarly situated Canadian plains, and has less people to a square mile than South Africa, Algeria, or even Arabia. All of the States are thinly settled.

Victoria, the most densely populated State, is about equal in size to Kansas plus Connecticut and Rhode Island; its population is about that of Connecticut. New South Wales, much larger in area than Texas, has the population of Arkansas. Queensland, inside of which could be placed the seventeen Atlantic States, extending from the Gulf of Mexico to Quebec, in addition to Minnesota, North Dakota, South Dakota, and half of Iowa, enrolls less people than Oregon. South Australia, larger than the three Pacific States, California, Oregon, and Washington, plus Kentucky and West Virginia, has the population of New Hampshire.

The enormous State of West Australia, within whose borders Spain, Italy, France, Belgium, Germany, and Austria-Hungary, or all the United States east of the Mississippi, could be accommodated, has 40,000 fewer people than rural Vermont. In density it corresponds with Greenland and French Sahara. Tasmania, the baby State, is a little larger than West Virginia; its population is about that of Columbus, Ohio, The Northern Territory, ten times the size of Alabama, is inhabited by 3,672 people—the sparsest population of any consider-

able area of the earth's surface

inhabited by man.

A modern warship, if allowed access to the bays and harbors, could bring about one-half the population within reach of its guns. A belt of country too miles wide along the east, south, and southwest edges of the continent would include probably 80 per cent of the Commonwealth population. There are no inland cities of over 10,000 population, except six mining camps, and the most remote of these is about as far from the sea as is Pittsburgh.


In the center of the continent is an area larger than all the United States west of the longitude of Denver, in which less than 5,000 people reside.

CITY LIFE EVEN MORE POPULAR THAN IN THE UNITED STATES

A striking feature of the Australian census is the concentration of population in cities—a phenomenal situation for an agricultural and pastoral nation with less than 1 per cent of its area

under cultivation and 47 per cent unoccupied. The six Australian State capitals include 38.80 per cent of the Commonwealth's population, and five of them are growing at the expense of the back country. No other nation, and few States, can match these figures. In South Australia 45.68 per cent of the people live in Adelaide; Perth enrolls 37.95 per cent of the people of West Australia; a large part of the remainder are in mining camps. Sydney, the capital of New South Wales, has 725,000 inhabitants. 39.6 per cent of the entire population of the State, and 71 per cent of the increase for the period 1911-1913 is credited to the metropolis.

Victoria shows an even more marked tendency toward urban concentration. The proportion of the population of Melbourne to the total population of the State has steadily increased from 43.3 per cent in 1900 to 47.1 per cent in 1914, and there seems no prospect of a diminution. During the three-year period ending 1913, 84 per cent of the increased population was credited to Great Melbourne, which is

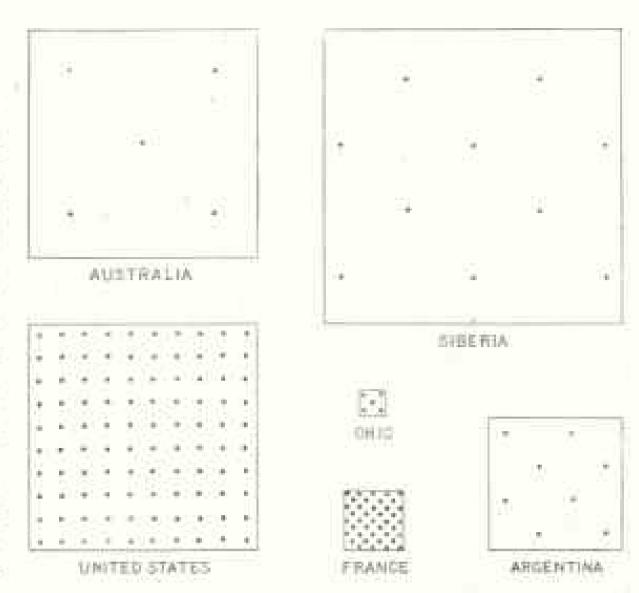

A COMPARISON OF THE DENSITY OF POPULATION OF AUSTRALIA, THE UNITED STATES, SINERIA, FRANCE, AND ARGENTINA

The squares represent the relative areas of several countries and the dots the population, there being a dot for each 1,000,000 inhabitants. If small squares are formed by connecting the dots, the relative sizes of these will represent the relative amount of land per inhabitant.

der of the State. During 1914 a net loss was recorded for the population outside of the metropolis.

It has interested me to compare the distribution of the first 5,000,000 people within the United States - a number reached about 190 years after the first English settlement—with the distribution of Australia's first 5,000,000, attained in 1915-127 years after the landing at Botany Bay. In both cases the people were grouped on the edge of the continent, in corresponding positions, their centers of settlement determined by climate and soil and nature of the coast. The chief point of difference is the absence of large cities in the United States. In 1800 New York was one-muth the size of Sydney, and the entire urban population of the United States (4 per cent of the total population) could be accommodated in the city of Adelaide.

#### WHITE AUSTRALIA

A "white Australia" is the settled policy of the Commonwealth government,



Photograph by B. W. Killmen.


A SCHOOL IN THE BUSH: QUEENSLAND

the immigration laws being so administered as effectually to exclude colored races. Legislation is directed particularly to the exclusion of Chinese, Japanese, and Polynesian labor, not only from the land, but from employment in pearl fishing, coastwise shipping, and on overseas steamers holding mail contracts. The various restrictive acts have secured the desired result. At the latest census (1911) there were 38,680 Asiaties, 603 Africans, 84 Americans, 2,751 Polynesians, 10,113 mixed-blood Australian aboriginals—a total of 52,338, including 14,554 halfcast, out of a population of 4.568,707, or a little more than one per cent.

The Australian's ideal is a continent of

whites without the "taint of color," "a homogeneous people of British origin." They point to America as a horrible example of an unmanageable mixture of races. They recognize the fact that their policy will indefinitely delay the development of the continent, but are willing to make the sacrifice,

But the fundamental reason of their policy is doubtless economic, an unwillingness to come into competition with "people with lower standards of living," to run the risk of disturbing the existing domination of the "laboring man." This attitude is shown by legislation against Asiatics already domiciled in Australia. By legal definition one Asiatic constitutes

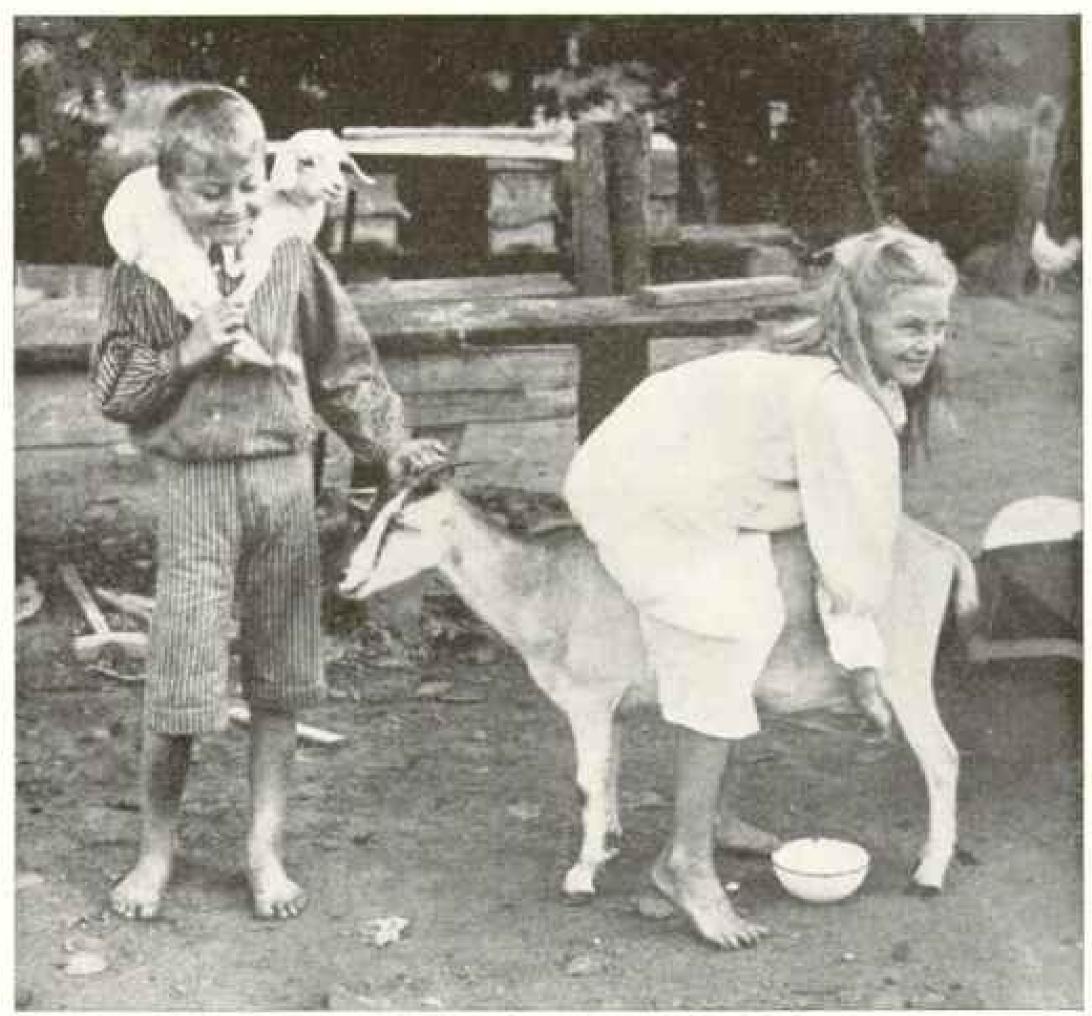

Photograph by B. W. Killern

# "A TOUCH OF NATURE MAKES THE WHOLE WORLD AKIN"

Children the world over are never so happy and interested as when they feel they are actually helping in some useful work. Australian youngsters are given every opportunity to help and they develop early a love of the practical things of life, which viewpoint generates energy, resourcefulness, and a love of the out of doors,

a factory, but four white people in three States and six in West Australia are allowed to work together without coming under the restrictions of the factory acts.


Australia is not only "white," it is also British—the most British of all lands outside of Great Britain. Australian writers call attention with pride to the fact that Canada has her French province, that the Dutch are in South Africa, that India and Egypt have large native elements, and that America is a medley of races. Of the total population at the last census \$2.90 per cent were Australian born: 13.35 per cent were natives of the United

Kingdom, and 0.72 per cent were born in New Zealand.

#### SOME NATIONAL TRAITS

They are proud of their British ancestry and glory in the achievements of their race.

An American who knows the United States and Canada feels at home in Australia, much more so than in the British Islands. He finds the people discussing immigration, land settlement, railroad building, mining, irrigation, forestry, secondary education, social legislation, progressive pg. stand-pat policies, military

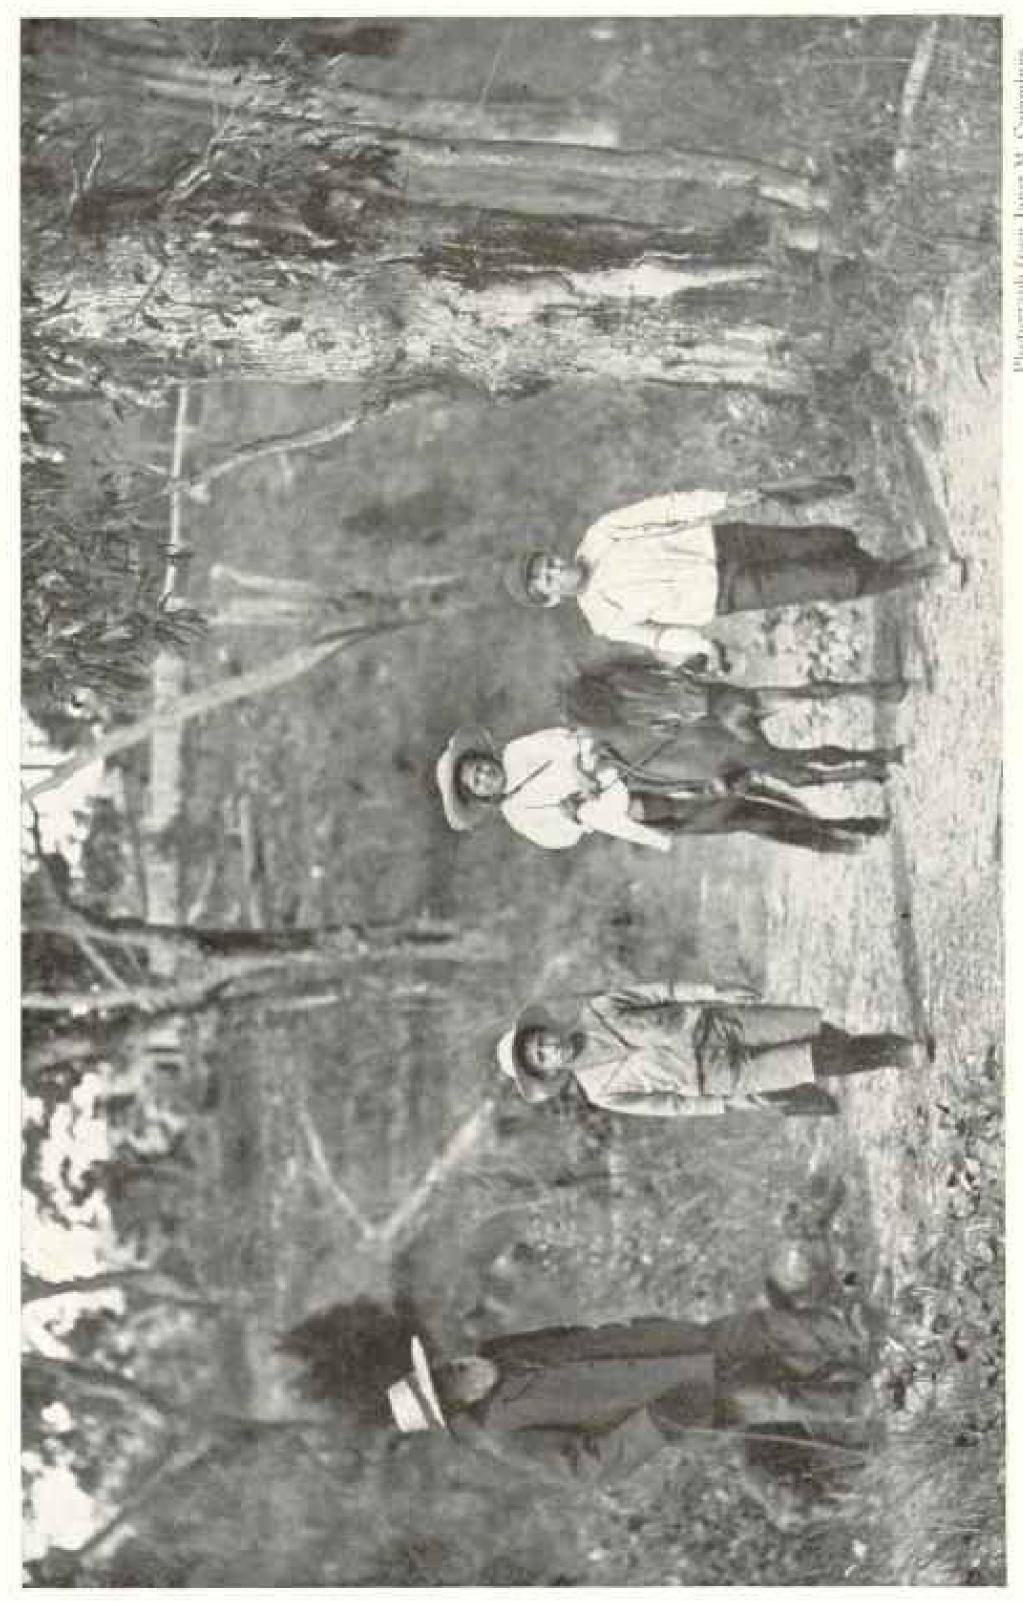

Photograph Feats Janes M. Caricodugs

make way for Youth as he murches bravely along the one Highway to Knowledge that is available se of the Blood and peasant and alike-the school-room AUSTRALIANS OFF TO SCHOOL, VICTORIA, AUSTRALIA OWLINGE I YOU'NG Old Pather Time steps aside for the montent to a THE ROYAL BOAD TO KE



3) Underwood & Underwood

"DOING THEIR BIT"

Both well over their allotted threescore and ten, these two Australian women—the one on the right the mother of the commander-in-chief of Australia's oversea forces—are never-theless contributing their share of assistance in maintaining their country's contingent at the front. They spend most of their waking hours cutting up clean rags to be used in pads for the wounded.


training, need of a big navy, and other matters relating to national development. He hears in general the language of Ontario, but the variation in individuals, families, and communities is closely similar to that in the United States, plus a bit of cockney.

Many of the numerous Australianisms are also Americanisms, but would require an interpreter in England. In some mining towns and outlying villages the local dialects of the United Kingdom are said to prevail, but there is probably nothing in Australia like Dunedin or Christchurch, New Zealand, where the peculiarities of speech of southern Scotland and middle England are found in an exaggerated form.


Australian as a class from Americans their attitude toward work and their attitude toward wealth. The percentage of men who do no productive labor, loafers and "idle rich," is probably about the same in the two countries, but the number of men and women who voluntarily work long hours and gladly assume uncongenial tasks with the idea of demonstrating their usefulness and "getting ahead" is very much greater in America. In Australia the species finds an uncongenial environment.

On the basis of doing a moderate amount of work amidst agreeable surroundings, most Australians are workers. Short hours are the rule, and there is a 
tendency to ward off competition by legislative enactments rather than to meet and 
overcome it.

The desire for money is in most cases a desire to secure a competence, not to secure power and prestige by amassing a huge bank account. Wealth is so diffused that nobody is really poor and few are

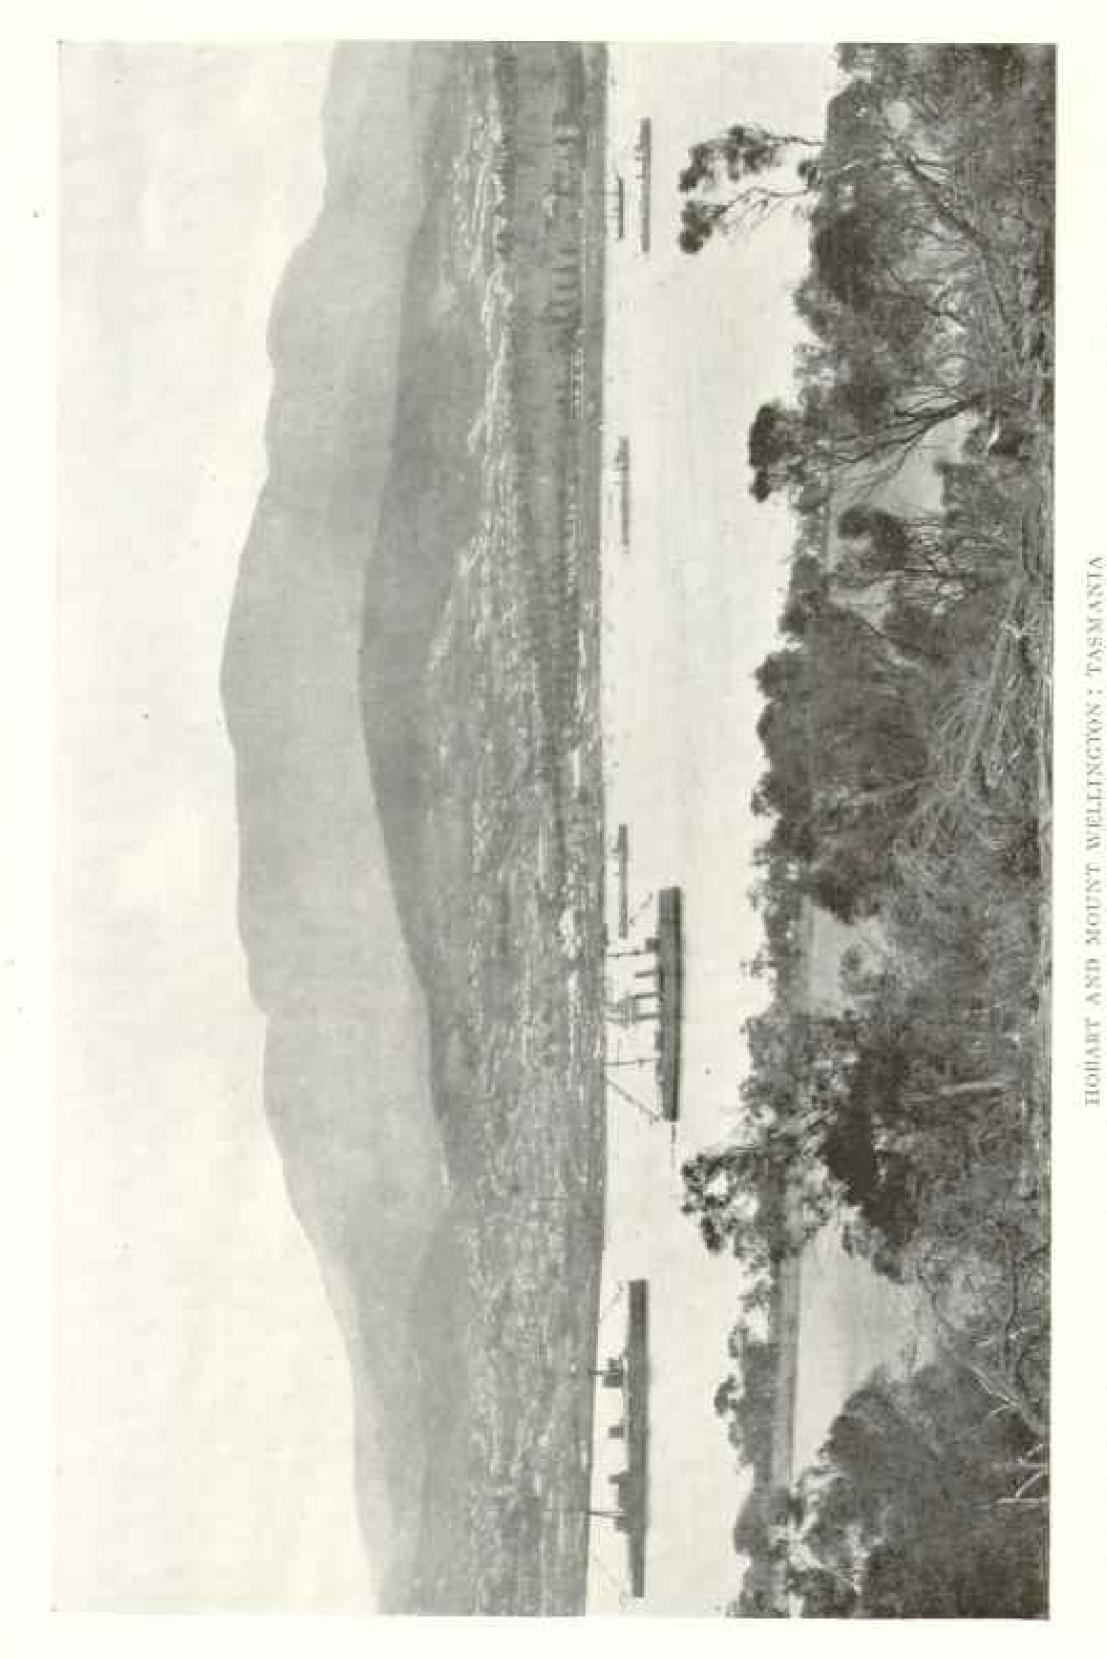


With Mount Wellington as a striking background and the Derwent River as its foreground, Hobart, the capital of Tarmania, is one of the mentional prost permentaged cities of the southern world. Founded in 1804, it now has a population of 40,000 and is a highly progressive manicipality.

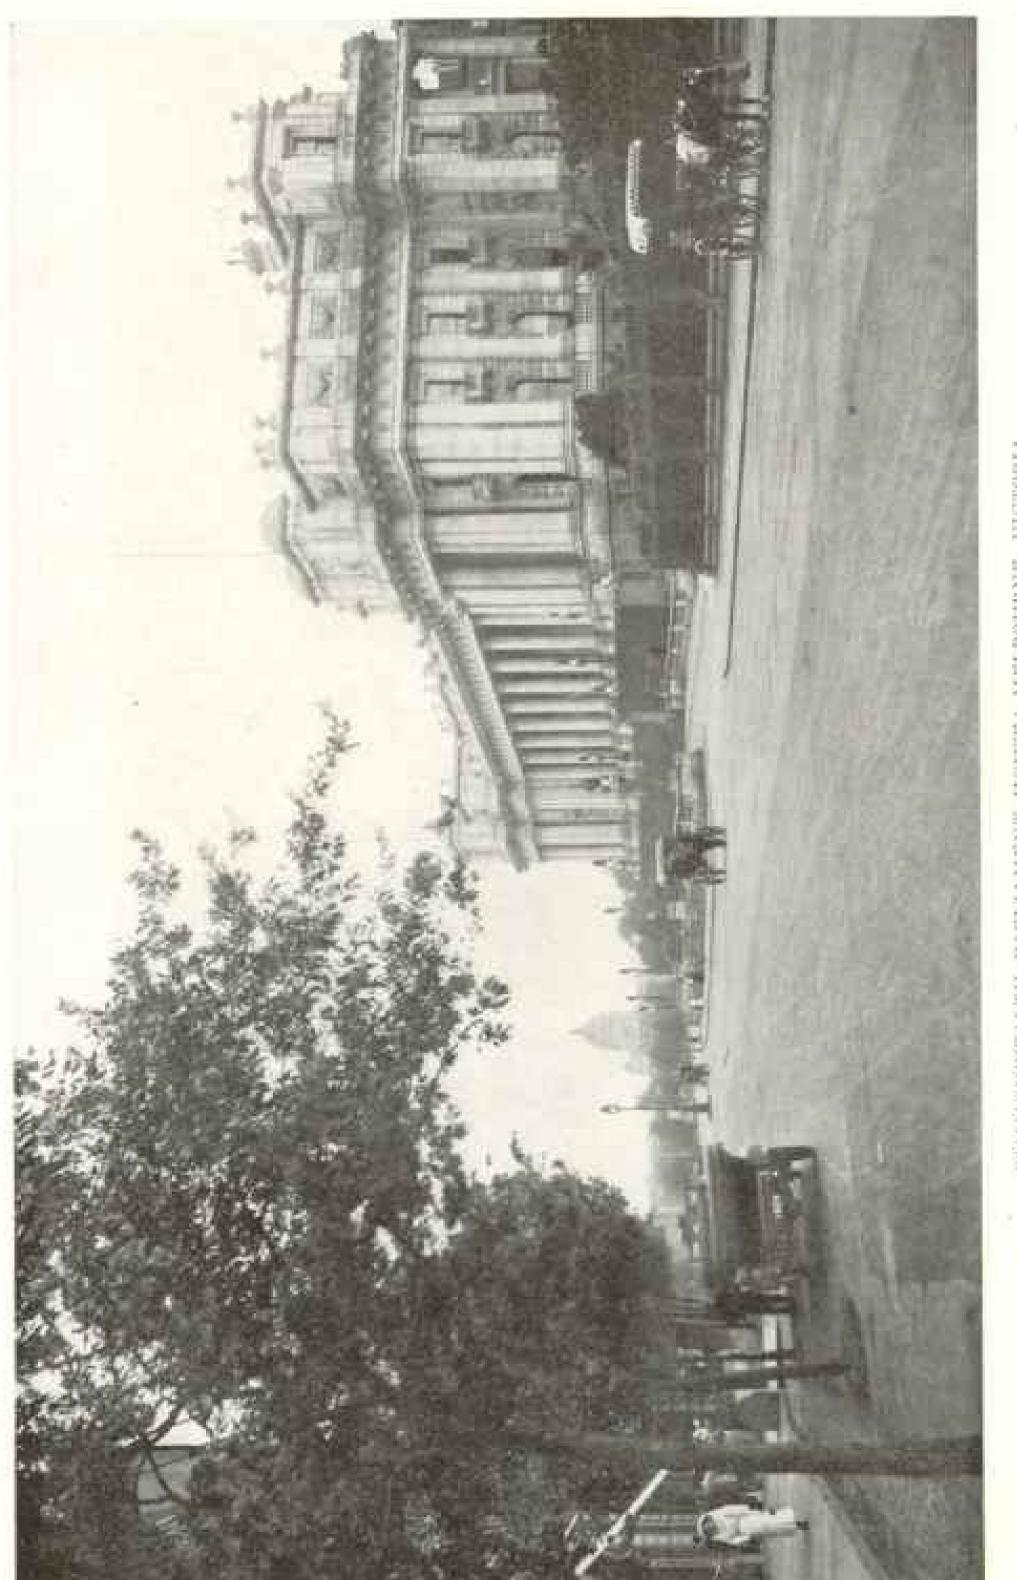

COMMONWEALTH PARLIAMENT HOUSE: MELBOURNE, VICTORIA

White Sydney is much older than Melbourne, there is a neck and-neck race between them for the honor of the greatest population, not to mention a gentlemanty rivairy in all other matters. More than one-fourth of the population of the six Amstralian States is only about 5,000,000. At present Melbourne is the seat of the Federal Government, but will lose that distinction when the new capital, Camberra, is completed.

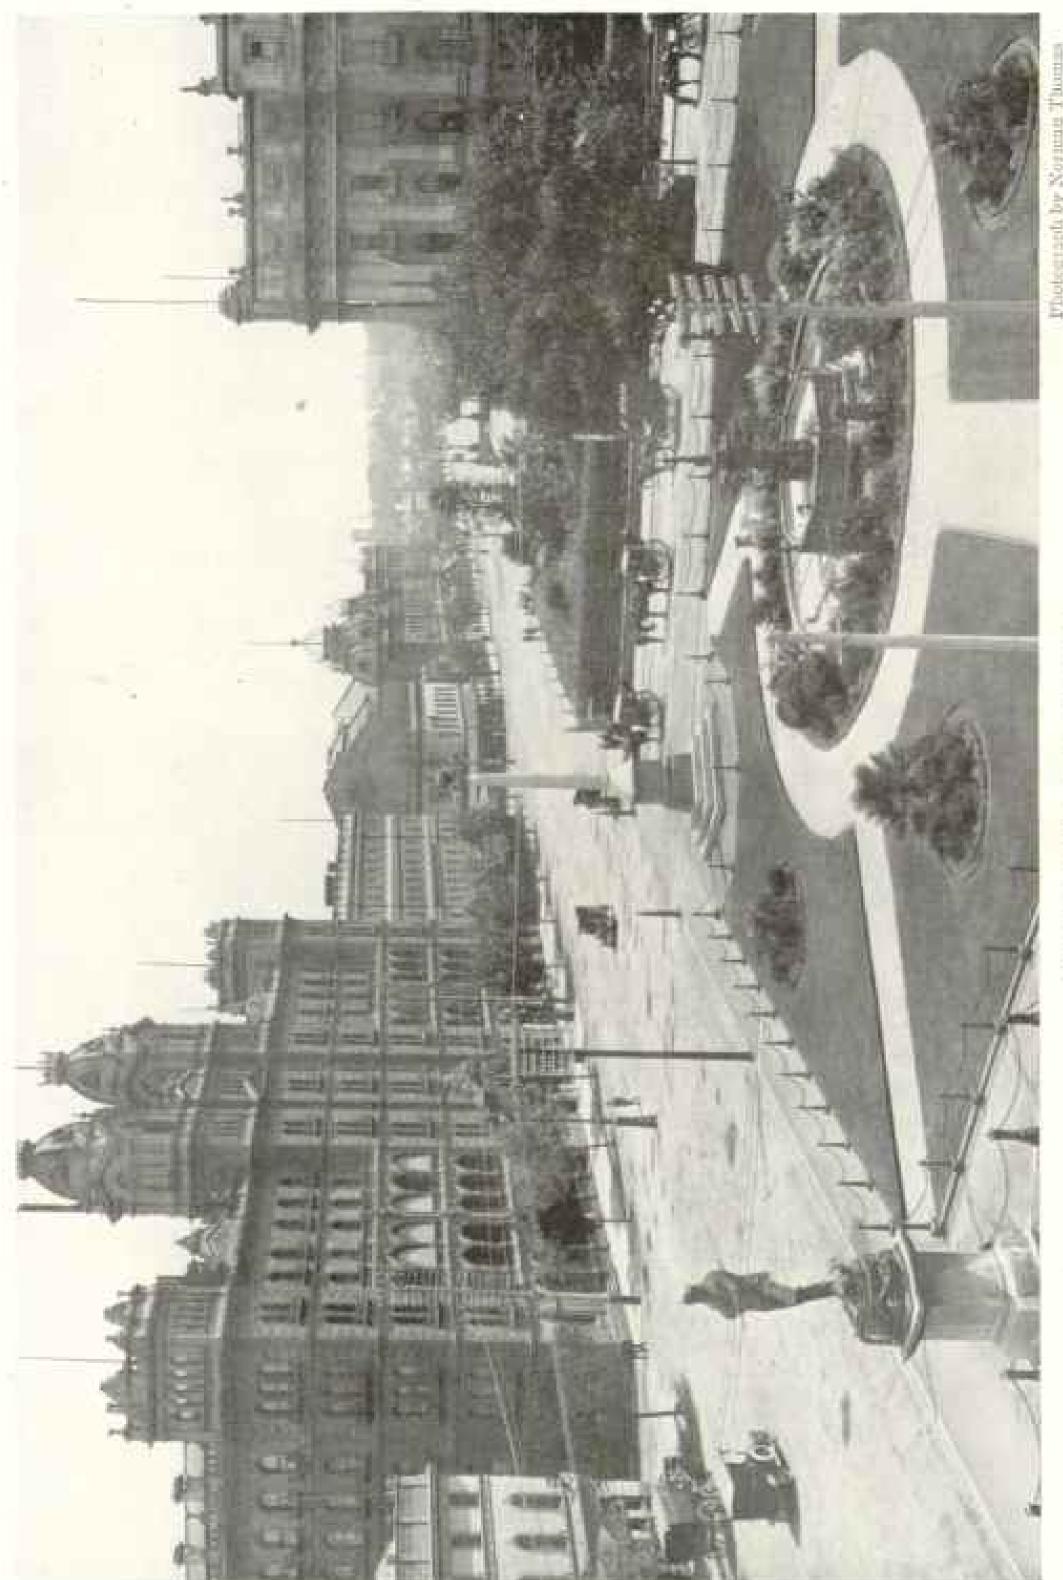

Photograph by Norman Thomas

IN MILLIOURNE SPHING STREET,

counded four-score years ago, it now has nearly 700,000 population, and proudly claims to have finer to any part of the world. The ramshackle districts which usually lie between the suburban places found in Melbourne, which is practically slumless. Melbourne is the Chicago of Australia. Franklic buildings than any other city of its six and the "down-town" section of a city are not very rich. It is stated that one in six Australians owns property, and that one in four has deposits in savings banks.

HIGH SCHOOLS AND UNIVERSITIES POORLY
ATTENDED

One of the anomalies of Australian life is their attitude toward education. In a country where the government digs a man's well, sells him fish, and tells him when to open his store, and where 98 per cent of the adult population can read and write, it is strange indeed that interest in higher education should be so slow in developing.

Free public education from kindergarten to a university degree, giving equal opportunities to rich and poor of both sexes, is not known in Australia. The numbers enrolled in secondary schools, both public and private, and in universities are therefore relatively small.

The States of Washington and Victoria have about the same population, but the Washington high schools enroll four times the number of pupils and the State University enrolls four times as many students.

One reason for the small number of students in the university and secondary schools is doubtless the tuition charges; but this obstruction is partly removed by scholarships and stipends of various sorts granted to deserving pupils at public expense.

To my mind the chief reason is the low valuation placed on higher education; too few are willing to obtain it at a personal sacrifice. Stories of American boys and girls without money, who by the thousands work their way through school and college by sacrificing their holidays and vacations, performing menial services and living on meager fare in cheap lodgings, read like fiction to the son of the Australian laborer.

## AUSTRALIANS AT PLAY

With a short, easy day for the business and professional man and for the wageearner, with Saturday afternoon free and frequent holidays, the Australian has the energy and the time for amusements, which, because of the climate, take largely the form of out-of-door sports. Horseracing is a national interest, to an extent unknown in other countries, and racecourses are as much a part of a community's equipment as streets and cemeteries.


Metropolitan "cup days" in spring are
the Easters of Australia, the days on
which fashionable women display their
new gowns and bats. For the great races
people come to the cities by thousands,
the streets are crowded, and the hotels
packed to the limit. Ordinary work practically ceases; freedom and gaiety prevail
and money is lavishly spent. The attitude of the community is like that of an
American student during an intercollegiate foot-ball match.

Unfortunately horse-racing is not only the national sport; it is also the national vice. Where thousands see the races, tens of thousands bet on them. A lack of knowledge of horse or rider or owner is no deterrent, for there is little pretense of an honest race. The grand prize of \$25,000 to \$100,000—occasionally \$300,000—is irresistible. The gambling spirit pervades all classes and all occupations.

To quote an attorney general of New South Wales: "Clerks and shop girls will stint themselves of food and office boys pilfer the stamps to buy a ticket or share in one of these lotteries... ninetenths of the embezzlements and forgeries and breaches of trust which come before the Australian courts are directly due to horse-racing and its concomitants." In spite of editorial and pulpit utterances, of votes in the hands of women, of efforts of the Commonwealth government and mild legislation by States, the evil continues.

As in the United States, the "movies" often constitute the chief indoor amusement, but the universal recreation is the picnic, which in Australia reaches its highest development. Men, women, children, families, clubs, churches, lodges, and miscellaneous groups are out on picnics afternoons, Sundays and bolidays.

Two pienies a week are not unusual; a young lady of my acquaintance had five to her credit. The pienickers walk, ride horses, take wagons, or go by motor, street car, train, or boat. They go to the shore, to the woods, to rivers, to pictur-

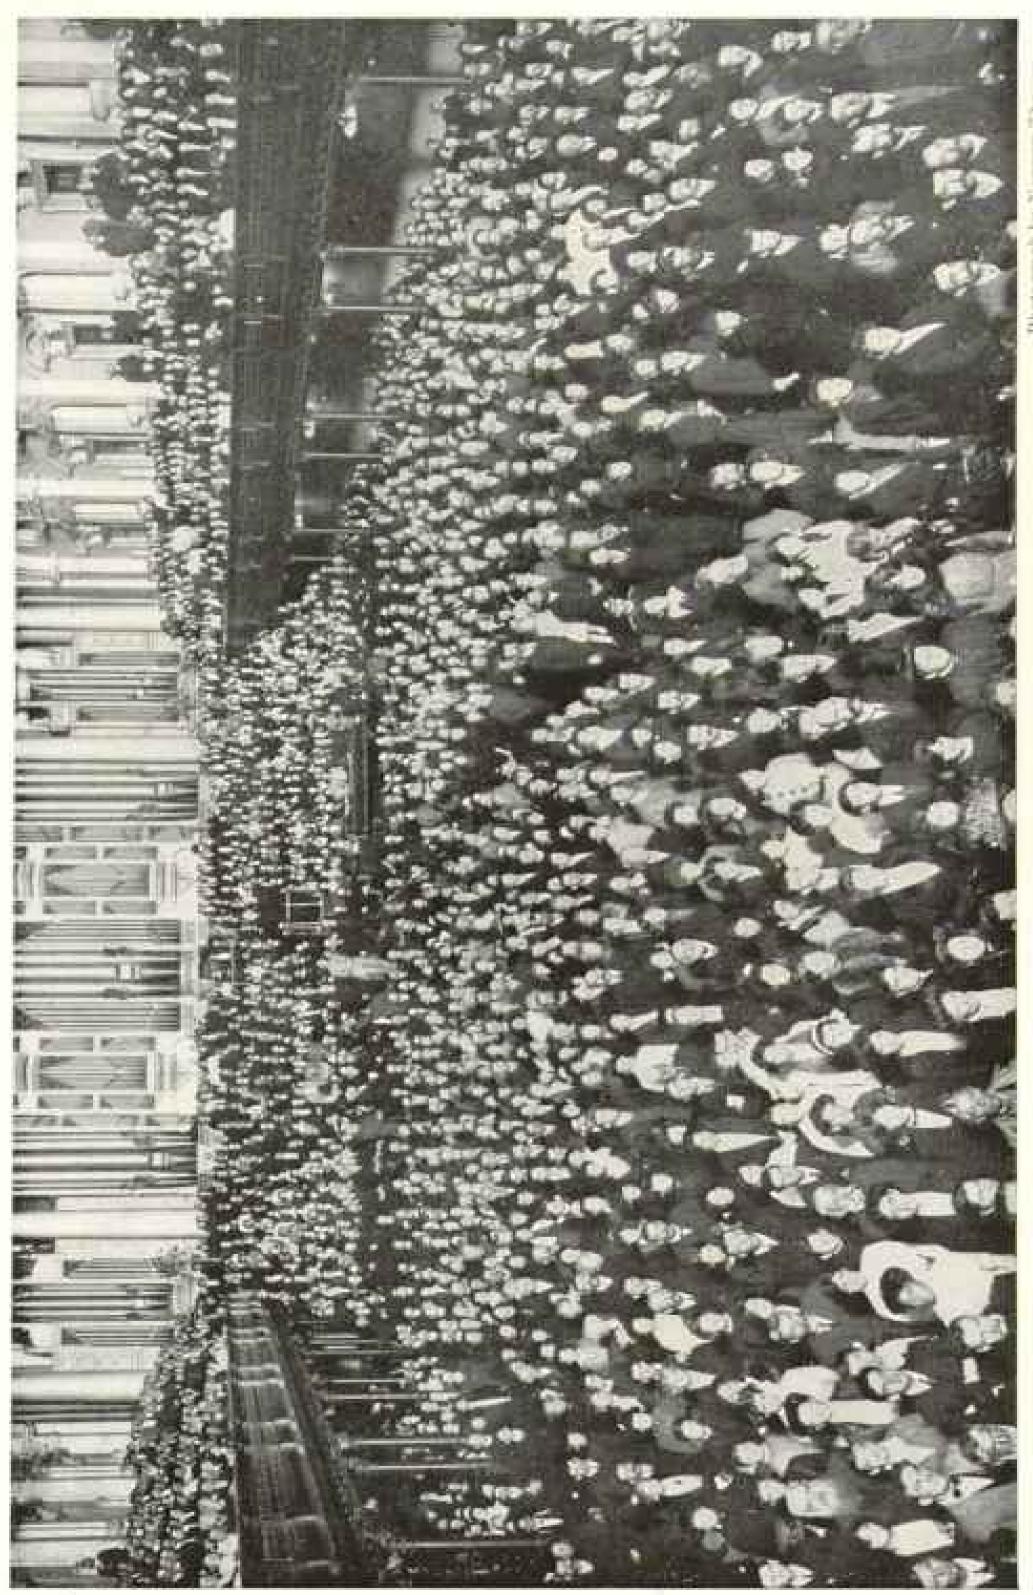

Photograph by Norman Thurses

V HALL, WHICH HAS ONE OF THE LANGEST ORGANS IN THE WORLD INTERIOR OF SYDNEY

An Australian's idea of a nice day is the exact antithesis of ours. He thinks it is a nice day when it rains. When the havoe wrought by a drouth is realized, one cannot but agree that his point is well taken and his opinion justified. One wonders, though, if when the great city andience pictured above went into the street and found it raining "cats and dogs" a consensus of opinion among the ladies would have borne out the previous statement.



Photograph by George Bell

LAUNCHING THE AUSTRALIAN-BUILT TORPEDO-BOAT DESTROYER "TORRENS"

The policy of the Australian Commonwealth is to make the continent able to defend itself. Under an agreement with the mother country, it undertakes to equip and maintain a navy consisting of a battle cruiser, three unarmored cruisers, six torpedo-boat destroyers, and two submarines.


esque hillsides, or to the zoological and botanical gardens, which in Australian cities are used, not guarded by "keep off the grass" signs. The time is occupied by gossiping, reading, sewing, writing letters, playing simple games, eating lunch or supper, fishing, swimming, studying flowers or insects, or "plain resting."

America has much to learn from the Southern Continent of the use of parks and the attainment of recreation without the expense of country clubs and Coney Islands.


# THE DAY LABORER IS KING

The day laborer, as opposed to the employer and to other workers, is king in Australia. The unions, through the labor party, practically control the executive, legislative, and judicial machinery of the cities, the States, and the Commonwealth. Much of the legislation enacted during the past ten years—for example, shortening of hours, increase in wages, restriction of child labor, safeguarding from accident, and employer's liability—finds its counterpart in the United States. Certain other features of industrial life are unfamiliar to Americans.

Forty-eight hours is the recognized maximum for a week's work; but in certain occupations forty-four, forty-two, forty, and even thirty-six hours are considered full time. Some of the larger building trades have a forty-four-hour week, and it is probable that this figure will become the recognized standard for all labor. Of the "four sacred eights" in the original slogan—"eight hours' work, eight hours' play, eight hours' rest, and

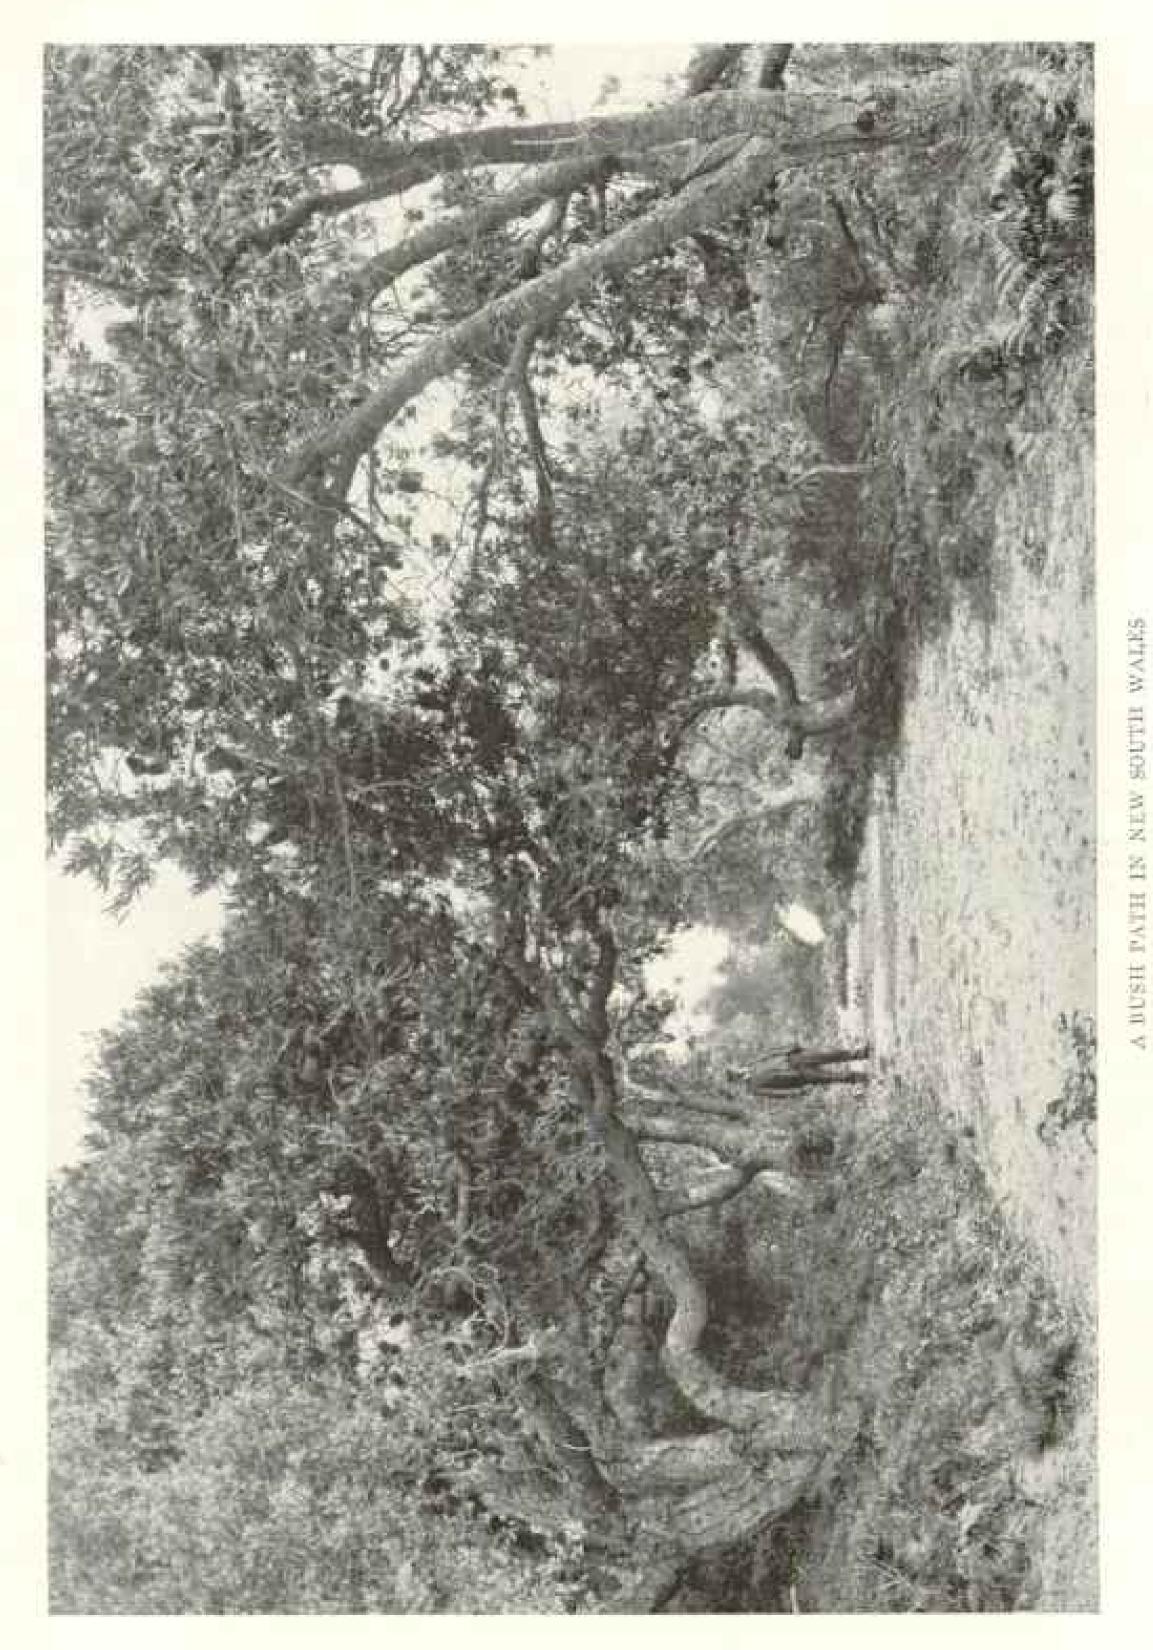


te vegetation is thick and tangled and the early settlers cleared their land with great difficulty In the well-watered sections of Australia

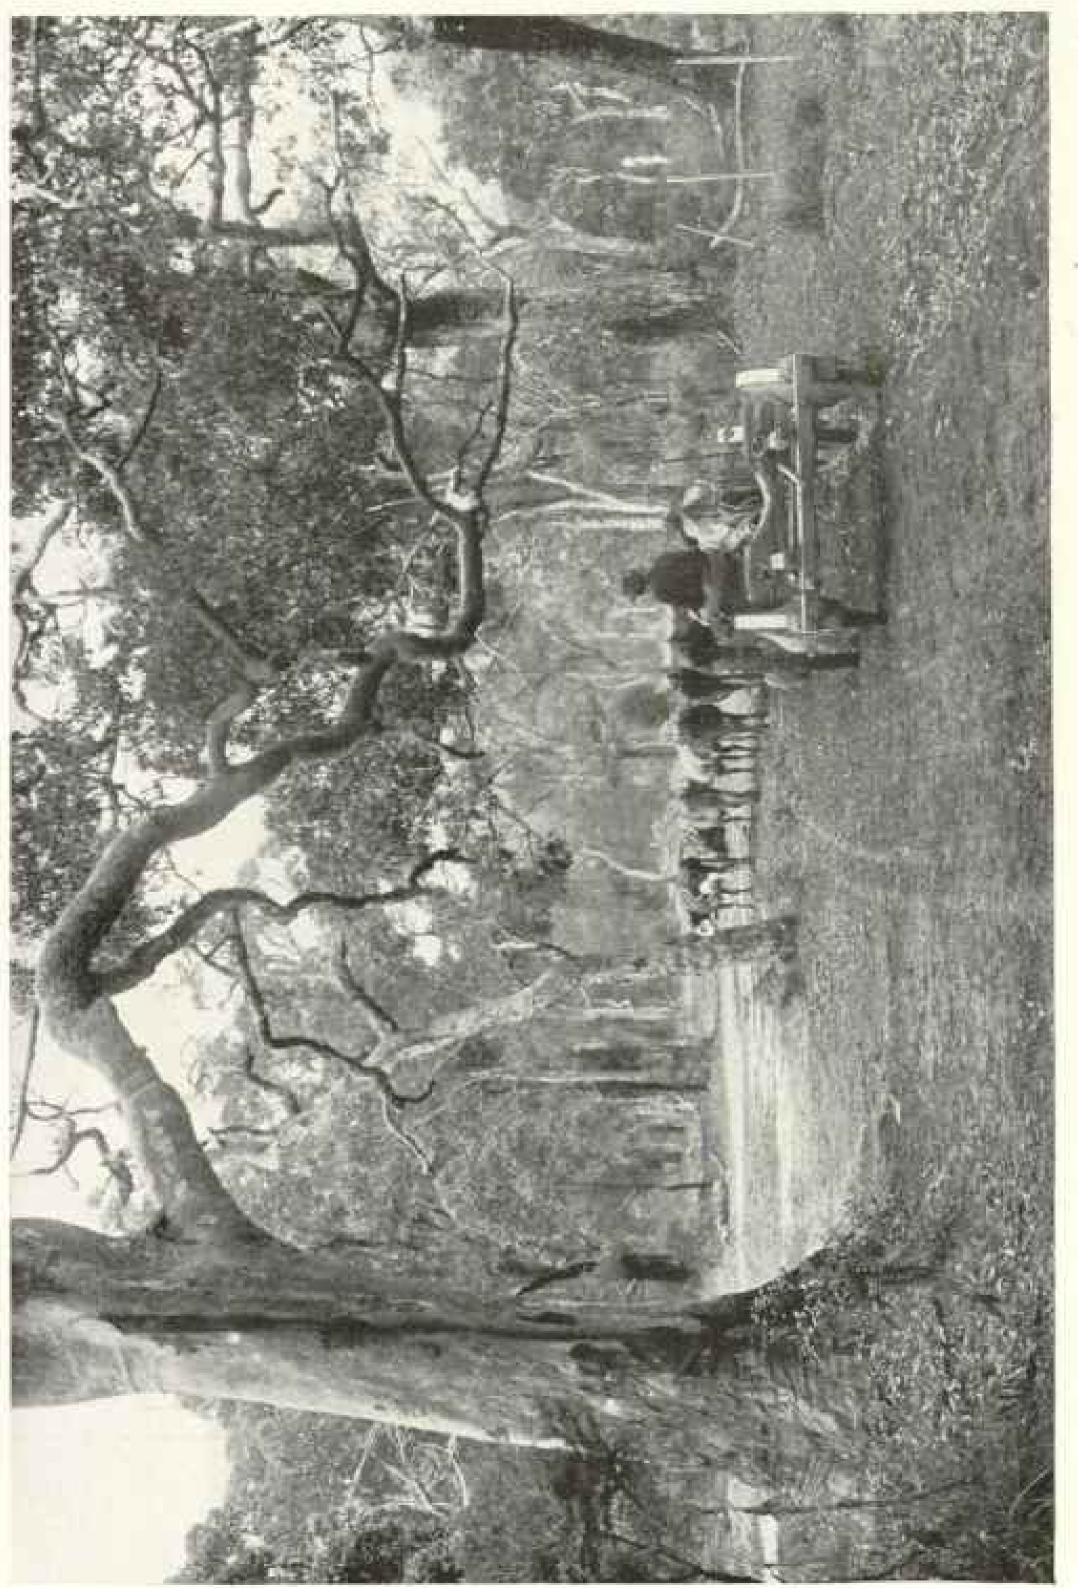

COUR-DRAWN LOGGING WAGON: NEW SOUTH WALKS

They tell many a story about halbock drivers in Australia. Usually their language to the soldiering ox is about as sharp as the crack of their perceived whips. But once a "ladkocky," swinging his whip and preparing a whole machine-gun load of verbal shots to accompany its lash, perceived the mail-coach coming, and a elerical hat on the front seat. The whip dropped and the "bullocky" coughed politely, "About Strawberry did as he was told.

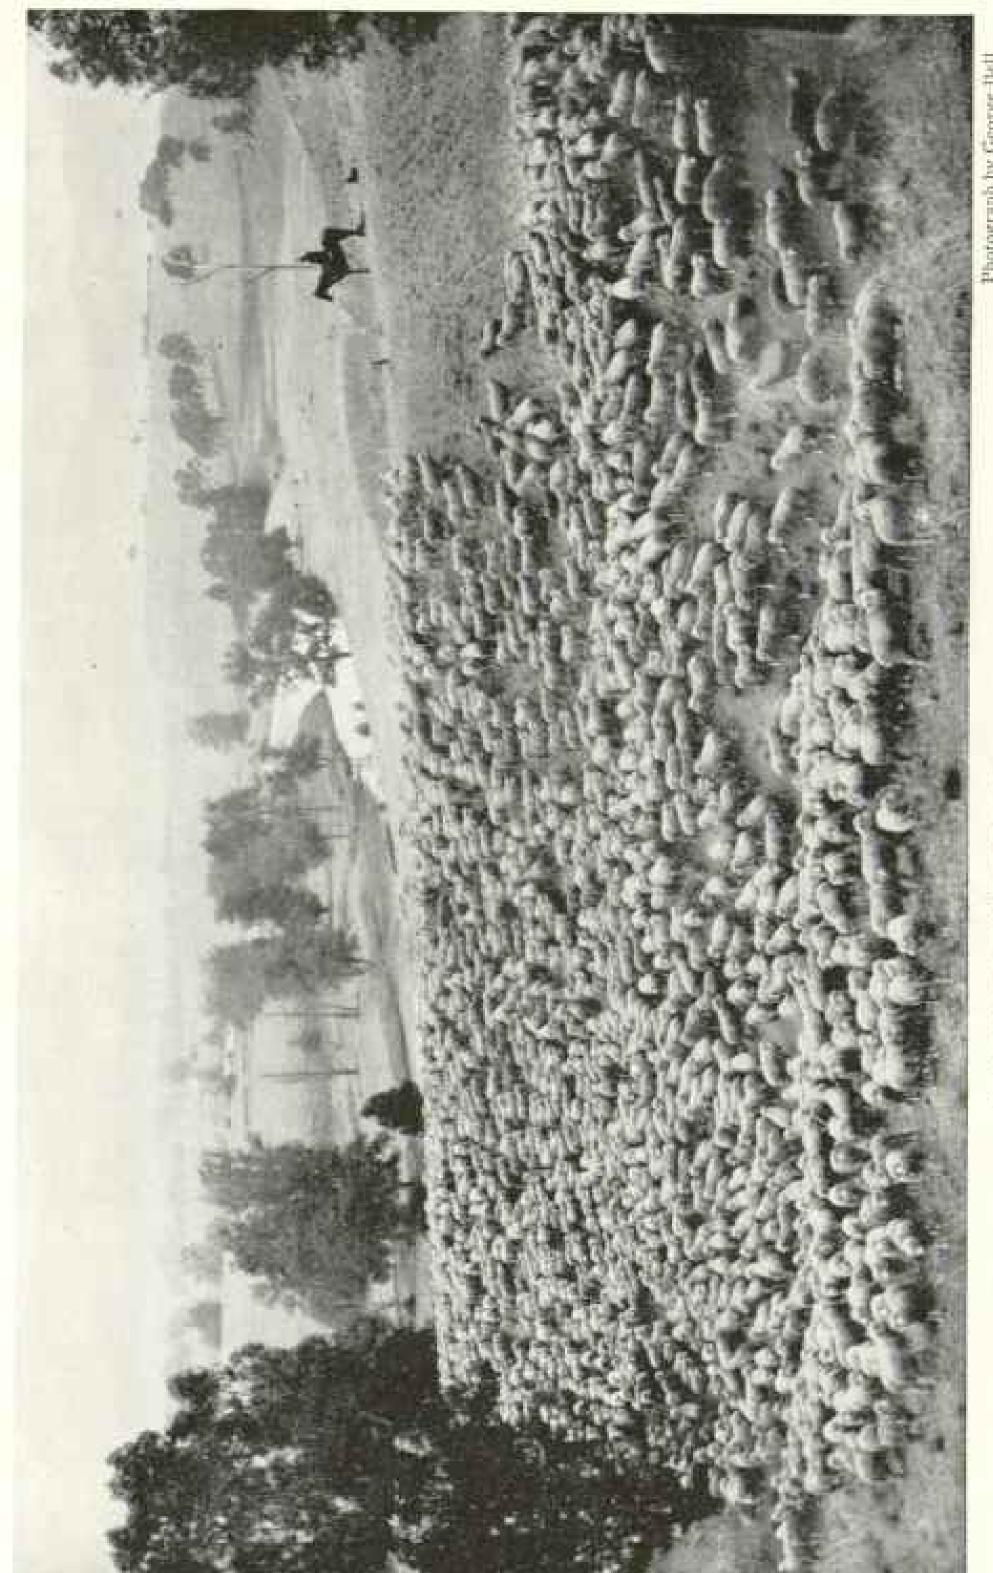

Photograph by George Hell

TOCK OF SHEEP ON A NEW SOUTH WALRS RUN

For 100 miles on every side every one knows that shearing begins at the central paddock. Orders have to stations to have different detachments of sheep marched into certain places on certain dates. Regiment troops at a military concentration. When the final order arrives to have the sheep from White Dog paddock "On the Wool Track," suddeck on Wednesday week they must be; for i he sent out weeks before to the back stations to have different detachments of after regiment has to be shifted in like troops at a military concentration. When it at Emu paddock on Wednesday week at Emu paddock on Wednesday week the from the station to fetch 3,000 or 0,000 of those sheep into the woot-shed paddock, "The shearers are concentrating,

eight hob a day"—only the portion relating to rest has been retained. Stores are forced, not permitted, to close at 6 p. m. on four days, at 9 or 10 p. m. on one day, at 1 p. m. on Saturday; but drug stores and saloons and restaurants are ex-

empted.

After watching railroad laborers doing "the government stroke," it was easy to understand the opinion of contractors, who had had experience in the United States, Canada, England, France, or Germany, that the work accomplished in an eight-hour day in Australia was the equivalent of that performed in six and one-half to seven hours in other countries.

### A LIVING WACE DEFINED

The theory of the minimum wage is in practical operation. The fluctuating cost of living is recorded in detail by various boards and furnishes a basis for awards in industrial disputes. It is interesting to note the definition of a living wage as formulated by the Court of Industrial Arbitration of New South Wales in

1014:

"The living wage is standardized as the wage which will do neither more nor less than enable a worker of the class to which the lowest wage would be awarded to maintain himself, his wife, and two children—the average dependent family in a house of three rooms and a kitchen, with food, plain and inexpensive, but quite sufficient in quantity and quality to maintain health and efficiency, and with an allowance for the following other expenses: Fuel, clothes, boots, furniture, utensils, rates, life insurance, savings, accident or benefit societies, loss of employment, union pay, books and newspapers, train and train fares, sewing-machine, mangle, school requisites, anusements and holiday, intoxicating liquors, tobacco, sickness and death, domestic help, unusual contingencies, religion, or charity."

chinery has been devised to adjust misunderstandings between employers and employees and to prevent strikes and lockouts—an experiment which is attracting world-wide interest. In 1914 five hundred and twenty-two State boards dealing with disputes in various occupations were sitting and the docket of the Commonwealth courts were overloaded.

While many disagreements have been composed by these various boards, industrial unrest has increased to a discouraging extent, and the difficulty experienced by courts and boards in enforcing their awards, except as against employers, tends to nullify the effect of arbitration. The number of industrial disputes has increased since the Industrial Arbitration Act of 1912 became operative, and shows little diminution in consequence of the present war.

statistics, the parties to disputes prefer to fight it out. (If three hundred and thirteen "industrial dislocations" in this State for the year 1914, two hundred and forty-five were settled by "strife," forty-five by "arbitration," and twenty-three by "other

means."


### THREE AUSTRALIAN CITIES

While the visitor may feel that the Australian capital cities are sapping the life of the rural sections, he must admit their attractiveness. They are clean and are not overcrowded, and lack the congested districts of tenement houses. Parks are numerous, the streets are ornamented with trees, and an effort is made to decrease the natural ugliness of trolley and telephone poles and street lights. Gardens, which take the place of lawns, are everywhere present, and where the city meets the country the zone of ramshackle buildings and unkept yards, characteristic of many American cities, is conspicuous by its absence.

Sydney is the seventh city in size in the British Empire, being exceeded only by London, Calcutta, Bombay, Glasgow, Liverpool, and Manchester. It is about the size of Boston or St. Louis, two of the five largest cities of North America. Its population is exceeded in the Southern Hemisphere only by Buenos Ayres


and Rio de Janeiro.

Sydney has grown spontaneously, like Boston, not according to a previous plan, like Washington or Salt Lake City. It has straight streets and crooked streets, long streets and short streets, boulevards and streets too narrow to permit double-

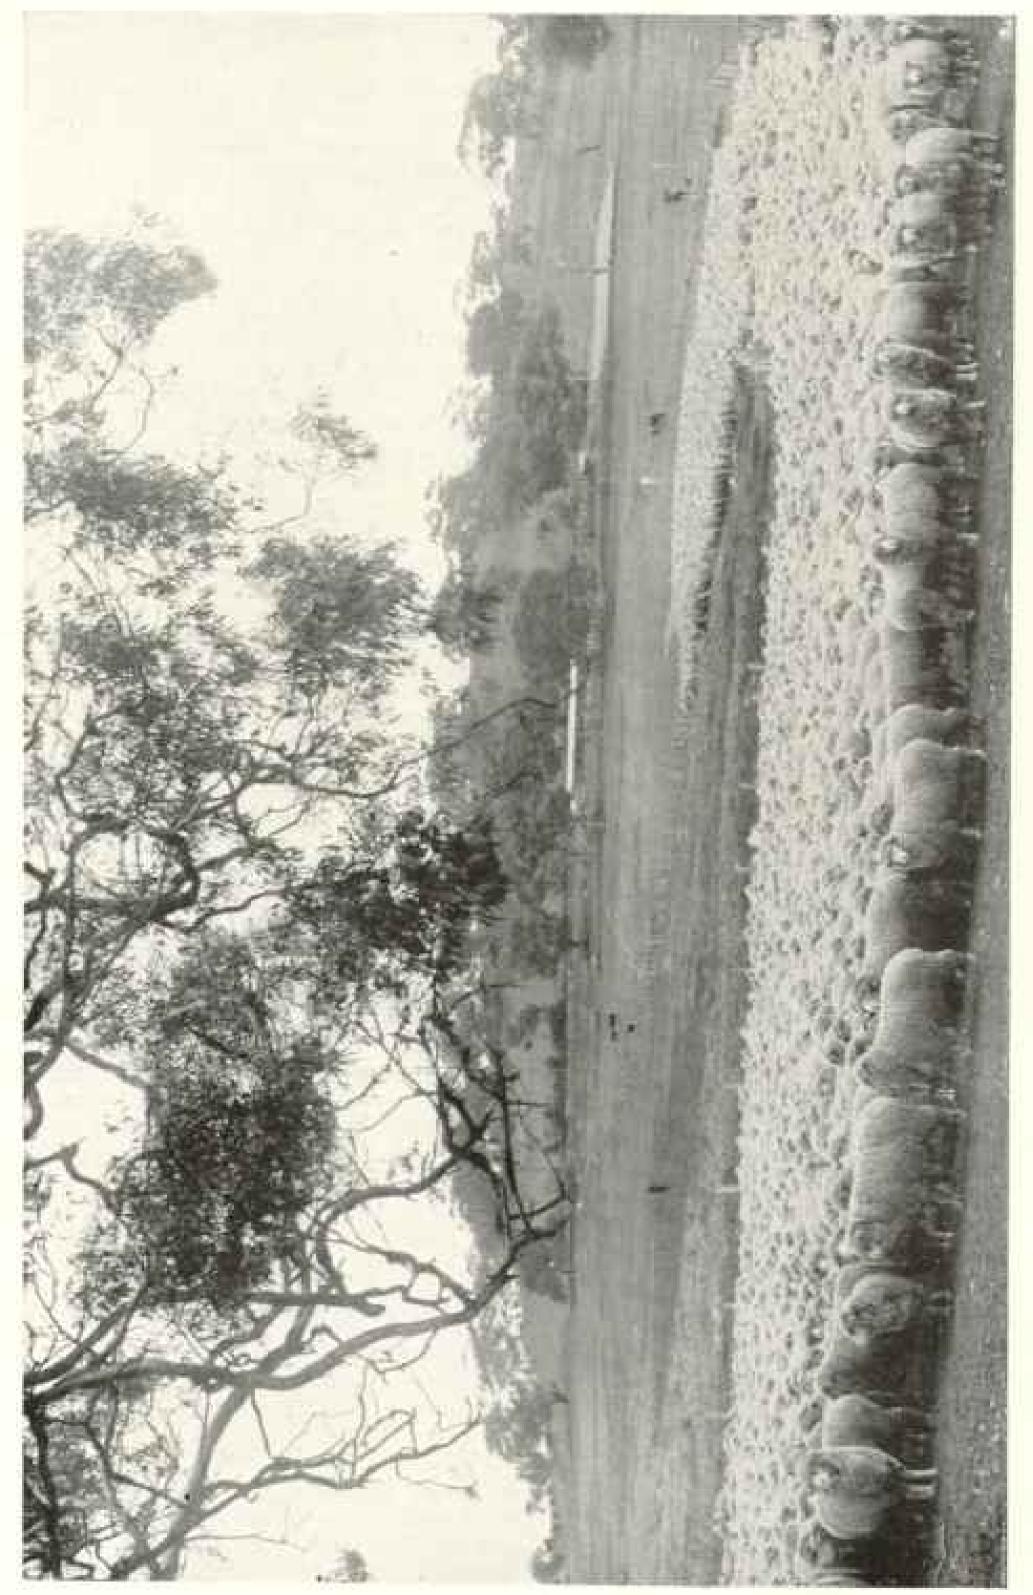

A PLOCK OF SHEEF ON AN AUSTRALIAN FARM

sheep, but now she has been forced to yield first place to Azmentina. I of our western plains, so they are encroaching upon the sheep ranges of farmer and his fence have encroached upon the with the result, that the number of above is dec-

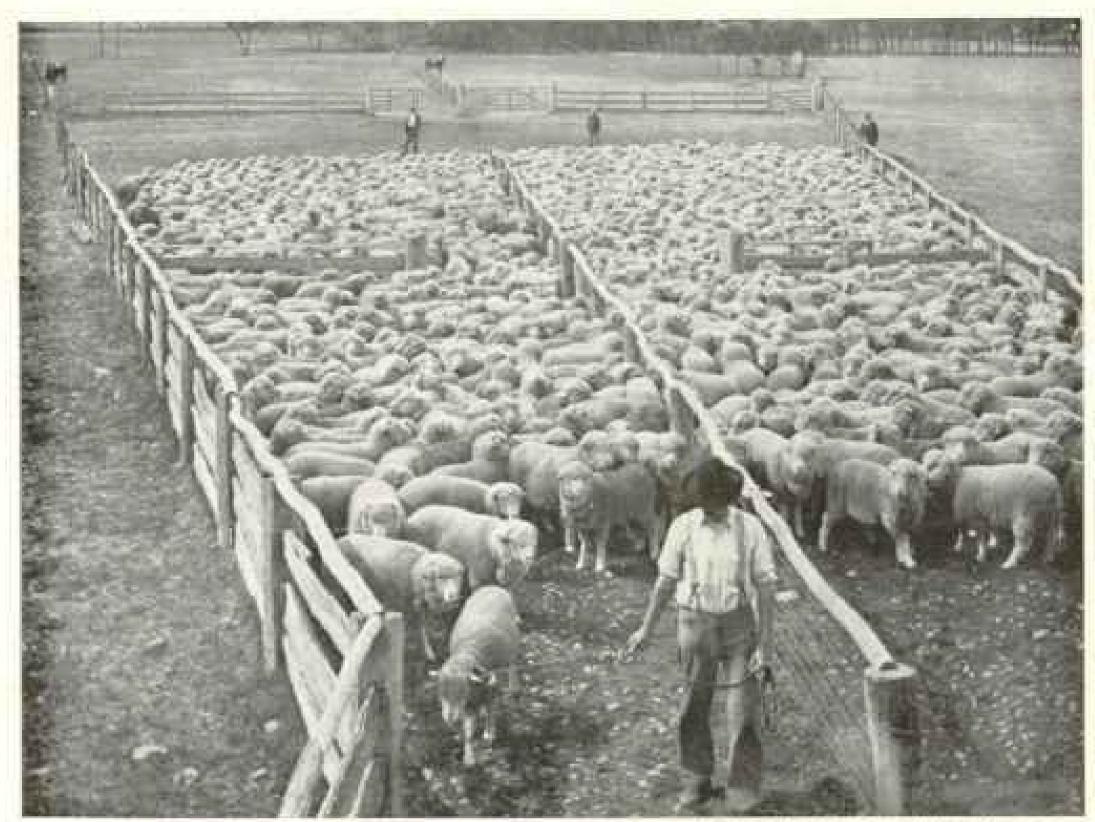

Photograph from Boston Photo News Co.

# PREPARING TO "DRAFT" A PLOCK OF SHEEP: NEW SOUTH WALES

Drafting sheep is the process of separating them. They are driven into the drafting yard, from which leads a runway wide enough for one sheep, with two pens at the end and a gute. By turning this gute to one side or the other the drafter is able to send a sheep into the one pen or the other. Each owe has a right-car mark und each wether has a left-car mark. Expert drafters can work two and even three gates at a time, separating the sheep into three and even four pens and classes.

tracking. Some parts of the city are flat; served an explorer a better turn than in others the streets lead up and down steep little hills. There is no division into business and residential sections, or into "new part" and "old part," or "rich part" and "poor part." The soft buff-colored standstone, so largely used in construction, gives a pleasing impression of age even to buildings recently constructed. It may be that the attractive informality of the life of the metropolis is a reflection of the city, or both may have resulted from the mild and fluctuating climate.

### A KINDLY FATE

The surprising beauty and spaciousness of the harbor of Sydney, Port Jackson, its "deep water fingers stretching miles up between wooded banks." have often been described, but its commercial value is not so widely known. Fate never

when it directed Captain Cook's course to the entrance of Sydney Bay, for it is the one place along a thousand miles of coast where access to the interior is CHSY.

In natural advantages it surpasses any harbor of the North American coast. The entrance is a channel one mile wide and go feet deep, walled by perpendicular cliffs of sandstone. Inside The Heads is an expanse of deep water covering several square miles and extending with slight decrease in depth along many miles of shore. Danger at the entrance, shifting sand-bars, shelving bottom, strong currents, and rough seas stirred up by winds are all lacking. In 1913 the total shipping business amounted to over 9,000,000 tons, a figure exceeded in the United Kingdom only by London, Liverpool,



SHEARING SHEEP: JIMBOW, WEST OUGENSLAND


A good shearer will shear one hundred sheep a day and is paid six cents a head. The shearing season begins in July and ends in November. Men come from all parts of the world to become shearers, and they travel from sheep station to sheep station as the tramp printer used to travel from city to city.

Cardiff, and the Tyne, and in the United States only by New York and Duluth.

Melbourne's appearance speaks of ambition and faith in the future and reflects the exciting epochs in the history of Victoria. The groups of government and city buildings are admirably placed and include some imposing structures which rank with those of any American State capital. Railways are convenient, the parks and public gardens are large and numerous, well cared for and largely used.

Business is concentrated on a relatively small number of blocks bounded by streets 99 feet wide, feeding into parkways of twice that width, which seem to have been planned to secure fascinating vistas. Although the exaggerated prophecies of Melbourne's builders have not become realities, the feeling for greatness, and order, and convenience has been splendidly expressed.

Adelaide's unusual plan—a business section surrounded by a zone of 2,000 acres of park lands, beyond which are the residential sections—seems designed to put business cares, recreation and quiet home life in separate compartments. The organization of city life to allow for

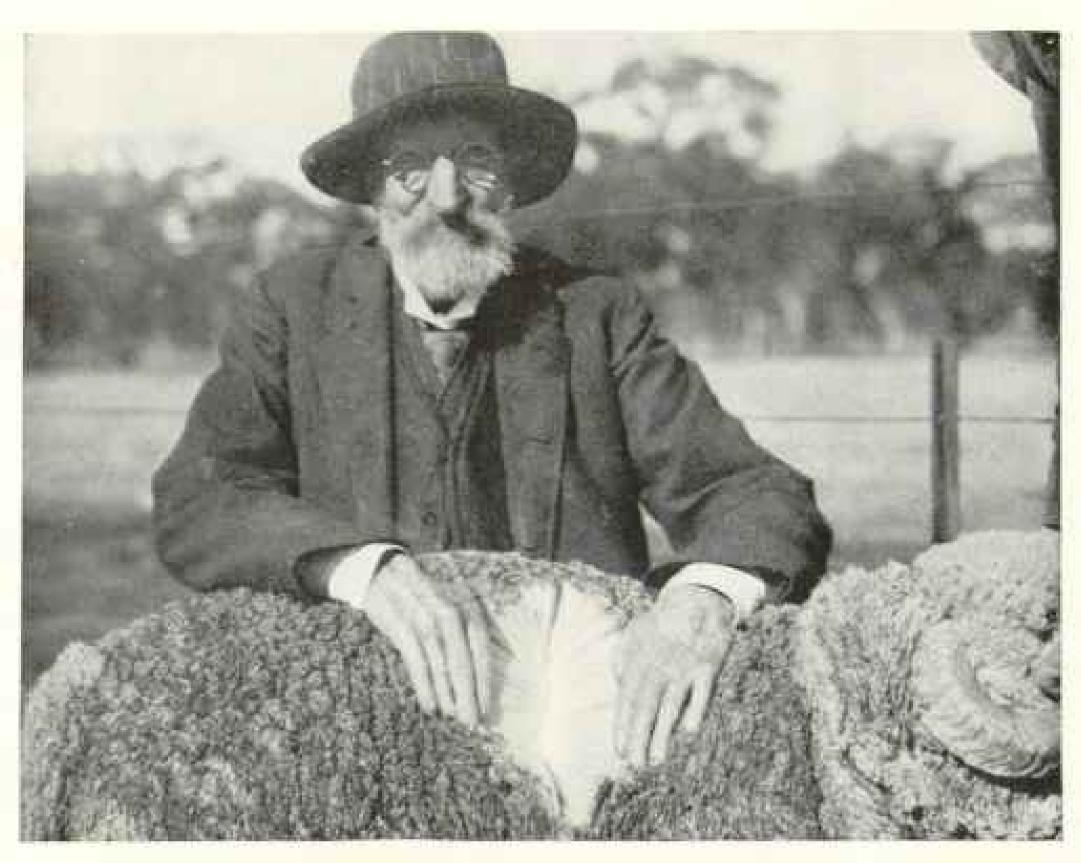

AN ILLUSTRATION OF THE HEAVY, FINE WOOL OF AN AUSTRALIAN MERING RAM (SEE PAGE 533)

leisure—a feeling more prevalent in Adelaide than in Melbourne, or even in Sydney, and almost unknown in American cities—is partly responsible for the universal impression among visitors that Adelaide ranks high in general culture.


But climate and the high quality of the South Australian pioneers are also factors which have helped to make Adelaide such a desirable place of residence. Those who are attracted by the climate, people, and manner of life of the foothill cities of Southern California, who care for out-of-door life and flowers and fruit, and wish to spend week-ends in near-by mountains or at the seashore, would feel at home in Adelaide.

Most writers on Australia profess to see differences in types and manners in the three leading cities of the Commonwealth, and the natives feel sure that differences exist. Melbourne is "hustling;" Sydney is "easy-going"; Adelaide is "solid" and "contented." On the basis of short acquaintance these characterizathous seem as unreal as "dead" Philadelphia or "provincial" Boston would to an
Australian traveler. In the American
sense, no Australian city is hustling; all
are easy-going and contented; all are
doing much business in an orderly, efficient manner. As places for residences,
they have few competitors among cities
of the United States.

### THE AUSTRALIAN BUSH

The "bush" of Australia is the back country anywhere away from thickly settled communities, where life resembles that of the ranchman of New Mexico, the dry farmer of western Kansas, or the settler in a remote Colorado valley, whose daily round of duties involves energy, skill, and daring. The enemies of the bushman are not disagreeable persons who may be ignored or bought off or turned over to the police; they are heat and winds and floods—forces of nature to which man's resistance is feeble.

For the weak-hearted and the lover of

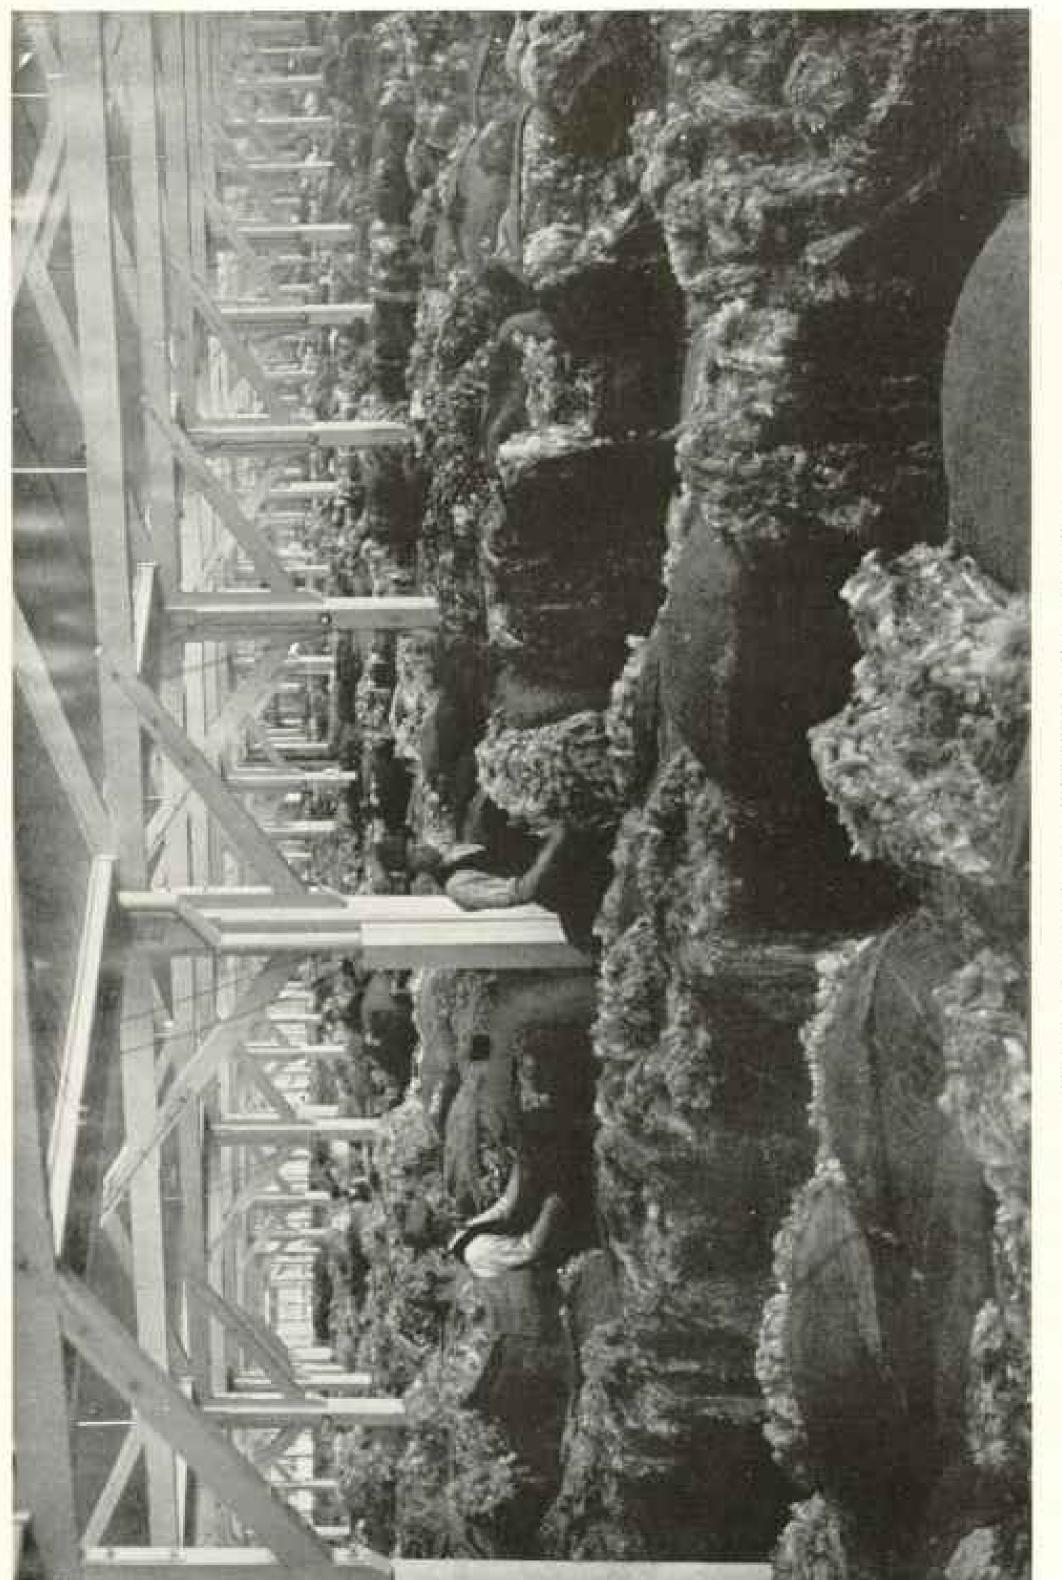

A WOOL SITED IN PORT ARELAIDE, SOUTH AUSTRALLA

The aretions of Australian wool markets often witness as Boely bidding as on the New York Stock Exchange. The wool sold is contained in the high storehouses miles away. About a third of each lot is on the following the highest sold base open, so that prospective bayers can inspect each lot before the sale begins and note on his catalogue the price he is willing to bid.

physical comfort and social companionship the battle with the bush is lost at the outset. The struggle demands self-confidence, a dogged refusal to be discouraged, a faith in the future of the country, and a profound belief that a man's life sacrificed for the good of coming generations is well spent.

# A TYPICAL SHEEP STATION

Sheep station of the better class. Parts of this ranch, which was formerly about the size of Connecticut, and still retains the generous proportions of 300,000 acres, are inclosed by dog-and-rabbit-proof fences and subdivided into grazing paddocks. The all-essential water is obtained from wells of uncertain yield, from storm-water "tanks," and from the roofs

of buildings.

There is a blacksmith shop, a carpenter shop, and a laundry, in addition to the familiar sheep pens and wool sheds. Besides the station-house—a roomy structure of stone and galvanized iron—there are outlying houses for workmen and huts for the families of "blackfellows"—docile dependents who are fed, cared for like children, and render a little inefficient service. Teams of camels bring in fuel and haul wool to the port at Fowler Bay (see map, pages 480-481) and pack-camels carry water to distant points.

of labor common to American ranches, for the Australian employee has clearly defined working days. But the employer and his family are not restricted and their work is varied and arduous. The owner is incessantly busy with repairs, with examination of fences and water supplies, and keeps a cheerful and generous spirit in spite of the fact that hopes of financial independence, which had come within reach after years of isolation and struggle, were shattered by the drought of the previous year.

The women of the family, refined, educated and broadened by travel, are bearing the household burdens, running the store, post-office, and telegraph station, acting as nurse and medical adviser to women and children of the

"blacks," and making life more endurable for the small ranchmen of the neighborbood, who had lost much through failure of crops and starvation of their meager flocks.

The ever-present temptation to "let things slide" is courageously resisted. Culture is shown in a collection of good books and musical instruments, in the appearance of the table, the leisurely ordering of meals, and the discarding from conversation of the cares of a busy day. Time is arranged for reading, for quiet gossip, and for interchange of ideas on a wide range of subjects. The dirt and annoyances incident to ranch life are kept outside of the home.

When a traveler comes along he is accepted on terms of equality, receives what the station has to offer, and is expected to give from his store of experiences. The bushman looking for work is passed along from station to station, hospitably entertained and supplied with

provisions for the road.


For us hospitality was begun by the owner, who sent a cordial invitation 130 miles inland to our desert camp, and was ended by his daughter, who guided us on the 400-mile "track" to the boat at Port Lincoln.

### THE LANDS OF COTTON AND WOOL

What America is for cotton, Australia is for wool. The Australian has no serious rival as a producer of Merino wool. In this favorable climate sheep multiply rapidly and produce the heaviest known fleece of the finest known quality. The fiber is fine, of great length, unusual strength, and therefore holds first place in the manufacture of high-grade cloths in England, Germany, and America.

With a satisfactory market assured for every pound of wool Australia can raise, it is natural to find all sorts of people trying their hand at sheep-raising. Law-yers, physicians, clerks, teachers, titled aristocracy, as well as farmers and stockmen, are enrolled as wool-raisers, and while the actual work on the run requires few men, the number indirectly connected with the wool and mutton business probably includes one-third of the population.

During a series of good seasons his returns are very great, but he must fight

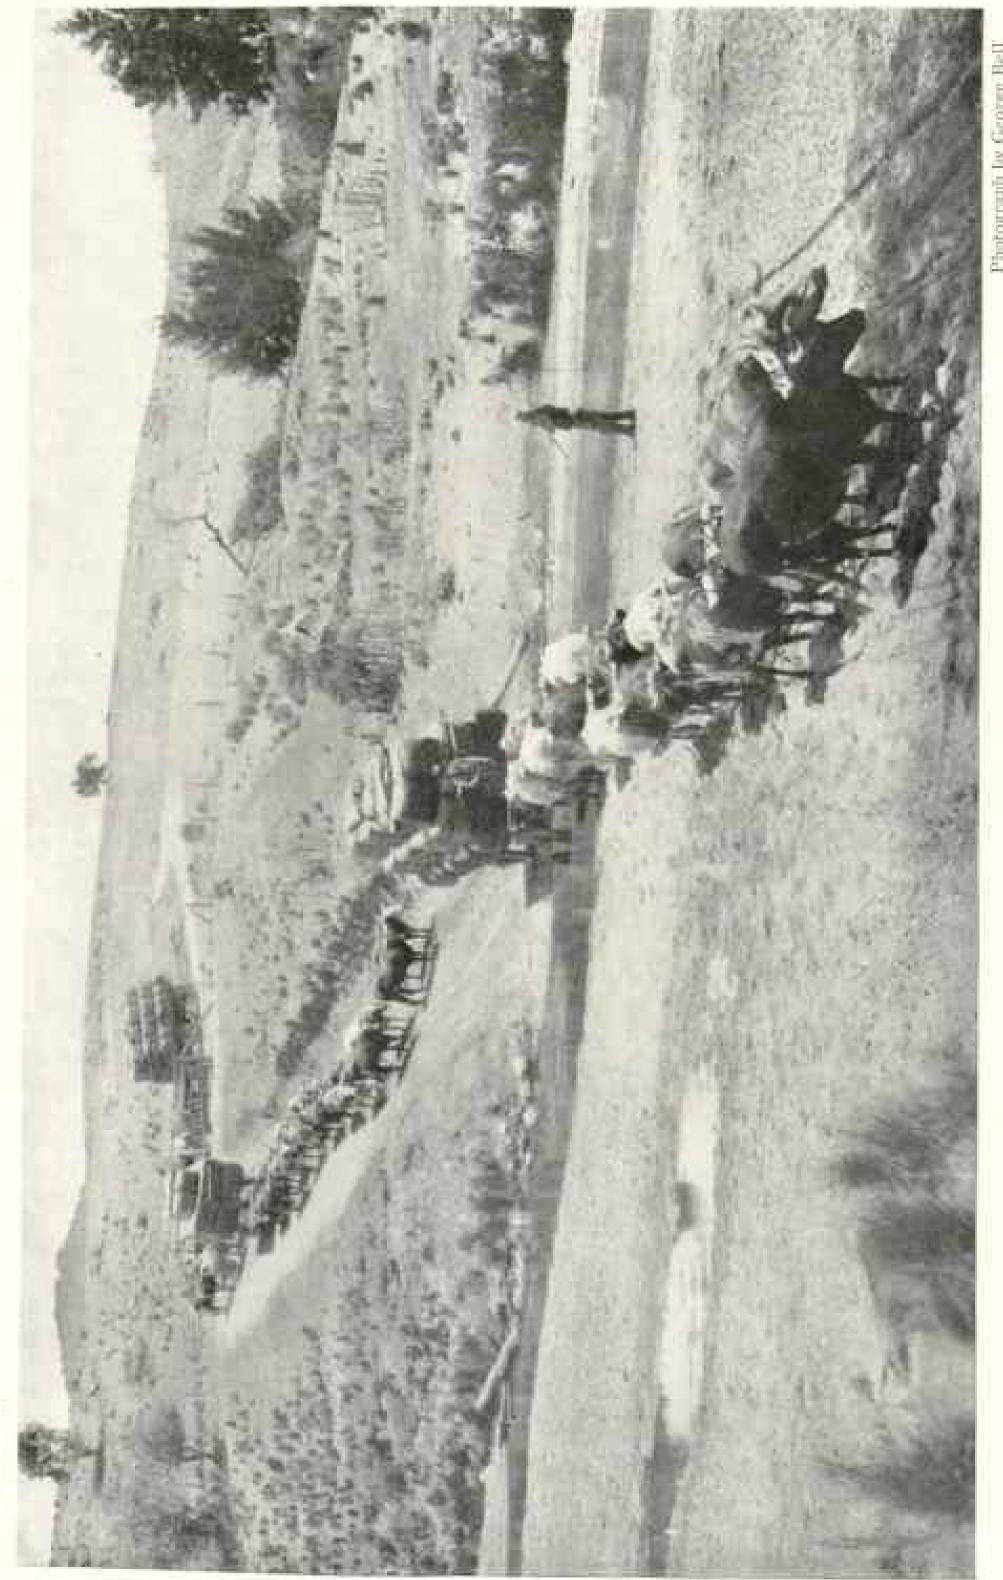

Photograph by George Bell

CARTING WOOL, TO BATHURST

The bullock teamsters charge about \$20 a ton per fundred miles for haufing weed, the price depending largely on the supply of grass available about the road. Often the teams must cross vast parched plains several hundred miles broad, in which there is norhaps not more than one water-hole and one person to a hundred square miles (see page 535).

the dingo and rabbit, and a year of drought may mean complete loss of flocks. During the past ten years he has been called upon to give up his land to farmers and to pay the cost of political experiments designed to improve the lot

of the day laborer in cities.

In 1913 there were \$5,000,000 sheep in the Commonwealth; the value of wool exports alone was \$128,000,000, or 65 per cent of the total pastoral products. In addition to wool, there was sent to market; mutton, \$14,000,000; skins, \$11,-000,000, and tallow, \$10,000,000; so that if all products of the sheep industry be combined, the total equals 40 per cent of all exports from the Commonwealth.

# THE CATTLEMAN

As in America, the cattlemen of Australia occupy the outlying posts of civilization. They are "way out back" in the "Never-Never" country, or even "behind the beyond." The cattle roam widely over unfenced runs thousands of square miles in area. The average size of pastoral holdings in the Northern Territory is 275,000 acres. In West Australia one hundred people own together 40,000,000 acres, and Frazer speaks of a Queensland "cattle king" who held 60,000 square miles—an area nearly as large as all New

England.

The events of the year are the "musters" (round-ups), when the "mobs" (herds) of cattle are assembled, counted, and sorted, the "clean skins" branded and suitable stock sent to market. But sending to market is a serious business. Two, three, or even five months may be required to drive cattle to the nearest port or railroad. Unless the season is favorable it cannot be done at all, for feed and water are lacking along the tracks. Even in good years forage is insufficient and water absent over long stretches of country, and herds of cattle started on the long drive may be greatly depleted by starvation and thirst, the remnant reaching their destination fit only for "boiling down."

A stockman told me of one of his mobs numbering 2,000 which succumbed completely to the hardships on an Soo-mile drive (see also page 537). STOCK ROUTES AND WATERING PLACES ARE MAINTAINED BY THE GOVERNMENT

Stock routes are laid out and tended as carefully as wagon roads or railways. They head for the principal markets, or for the ends of railroads, which extend into the arid belts and wind across the country, taking advantage of all known water supplies. Streams, springs, billabongs, and gnamma holes are used, regardless of the quality of the water, for almost any liquid is acceptable in the desert.

When the distances between watering places are too great, or areas of feed are beyond the reach of water, artificial supplies are provided and kept under surveillance. In places wells are dug; elsewhere reservoirs and tanks designed to collect storm water of infrequent rains are constructed. Many of these are built below the surface and covered to check evaporation. Where other means fail, skeleton buildings with large roof area are constructed to conserve rain-water.

A land-office map of an Australian State is decorated with a network of crooked lines, main arteries with branches, along which are indicated at distances of 10 to 40 miles the watering places and camping sites maintained by the government. These stock routes cover the continent like a system of rail-ways, for which they form a substitute, and their construction and maintenance is a highly important function of the States.

In New South Wales 6,000,000 acres are reserved for this purpose, and seven hundred public watering places have been constructed, three-fourths of them tanks and reservoirs. In South Australia routes extend from Port Augusta to the borders of Queensland and West Australia, and into the heart of the Northwest desert for a distance of 700 miles. One route crosses the State and continues through the Northern Territory to the northern edge of the continent. West Australia likewise maintains 2,000 miles of stock routes leading from inland stations to the cities on the Southwest coast.

While farmers in the new country were few or absent, the cattlemen secured the land. They were powerful financially



Photograph of sperimen in U. S. National Museum

# A KEA, OR MOUNTAIN PARROT, KILLING A SHEEP: NEW ZEALAND

In this bird we see the harmless, vegetable-eating parrot transformed into a vicious hird of prey within the space of a few decades. Having gotten a taste of sheep fat from the frezen carcasses hanging on the meat gallows at the ranch houses during the cold winters, they soon learned to attack the live sheep. These attacks became so frequent that a bounty had to be put upon the head of every kea.

and politically and practically controlled the State parliaments. Laws favoring the large landholder were passed and acts designed to protect the small holder often were nullified. By the familiar processes of bogus competitive bidding, exaggerating the value of improvements, employing dumnies, and choosing choice bits of land in such situations as render large adjoining areas useless for purposes other than grazing, the 640 acres which an individual might lease under the law could be indefinitely expanded.

### DUMMY LEASE-HOLDERS

In one case the purchase of 27,000 acres in forty-acre blocks scattered broadcast over the run effectually secured an area of 258,000 acres, and by the transference of dummy leases four squatters obtained control of 55,000,000 acres, not in the arid region, but in the heart of New South Wales. The situation was complicated by large free grants of the choicest land in the Commonwealth—grants given to army and navy officers, to favored politicians and promoters.

Settlement by farmers was delayed also by a strange economic theory that the way to colonize was to sell land at a high price, using the proceeds to bring out more colonists. By keeping the land beyond the financial means of the average immigrants, a "nicely graded society of landlords, yeomen, and laborers" could be established!

That the problem of regaining for the people the enormous holdings already alienated to wealthy stockmen and absentee landlords is under vigorous attack is shown by the bewildering mass of legislation enacted during the past twenty years.

The significant difference between the present Australian and American practice is that the public lands of the Commonwealth are in general leased, not given away or sold. Free land to which unrestricted title may be obtained by settlement and cultivation is now unknown in Australia. On lands not previously occupied the farmer secures possession by a five-year residence and the payment of a small annual rental—a figure subject to

change after a stated period. If his land is part of a larger holding purchased by the State, the settler pays the price in the

form of long-term loans.

Since much of the desirable land is included in large estates, the amount available for settlement is measured by the ability of the government to purchase holdings at their present high valuation.

### THE SOURCE OF HER WEALTH

The position of Australia as the leader among nations in average wealth per head of population is largely the work of the stockman, who has made good use of his opportunities; his wool, and mutton, and beef, and hides are known in every world market.

The Australian wheat-grower, like the sheep-rancher, is master of his craft; he uses the most modern machinery, imported from abroad, and has developed implements of his own, including the well-known stripper-harvester used in other wheat-growing countries. Under the guidance of scientific leaders, he has increased the yield and improved the quality of his crop, and has developed new varieties suited to the climate. In brightness and hardness of grain, in milling qualities and in whiteness of flour, his wheat stands unequaled, and therefore ranks first in value per bushel in foreign markets.

Oddly enough, the handling of Australia's wheat crop is still in a primitive stage. It is put in bags in the field, hauled in bags to the railway station, carried in bags on the train, and remains in bags during its oversea journey to market.

Instead of the familiar grain elevators of the United States and Canada—big ones at terminal points, small ones scattered along the railways—the traveler in Australia sees bags stacked by the hundreds at nearly every station and accumulated by thousands at the larger shipping points. Stacks containing 100,000 to 200,000 bags of wheat are not musual sights at South Australian ports (see page 540).


That Australian agriculture is an infant is shown by the fact that the land under cultivation is 14,700,000 acres, less than half that of Kansas and an insignificant fraction (0.77 per cent) of the area of the Commonwealth. That the tropics are practically uncultivated, and the area with rainfall between 10 and 20 inches little utilized, is to be expected, for these conditions prevail in other countries, and the treatment of such lands may be left for the future; but it occasions surprise to find that nearly 300,000,000 acres in the temperate zone, receiving over 20 inches of rainfall—land like that of Tempessee, Nebraska, and Oregon—should remain idle (see p. 545).

The Commonwealth is suited for all the crops of the temperate and tropical zones, and on the small area cultivated nearly every known kind of grain, fruit, and vegetable is grown. Many varieties of fruit trees and vines thrive even better in Australia than in the countries from which they were introduced, and the climate is such that lemons and oranges and the finer varieties of grapes may be grown in all the States on the mainland.


# MORE ANIMALS PERISH THAN IN THE DAYS OF THE MURRAIN

The Australian farmer and fruitgrower and ranchman are practically free from the fear of frosts, but instead they must contend against a more bitter focthe drought. In other countries droughts when severe are local. Australia alone is subject to visitations (fortunately rare) which travel like a scourge from one end of the continent to the other. Those who have experienced a drought on our western plains, when growth of vegetation not only seems to be suspended completely, but grass withers to the roots. may form a picture of the disaster attending a severe drought extending, as it were, from California to New York, with only the mountains and parts of New England and Washington retaining their coating of green.

Ten of the twelve droughts recorded for Australia since 1880 affected chiefly the inland areas, where the rainfall is normally below 25 inches; but the great drought of 1902-1903, which marked the culmination of five unfavorable years, affected the entire continent. In one year 15,000,000 sheep and 1,500,000 cattle perished, and the whole drought period saw the death of 60,000,000 sheep and 4,000,-

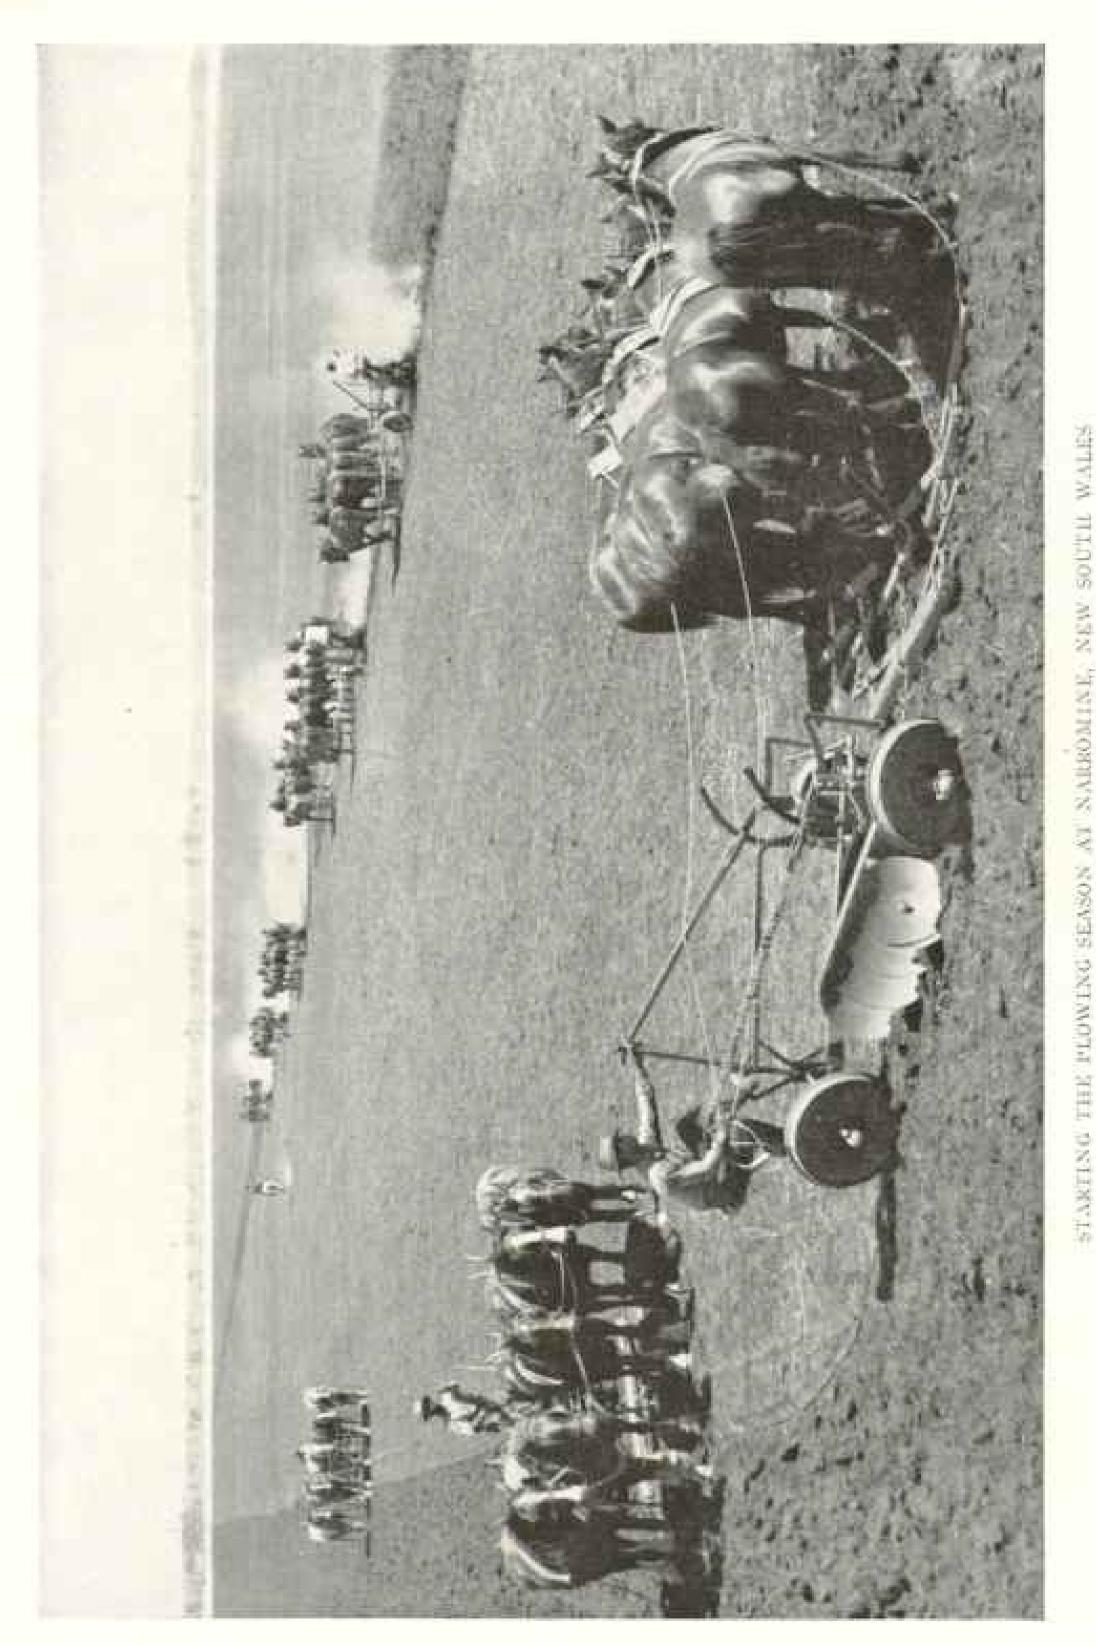


Australia is the most level in surface and regular in outline of all the continents, and even of most large islands. It is also the lowest continent, with an average elevation about that of Otio,

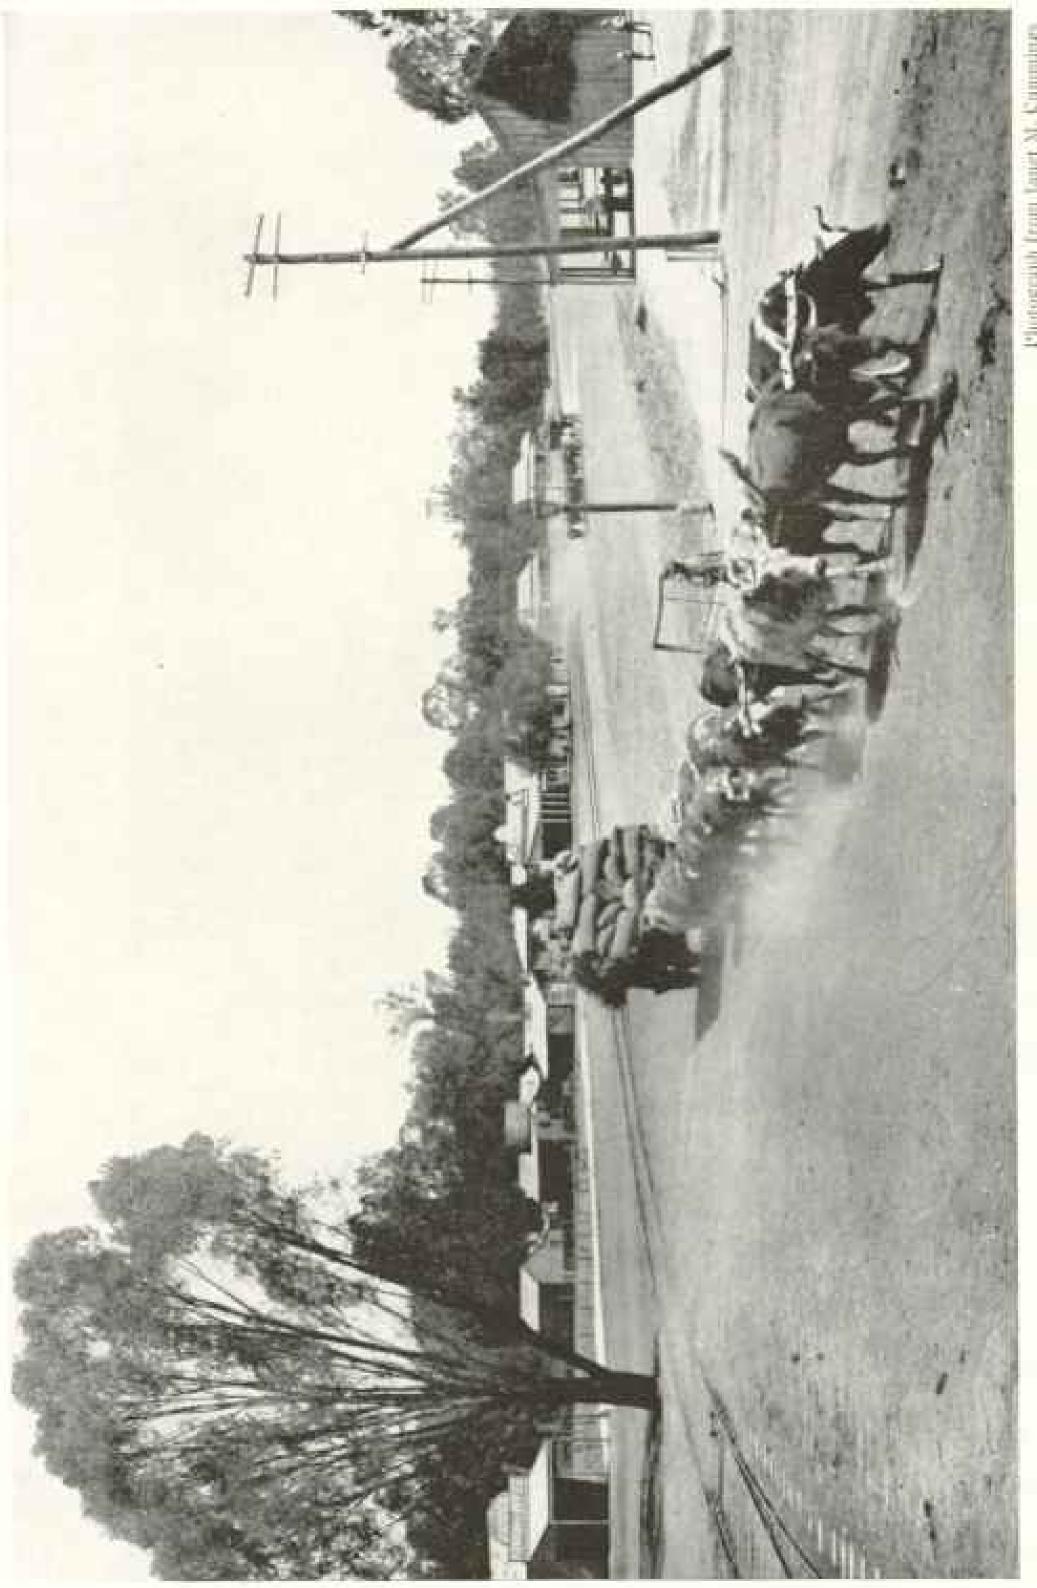

Photogengili from Janet M. Commings

WHEAT IN THE MALERE DISTRICT, NORTHERN VICTORIA CARTING

It has a fair amount of rainfall, and when land. By a system of farm loans this can be carried out by settlers, the government lending a wheat now grows where once the lush reigned supreme, although more than half of the district is about 11,000,000 acres of bush territory in temperate Victoria. The Mallee district consists of about 11,000 the scrub is cleared off makes excellent furning Much fixed amount for every ten acres cleared. still open to settlers,

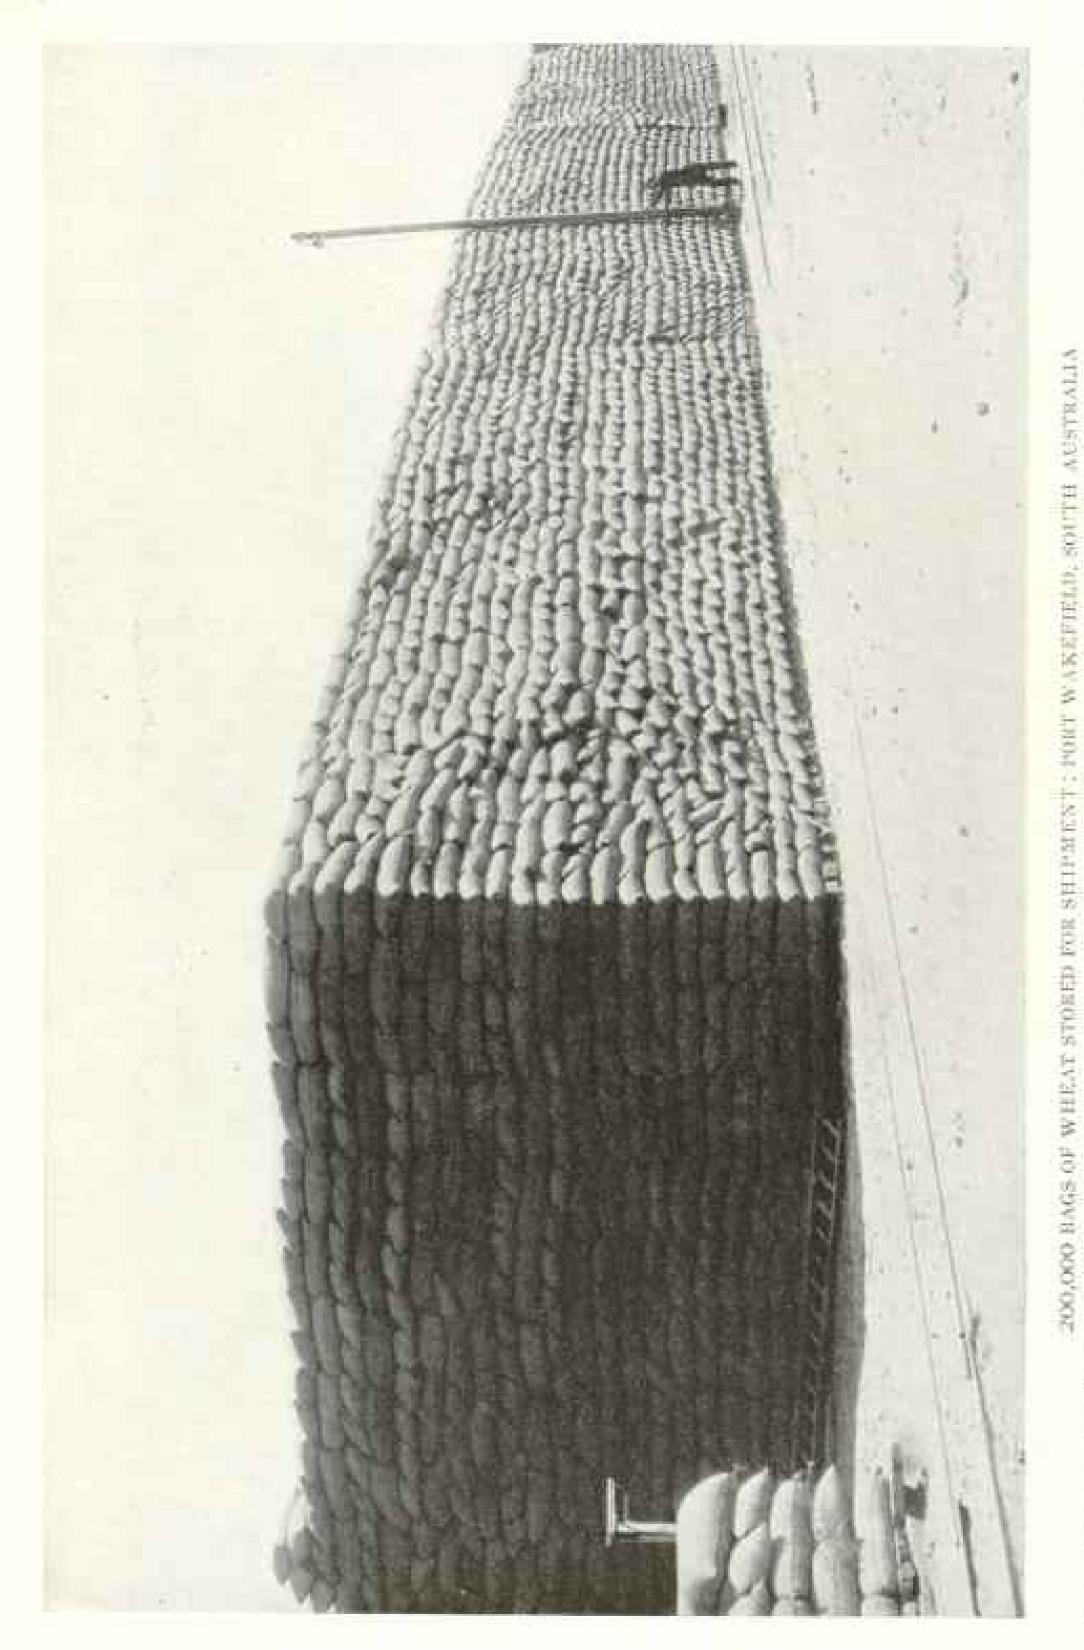

Owing to the dry weather in the harvest senson, the wheat can be stacked for shipment. Unlike ours and the Canadian crops, grain in Australia is handled in bags; elevators are not used (see page 537).

000 cattle from starvation and thirst. Mining operations were checked for lack of water. The wheat production fell in one year from 38,000,000 bushels to 12,-000,000 bushels, and flour, as well as other foodstuffs, were imported. Many people left the country, the excess of departures over arrivals for the period 1901-1905 being 16,800. The birth rate decreased; the death rate increased so that the increase in population dropped to 1.38 per cent, the lowest in the history of the country.

Nothing shows better the temper of the Australians and the marvelous recuperative power of soil and stock than the rapid recovery from this overpowering disaster. During the drought "the blacksoil plains of the Darling were reduced to dust, without vestiges of herbage for miles. Within a week they were covered with green, and in a few weeks there was

luxurious pasturage."

In the year following the drought 74.-000,000 bushels of wheat were harvested, and the fields of New South Wales, which had returned about two bushels to the acre in 1902, returned 15 to 17 bushels per acre in 1903. Within three years the flocks of this State, which had lost 17,-000,000 head during the drought, had increased from 23,000,000 to 40,000,000. and the number of cattle and horses had doubled; and by 1905 the number of sheep and of cattle in the Commonwealth exceeded that of 1900.

### THE RABBIT PEST

The Australian farmer and ranchman originally had little to contend with in the way of native prolific weeds and predatory animals; but, unfortunately, Australia, like the United States, has suffered from misguided efforts to introduce new species of plants and animals. The cactus finds a congenial home. Its myriad seeds are spread by birds, by wind, and through the involuntary efforts of cattle and sheep. It plays the part of the Russian thistle on our western plains, and, thriving as it does in most any soil and climate, has so far defied the efforts of the bushman who by ingenious systems of burning, burying in pits and poisoning, have courageously attacked the pest.

Foxes and also rabbits have been intro-


duced, for the transplanted English squire must have his sport, and the hunting of kangaroes and wallabies and wombats furnish about the same excitement as killing a herd of defenseless buffalo or cornering woodchucks on a New England farm. Foxes have outlived their usefulness; they take an annual toll of about 100,000 sheep, and are now more dreaded than the diago.

Likewise the enthusiasm with which the harmless-looking rabbits were turned loose has been replaced by sincere regret. The joyous sport of "hunting the hare" has become the discouraging and expensive task of exterminating "vermin." Within a few years after their introduction rabbits were overrunning the country. They appropriated the forage for sheep and cattle and threatened the extermination of the native fauna because of the loss of its food supply. Like swarms of locusts, they swept parts of the country clean of vegetation, destroying the bushes and eating the grass down to its roots. Not only were the agricultural lands and sheep "runs" infested, but vacant land in the suburbs of the cities was honeycombed by these industrious little miners.

# MORE THAN TOO,000 MILES OF WIRE FENCES BUILT TO CHECK RABBITS

Liberal bounties and wholesale poisoning and hunting with packs of tamed dingos failed to check the spread of the remarkably prolific beast. Hundreds of thousands were killed, but millions were born each year. There was some hope that a severe drought might exterminate them or at least deplete their numbers to the point where a vigorous attack might be successful. It was found, however, that though during droughts their corpses were thickly strewn over "back blocks" and along dry water-courses, they quickly reappeared with the coming of the rains. The introduction of parasites was also without result, and it seemed for a time as if agriculture and grazing were doomed over large parts of the continent.

As a last resort, the scheme of fences, which gives to an Australian land map such an unusual appearance, was devised. As described in the South Australian Act of 1914, the "rabbit-proof fence" is made

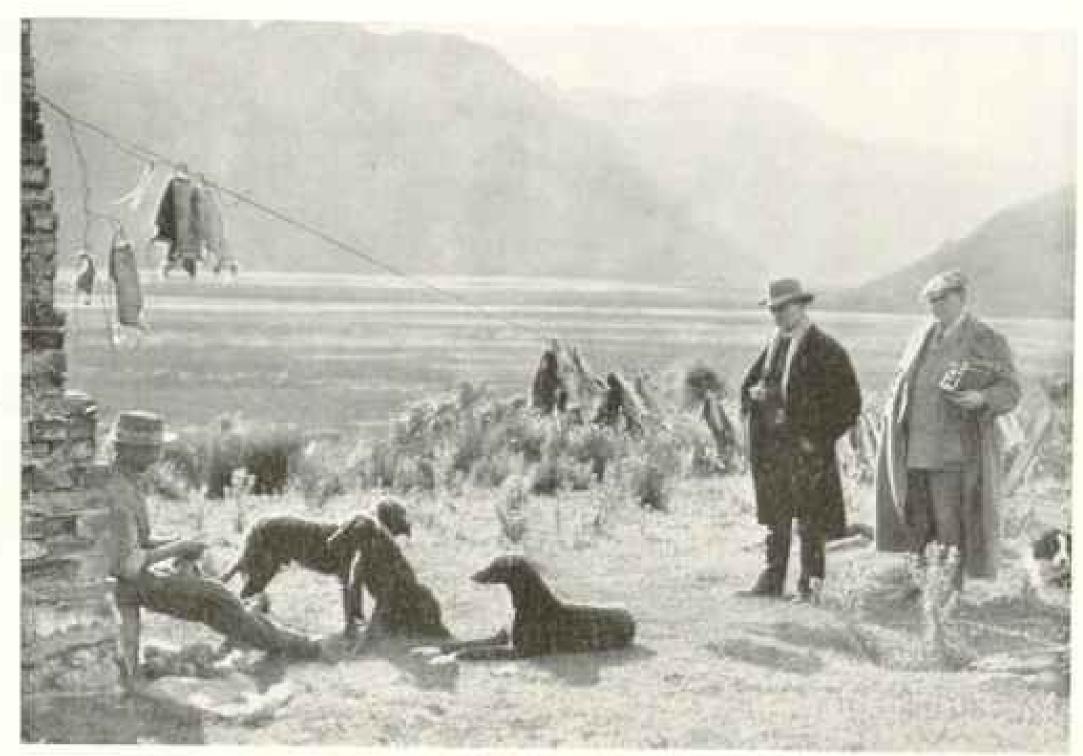

Photograph by Norman Thomas

# AN AUSTRALIAN HARBIT TRAPPER

An Englishman, moving to Australia, desired to give his farm a homelike air, so he took along some rubbits. They began to spread like the English sparrow in America, and soon the fertile parts of the country were overrun. The rabbit march inland was that of a pitiless vandal army, for, in the dry years, not content with nibbling the grass of the sheep and cattle stations to the point where it would not make goose pasture, they are it out by the very roots, harked all the trees, and left nothing but blank desolution behind them. Poison was tried, special machines being devised to sow poisoned grain in furrows where the rabbits would burrow for it, but the sheep and cattle would pass it over. But it came nearer to killing off all the birds than it did the rabbits and was abandoned. Now rabbit-proof fences and bounties hold the rabbit plague in check


of wire netting 3 feet wide, set 4 inches out into the desert. They border stream into the ground, and topped by a strand of barbed-wire placed above the netting. A "vermin fence," designed to prevent the eneroachment of "rabbits, wild dogs, and foxes and any other animals which the governor, by proclamation, declares to be vermin," is built like a rabbit-proof fence, but reaches a height of 43% feet and includes three strands of wire at the top. Especially designed gates are used on highways and the penalty for leaving one open is justly severe.

The cost of these fences is enormous, for distances are great, construction is expensive, and they must be continually patrolled and repaired; but the need is imperative and the work has been vigorously pushed. Vermin fences run through woods, cross vacant fields, and stretch far

channels and follow the shores of the great salt lakes, dividing the country into a series of irregular blocks.


The State of South Australia has, since 1891, crected 29,148 miles of fence, enough to encircle the globe and with the renmant build a double line of fence along the southern border of the United States. When contracts now running are completed the mileage will be much increased. New South Wales has expended over \$27,000,000 for rabbit extermination and has within its borders 98,000 miles of ferice. One of West Australia's fences extends entirely across the continent.

Of late years the rabbit has been repaying in part for his keep - paying board, as it were. He goes to swell the

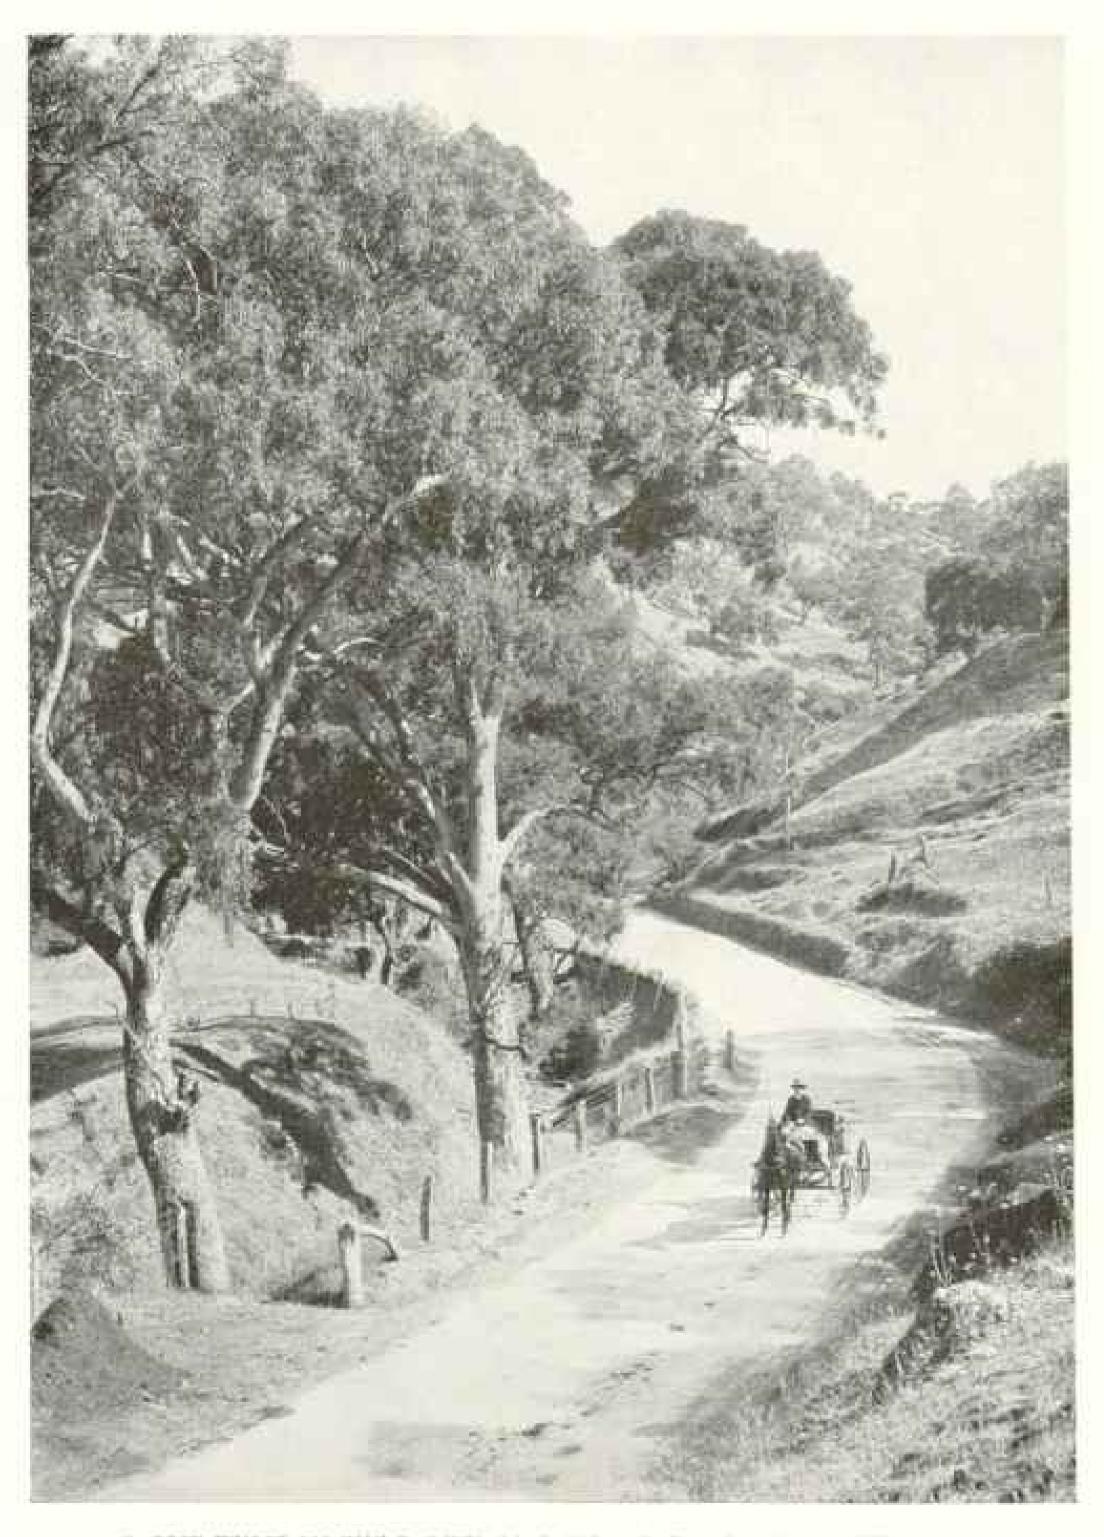

A RABBIT FENCE ON THE BARKER ROAD NEAR GLEN OSMOND, SOUTH AUSTRALIA

More than one hundred thousand miles of rabbit fences had to be built to put a check to their ravages. It is said that they were once so numerous that three million were poisoned at a single water-hole in one of the drought years. At some places the paths they were in going down to the Darling River are declared by C. E. W. Bean, author of "On the Wool Track," to be two feet deep (see page 342).

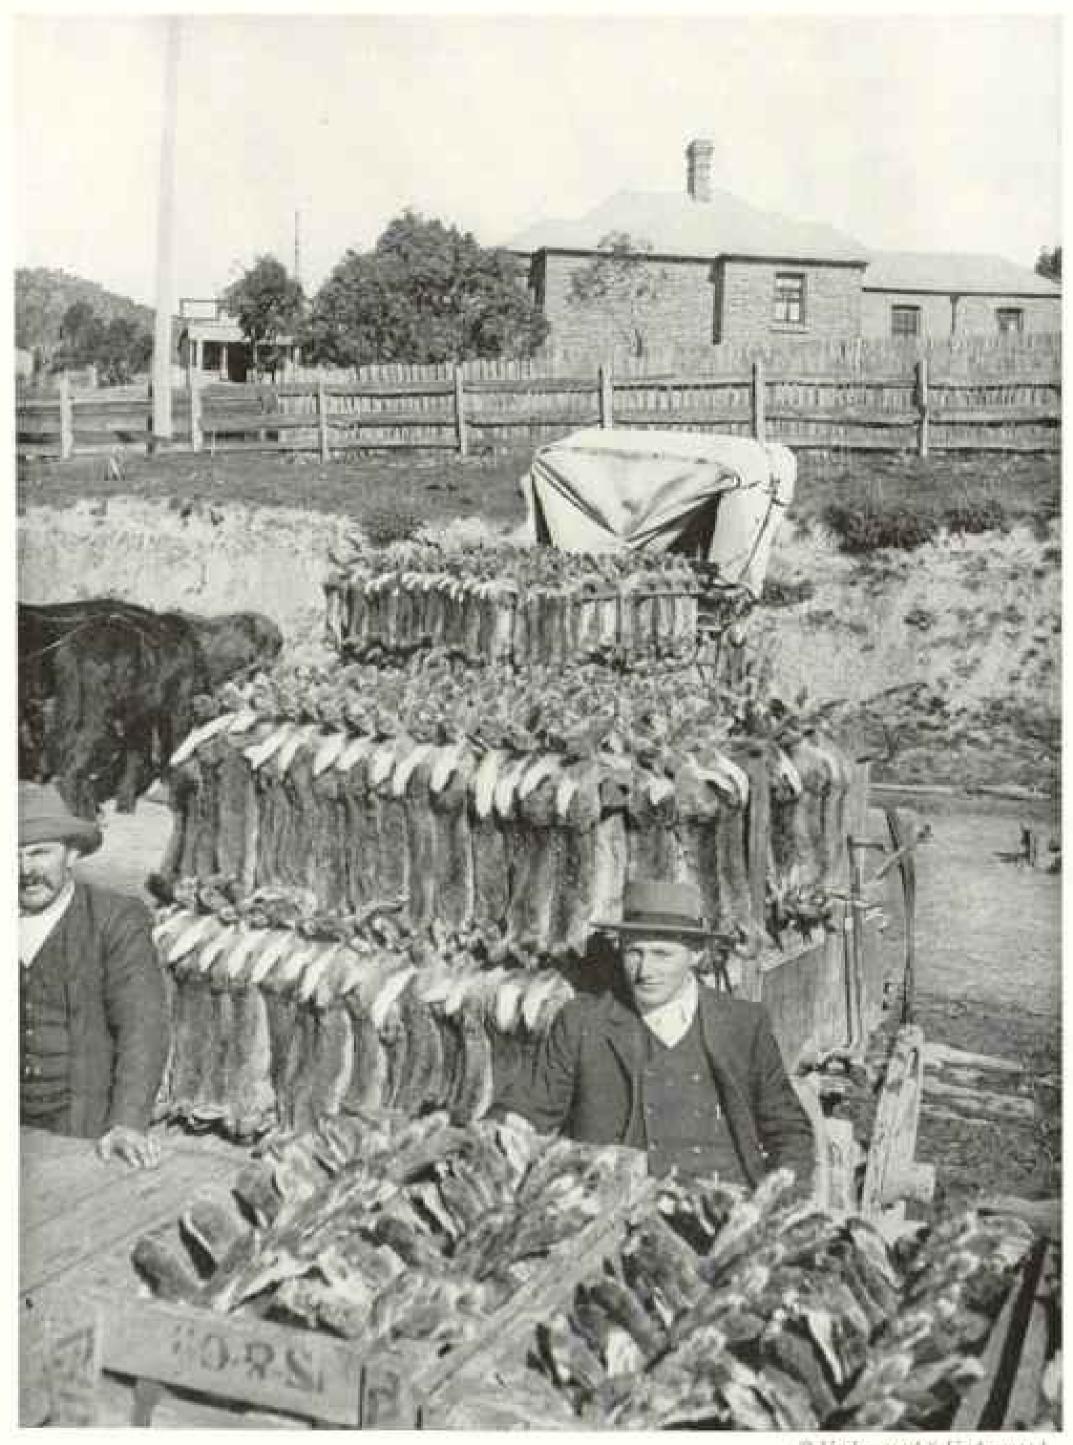

O Underwood & Underwood

TWO AND A HALF TONS OF BUNNIES: TARANA STATION, AUSTRALIA

The rubbit now has only the poor lands bordering the desert, which it is unprofitable to fence, for his own. But even here the professional rubbit trapper and his dogs assail him. For rubbits are now sent frozen to England, their carcasses for food and their skins for furs and felt.

wealth. Along the country roads rabbits may be seen hung on the fences awaiting the passage of the rabbit carts which convey them to the packing-houses to be prepared for shipment as frozen meat and hides. Practically all are exported (the Australian does not eat "vermin"), and during 1913 frozen rabbit and hare to the value of \$1,400,000 and skins to the value of \$3,000,000 were sent from Commonwealth ports.

# SAVING A SCANTY RAINFALL

On the assumption that a temperate climate and 20 inches of rain be required for Australian agriculture, there is available for crops only 480,000 square miles, 307,000,000 acres, or 16 per cent of the continent. As thus viewed, Australia for the farmer is somewhat larger than Germany and Austria-Hungary and equal to the combined areas of Louisiana, Texas, Oklahoma, Kansas, Nebraska, and South Delayana, Kansas, Nebraska, and South

Dakota (see also page 537).

There remain, however, within the temperate zone 347,000 square miles, or 860,000,000 acres, with rainfall less than 20 inches. How may this enormous area in the temperate zone of good soil and favorable temperature be reclaimed for farming, or at least made available for grazing? As might be expected from the spirit of the Australian people, this prodigious task is being vigorously attacked. Much is being done with dry farming and by the selection of drought-resisting plants; but the hopes of reclaiming desert lands to agriculture are based, as in the United States, on irrigation.

The problems which confront the Australian reclamation engineer are exceedingly difficult. Of mountain ranges suitable for collection of water there is one—a plateau-like affair, 2,000 to 4,000 feet high, with knobs here and there reaching above 6,000 feet, but without important accumulations of snow. The range is so near the Pacific coast that no large belts of agricultural land are found on its well-watered eastern slopes. The task before the Australian is comparable with that involved in irrigating Arizona and New Mexico after the Rio Grande, the San Juan, the Colorado, and the Gila had

been eliminated and the mountains now furrowed by living streams reduced to

ridge-dotted plains.

One of the world's great irrigation schemes, and the most ambitious yet undertaken by Australia, is the impounding of the waters of the Murrambidgee, one of the chief tributaries of the Murray. This project, which is rapidly nearing completion, involves the construction of the great Burrinjuck dam—240 feet high, 780 feet long, with a width of 18 feet at the crest. Though its dimensions are less, it is a fair rival of the Roosevelt dam of Arizona, which it resembles in structure and setting. The artificial lake formed at Burrinjuck is 41 miles long.

From the dam the water is to be led down the channel of the Murrumbidgee 200 miles to Berembed, where it will be diverted among 250,000 acres of choice farm lands which are now awaiting set-


tlement.

Unlike the American system, which limits governmental control of irrigation projects to the selling of water and land, the government of New South Wales becomes the parent of an irrigation colony. It plans and builds villages, lays out and controls race-courses and athletic fields, builds houses and fences, sells trees and seed and lumber, loans money, stock, and agricultural implements, grants reduced freight and passenger charges on railways, builds and operates butter factories, cheese factories, and canneries, and provides scholarships at the university.

### THE LARGEST ARTESIAN BASIN

Beyond the reach of streams from the coastal mountains, the land stretches westward for nearly 2,000 miles without encountering water sufficient for irrigation. Part of this vast area is available for dry farming if domestic and stock supplies can be obtained, and large areas are suitable for cattle and sheep if only water can be found.

Drilling for water in arid regions has revealed the largest artesian basin in the world, covering 499,000 square miles. From this basin New South Wales has obtained 468 flowing wells, ranging in depth from 46 feet to 4,338 feet at the

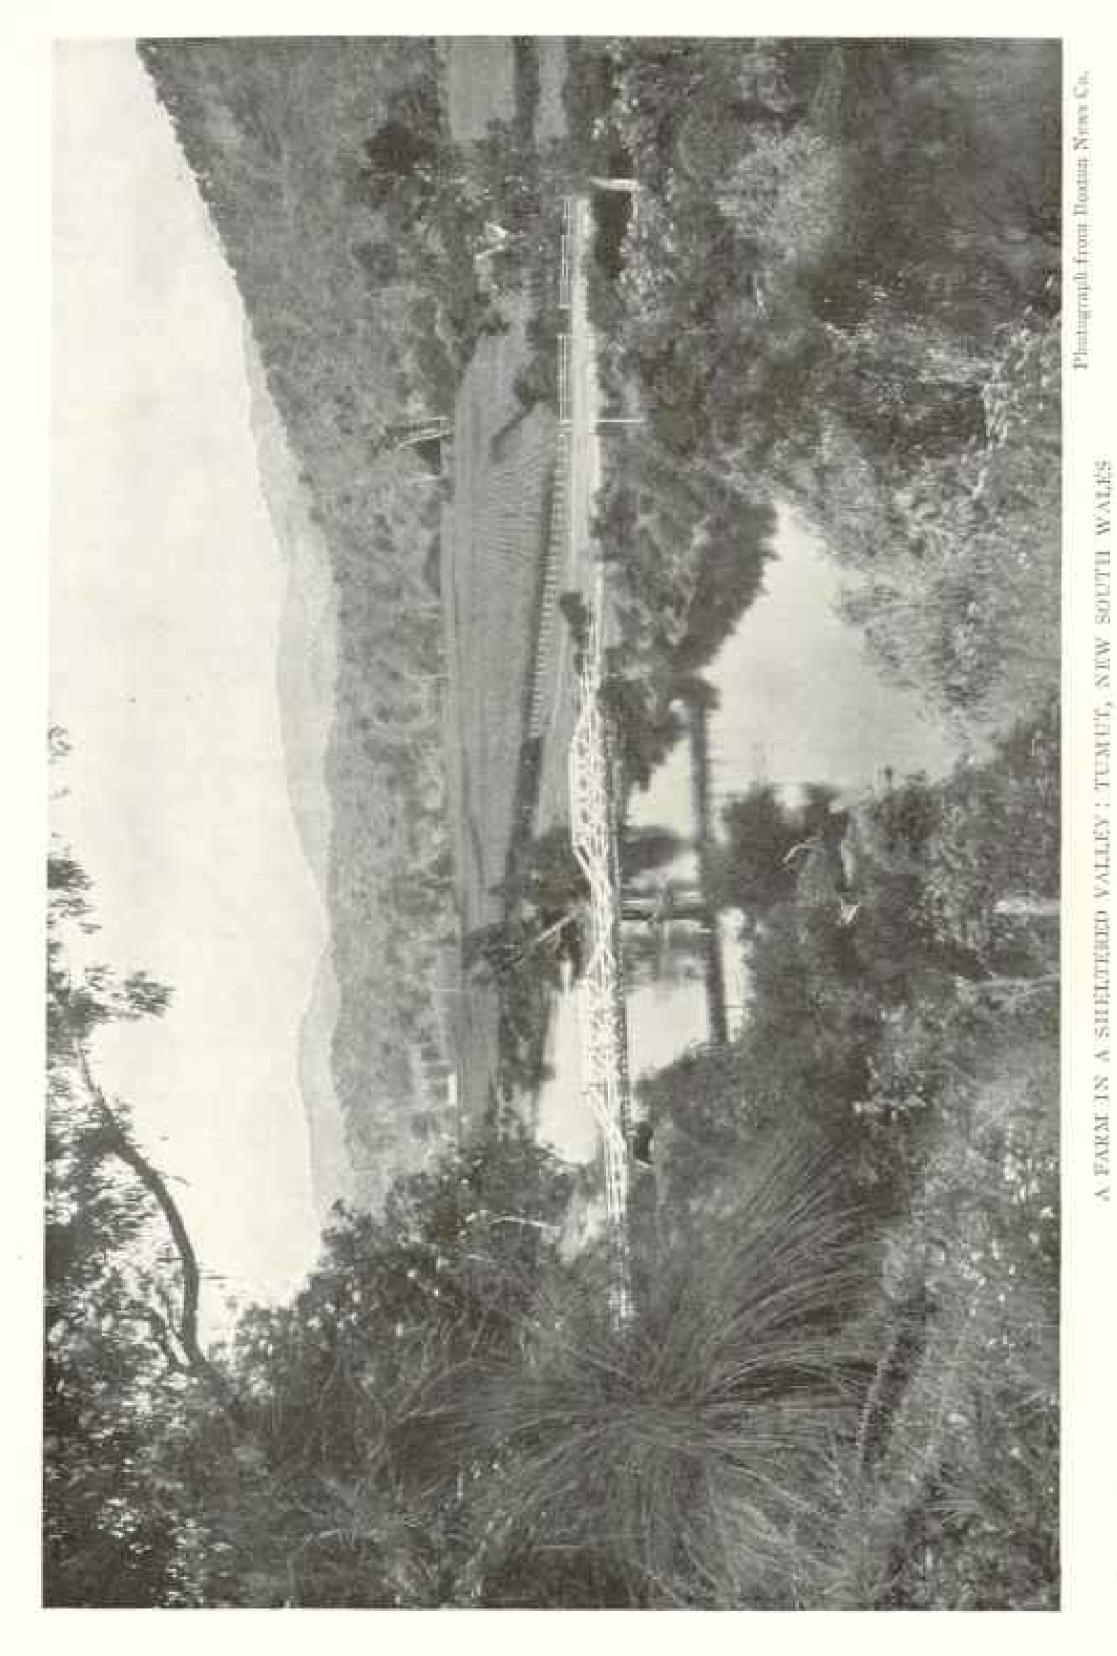

the greater part of Australia, but where rainfall suffices the hand is emormously productive Insufficient moisture prevents agriculture in

Boronga bore, which yields over 1,000,-000 gallons daily. In this same basin Queensland has 985 flowing wells, 64 of which are classed as yielding over 1,500,-000 gallons per day and 6 over 3,000,000; twelve of them are over 4,000 feet deep, and the Bimerali No. 3 was sunk to a depth of 5,045 feet.

Water from these deep wells is naturally hot. Temperatures between 120° and 150° are fairly common, and eight wells of Queensland furnish water above

190%

The temperature of well water is unimportant, but its quality is a factor of
moment, and unfortunately the water
from many of the deep wells contain alkali or salt in quantities which render
them useless except for stock which have
become accustomed to impure water. It
is most discouraging to obtain at great
expense a well of large flow only to find
its waters unfit for irrigation or domestic
use. The grip of the desert is felt not
only on the surface, but at depths below.

### THE PROBLEM OF THE TROPICS

The northern edge of the Australian continent corresponds in latitude to Costa Rica, the coast of Venezuela, and the central Philippines; its southern edge, excluding Tasmania, has about the position of Washington (D. C.), San Francisco, Peking, and central Portugal (see map, page 477). The portion of the continent within the tropics is therefore large—38.6 per cent of the lands of the Commonwealth—but conditions are such that even the Malays have found it less attractive than the more tropical regions farther north.


In the Northern Territory the natural obstacles are too serious to be overcome without capital and expert knowledge. The summer monsoon, caused by overheating of the great desert belt in the center of the continent, brings heavy rains during the three summer months, culminating in January. During this season grass literally bounds up, some varieties attaining heights of to feet in three months—so coarse and rank as to be useless for stock—and must be removed by burning. The ground becomes so soaked that traffic is impossible, farming imple-

ments are bogged, and river flats with good soil are submerged. These flood conditions are succeeded by drought, and from March to October the monthly rain is measured by fractions of an inch, and in some years fails altogether. On leaving the coast the rainfall rapidly decreases and desert conditions prevail over nearly half of the area within the tropics.

The few settlers in the Northern Territory are making an heroic struggle in this unfavorable environment. Port Darwin, the capital city, on one of the best harbors in the world, is a village of iron houses, with a population of about 1,000, less than half of whom are whites, and the white population of the territory, the size of three Swedens, is about 2,000. It is reached by steamer from Brisbanean eight to eleven days' journey, and access to the back country is attained by a narrow-gauge road, running trains semiweekly to Katherine River, 200 miles; by two boats a year, subsidized to visit coastal ports on the Gulf of Carpentaria. and by pack-horse mail, whose going depends upon seasons and the state of roads. The distance inland to the nearest railroad at Oodnadatta is 1,300 miles, and a large part of the cattle are driven 1,000 miles or more to market.


The coast of northern Queensland is truly tropical; its heat and humidity are high. The average annual rainfall from latitude 25" northward is over 50 inches. and for about 100 miles of coast exceeds. 90 inches. At Harvey Creek it is 165 inches, and annual falls of 211 inches at Innistail, 238 mehes at Harvey Creek. and 241 inches at Goondi have been recorded. On twenty-two different occasions single downpours exceeding 17 inches have been experienced at various stations. These superabundant supplies furnished by monsoons and trade winds unfortunately are not distributed inland, but are confined to the coast by mountains. More than one-half of Queensland is within the tropics, making an area larger than Central America, Cuba, Jamaica, and Porto Rico combined.

The story of sugar is an important phase of the problem of the tropics. This industry in tropical Queensland was built up by the use of indentured Asiatic and

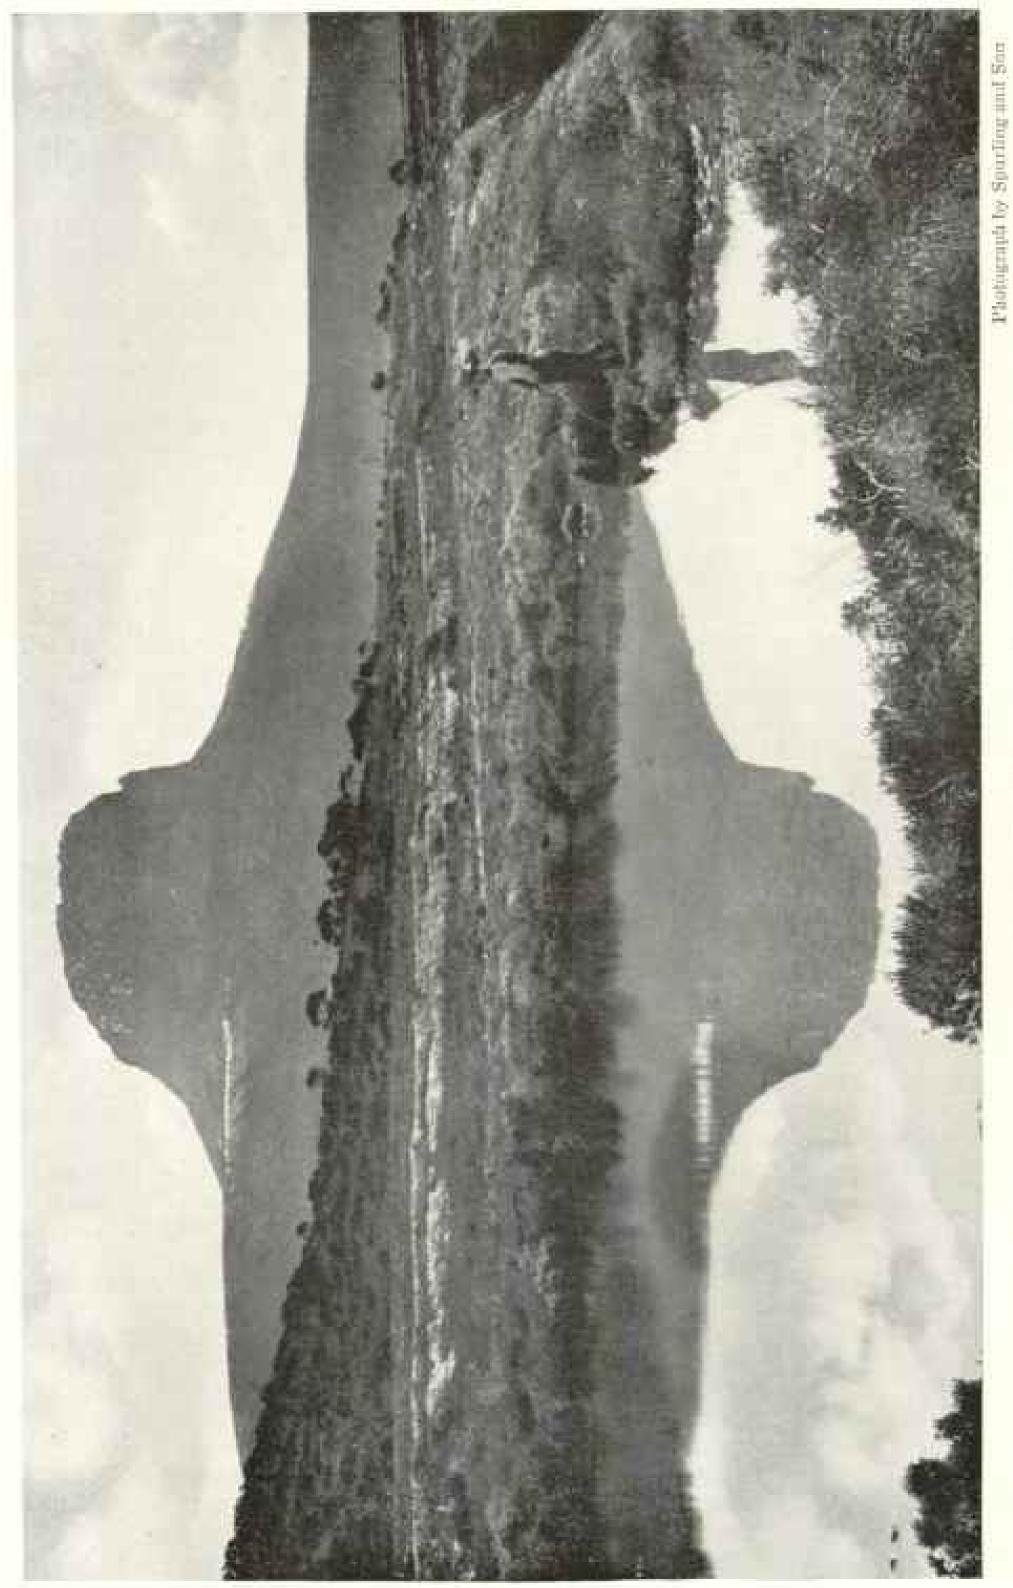

MAN MAJUFT NORTH HIGHLANDS, TASMANIA

# Tasmania is blessed with water and escapes the fear of drought ever present in other Australian States (see page 537). The peaks and ridges which everywhere break the surface of the island are rich with minerals. And her people have such alternding faith in the future of Tasmania that they believe she will one day bear to the rest of Australia the relation that England bears to Continental Europe.

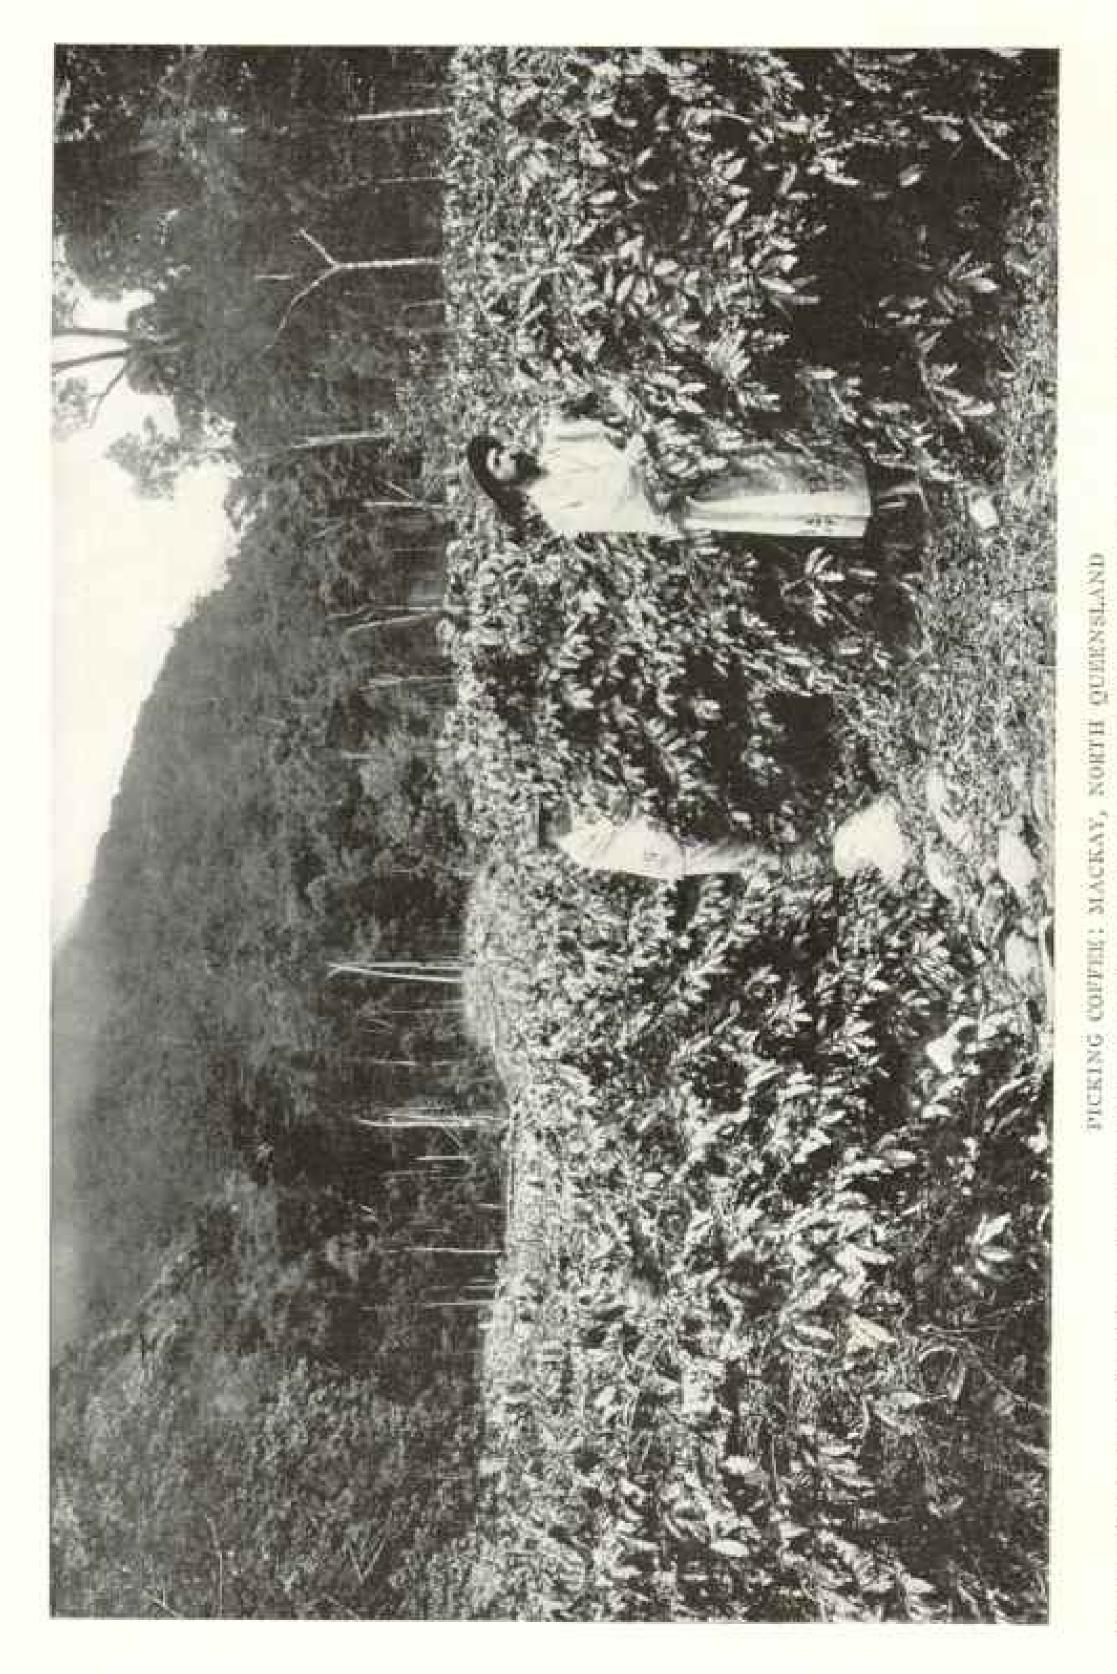

d in a latitude as cool as that of our country, and yet three-fourths of its territory lies nearer the Equator than the sugar-cane lands of Louisiana One usually thinks of Australia as being situate



Phistograph by H. E. Gregory

# A CHARACTERISTIC "LAKE"-THE DED OF LAKE HART

Kanaka labor. Opposition to the color of the laborers, and more especially to the wage received, led the people of the temperate part of southern Queensland, outside the sugar belt, to object to the employment of non-Europeans, and the political friction engendered led to serious talk of secession. With the formation of the Commonwealth the demand for the elimination of competition with colored races under the guise of the "White Australia" policy was irresistible and the sugar-planters were deprived of their efficient labor and their profits.


The profits were restored by a bounty granted on condition that white labor be employed and that wages and hours be "fair and reasonable." Bernhard H. Wise states that "for the first five years the cost of this experiment was about \$4,000,000." While the tonnage of sugar produced has fluctuated, the acreage of the Commonwealth has remained practically the same since 1902, and the number of persons engaged in the sugar industry has decreased steadily from 46,000 in 1907 to 28,000 in 1912.

The history of cotton, rice, and coffee, for which the climate of Australia appears to be eminently suitable, is similar to that of sugar. In spite of liberal bounties, their production has decreased.

### THE DESERT.

The Central Desert is the Australians' family skeleton. There is not much said about it at home and the visitor rarely sees it; but it is there, a stern reality, which stands in the way of national development. Other continents have deserts, too; the Sahara is larger and our Mohave and the Painted deserts, as well as large areas in Utah and Nevada, are as barren as the region about Lake Torrens.

It is its enormous area in proportion to the size of the continent which gives the Australian desert its commanding position. More than half of the entire continent receives less than 15 inches of rain per year, and the area receiving less than 10 inches is 1,077,245 square miles—more than one-third of the continent, or more than all the United States east of

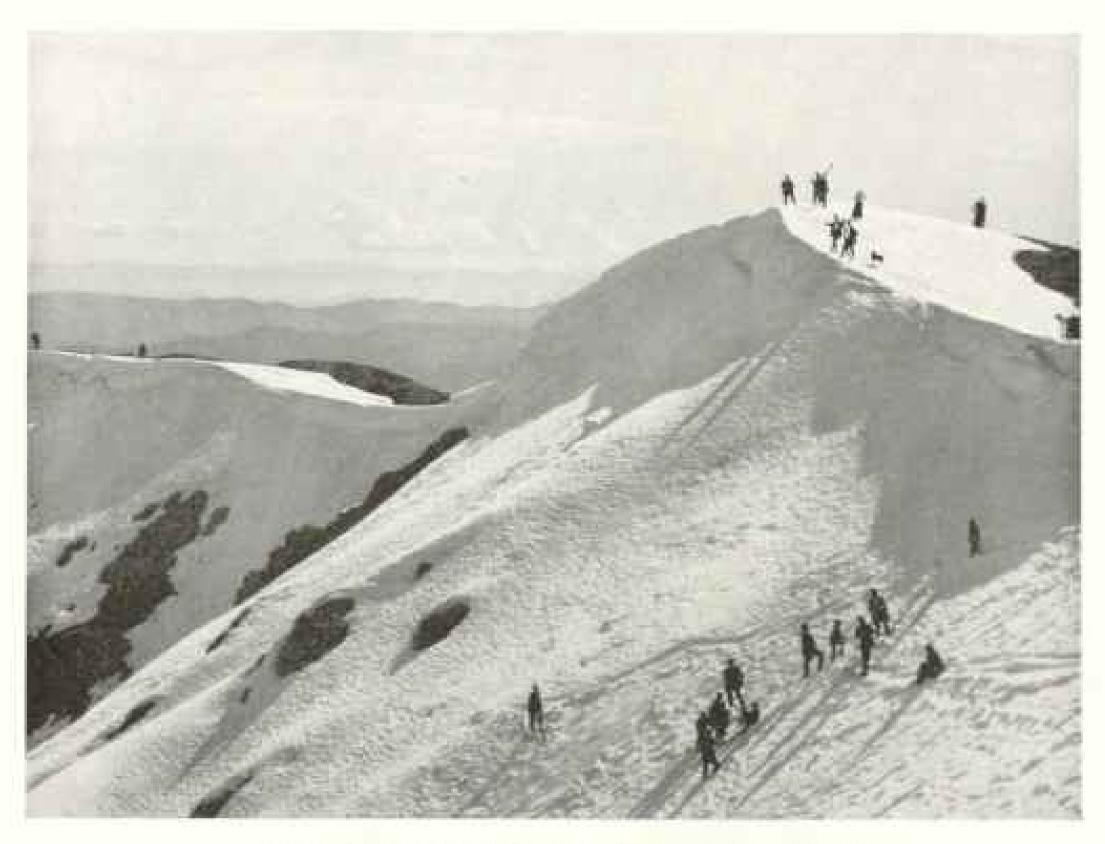

MOUNT FEATURE TOP, VICTORIA, IN EARLY SPRING

Snow-capped peaks are rare in Australia, and this view of the high Alps was first seen by the young explorer. Hamilton Hume, who in the early years of the nineteenth century won his way from Sydney across country to Port Philip, where Melbourne now stands. There was Kosciusko to the southeast, and Bogong, Feather Top, and the Cobbler raising their giant hoary heads in front, and you may be sure the explorers could scarce prepare their breakfast for gazing at the strange scene.

the Mississippi. One station reports eight inches in seven years; another six inches in ten years. In the center of the desert the annual precipitation is less than five inches, and over large areas rain may not fall for a period of several years.


(see map, page 588).

Large areas are so that that no feature in sight rises above the level of the eye except the ghost-like ridges suggested by the ever-present mirage, and the portion known as the Nullarbor plain, having dimensions, roughly, 450 miles by 200 miles, is one of the most even land surfaces in the world. Railroad levels across this plain reveal a gradual slope from 320 feet to 605 feet in a distance of 450 miles—an imperceptible rise of about seven inches to a mile and a difference in elevation of any two points 20 miles apart of less than 40 feet (see map, pp. 480-481).

In constructing the Commonwealth railway (from Perth, Western Australia, to Port Augusta, South Australia) there are no obstructions to avoid, no bridges to build, and practically no grading to be done, and for 430 miles in a single stretch the line will be without curves.

### A DESOLATE REGION

The Australian desert is not a mythical affair like the "Great American Desert," but is a singularly inhospitable waste, which may be entered only in favorable seasons and by special means of transport. Excluding the miners of the Kalgoorlie region, the population on 800,000 square miles of this area, including ranches and villages along the railways, is estimated by the Meteorological Eureau at "probably not a thousand white folk."

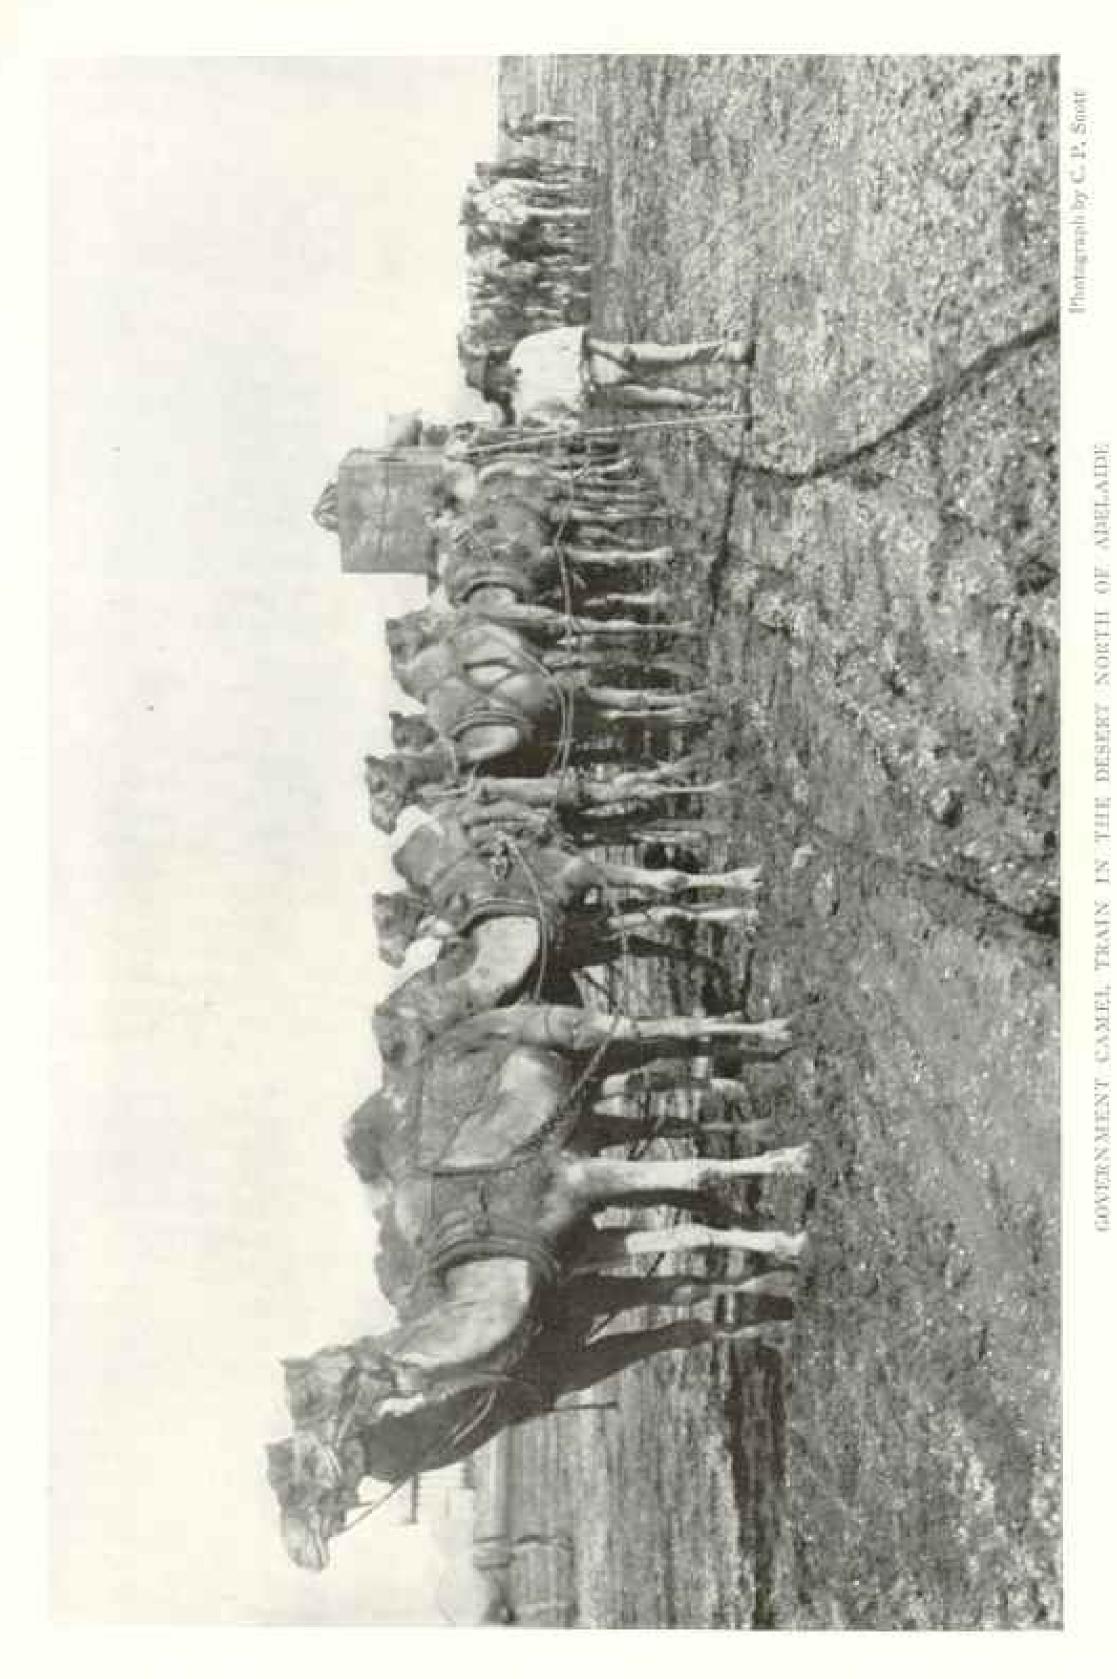

The Great Desert of Australia divides the continent into two parts, isolating the people of West Australia as completely as if they were on another transportation in this region.

# CAPRICIOUS RAINS

Large areas of the desert are unknown, but the wide-spaced tracks of explorers are sufficient in number to reveal its character. The reports of the most recent expedition coincide with those undertaken a half century ago: "We have demonstrated the uselessness of any persons (pastoralists or miners) wasting their time and money in further investigations of that desolate region" (Carnegie).

The annual average rainfall is not only insufficient, but is distributed from year to year and throughout the year in capricious fashion. All the rain of a year may fall in a few hours, or several years may pass without rain enough to wet the

ground.

Evaporation on the desert's edge, where tested by measurements of loss in tanks, in New South Wales and at Coolgardie, Western Australia, is at the rate of 85 inches per annum—about that of the lower Colorado Valley. At Laverton it is 146 inches, or more than 12 feet—15 times as much as the rainfall.

Travel through the desert consists essentially in getting from one water-hole to another, a task at which the native excels the European. The aboriginal knows the location and yield of every water-hole within the limits of his hunting ground, and is free to move with the rains. When soaks and gnamma holes fail he digs up mallee roots, from short lengths of which water sufficient for a drink may be obtained. He has also learned that water may be squeezed from the bodies of frogs, which bury themselves in mud during droughts.

### CAMELS ARE INTRODUCED

Not until 1862, after many failures, was the desert crossed by horses, and then along the line which has proven to be the only feasible one. Compared with other routes this first transcontinental traverse by Stuart is well watered, and has determined the location of the Adelaide-Port Darwin telegraph line, and of a proposed railway (see map, pages 480-481).

From the termini of railways in Oueensland and New South Wales, 2,000 miles westward to the Indian Ocean, camels are the burden-carriers across the

waterless steppes. Settlements of Afghans with their camels are familiar sights at mining camps and stations along the railways. They carry wool to market and return with needed supplies. Driven in harness, or saddled, they bear the settler and the mails from oasis to oasis, and take the missionary, physician, and engineer to their work. They are used to haul materials for construction, to bring in fuel, to plow, and to distribute water along routes of travel. The water-supply branch of the West Australia government has 350 camels in use, and 300 are taking part in the construction of the Port Augusta-Kalgoorlie railway (p. 554).

The camel of Australia is not a beautiful or an affectionate beast, but he will browse on desert shrubs and carry a load three or four times that of a good borse 20 miles a day without apparent fatigue. When deprived of water for more than five or six days, his efficiency decreases, but he is capable of work for much

longer periods.

On Carnegie's expedition the camels were without water for thirteen and one-half days. On a geological expedition north of Eucla, camels were at one time twelve days without water in an average temperature of 100". On the Jones Survey across and beyond the Nullarbor plains, camels traveled 340 miles over rock and sand, in fifteen days, without water, and waterless stretches exceeding 600 miles have been covered.

It is no simple matter to fill a camel with water. His ordinary drink is seven to eight gallons; when thirsty, twenty gallons; but after being deprived of water for several days, forty gallons is scarcely enough. His demands, therefore, make great inroads on small water-holes. In desert mining camps, where water is scarce, the drink for a camel may cost \$2 or \$3, and the owner of "Misery," coming in from a long trip, is said to have paid \$14 to quench the thirst of his mount.

At the end of the railway, in South Australia, is Oodnadatta, the most remote village on the continent. Three stores, a hotel, a missionary hospital, an Aighan village, and buildings of the government railway are its principal features. Water is obtained from an artesian well which



Score

Photograph by

yields 270,000 gallons of somewhat salty, hot water a day; for drinking, the rain-water caught on iron roofs is used. Food of all kinds is brought to Oodnadatta by train; the town exists for the purposes of forwarding supplies by strings of camels to far-away ranches and for shipping produce of scattered stations and transferring cattle and sheep in times of drought.

### BUILDING A DESERT RATEWAY


A ride on one of the tiny trains which run twice monthly to Cochadatta, equipped with extra tank cars and water bags for passengers, is dreary enough if one is looking for grass and water and trees. To me the views of sand-dunes and gibber-plains, of the sheet of Lake Eyre, of mirage and dust-storms and distant mesas, constituted features of a fascinating journey.

The Great Desert of Australia divides the continent into two parts, isolating the people of West Australia as completely as if they were on another island. There is no land communication between this State and its nearest neighbor except by telegraph, and the boat journey from Sydney to Perth requires more time than from Sydney to New Zealand and only a little less than from Perth to India.

The Commonwealth has now undertaken the task of providing an overland route from the Pacific to the Indian Ocean. The ordinary engineering problems are so small that the line was laid out by compass; there are no tunnels, deep cuts, or steep grades, and few culverts and bridges are required. Sanddunes are the greatest obstruction, and the amount of excavation in crossing a belt of dunes 20 miles wide is more than half that required for the whole 1,063 miles of new track (see map, pages 480-481).

The remarkable feature of the railway is its location in a region uninhabited even by aborigines, and where the real task of the engineer is to provide water, grading and track-laying being incidental,

The preliminary surveys for the railway were conducted by camel parties; then well-boring outlits were dragged by teams of 14 or 16 camels over the route or from ports on the coast. Workmen supplied with water by camel-trains were set at work constructing catchment basins

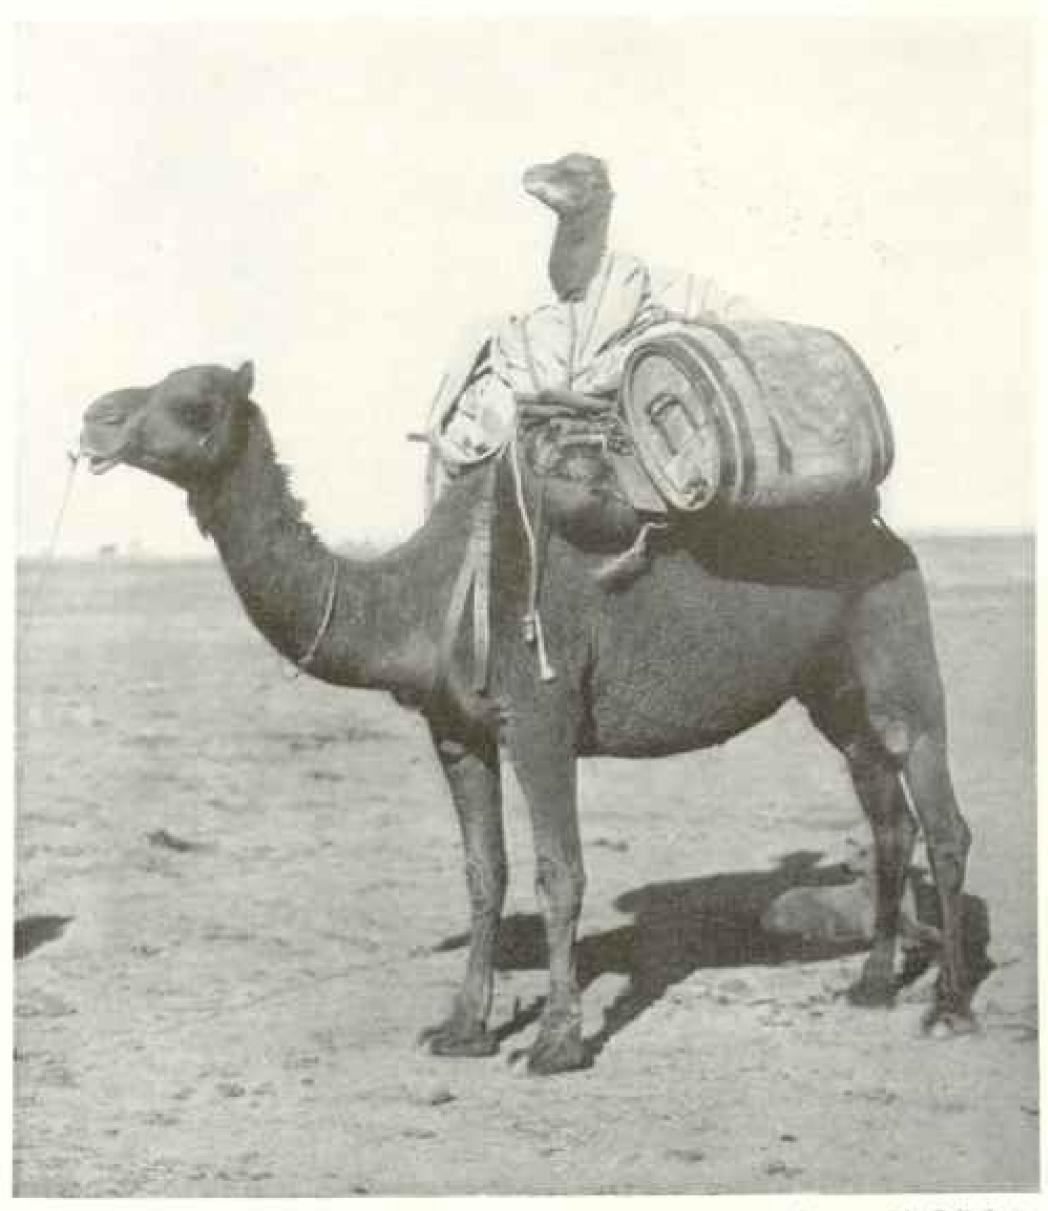

Plintagraph by C. P. Scott

"GETTING ON" IN THE WORLD

On the long marches through the Australian deserts the wolldly legs of the bany camels sometimes fail them, and they are then given a free ride.

and digging shallow wells, but the chief reliance is upon water in tank cars hauled hundreds of miles.

At the eastern end of the line water must be found for 200 horses, 300 camels, and 1,200 workmen with their families, besides that needed for eight locomotives, each one of which uses about 60 gallons per mile, or 60,000 gallons for a 1,000-mile run. Water at the head of rails, carried 300 miles in tank cars and 30

miles by camel, costs \$39 a thousand gallons; at one point the cost is \$2 a gallon. At the western end of the line, water is taken from pipe 350 miles long, then hauled 220 miles at a cost of \$8.40 a thousand gallons for each 100 miles.

PANAMA CANAL IDEAS APPLIED IN THE AUSTRALIAN DESERT

It was interesting to watch the railroad building. The construction camps



Plantograph by H. E. Gergary

A BUBBLING SPRING OF SALT WATER: CENTRAL AUSTRALIAN DESERT

hear the end of the line have buildings like those on the Panana Canal, with well-equipped hospitals, dining-rooms, and offices. The "tea and sugar train" is continually bringing supplies from the storehouse at Port Augusta, for the daily menu of the highly paid workman includes not only freshly baked bread and fresh meat, but also fresh vegetables and fresh fruit.


At the end of the constructed track the home-like train is left and a string of thirteen camels carries us on into the desert towards Ooldea and the Nullarbor plains. At Ooldea soak there is water among the sand-dunes and we go into camp, nearly 200 miles from the nearest settlement. Over the 630 miles separating Ooldea from Kalgoorlie travel by motor is feasible after supplies of water and gasoline have been laid down at stated points by camels. There is no road, but the Nullarbor plains are remarkably level and their surface is practically free of sands.

The expected returns from traffic on the Australian transcontinental line are an insignificant fraction of the cost of building and upkeep, but its political and strategic values are immense. It shortens the distance from London to Melbourne or Sydney by nearly a week, and Australia and New Zealand or America. It brings the western half of the continent in touch with the eastern by converting a strenuous two months' overland journey from Adelaide to Perth into a comfortable ride of two days.

### THE ROMANCE OF GOLD AND SILVER

When word reached Sydney early in 1849 that an Australian engineer had found gold in the streams of the Sierra Nevada, the boats to San Francisco were crowded with Australians. One of these amateur miners, Edward Hargraves, was so impressed with the similarity between the gold-bearing rock of California and the rocks along the Macquaric, that he hurried back to Australia and had the satisfaction of startling the peaceful colonies by the discovery of gold in New South Wales in February, 1851. One year later 105,000 men were encamped at three gold centers: Ballarat, 40,000; Bendigo, 40,000; Castlemaine, 25,000.

In 1850 Victoria had a population of 76,000, chiefly stockmen and farmers; by 1855 there were 364,000 inhabitants, three-fourths of them men. During this period Melbourne rose from a town to hold for a time the position of the foremost city in the Southern Hemisphere;

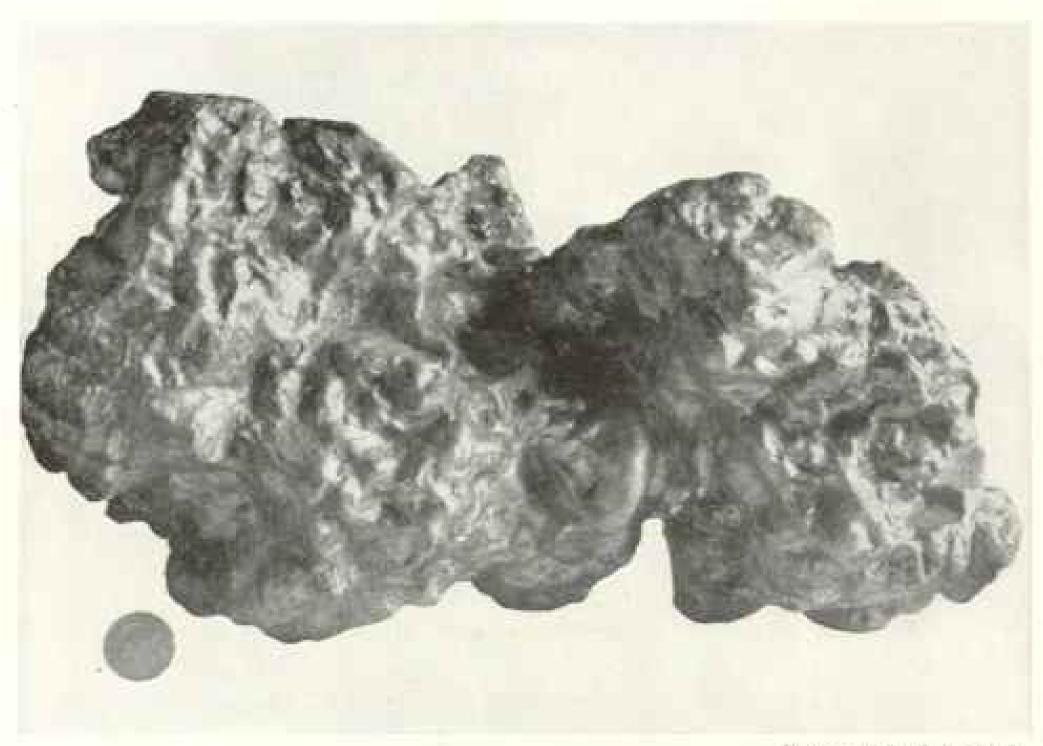

Photograph by C. R. Martin

AN AUSTRALIAN GOLD NUGGET COMPARED TO A \$20 GOLD PIECE

The nugget weighed 2.159 ounces when found at Ballarat, Victoria, on June 15, 1858, and was sold for \$50,000

parks were laid out; the University, Public Library, and Museum established; the first Australian railway built, and plans for the future knew no bounds.


Reports of panning \$100 to \$200 per day and of finding nuggets worth thousands of dollars each upset even the most sober-minded. "Farms, shops, ships were alike deserted, not only by men on them, but by their owners and masters. It was shearing time, but there were no shearers; it seemed like that at harvest time there would be no reapers." Even government officers and policemen deserted, and order was kept and offices manned by soldiers brought from Tasmania and from England.

The workings at Ballarat and Bendigo justified the excitement. For the first ten years, 1852-1861, the output was valued at \$486,000,000. From the Victoria field have come 412 gold nuggets, each weighing over 100 ounces, 52 over 500 ounces, and 12 over 1,000 ounces. The weight of the "Welcome" was 2,217 ounces and of the "Welcome Stranger," found an inch

below the surface, 2,520 ounces, worth \$50,000.

Queensland's turn came next. One small field after another was developed, until in 1886 the famous Mt. Morgan mine was opened. This wonderful mine. literally a mountain impregnated with gold, began by paying dividends of \$2;-000,000 a year. In 1889 the stockholders received \$5,000,000, and the dividends for the first twenty years amounted to \$35,000,000. Although Mt. Morgan continues to produce \$2,000,000 in gold a year and is a leading factor in Queensland's annual gold production of \$5,000,-600 to \$10,000,000, it is in reality a copper mine! The gold constitutes the fringe of a mammoth deposit of copper, with reserves estimated at 7,000,000 tons. In several respects it is the most remarkable mine in the world and ranks next to Broken Hill as a dividend-payer.

Tasmania had her mining excitement with the discovery of tin at Mount Bisch-off (1871), followed by the finding of deposits of gold, copper, and silver.

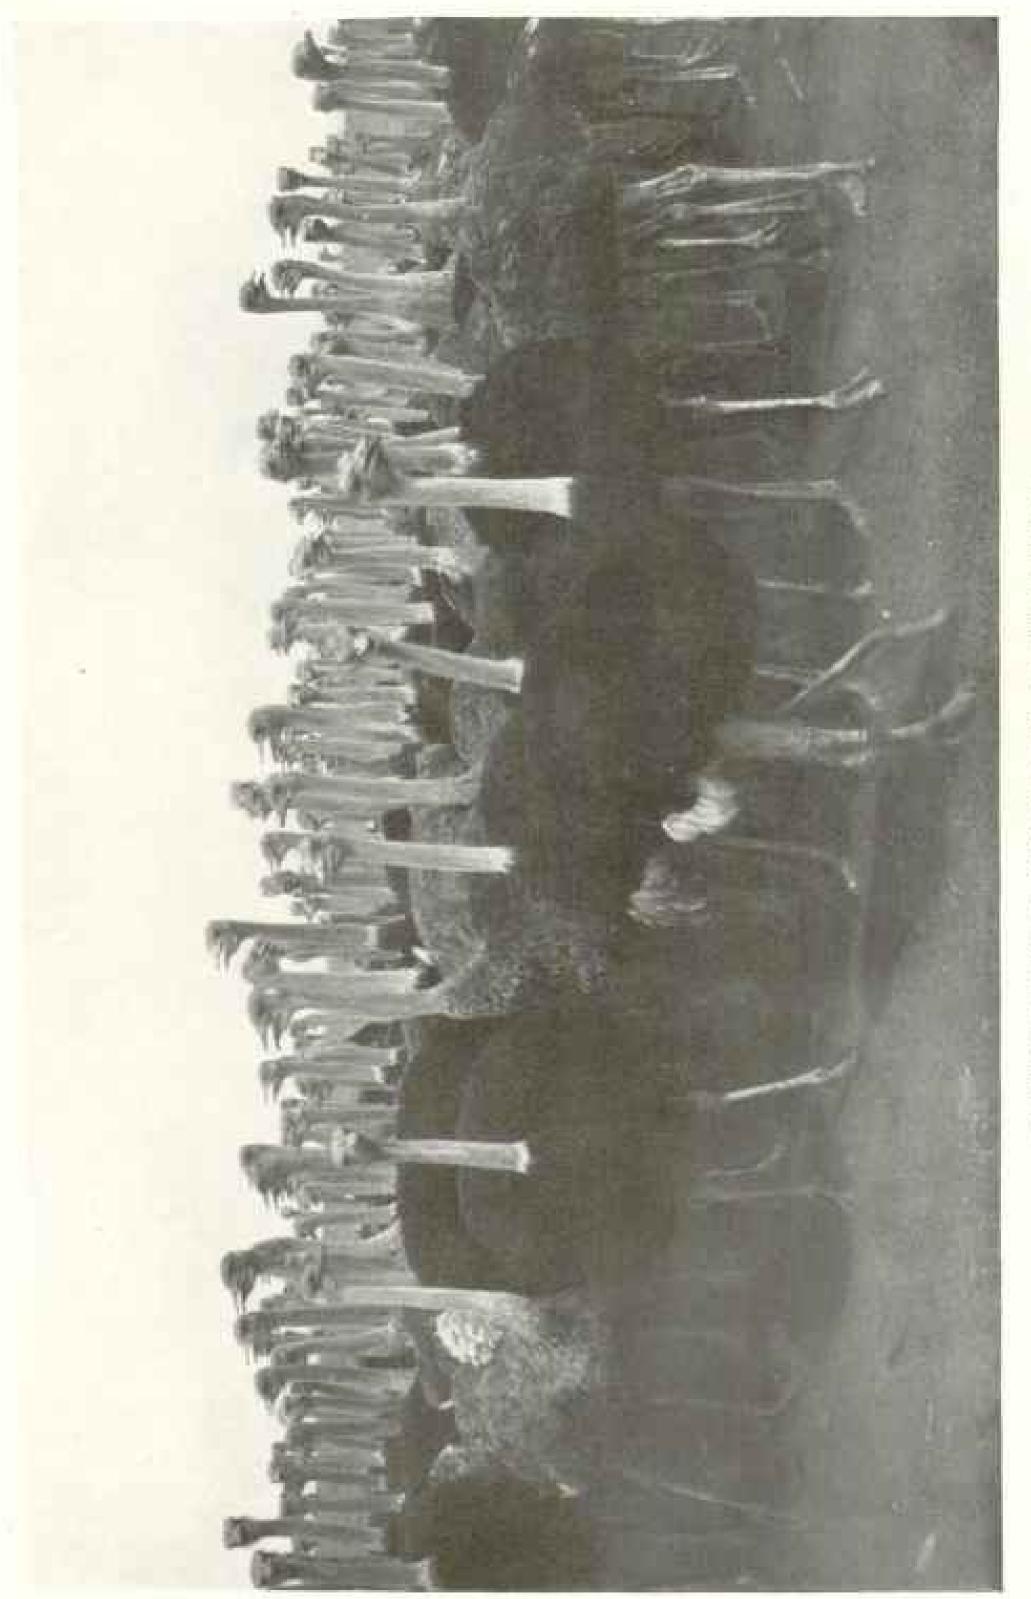

"The young birds are said to be remarkably silent, but the old birds, and especially the males, have a hearst, mountial ery, which is likened by others to the lowing of an ox."—Knowerox AN OSTRICE CHORUS: PORT AUGUSTA, SOUTH AUSTRALLS

These discoveries had, however, little effect in increasing the population or changing its character. Although this State ranks first in the production of tin, second in silver and lead, and produces over 6,000 tons of copper a year, "it remains what it always was—a group of gardens, farms, wood-lots, and or-chards" in the midst of delightful scenery. It is the White Mountain region for Australia.

### PARCLOUS HETURNS

Broken Hill, in New South Wales, is perhaps the most famous mining district in Australia, noted alike for containing the largest lead-silver mine in the world and for its endless labor troubles. These two claims to fame are closely related, for the richness of the ore bodies and size of the dividends have incited the miners to "get their share." The crude ore runs 16 per cent of lead and zinc and 11 ounces of silver to the ton. From a lode to to 300 feet wide and 2 miles long ore to the value of \$383,000,000 has been extracted. One of seven shares of the original proprietary syndicate, valued at \$500, afterward was quoted at \$11,000,000!

The Broken Hill mines have changed the map of Australia. They support in the desert a city of 33,000 people, a privately owned railway 250 miles in length leading to a port in an adjoining State, and at the end of the railroad the smelter town of Port Pirie, with a population of

15,000.

West Australia was the last of the States to feel the push of mining discoveries, but the impulse came with unusual force. The growth, development, prosperity, legislation, and social character of this State are but the reflections of its gold mines. In 1880 the total population of an area nearly one-third as large as the United States was 29,000, distributed along the coast and engaged in agricultural and pastoral pursuits. But the sensational discoveries at Coolgardie (1892), followed by the almost unparalleled finds a few miles farther on, at Kalgoorlie, within three years doubled the population of the State, and during the twenty years since Hannan made his memorable discovery a population of 48,000 had become 320,000 (see map, pages 480-481).

The mines of the "Colden State" have



RAILROAD MAP (SEE ALSO PAGES 480-481)


Although the cuilroads of Australia are largely State owned, there can be very 10w through routes, for each State has its own gange track (see text, page 564). It is not likely that motor trucks will ever play a large part in the Australian Desert. The amount of material transported to the back country will always be small, and on account of the scarcity of water and the very high price of gasoline (there is no fuel oil of any sort in Australia), it will be unprobtable to use tracks for transportation. Where a large amount of material is to be handled, as from a mine, an amount too large for camels and too small to justify the construction of a railway, motor trucks will eventually, I believe, find a place. At present automobiles are used in the more thuckly settled parts of the country; horses, however, are the chief transportation agents in the humid regions and camels in the arid.

fabulously rich. Within a few feet of the surface gold in flakes, grains, and nuggets weighing tens of ounces was ready for the finder. In one excavation 8 feet by 5 feet by 4 feet \$90,000 was taken, and by the year 1900 seventy tons of gold had been gathered at Kalgoorlie.


West Australia is the Nevada of the southern continent; Kalgoorlie its Com-

stock Lode.

The sensational yields of the early days in Queensland, Victoria, and West Australia were largely from surface workings made by pick and shovel; but now ore is mined at Ballarat to depths of exceeding 2,500 feet. At Bendigo thirteen shafts are over 3,000 feet in depth, and the Victoria Reef Quartz Mine reaches a depth of 4,614 feet—probably the deepest gold mine in the world. In West Australia real prosperity began with deeper mining and has continued with slight abatement to the present day.

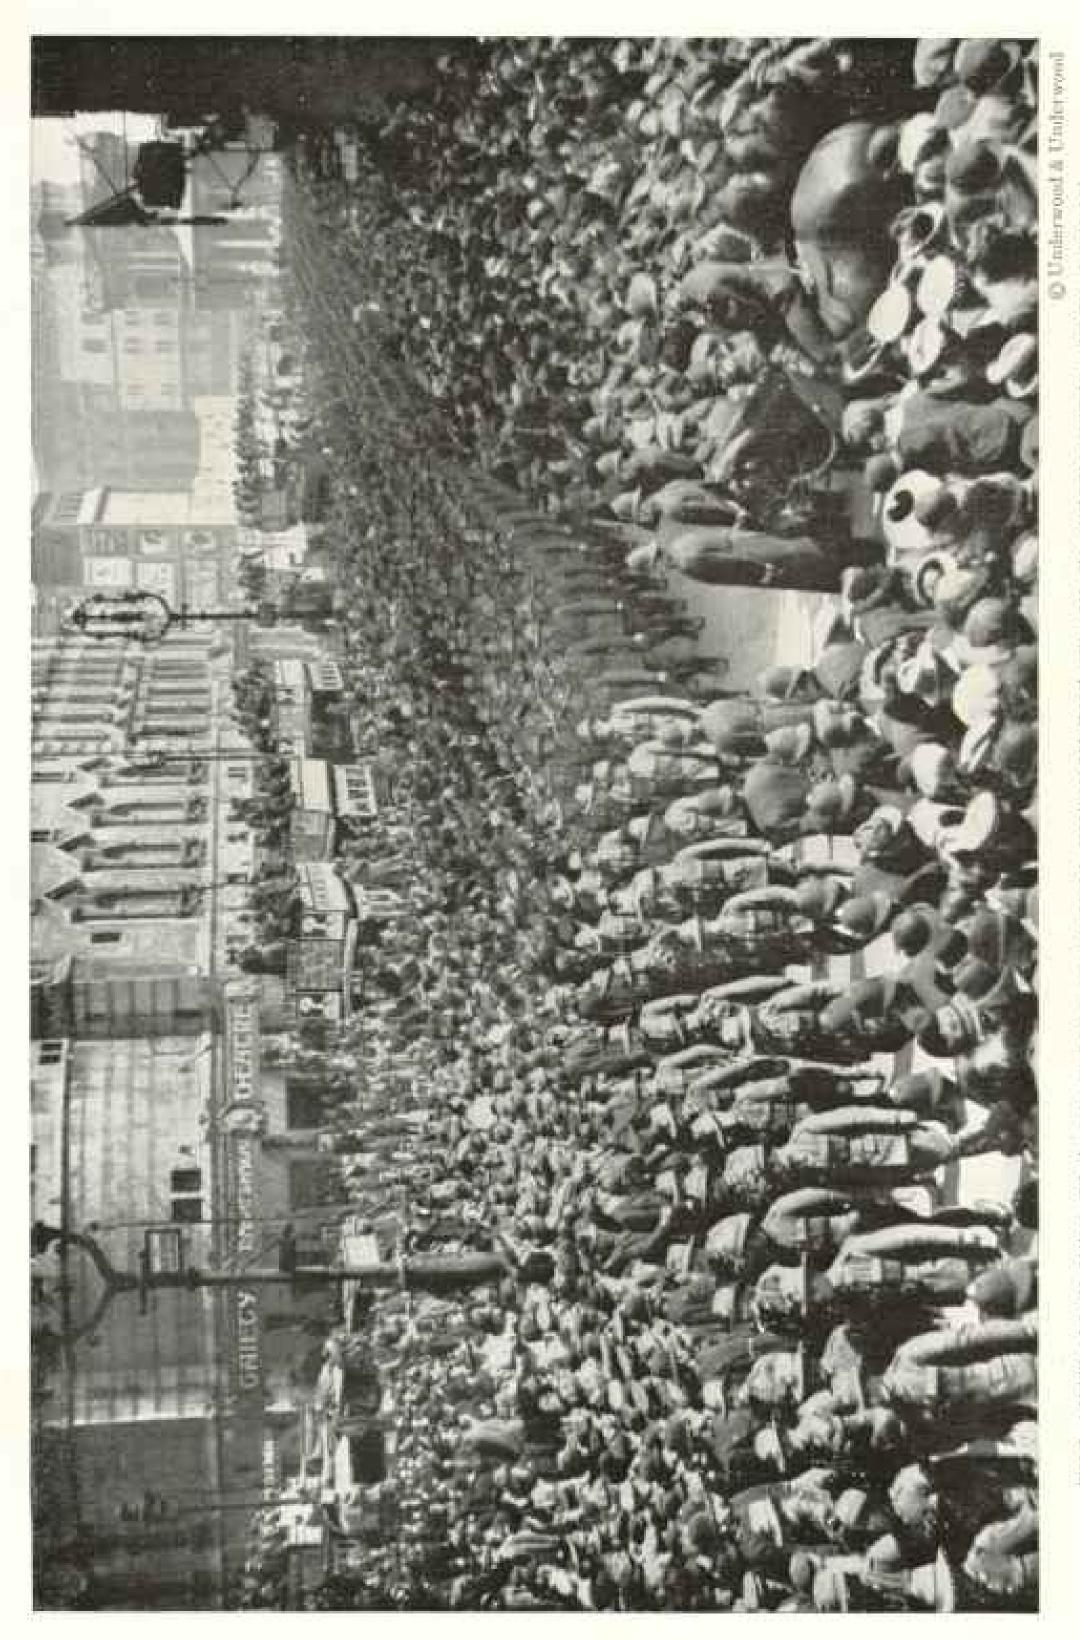

sons in the patriotic devotion of the people of the overseas dominions, but none more stirring than the march-ing of this division, which had come 11,000 miles to help the mother country THOORS MARCHING THROUGH THE STRAND TO WESTMINSTER ARBEY, LONDON THE AUSTRALIAN-NEW ZEALAND London has had frequent object lessons in

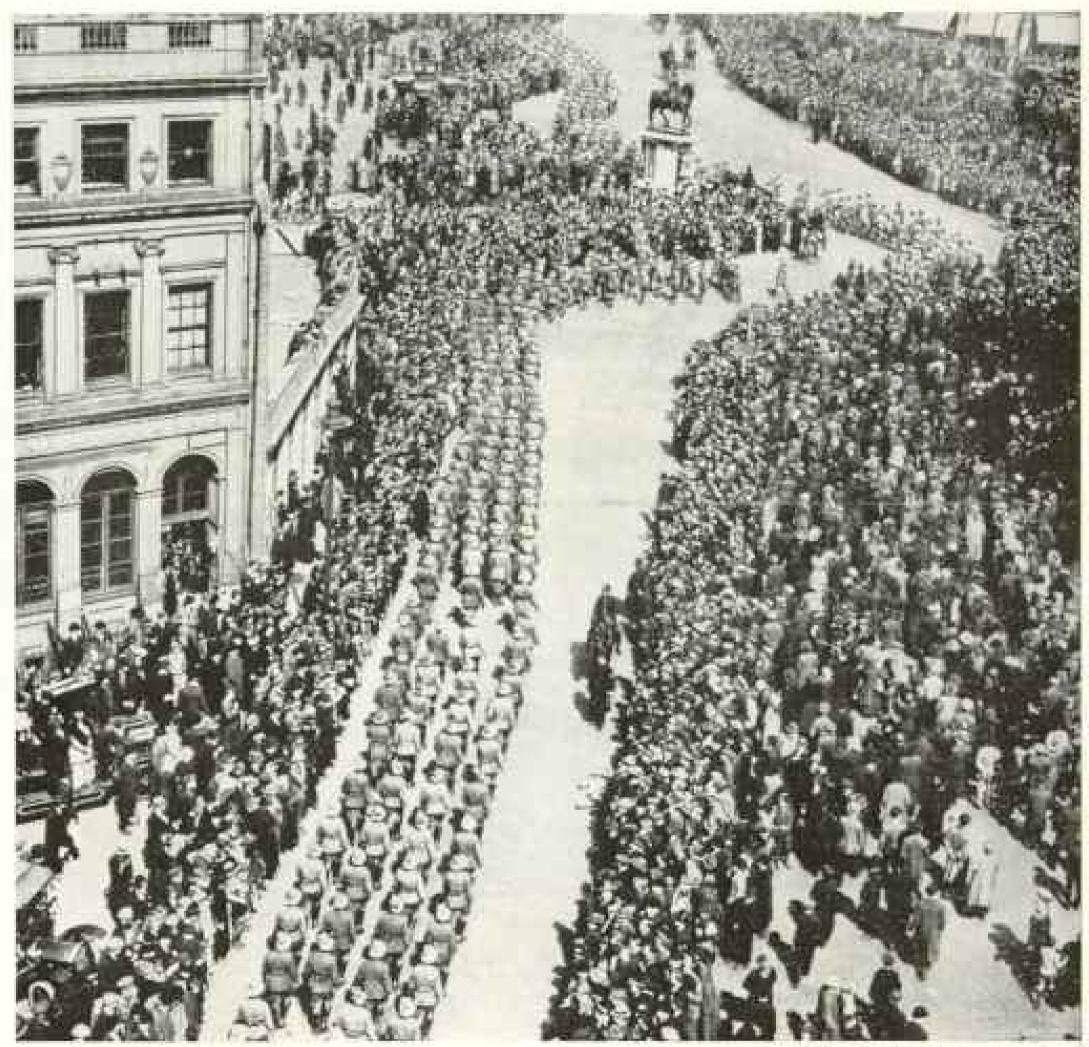

C International Film Service

# A GREAT DEMONSTRATION AS AUSTRALIAN AND NEW ZEALAND TROOPS MARCH THROUGH THE STREETS OF LONDON

Could one read the immost thought of every individual in that multitude of watchers, what a flood of sorrow and woe the reading might reveal! For London homes that have not sent fathers, husbands, brothers, or sons to make the supreme sacrifice for the Empire are rare,

The Broken Hill mines supply the bulk of the lead, silver, and zinc annually exported from Australia, the zinc until 1914 going chiefly to Germany for the manufacture of munitions. It is not at all unlikely that volunteers from New South Wales have met their death from shrapnel made from zinc and copper which they had previously mined.

For a few years following 1900 Australia ranked first among the world's producers of gold, but with the development of the Alaskan fields and the unparalleled production of the Transvaal she has fallen to third place.

# A WATER MAIN 350 MILES LONG

The gold mining camps of Western Australia are in an unmitigated desert—hot and dry. In the early days of the gold fields water was scarcer than gold, and the hardships endured by the early miners and the disastrous endings of some of the prospecting expeditions make a story one would like to forget.

With the discovery of rich gold mines



Photograph by Courge Bull

# AUSTRALIAN TROOPS EMBARKING FOR FRANCE

So long as red blood continues to run in human veins, so long will men continue to pledge their lives, their fortunes, and their sacred bonor to the maintenance of what they believe to be their country's rights.

centering at Kalgoorlie, a serious problem was presented. The region is without streams and fresh-water lakes, and wells yield only salt water. The nearest supply in quantity is 300 miles distant. By converting the salt water into fresh with condensers, by utilizing the few soaks, by storing some of the scant rainfall, by hauling water with camels and later by rail, mining operations could be carried on at great expense. When dry blowing of alluvial gold had exhausted the rich surface deposits and the equally rich ledge was encountered, the future profits of the field depended not only upon the amount of the mineral-gold-but also upon the mineral-water.

To meet this situation a most ambitious scheme was undertaken—the construction of a pipe-line from a point near the coast over desert range and valley to supply an artificial reservoir with 5,000,000 gallons a day. The length of the 33-inch steel main pipe is 351 miles—115 miles longer than the Los Angeles aqueduct—and the water is lifted by a series of pumps to a height of 1,290 feet. The cost was great, \$5,000,000 for the manufacture of the pipe alone,

The water is sold by the government at an average rate of 75 cents per thousand gallons—a price which seems large to American consumers—but it replaces the wholly inadequate supply of poor water bought at the rate of \$8.00 to \$12.00 per thousand gallons. Without the Goldfields' pipe line the richest mining fields of Australia with the cities of Coolgardie, Kalgoorlie, and Boulder would revert to their original state—a forbidding desert.

The various State governments advance money to prospectors and to mining companies, drill for metals, coal and oil, erect and operate crushers, testing plants, construct roads, build dams and reservoirs, buy and sell machinery. In Victoria 26 batteries are run at government expense; in West Australia, 40. New South Wales has "grub-staked" prospectors to the sum of over \$2,000,000.

The mining towns of Australia emphasize the Australians love of home and pleasant surroundings. The mushroom city of Kalgoorlie in the land of "sun, sand, sin, sorrow and sore eyes, where water is obtained from the end of a 350mile pipe, has its gardens and lawns and

shade trees.

To an American, whose idea of a mining town is based on visits to Butte or Virginia City, a day in Ballarat, Victoria, is filled with surprises. He walks through clean streets, lined with attractive buildings and adorned with statues, leading to parks and public gardens and on to a beautiful lake. Ballarat has demonstrated the fact that mining town is not synonymous with ugliness and lack of public Spirit.

#### THE IMMICRATION AUSTRALIA SEEKS

Australia is disappointed that of the four large areas which offer congenial homes for people of European blood,namely, Australia, Canada, United States and Argentina - Australia alone is passed by, while the other three favored regions are receiving Europeans by hundreds of thousands. She sees the United States receiving in one year (1913) 1.107,892 people from abroad, more than the entire net immigration to Australia for the past fifty-three years, and in another year (1010) enrolling four times as many people born in the United Kingdom as were living in Australia.

not only small but remarkably fluctuating for individual States and for the Commonwealth, and at times has ceased altogether. For the five years, 1896-1900, the net immigration was only 2,487, and the five years following showed a net loss of 16,793. Since that date net immigration has again increased, and in 1913 reached 55,000.

The stream of immigrants has been

In countries of large population the rate of munigration is a matter of small account, but a continent of nearly 3,000,-000 square miles, with vast undeveloped natural resources, must have people if the financial burdens incident to development are not to be crushing. On June 30, 1914, before the beginning of the European war, the debts of the six States reached the enormous total of \$1,550,-000,000, or \$245 per capita, in addition to a Commonwealth public debt of So3,-000,000. These startling totals for a dominion with a population less than New York City, while not directly comparable with the debts of most other countries because much of the money is invested in public utilities, are disproportionate to the population and demand interest charges not easily met,

#### ENCOURAGING NEWCOMERS

Viewed in the abstract, the advantages offered by Australia to a foreigner are exceptionally good. The climate is healthful, imoccupied land is abundant, and social life is unusually pleasant. But in spite of a vigorous campaign, immigrants. do not flock to the Commonwealth. Perhaps, because the land, though practically free, is not really so in the sense of the homesteads in the United States, to which absolute title is obtained by residence; and the available land also requires more preparation than the prairies of Canada before return in crop is possible, while the rainfall is less reliable.

Or it may be that the door for the

immigrant is not wide open.

The type of immigrant desired is indicated by the classes to which the States and Commonwealth provide "assisted passages." The South Australian list is typical: "a. Agricultural or other rural workers, b. Domestic helpers, c. Persons whose introduction to the State will not, in the opinion of the minister, cause congestion in the State in any occupation. or trade." Even with agricultural laborers "care is taken to limit the supply to the demand."

#### THOSE WHO ARE NOT INVITED

Agriculturalists who will take up small tracts of new land, and domestic servants, are more than welcome, and to these

money aid is extended, but mechanics and miners, factory operatives and manual laborers, and professional men, are not received with open arms, and may find difficulty in becoming established. The carpenter calls for immigrants, but not for more carpenters; the mason sees no need for immigrants skilled in stone or brick work, and the pick-and-shovel man thinks there are enough of his guild

already in the country.

If 200,000 European immigrants, such as land in New York, should arrive at Sydney some year, planning to distribute themselves among the skilled and unskilled trades, to open small shops, and start market gardens, a special session of Farhamert might have to be called to deal with the disaster! And, when it is remembered that Europeans desiring to emigrate are in crowded industrial, rather than agricultural communities, and know little and care less for country life of uncertain outcome, there is no occasion for surprise that a call to the farm or to domestic service receives feeble response. Even Australians are drifting to the cities (see pages 513 and 527).

#### THE AUSTRALIAN COMMONWEALTH

As population increased and industries and communications became established, it was found that the interests of the Australian States were not identical—in fact, were in many respects antagonistic—a condition readily understood when the sites of the colonies are noted (see map,

pages 480-481).

It is as if Massachusetts, Pennsylvania, Georgia, Arizona, and Oregon were small contemporaneous colonies, each striving to work out its local problems. It appeared to be the duty of each State to enlarge its power, regardless of the welfare of its neighbor or of the continent as a whole. Even within the States differences developed, and secession was proposed by the tropical portion of Oncensland and the mining sections of West Australia.

New South Wales was a free-trade State; the others favored protection; but each State had its own tariff laws. Each State also had its own land laws and rules governing copyright, and its own system of defense and of quarantine. Each State developed its railways without regard to interstate traffic, with a gauge and type of rolling stock which suited its needs.

#### STATE RATE WARS

The struggle was the most intense between the two most populous colonies,
New South Wales and Victoria—in reality between the cities of Sydney and
Melbourne, Victoria built railroads to
and along the border of New South
Wales and agreed to carry wool and produce of New South Wales origin to Melbourne at nominal cost. New South
Wales also made ridiculously low rates
for freight from Victoria points to
Sydney, and Queensland and South Australia were likewise industriously engaged,
in cutting their neighbors' throats at

public expense.

The submergence of national to local interests and the desire to build cheaply and rapidly have resulted in a condition of railway gauges which makes interstate traffic impossible without reloading. New South Wales has a gauge of 4 feet 81/2 inches; Victoria, 5 feet 3 inches; Queensland and West Australia, 3 feet 6 inches; South Australia, 5 feet 3 inches, 4 feet 814 inches, and 3 feet 6 inches. The gauge of the new transcontinental railway is 4 feet 85% inches. A passenger landing at Brisbane, destined for Ferth, must change to a different type of car five times, and even between the two largest cities, Sydney and Melbourne (582 miles)—the distance from Omaha to Denver-no through cars can be operated.

With such jealousies and antagonisms it is not surprising that fifty years of fruitless effort should have preceded federation, or that the constitution finally adopted should give large play to the doctrine of State's rights. The model chosen was, naturally, the Constitution of the United States, in which the States retain such powers as are not specifically delegated to the Federal authorities. The Canadian scheme, in which Federal Parliament is supreme over the provinces, and the South African Union, which is a union only in name, were unacceptable.



O Underwood & Underwood

ANZAC TROOPS OFF TO THE FIRING LINE IN FRANCE

Their hearty response to the welcome of the French villagers is full of joility, even though a thousand Balaklavas relied into one may be their morrow's lot

#### STATES RIGHTS IN AUSTRALIA

But the Commonwealth government of Australia has a much narrower scope than the Federal Government of the United States. Its chief function is to organize defense, regulate overseas and interstate commerce, establish and collect customs duties (of which three-fourths must be returned to the States), coin money, and operate post-offices, telephones, and telegraphs. The States retain all forms of taxation, control the public lands and rivers, and operate railways. The meteorological service is a Commonwealth department, but geological surveys, mine investigations, irrigation, etc., are State functions. Interstate commissions replace Federal bureaus in dealing with many internal problems.

There is even a greater difference between Australia and America in the scope of governmental action. To an Australian, the Federal, State, and city governments are not organizations designed primarily to preserve order and protect property and maintain civic rights; they exist in order to do the people's business,

and have no apparent limitations.

Action by Parliament is the cure-all for public and private ills. The State operates railroads, street cars, ferryboats, water works, electric light plants; fixes prices and hours of labor and wages; makes clothes and machinery; sells fish, meat, dairy produce; exports wines; runs warehouses; supplies seed wheat; builds fences and roads; digs wells; provides insurance; pays hospital bills; loans money to individuals; buys and sells land; runs mining plants;

#### A GENUINE AUTONOMY MAINTAINED

Not only have the States refused to be submerged in the Commonwealth, but the Commonwealth maintains its independence of the British Government to an unusual degree. Politically and economically, Australia and England are far apart. Appeals to the Privy Council at London are strictly limited, and tariff regulations restricting the trade with the mother country are in force. To the Australian the Commonwealth is a growing nation, which owes its origin, but not its development, to England.

The leaders recognize the fact, obvious to the foreigner, that Australia has its own problems, in the solution of which little is gained by following traditions and customs applicable to a thickly settled manufacturing country with well-defined social strata.

If one were to take at their face value a selection of caricatures and humorous writings, as well as editorials, letters, and pamphlets, printed in Australia during the last quarter of the nineteenth century. he might well reach the conclusion, apparently arrived at by certain of England's enemies, that self-centered and ambitious Australia was little removed from an unfriendly Australia. The fallacy of confusing independence with disloyalty is anuply demonstrated by the Boer War and by the Great War.

When by Germany's action Great Britain was placed in a perilous position, the response of Australia was vigorous and mmedate. A nation of peace-loving people, intent on their own affairs, was transformed into a group of warring Britons, as it were, over night. It appeared as if the very weakness of the political tie strengthened the bond of

allegiance.

#### PROMPT TO ANSWER THE EMPIRE'S CALL

Within two months after war was declared the little Australian fleet of five cruisers, three torpedo-boat destroyers, and three light gunboat≤, built and manned at the nation's expense, had occupied the German Pacific islands—Samon, Marshall, Carolines, Pelew, Ladrones, New Guinea, New Britain—broken up the German wireless system, captured eleven enemy's vessels, forced twenty-five others to intern, and prevented the destruction of a single British ship in Australian waters. In the third month of the war the Emden, lying in wait for Australian transports, met its fate before the guns of the cruiser Sydney. Later on the watchful Australian fleet played its part in driving von Spree's squadron from the Pacific into the trap set by Admiral Sturdee at the Falkland Islands.

The response of the military forces was likewise quick and effective. Although fighting at a distance involved unusual effort and expense, the task was



Photograph by George Rell

WELCOME HOME: THE RETURN OF THE HOSPITAL SHIP.

In all the history of war no colonials ever rendered braver or better service to a mother country than that which Australians and New Zealanders have rendered to Great Britain in her present struggle. From Gallipoli to Arras and the Somme they have covered themselves with glory. And the devotion of the folk back home is worthy of the courage of the men at the front.



Photograph from Paul Thompson

A WARM WELCOME FOR A YOUTHFUL VETERAN

The Australian people are naturally proud of their beroes on their return from the firing time. This photograph shows a wounded Ansac being attended by auxiliary nurses on arrival at the base hospital at Randwick, Sydney.

loyally assumed. Universal military service was inaugurated for the first time by an English-speaking community. Factories were turned over to the government, seventy steamers were requisitioned and rebuilt for transport service, war loans were offered and quickly accepted.

On November 1, 1914, 20,000 men, the entire Australian army at the declaration

of war, left Australia for Egypt; at the end of the first year of the conflict 70,000 were in the field, and by July, 1916, "nearly 300,000 volunteers had crossed the seas." The creation, equipment, and supplying of this army, involving enormous cost and personal sacrifice, constitutes a thrilling chapter in the history of loyalty.



#### That's what you're doing when you eat good soup.

Not merely flesh and muscle, but nerve-power and energy are what count in the world today. And good soup—as all authorities agree—is rich in the nutritive properties which build up vitality and force.

You find not only enjoyment and satisfaction, but

power-building nourishment in

## Campbell's Tomato Soup

Its fragrant aroma, inviting color, and exhibitanting flavor are founded on Nature's own recipe as put up in the juicy red-ripe tomato.

By means of the exclusive Campbell method we preserve these tempting qualities with all their natural efficacy retained. We blend the pure fresh juice of the tomato with other choice ingredients in a well-balanced delightful and wholesome combination.

Campbell's Tomato Soup is valuable not only as a creator of appetite, but as a food which is assimilated almost completely and transformed, with the least possible tax on digestion, into the elements of active capacity and power.

Do you get the benefit of this nourishing soup as often as you

might?

# Eamphellis Soups

LOOK FOR THE RED-AND-WHITE LABEL

## Misses' Fur Coats

Exclusive in Design



C. G. Gunther's Sons

Established 1820

391 Fifth Avenue

New York



## Operate Immediately! But the Money?

HE had never been sick a day in his life, he boasted, and the next week came an attack of appendicitis. The doctor said, "Operate immediately," and his wife went pale, for there was no money in the bank. But in all his pain, he smiled, "Don't worry, my dear, I have taken out an Ætna Policy. Ætna will pay the doctor or the hospital and send us an income as long as I am disabled."

Be wise, too - now, while you are well -



If you are in a "Preferred" occupation, and under 51 years of age and pay \$60 a year for an Ættan Disability Policy, you will get:

\$25 a week up to 52 weeks while you are ill. \$25 a week for 100 weeks—nearly two years if you lose the sight of both eyes by disease, or the use of both hands or feet or one hand and one foot by paralysis. Also payment of hospital charges up to \$12.50 per week for ten weeks, or for a surgical operation.

Or you will get \$50 a week as long as you are disabled by a railway, steamship or burning building

necident. \$25 a week if disabled by an ordinary accident. If you are killed in an accident or lose two limbs or both eyes, you will get from \$5,000 to \$15,000, depending upon the character of the accident and the number of years you have carried the insurance. Half as much for loss of one hand, foot or eye.

Send this coupon and find out about this wonderful policy and all the other Æina. Disability and Accident Policies—one as low as Sc a day protects you in ease of accident. Among all these there is one that fits you exactly. Tomorrow may be too late. Send the coupon and find out about it—today.

#### ÆTNA LIFE INSURANCE COMPANY

Drawer 1341

HARTFORD, CONN.

The largest company in the world writing Life, Accident, Health and Liability Insurance

Agency opportunities for all Casualty and Bonding lines

An Ætna Agent has a national advertising campaign working for him all the time

AND THE PROPERTY OF THE PARTY O

## All Kodak Film is now Speed Film

When we began the manufacture of "Speed" film it was decidedly faster than our regular N. C. emulsion. There were, however, some particulars, such as uniformity and keeping quality, in which it was more difficult to control than the old reliable "N. C." In order to protect our customers against film that might have deteriorated through age, we did not give it as long a dating as was given the N. C. film. We were inclined to make haste slowly.

In the Speed film, we had just what we claimed for it: "speed". In the N. C. film, which had a very different emulsion, we had beautiful gradation and absolute reliability. Gradually, during a period of six years, we have increased the speed of our N. C. film without losing one jot of its reliability, its keeping quality or its fineness of gradation.


All Kodak film is now Non-Curling Speed film, both the Autographic, and the "N. C." that is wound in the old way without the autographic feature. Both are the reliable, dependable film—with added speed.

Important to Amateurs. Practically all negative emulsions (both plates and films) and Kodak film in particular, have a wide latitude on the side of over-exposure. This means, that while your pictures will be unsatisfactory if even a little under-exposed, they can have considerably more than the necessary exposure without the slightest harm. The moral is, of course; when in doubt take the choice of erring on the side of over-exposure. Kodak Speed film will help

out appreciably by giving better timed negatives than can be obtained with other films when light conditions are poor. On the other hand, the latitude is such that you can expose and should expose, under good light conditions, just the same as you always have with the regular Kodak N. C. film. It isn't intended that you should cut down exposures when using Speed film. It is intended that you shall get better negatives when working under adverse conditions—and you will.

If it isn't Eastman, it isn't Kodak film.

EASTMAN KODAK CO., ROCHESTER, N. Y., The Kodak City.

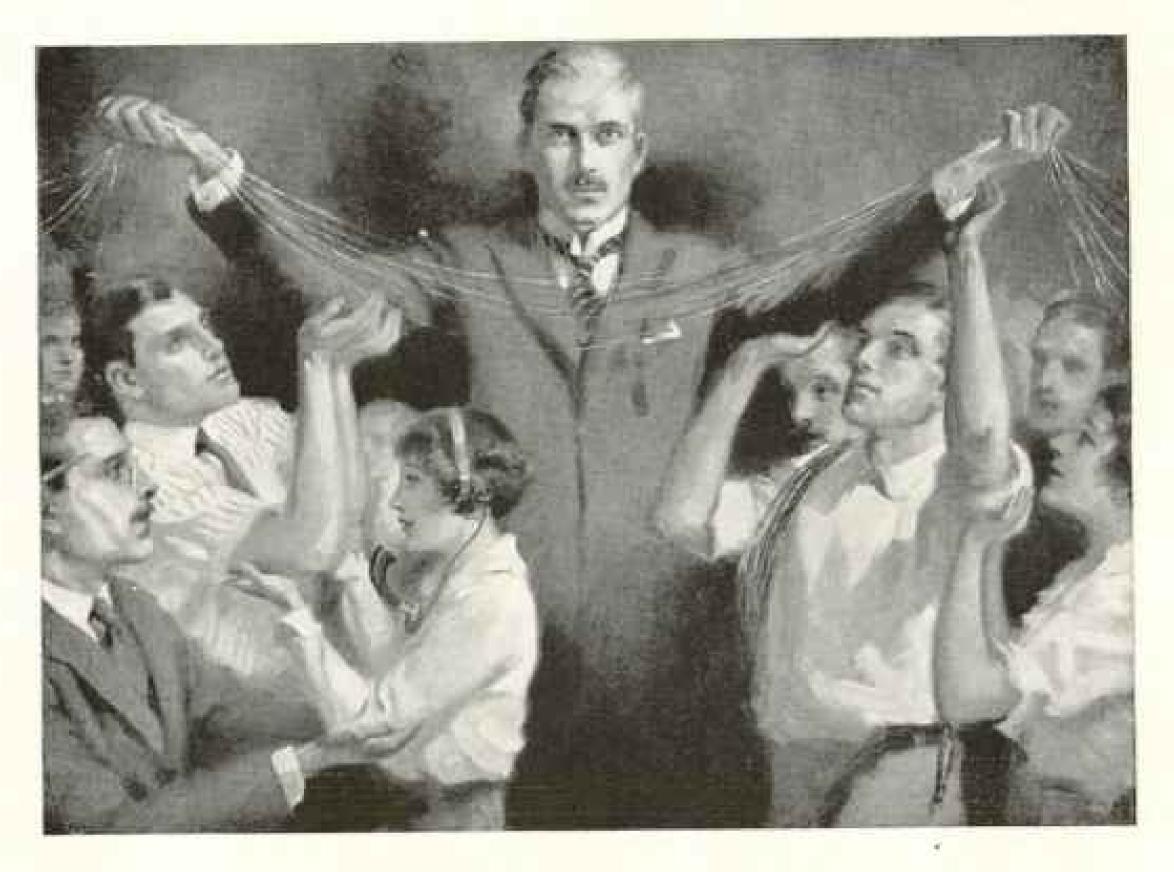

## Loyal to the Service

They Uphold Each Other's Hands

The public must be served. This is the dominating thought of the entire Bell organization from the president down. Every employe feels the sense of responsibility that this working principle implies. The public must be served—efficiently, uninterruptedly.

In the fulfilment of this policy, the management of the Bell System realizes that every individual employe must give undivided and undistracted effort and interest to his work.

To assure this, every worker receives adequate remuneration, ample protection in case of illness and provision for old age. All these personal matters are cared for so that the employe has the least possible worry regarding his own welfare. His whole-hearted attention can be devoted to serving the public.

While each employe realizes that he is but a single factor, he understands that not only is supreme personal effort expected of him, but also a loyal support to every other

telephone worker.

There is something in the telephone organization which imbues every employe with a spirit of loyalty to the public. All feel a direct responsibility for each other because each recognizes that only by mutual endeavor can they render the highstandard of service which is expected of them. They uphold each other's hands so that the public may be served.



AMERICAN TELEPHONE AND TELEGRAPH COMPANY

AND ASSOCIATED COMPANIES

One Policy

One System

Universal Service



T is commical—there is linle or no waste. It is good food waher. It is appetizing to the most fastidious.

This is our 30th season in the manufacture of Jones. Dairy Farm Products. Your grocer will tell you of our prices and times of shipment.

Be sure that it's Jones.

MILO C. JONES Jones Dairy Farm Ft. Atkinson, Wis.

#### For 25 Years We Have Built Motors

To Operate Commercial and Domestic Appliances

The fact that they are Bought in Thousand Lots by Nation-wide Distributors is their



best sales argument. Such men demand motors that are long-lived and entail small maintenance expense. Their customers throw back defective motors and sometimes the appliance too. That's why these appliance manufacturers look to quality first. in a motor.

They buy of us because-We Build Our Motors

with Electrical and Mechanical Precision.

They are liberally designed; liberally rated. They run quietly and smoothly.

Our sales engineers are ready to give engineering suggestions as to the proper motor for particular installations,

Bulletin 340 sent on request

The Holtzer-Cabot Electric Co.

Boston, Mass., and Chicago, Ill.



Above are lined with lamb skins. Price with mobals fleece linings, \$4.50. Any hayer not entirely satisfied may return them before milian and have his money. Our illustrated estalon pives immure directions and a whole lot of other information about cusmm tunning of hider and skins with hair or hir on; cost, mbe, and gap making 1 taxideous and head mounting 1 also prices of far. goods and hig mounted pame boads sex sell.

> THE CROSBY FRISLAN FUR COMPANY, Rochester, N. Y.

#### SPEAK A FOREIGN LANGUAGE!

The War has circuid unimmed our top those who know Broom, Frank, Gerran, or Chinas, Take adventure of the Wei advantant. Herrer your position.

Execut your bootenin. Emiliate expert troop with namely Amortizan recentries. Reputs proceed in great here earn burst read propers. However, on an electronic progress. must the back be within the cities and make that price include. Asymes a new language at home, by the


#### And Resenthal's Method of Practical Linguistry

Highest Award Passma-Partic Reposition !-Thus to the agrand sear to brain a beenigh language. You be a this living some sife a cutter positioner positioner seaths would need and places. He specks the charle or unlikely, for minutes or buors at a time pleasant fractioning made; on terflows rides by mynomialist This part superpaire will members wit the family can use it. You vemply peactice during spare monocars of of convenient theers, and in a surprisingly shows

time you speak, read, and understand a new hourse MAKES AN IDEAL XMAS CIFT

Brown for from "Longways Transies," particulars of Trans-

The Language Phone Method, 980 Painam Hidg., 2 W. 45th St., N.Y.

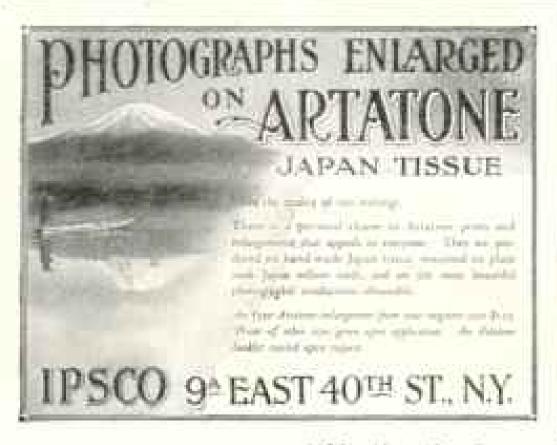







## WEST INDIES CRUISES

Two luxurious 24-day cruises to Guba, Jamaica, Pan-ama, and Gosta Rica by specially chartered American steamships, including many exceptional side trips by automobile and special train.

From New York, Feb. 10 and Feb. 24, 1917.

#### SOUTH SEA ISLANDS AND AUSTRALASIA

Fascinating new tours to the wonderlands of the great South Pacific—far from the ordinary reates of travel—visiting Hawaii (with trip to Kilanea Volcano), Samon (former home of Stevenson), Fiji Islands, New Zealand, (both islands), Australia, Tasmania, Rarotonga, and Tahiti.

Departures March 7 and March 11, 1917.

Also tours to California, Florida, Japan and China, and South America.

Sand for booklet desired.



17 Temple Place Dept. 7, Boston

New York Chicago Philadelphia, San Francisco Los Angeles

#### RAYMOND & WHITCOMB CO.









## Golden Hours at Sea

Such fascinating things to do and see and such comfort all the way if you choose

### Southern Pacific Steamships

(Morgan Line)

#### NEW YORK

#### NEW ORLEANS

See the quaint City of New Orleans, then board the "Sunset Limited" for California, affording opportunity for that marvelous side trip over the "Apache Trail," the oldest highway in America. Through Pullman Service between El Paso and Globe, Arizona, and Phoenix, Arizona, and Los Angeles, California, for Apache Trail Passengers.

For literature and full information address

L. H. Nutting, General Passenger Agent, 366 Broadway, New York





Give him to months of Christman jup-12 hig, bright, inspiring numbers of The American Buy. Equivalent to 7 long story books, I vancous of short sporter, 2 volumes of athletics and physical culture, a wnimms each of history, weodersft and nature study; arienter; how to make and how to do, and a others of new inventions, photography, humor and interesting items. Fully illustrated, 22 volumes worth \$15, all for \$1.56. Subscribe for him now. 500,000 beys and their parents find th's magnatus an unexcelled character-building agency. It's just the kind of magnatus any real boy wants—clean all through. It's a present he can't break, or here, or tire of.

\$1.50 a year. 15c a copy at news-stands.
THE SPRAGUE PUBLISHING COMPANY
29 American Building, Detroit, Mich.



maintains exceptionally good service year round to

## FLORIDA GEORGIA

Pinehurst, Southern Pines, Camden, Columbia, Savannah Additional train commencing Jan. 3.

The all Pullman, all steel

#### Seaboard Florida Limited

One day and two nights on route; morning trains from Boston and Bullale and afternoon trains from Pittsburgh connect.

#### "The Flamingo"

One night out to Tampa, Palm Beach, and intermediate resorts. Two nights out to Havana.

Get our Resert, Hotel, Golf, and Sports Guide at Northern offices, Boston, Buffale, Philadelphia, Baltimore, Washington, or

W. E. CONKLYN, Gen. East, Passenger Agent, 1184 Broadway, New York



This Magazine is from Our Presses

Judd & Detweiler, Inc.

420-422 Clebenth Street

Washington, D. C.

## CUBALAURIER PARADISE

Title of a beautifully illustrated 64 page booklet telling you all about the enchanting island of Cuba sent on receipt of 3 cents postage.

UNITED RAILWAYS OF HAVANA

Frank Roberts, G. P. A.

Suite 1116

42 Broadway, New York



## What It Must Do

The electrical system of your motor car must do more than supply power to the starter. It must provide exactly enough electrical energy to keep the storage battery in good condition, so that it can maintain an unbroken flow of current to the lights and, in most modern cars, to the ignition.

Since these duties fall to the generator, a dependable generator is essential to your satisfaction with your car.

Westinghouse generators are dependable largely because Westinghouse has been able to apply to their design and construction the results of an unusually beond experience in producing electrical apparatus for the generating of power, and has put service before price.


Forty-seven automobile manufacturers pay the higher prior for Winninghouse Equipment to bear the satisfaction of their car-tiwners.

WESTINGHOUSE ELECTRIC & MPG. CO.

Automatic Equipment Data result

BEAUTIME WORKS POSTSBURGE, PA.

# Westinghouse STARTING, LIGHTING B& IGNITION EQUIPMENT

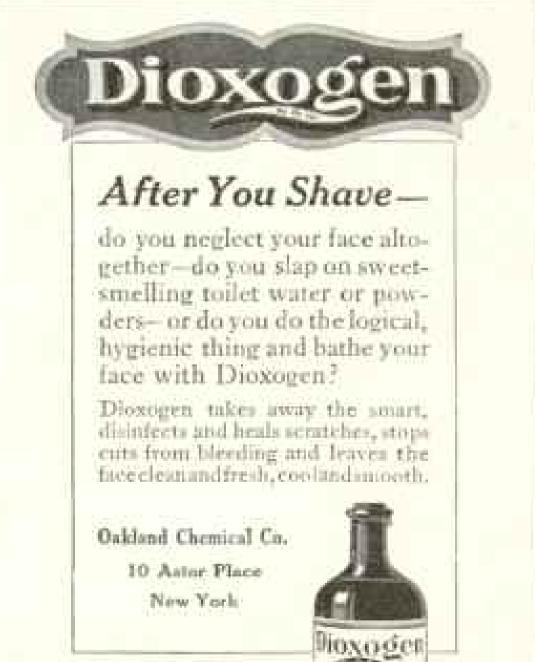



In spite of the great rise in the cost of raw materials, there has been no change in the quality of the ingredients entering into the composition of

#### SPRATT'S

#### Dog Cakes and Puppy Biscuits

Remember that a dog fed on SPRATT'S is al-

Send stamp for entalogue.

SPRATT'S PATENT, LIMITED NEWARK, N. J.

#### Bronze Memorial Tablets


JNO. WILLIAMS, Inc.

STATUARY BRONZE FOUNDRY

(Renthlished 1971)

556 West 27th St. Dept. T New York City

Designs and Estimates furnished free, Sent for Blustrated Pumphiets of Bronce Tablets,



is something more than a mere polish

-something more than just a cleaner.

Furniture needs an OIL to search and

preserve the wood!

#### 3-in-One

is exactly what fine furniture needs. Because it not only cleans, not only polishes, but also acts as a preservative. It does for furniture what the sap does for the standing tree.

Here in the way to use 1-ja-One on pour furentage, and was everyworks. Put a fewdrage on a right, wring suring add water, Wipstronuclasers little analysis of This takes out all dist and stains. Then dry and polish with a metrologia, following the grain of the wood. This restores the original beamty of the finish.

Treat desks and other office furniture the units with delight you.

5-in-One is sold at all morein 10c, 25c, and 50c borries and in 25c Handy Oil Cana.

FREE-Generous comple of 5-in-One Oil and Sperial Fatniture Circular sent free.

Three-in-One Oil Co., 42UF. Broadway, N. Y.



#### RECOMMENDATION FOR MEMBERSHIP

in the

## National Geographic Society

The Membership Fee Includes Subscription to the National Geographic Magazine

DUES: Annual membership in U.S., \$2.00; somual membership abroad, \$3.00; Canada, \$2.50; life membership, \$50. Piesse make remittances payable to National Geographic Society, and if at a distance remit by N. Y. draft, postal or express order.

Please detach and fill in blank below and send to the Secretary

191

To the Secretary, National Geographic Society, Sixteenth and M Streets Northwest, Washington, D. C.:

I nominate

Address

for membership in the Society.

82) H

(Write year address)

# BUY DIAMONDS DIRECT From Jason Weiler & Son Diamond Importers, Boston, Mass.

FOR over forty years the house of Jason Weiler & Son of Boston has been one of America's leading diamond importers selling to jewelers. However, a large business is done direct by mail with customers at importing prices! Here are five diamond offers—direct to you by mail—which clearly demonstrate our position to name prices on diamonds that should surely interest any present or prospective diamond purchaser.

I Garat, \$95.00

This reason gives in diamond is set great believed and perfectly and while as and perfectly and the first transfer of the best first transfer of t to jewelers. However, a large business is done direct by mail with customers at im-





| 36 carat .        |             | 833     | 10   | . 5. | 52,09 |
|-------------------|-------------|---------|------|------|-------|
| M. curat .        | 100         |         | 400  | 400  | 15.00 |
| 1% curati         |             | 400     | 100  |      | 39,00 |
| a curuts .        |             |         |      |      | 12.00 |
| Mount jetter      |             |         |      |      |       |
| som he pur        | 1717        | 4.0     | +0   | -    | m For |
| Linna Electricity | at of Danie | eff 100 | 3340 |      |       |










"'Mention the Geographic-It identifies you.""





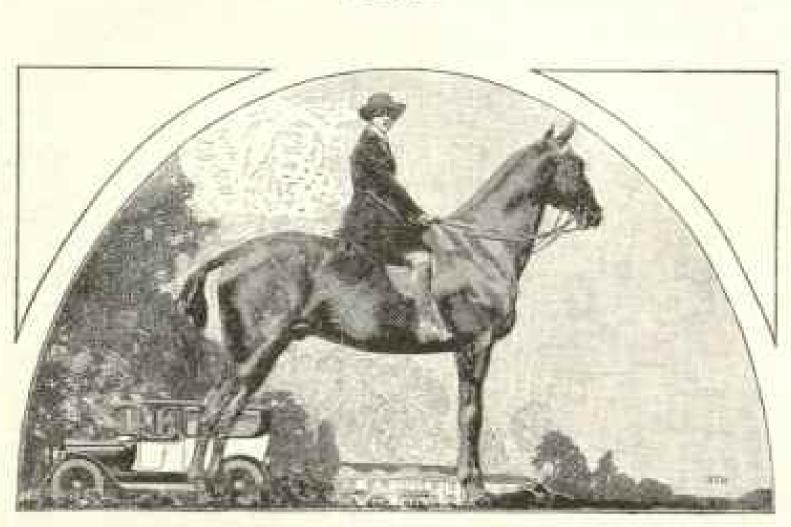

## Quality folk discriminate between true elegance and its imitation that's why they are quality folk

Now-for ten years -and longer the Packard has had the unstinted approval. of a discriminating patronage.

And today it is an even more luxurious, comfortable and serviceable car than ever before.

All that both America and Europe have learned about carriage elegance is embodied in the new Twin-six.

Its dignity of design, the lasting richness of its finish, is not to be imitated.


the sumptuous case of its upholstery and the quiet beauty of its furnishings, are all outer evidences of a deeper genuineness which makes it-and keeps it the standard equipage of refinement.

The powerful new motor has freed enclosed Packards for country touring-for all roads -at all times of the year.

Approved! True elegance

Ask the man who owns one

Packards TWIN-6

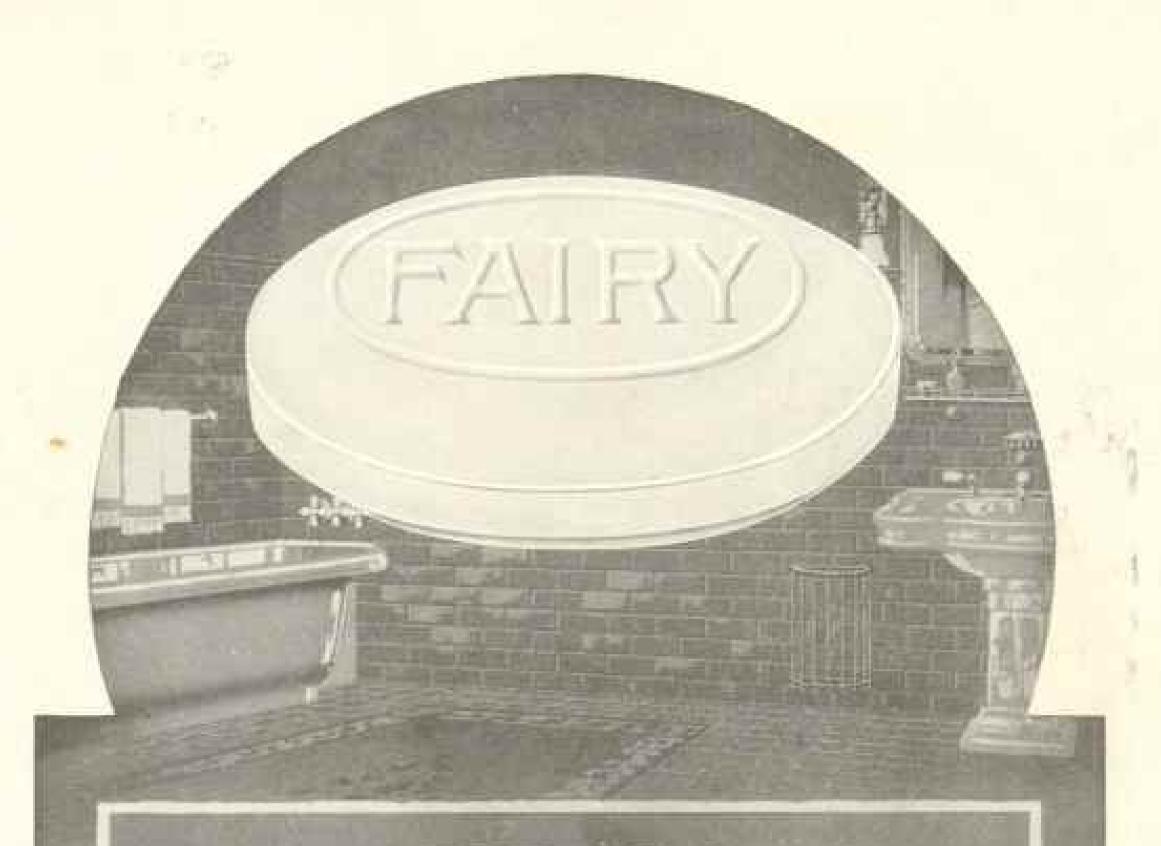

## FAIRY SOAP

is most refreshing and agreeable for toilet and bath use.

Fairy Soap is made of choicest materials; it lathers freely and cleanses easily in any kind of water; Fairy Soap floats.

With all its purity, convenience and pleasing qualities, Fairy Soap costs but 5c.

#### THE H.K. FAIRBANK COMPANY

The floating oval cake fits the hand



"Have you a little Fairy in your home?"

